


Lesson 3 Execute Actions

1. Project Outcome

Call and execute the action group programmed in the “Lesson 2 Action Group Programming” through the terminal command line.


(Action group file must be saved in the path of /home/pi/ArmPi/ActionGroups)

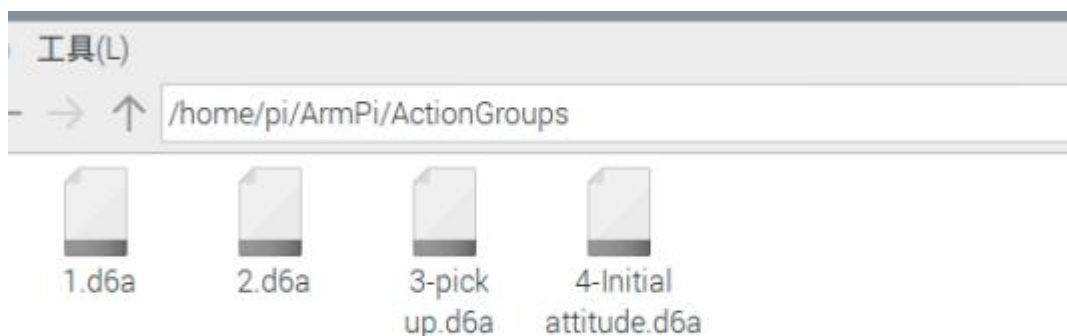


2. Complete Project

2.1 Actions Execute


1) Open LX terminal and enter the “cd ArmPi/HiwonderSDK/” command to the underlying directory file.

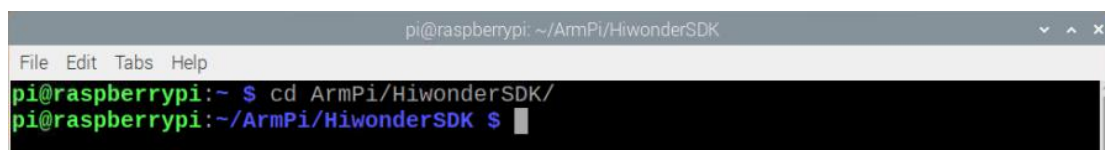

2) Enter “ls” to check the files.

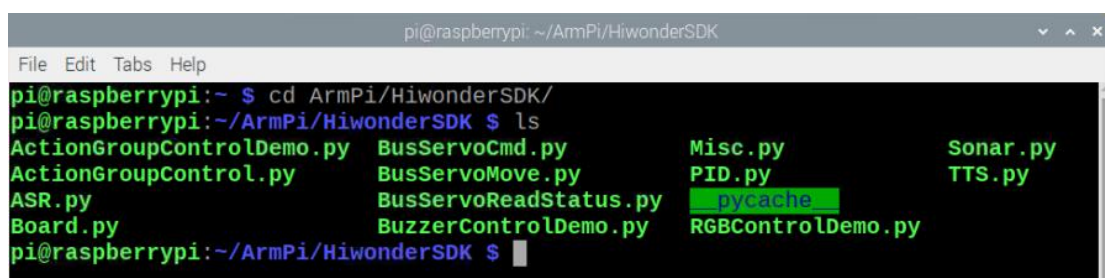

3) Enter “sudo python3 ActionGroupControlDemo.py” and then press “Enter” to run all the actions in the “/home/pi/ArmPi/ActionGroups” once.

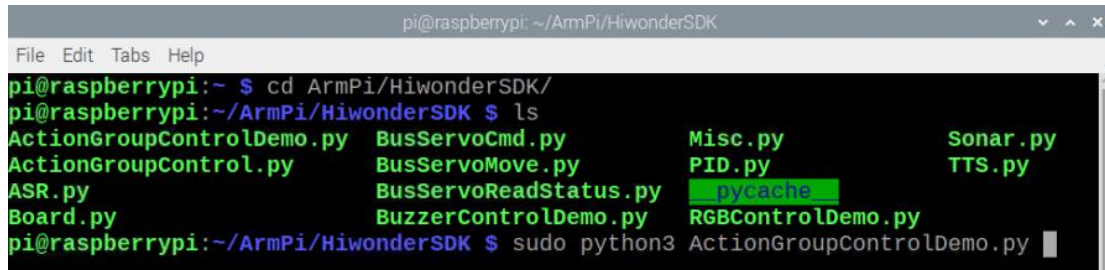

```

pi@raspberrypi: ~/ArmPi/HiwonderSDK
File Edit Tabs Help
pi@raspberrypi:~ $ cd ArmPi/HiwonderSDK/
pi@raspberrypi:~/ArmPi/HiwonderSDK $ ls
ActionGroupControlDemo.py  BusServoCmd.py      Misc.py      Sonar.py
ActionGroupControl.py      BusServoMove.py     PID.py      TTS.py
ASR.py                    BusServoReadStatus.py  pycache
Board.py                  BuzzerControlDemo.py  RGBControlDemo.py
pi@raspberrypi:~/ArmPi/HiwonderSDK $ sudo python3 ActionGroupControlDemo.py

```

2.2 Single Action Execution

If you want to run the single action, you’re required to modify in the file of actions programming.

1) Enter “sudo vim ActionGroupControlDemo.py” and press “Enter” to open the program through vi editor.




```

pi@raspberrypi:~/ArmPi/HiwonderSDK $ sudo vim ActionGroupControlDemo.py

```

2) In the program, the default running actions are No.1 and No.2. If you to only run the No.1 action, please press “i” to go into the editing mode. Then enter “#” to comment out the line.

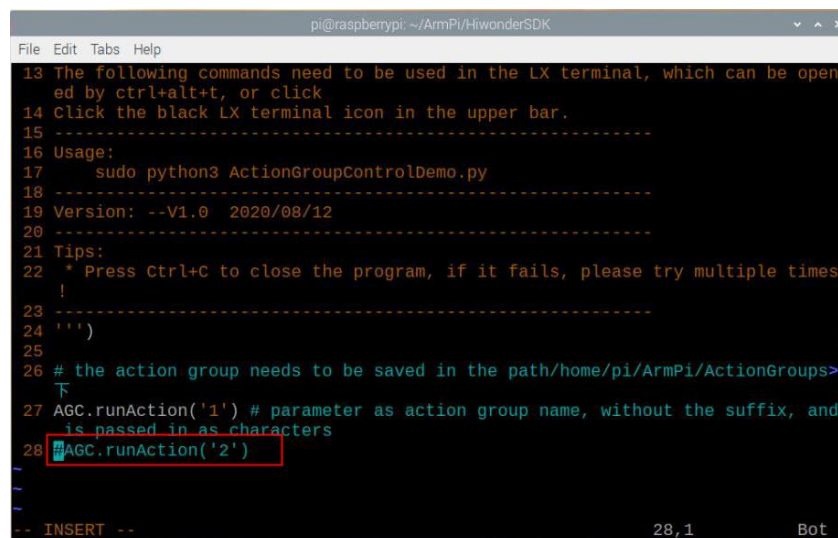


```

pi@raspberrypi:~/ArmPi/HiwonderSDK
File Edit Tabs Help
13 The following commands need to be used in the LX terminal, which can be open
14 ed by ctrl+alt+t, or click
15 Click the black LX terminal icon in the upper bar.
16 -----
17 Usage:
18 sudo python3 ActionGroupControlDemo.py
19 -----
20 Version: --V1.0 2020/08/12
21 -----
22 Tips:
23 * Press Ctrl+C to close the program, if it fails, please try multiple times
24 !
25 -----
26 # the action group needs to be saved in the path/home/pi/ArmPi/ActionGroups>
27 AGC.runAction('1') # parameter as action group name, without the suffix, and
28 is passed in as characters
29 #AGC.runAction('2')
-- INSERT --
28,1 Bot


```

3) Press “Esc” and then enter “ : ” to the last line mode. Enter “wq” and press “Enter” to save and exit.

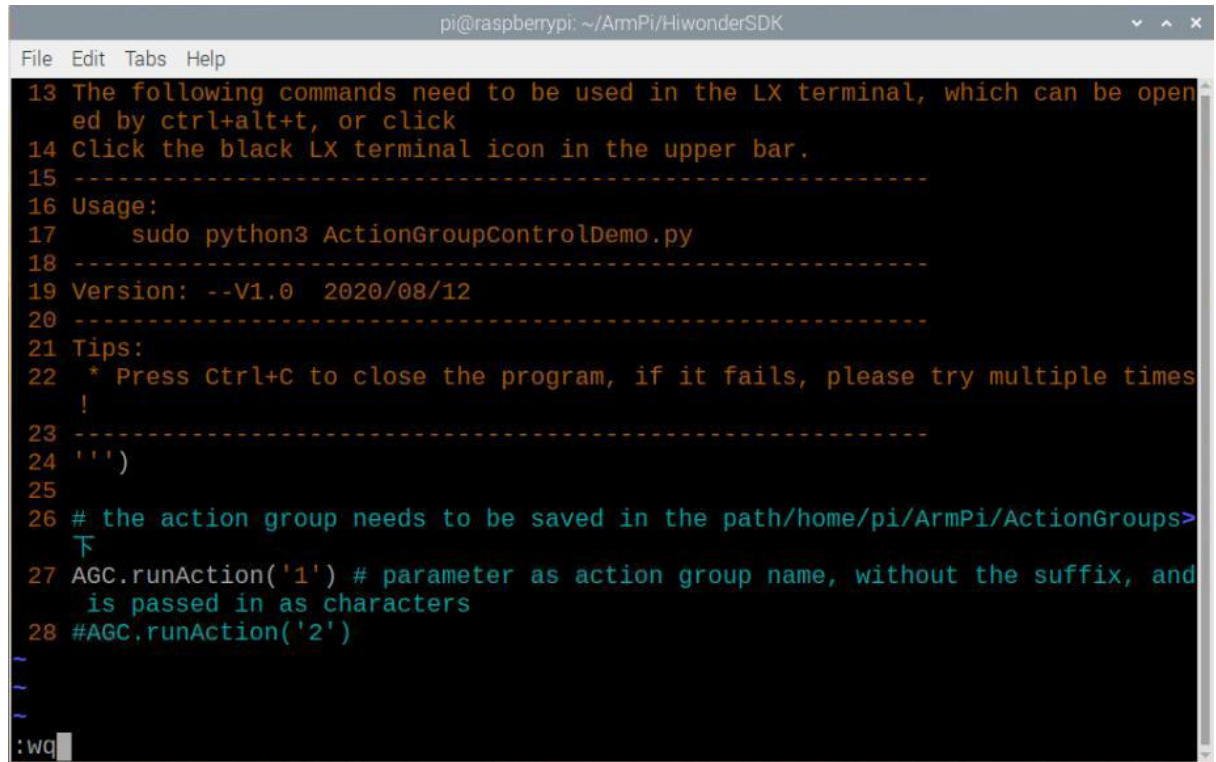

```
pi@raspberrypi: ~/ArmPi/HiwonderSDK
File Edit Tabs Help
13 The following commands need to be used in the LX terminal, which can be open
    ed by ctrl+alt+t, or click
14 Click the black LX terminal icon in the upper bar.
15 -----
16 Usage:
17     sudo python3 ActionGroupControlDemo.py
18 -----
19 Version: --V1.0  2020/08/12
20 -----
21 Tips:
22 * Press Ctrl+C to close the program, if it fails, please try multiple times
    !
23 -----
24 ''')
25
26 # the action group needs to be saved in the path/home/pi/ArmPi/ActionGroups>
    下
27 AGC.runAction('1') # parameter as action group name, without the suffix, and
    is passed in as characters
28 #AGC.runAction('2')
-
-
:wq
```

4) Enter the command “sudo python3 ActionGroupControlDemo.py” again and press “Enter”. ArmPi will run the No.1 action once.

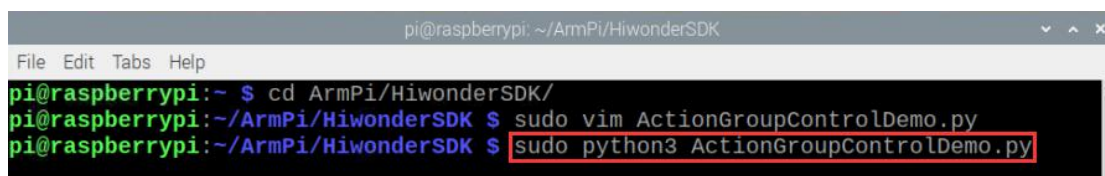

```
pi@raspberrypi: ~/ArmPi/HiwonderSDK
File Edit Tabs Help
pi@raspberrypi:~ $ cd ArmPi/HiwonderSDK/
pi@raspberrypi:~/ArmPi/HiwonderSDK $ sudo vim ActionGroupControlDemo.py
pi@raspberrypi:~/ArmPi/HiwonderSDK $ sudo python3 ActionGroupControlDemo.py
```

2.3 Execute More Actions

1) If you want to execute the programmed action, please enter “sudo vim ActionGroupControlDemo.py” command to the program file according to the above steps.

2) Copy the AGC.runAction(‘ ’) function. The parameters in the function must

have the same name as the saved action file, otherwise it cannot be executed.

For example, after executing the No.1 and No.2 actions, call to run the No.3 action. Select the function in line 28 with the mouse, press the "Y key" twice, and then press "P" to copy the above function.

3) Revise the parameter in the function to "3-pick up", save and exit. Then enter the command "sudo python3 ActionGroupControlDemo.py" again.