LAPORAN WORKSHOP DEVELOPER OPERATIONAL

MINGGU KE – 12

Oleh

LAURA TITA ANINDYA GUNAWAN

NIM E41230629

GOLONGAN B

PROGRAM STUDI TEKNIK INFORMATIKA

JURUSAN TEKNOLOGI INFORMASI

POLITEKNIK NEGERI JEMBER

2025

```
Cmder
http://localhost:8080/api?timeout=32s\": dial tcp [::1]:8080: connectex: No connection could be made because the target
machine actively refused it."
Unable to connect to the server: dial tcp [::1]:8080: connectex: No connection could be made because the target machine
actively refused it.

C:\laragon\www\kubernetes-laravel\laravel-minikube
λ minikube start --driver=docker
* minikube v1.38.1 on Microsoft Windows 11 Home Single Language 25H2
* Using the docker driver based on existing profile
* Starting "minikube" primary control-plane node in "minikube" cluster
* Pulling base image v0.0.50 ...
* docker "minikube" container is missing, will recreate.
* Creating docker container (CPUs=2, Memory=3072MB) ...
! Failing to connect to https://registry.k8s.io/ from inside the minikube container
* To pull new external images, you may need to configure a proxy: https://minikube.sigs.k8s.io/docs/reference/networking
/proxy/
* Preparing Kubernetes v1.35.1 on Docker 29.2.1 ...
* Configuring bridge CNI (Container Networking Interface) ...
* Verifying Kubernetes components...
  - Using image gcr.io/k8s-minikube/storage-provisioner:v5
* Enabled addons: storage-provisioner, default-storageclass
* Done! kubectl is now configured to use "minikube" cluster and "default" namespace by default

C:\laragon\www\kubernetes-laravel\laravel-minikube
λ kubectl get nodes
NAME       STATUS   ROLES           AGE   VERSION
minikube   Ready    control-plane   51s   v1.35.1

C:\laragon\www\kubernetes-laravel\laravel-minikube
λ
cmd.exe
```

```
Cmder

C:\laragon\www\kubernetes-laravel\laravel-minikube
λ php artisan migrate

  WARN  The database 'laravel_k8s' does not exist on the 'mysql' connection.

  Would you like to create it? (yes/no) [yes]
▸ yes

  INFO  Preparing database.

  Creating migration table ..................................................... 79.12ms DONE

  INFO  Running migrations.

  0001_01_01_000000_create_users_table ........................................ 177.50ms DONE
  0001_01_01_000001_create_cache_table ......................................... 95.02ms DONE
  0001_01_01_000002_create_jobs_table ......................................... 134.82ms DONE


C:\laragon\www\kubernetes-laravel\laravel-minikube
λ php artisan serve

  INFO  Server running on [http://127.0.0.1:8000].

  Press Ctrl+C to stop the server

  2026-05-09 11:40:57 / ........................................................ ~ 1s
  2026-05-09 11:40:58 /favicon.ico ............................................. ~ 2.60ms
php.exe
```

```
Cmder

C:\laragon\www\kubernetes-laravel\laravel-minikube\k8s
λ kubectl apply -f .
deployment.apps/laravel created
service/laravel created
deployment.apps/mysql created
service/mysql created
service/laravel-nodeport created

C:\laragon\www\kubernetes-laravel\laravel-minikube\k8s
λ kubectl get pods
NAME                        READY   STATUS              RESTARTS   AGE
laravel-575b8c55bf-5sn7c    0/1     ContainerCreating   0          36s
laravel-575b8c55bf-rqbm4    0/1     ContainerCreating   0          36s
laravel-575b8c55bf-vzddh    0/1     ImagePullBackOff    0          36s
mysql-5c4d589d75-9xmgk      0/1     ContainerCreating   0          36s

C:\laragon\www\kubernetes-laravel\laravel-minikube\k8s
λ kubectl get svc
NAME               TYPE        CLUSTER-IP      EXTERNAL-IP   PORT(S)        AGE
kubernetes         ClusterIP   10.96.0.1       <none>        443/TCP        11m
laravel            ClusterIP   10.110.18.121   <none>        80/TCP         56s
laravel-nodeport   NodePort    10.100.64.58    <none>        80:30007/TCP   56s
mysql              ClusterIP   10.99.157.158   <none>        3306/TCP       56s

C:\laragon\www\kubernetes-laravel\laravel-minikube\k8s
λ cd ..

C:\laragon\www\kubernetes-laravel\laravel-minikube
λ
cmd.exe
```

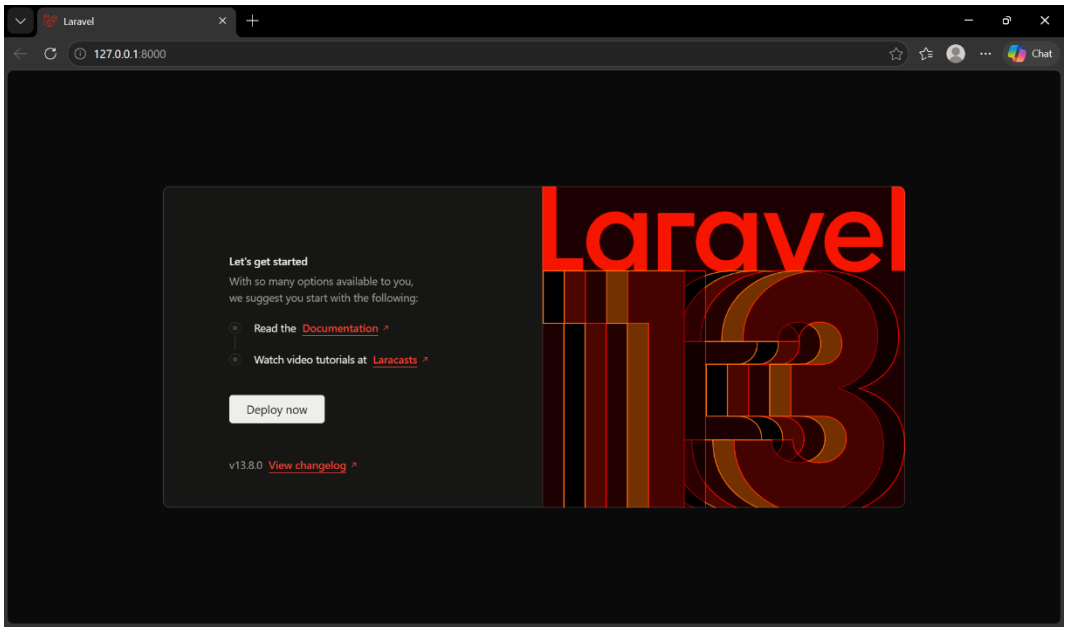

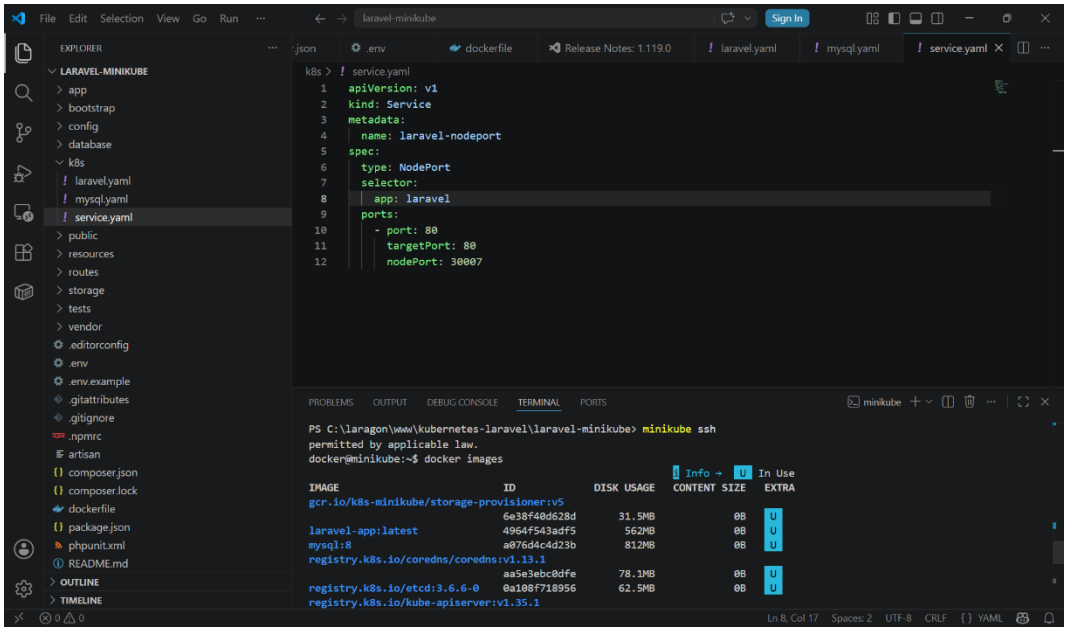
File Edit Selection View Go Run
laravel-minikube
Sign In
EXPLORER
LARAVEL-MINIKUBE
app
bootstrap
config
database
k8s
laravel.yaml
mysql.yaml
service.yaml
public
resources
routes
storage
tests
vendor
.editorconfig
.env
.env.example
.gitattributes
.gitignore
.npmrc
artisan
composer.json
composer.lock
dockerfile
package.json
phpunit.xml
README.md
OUTLINE
TIMELINE
.env
dockerfile
Release Notes: 1.119.0
laravel.yaml
mysql.yaml
service.yaml
k8s > service.yaml
apiVersion: v1
kind: Service
metadata:
name: laravel-nodeport
spec:
type: NodePort
selector:
app: laravel
ports:
- port: 80
targetPort: 80
nodePort: 30007
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
minikube
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> minikube ssh
permitted by applicable law.
docker@minikube:~$ docker images
Info → U In Use
IMAGE ID DISK USAGE CONTENT SIZE EXTRA
gcr.io/k8s-minikube/storage-provisioner:v5 6e38f40d628d 31.5MB 0B U
laravel-app:latest 4964f543adf5 562MB 0B U
mysql:8 a076d4c4d23b 812MB 0B U
registry.k8s.io/coredns/coredns:v1.13.1 aa5e3ebc0dfe 78.1MB 0B U
registry.k8s.io/etcd:3.6.6-0 0a108f718956 62.5MB 0B U
registry.k8s.io/kube-apiserver:v1.35.1
Ln 8, Col 17 Spaces: 2 UTF-8 CRLF { } YAML

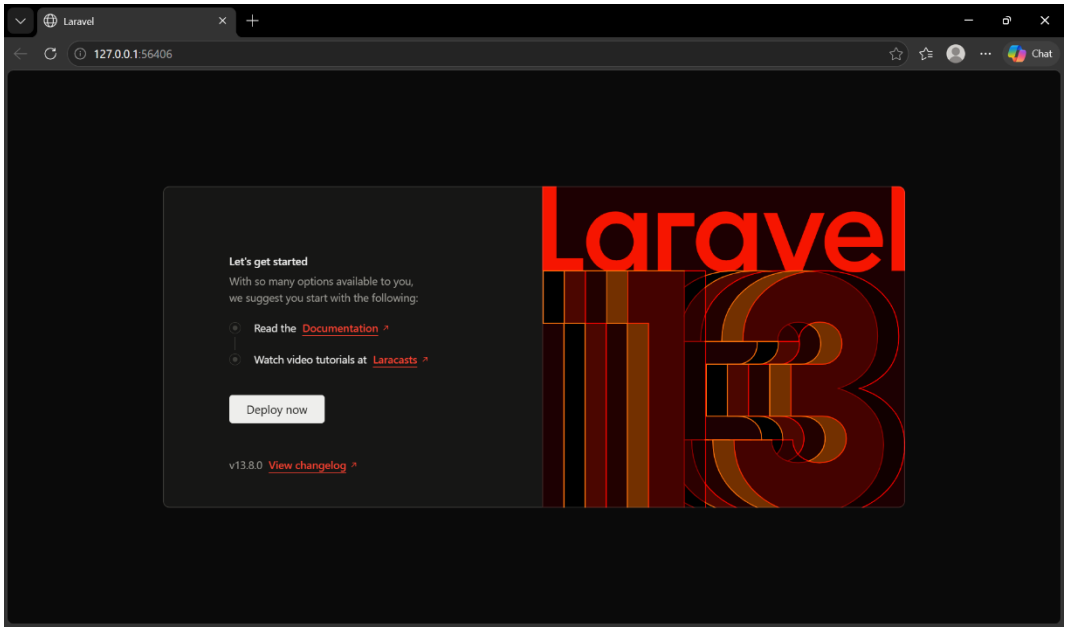
Laravel
127.0.0.1:56406
Chat
Let's get started
With so many options available to you,
we suggest you start with the following:
Read the Documentation
Watch video tutorials at Laracasts
Deploy now
v13.8.0 View changelog
Laravel
13

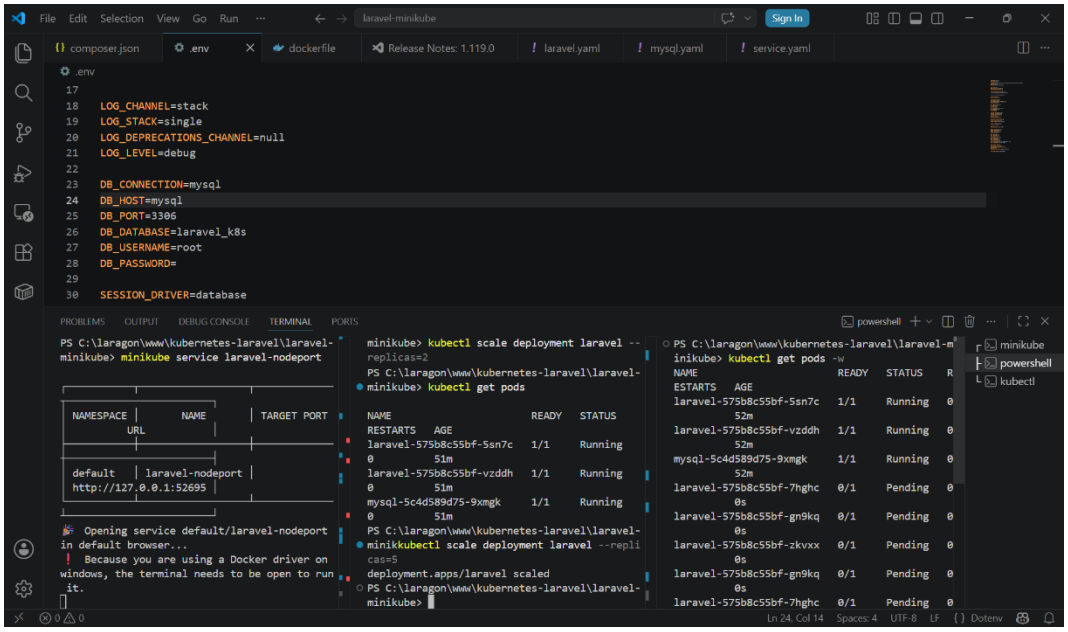
File Edit Selection View Go Run
laravel-minikube
Sign In
composer.json
.env
dockerfile
Release Notes: 1.119.0
laravel.yaml
mysql.yaml
service.yaml
LOG_CHANNEL=stack
LOG_STACK=single
LOG_DEPRECATIONS_CHANNEL=null
LOG_LEVEL=debug
DB_CONNECTION=mysql
DB_HOST=mysql
DB_PORT=3306
DB_DATABASE=laravel_k8s
DB_USERNAME=root
DB_PASSWORD=
SESSION_DRIVER=database
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
powershell
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> minikube service laravel-nodeport
NAMESPACE NAME TARGET PORT URL
default laravel-nodeport http://127.0.0.1:52695
Opening service default/laravel-nodeport in default browser...
Because you are using a Docker driver on windows, the terminal needs to be open to run it.
minikube> kubectl scale deployment laravel --replicas=2
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> kubectl get pods
NAME READY STATUS RESTARTS AGE
laravel-575b8c55bf-5sn7c 1/1 Running 0 51m
laravel-575b8c55bf-vzddh 1/1 Running 0 51m
mysql-5c4d589d75-9xmgk 1/1 Running 0 51m
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> kubectl scale deployment laravel --replicas=5
deployment.apps/laravel scaled
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> kubectl get pods -w
laravel-575b8c55bf-7hghc 0/1 Pending 0 0s
laravel-575b8c55bf-gn9kq 0/1 Pending 0 0s
laravel-575b8c55bf-zkvxx 0/1 Pending 0 0s
minikube
powershell
kubectl

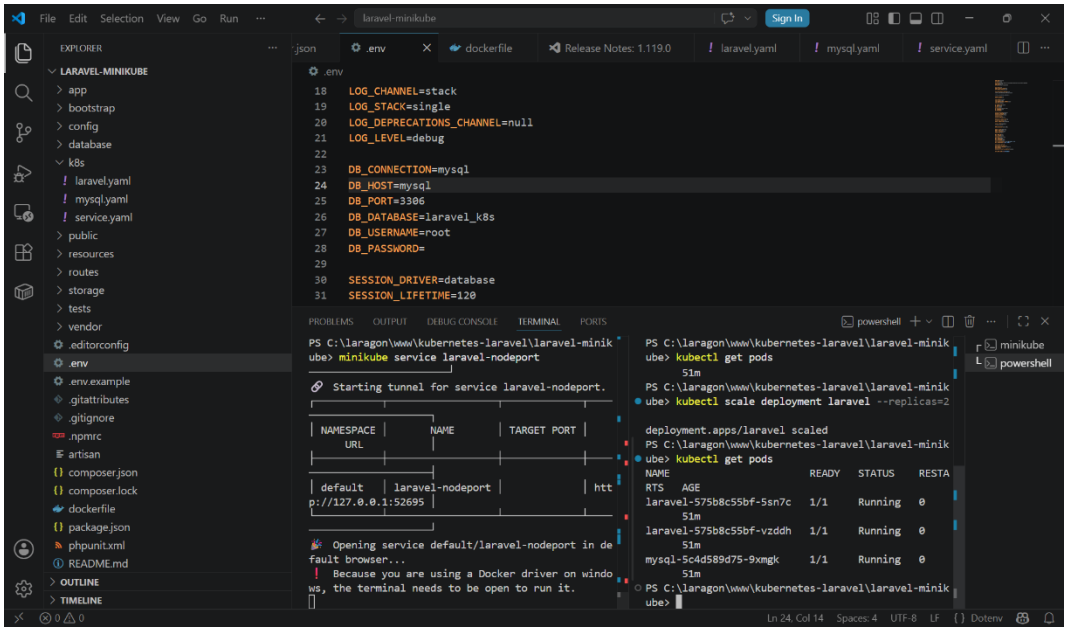
File Edit Selection View Go Run
laravel-minikube
Sign In
EXPLORER
LARAVEL-MINIKUBE
app
bootstrap
config
database
k8s
laravel.yaml
mysql.yaml
service.yaml
public
resources
routes
storage
tests
vendor
.editorconfig
.env
.env.example
.gitattributes
.gitignore
.npmrc
artisan
composer.json
composer.lock
dockerfile
package.json
phpunit.xml
README.md
OUTLINE
TIMELINE
LOG_CHANNEL=stack
LOG_STACK=single
LOG_DEPRECATIONS_CHANNEL=null
LOG_LEVEL=debug
DB_CONNECTION=mysql
DB_HOST=mysql
DB_PORT=3306
DB_DATABASE=laravel_k8s
DB_USERNAME=root
DB_PASSWORD=
SESSION_DRIVER=database
SESSION_LIFETIME=120
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
powershell
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> minikube service laravel-nodeport
Starting tunnel for service laravel-nodeport.
NAMESPACE NAME TARGET PORT URL
default laravel-nodeport http://127.0.0.1:52695
Opening service default/laravel-nodeport in default browser...
Because you are using a Docker driver on windows, the terminal needs to be open to run it.
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> kubectl get pods
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> kubectl scale deployment laravel --replicas=2
deployment.apps/laravel scaled
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> kubectl get pods
NAME READY STATUS RESTARTS AGE
laravel-575b8c55bf-5sn7c 1/1 Running 0 51m
laravel-575b8c55bf-vzddh 1/1 Running 0 51m
mysql-5c4d589d75-9xmgk 1/1 Running 0 51m
minikube
powershell

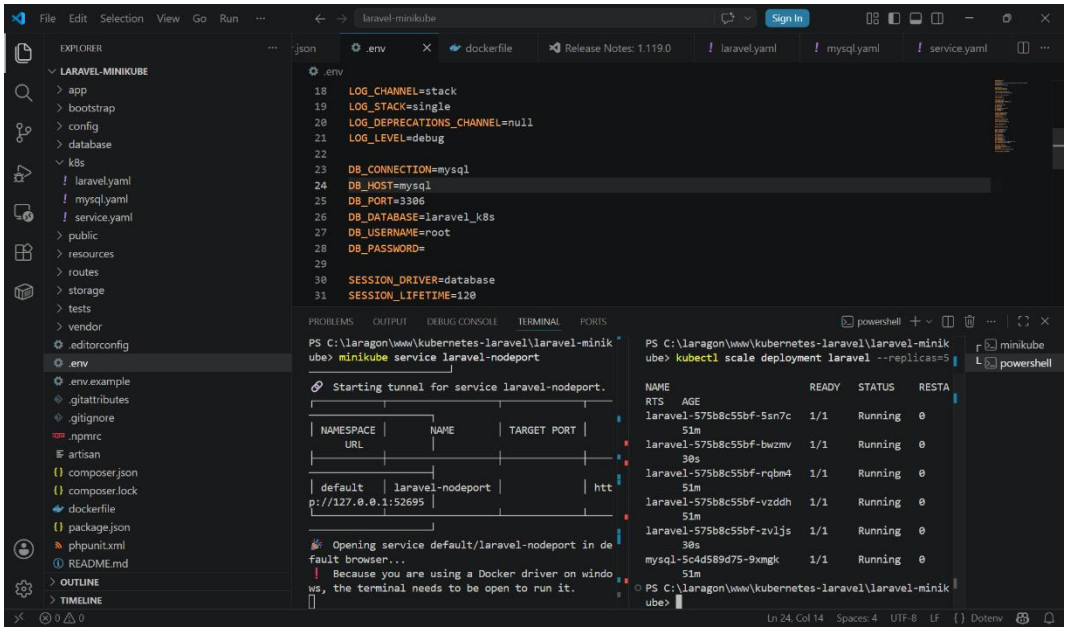
File Edit Selection View Go Run
laravel-minikube
Sign In
EXPLORER
LARAVEL-MINIKUBE
app
bootstrap
config
database
k8s
laravel.yaml
mysql.yaml
service.yaml
public
resources
routes
storage
tests
vendor
.editorconfig
.env
.env.example
.gitattributes
.gitignore
.npmrc
artisan
composer.json
composer.lock
dockerfile
package.json
phpunit.xml
README.md
OUTLINE
TIMELINE
.env
dockerfile
Release Notes: 1.119.0
LOG_CHANNEL=stack
LOG_STACK=single
LOG_DEPRECATIONS_CHANNEL=null
LOG_LEVEL=debug
DB_CONNECTION=mysql
DB_HOST=mysql
DB_PORT=3306
DB_DATABASE=laravel_k8s
DB_USERNAME=root
DB_PASSWORD=
SESSION_DRIVER=database
SESSION_LIFETIME=120
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> minikube service laravel-nodeport
Starting tunnel for service laravel-nodeport.
NAMESPACE NAME TARGET PORT URL
default laravel-nodeport http://127.0.0.1:52695
Opening service default/laravel-nodeport in default browser...
Because you are using a Docker driver on windows, the terminal needs to be open to run it.
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> kubectl scale deployment laravel --replicas=5
NAME READY STATUS RESTARTS AGE
laravel-575b8c55bf-5sn7c 1/1 Running 0 51m
laravel-575b8c55bf-bwzmv 1/1 Running 0 30s
laravel-575b8c55bf-rqbm4 1/1 Running 0 51m
laravel-575b8c55bf-vzddh 1/1 Running 0 51m
laravel-575b8c55bf-zvljs 1/1 Running 0 30s
mysql-5c4d589d75-9xmgk 1/1 Running 0 51m
PS C:\laragon\www\kubernetes-laravel\laravel-minikube>
minikube
powershell
Ln 24, Col 14 Spaces: 4 UTF-8 LF {} Dotenv

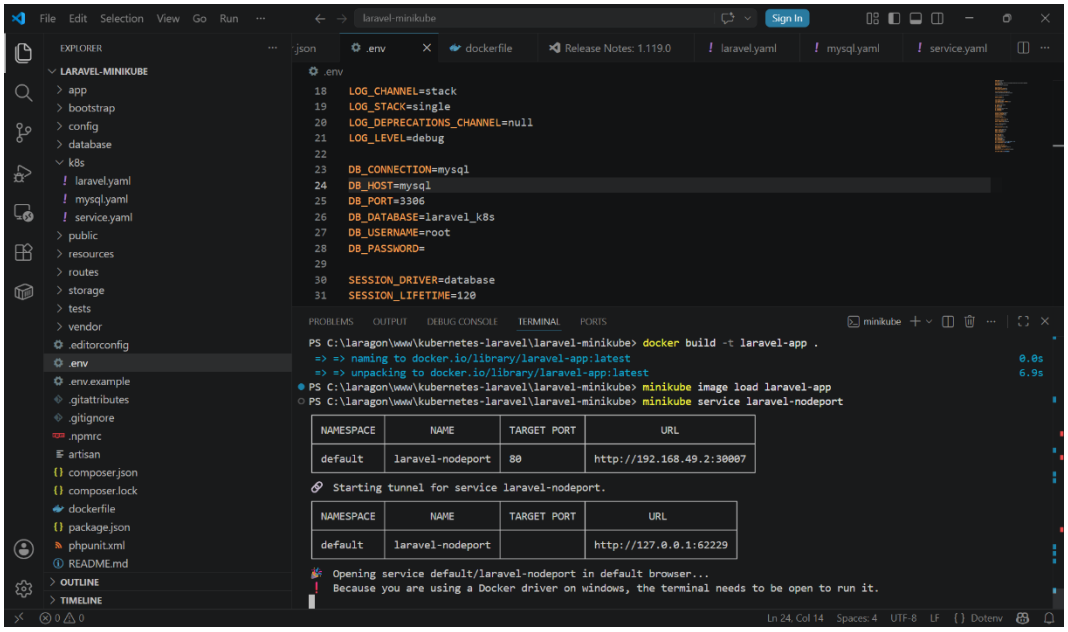
File Edit Selection View Go Run
laravel-minikube
Sign In
EXPLORER
LARAVEL-MINIKUBE
app
bootstrap
config
database
k8s
laravel.yaml
mysql.yaml
service.yaml
public
resources
routes
storage
tests
vendor
.editorconfig
.env
.env.example
.gitattributes
.gitignore
.npmrc
artisan
composer.json
composer.lock
dockerfile
package.json
phpunit.xml
README.md
OUTLINE
TIMELINE
.env
dockerfile
Release Notes: 1.119.0
LOG_CHANNEL=stack
LOG_STACK=single
LOG_DEPRECATIONS_CHANNEL=null
LOG_LEVEL=debug
DB_CONNECTION=mysql
DB_HOST=mysql
DB_PORT=3306
DB_DATABASE=laravel_k8s
DB_USERNAME=root
DB_PASSWORD=
SESSION_DRIVER=database
SESSION_LIFETIME=120
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> docker build -t laravel-app .
=> => naming to docker.io/library/laravel-app:latest 0.0s
=> => unpacking to docker.io/library/laravel-app:latest 6.9s
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> minikube image load laravel-app
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> minikube service laravel-nodeport
NAMESPACE NAME TARGET PORT URL
default laravel-nodeport 80 http://192.168.49.2:30007
Starting tunnel for service laravel-nodeport.
NAMESPACE NAME TARGET PORT URL
default laravel-nodeport http://127.0.0.1:62229
Opening service default/laravel-nodeport in default browser...
Because you are using a Docker driver on windows, the terminal needs to be open to run it.
minikube
Ln 24, Col 14 Spaces: 4 UTF-8 LF {} Dotenv

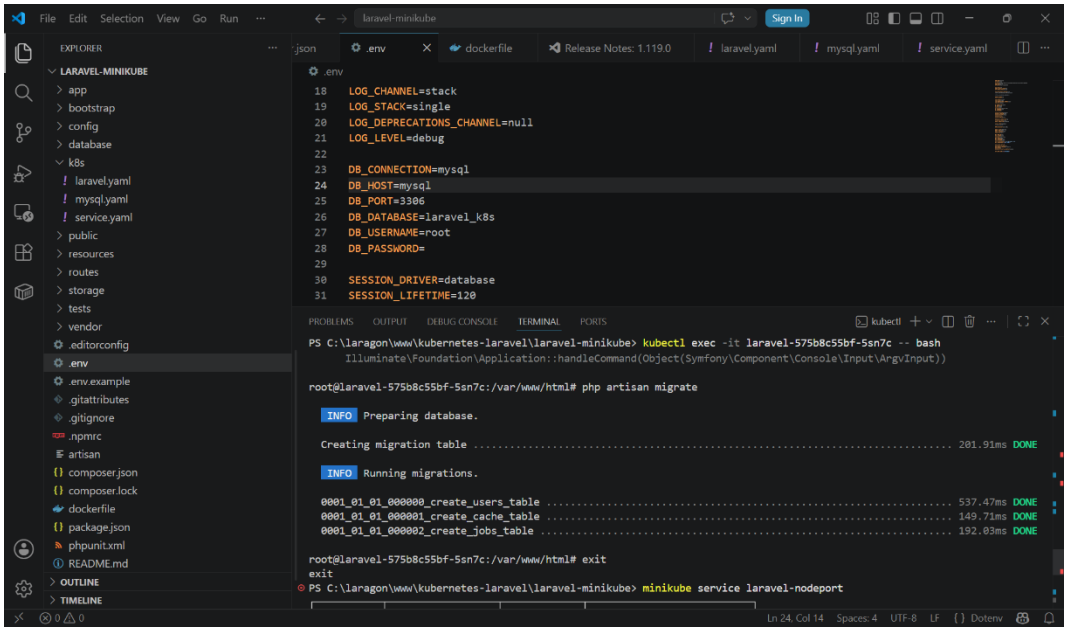
LOG_CHANNEL=stack
LOG_STACK=single
LOG_DEPRECATIONS_CHANNEL=null
LOG_LEVEL=debug
DB_CONNECTION=mysql
DB_HOST=mysql
DB_PORT=3306
DB_DATABASE=laravel_k8s
DB_USERNAME=root
DB_PASSWORD=
SESSION_DRIVER=database
SESSION_LIFETIME=120
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> kubectl exec -it laravel-575b8c55bf-5sn7c -- bash
Illuminate\Foundation\Application::handleCommand(Object(Symfony\Component\Console\Input\ArgvInput))
root@laravel-575b8c55bf-5sn7c:/var/www/html# php artisan migrate
INFO Preparing database.
Creating migration table ..... 201.91ms DONE
INFO Running migrations.
0001_01_01_000000_create_users_table ..... 537.47ms DONE
0001_01_01_000001_create_cache_table ..... 149.71ms DONE
0001_01_01_000002_create_jobs_table ..... 192.03ms DONE
root@laravel-575b8c55bf-5sn7c:/var/www/html# exit
exit
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> minikube service laravel-nodeport

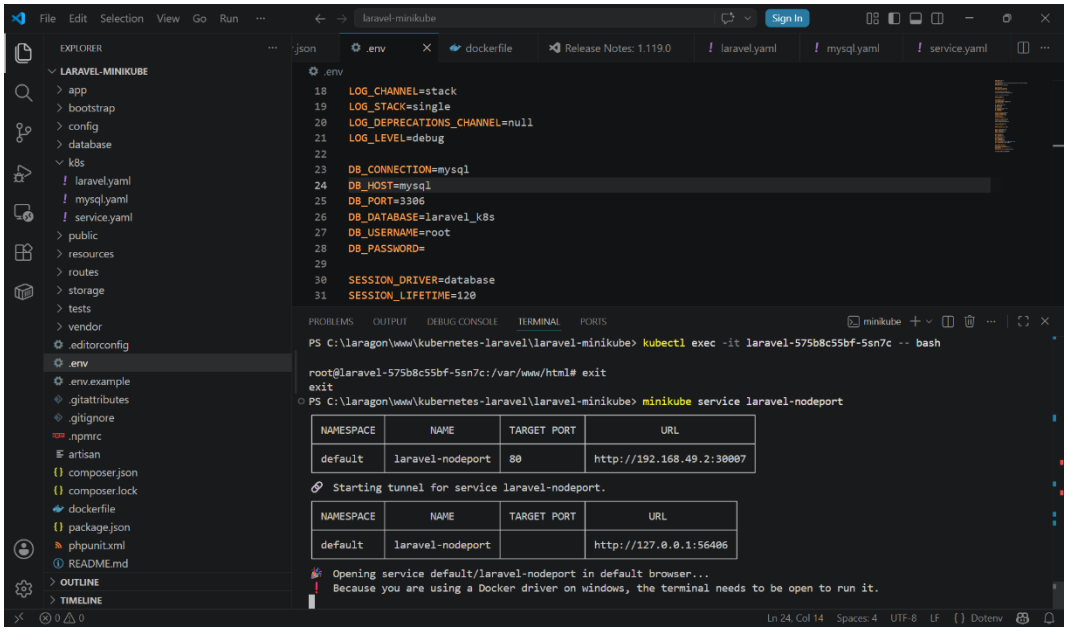
LOG_CHANNEL=stack
LOG_STACK=single
LOG_DEPRECATIONS_CHANNEL=null
LOG_LEVEL=debug
DB_CONNECTION=mysql
DB_HOST=mysql
DB_PORT=3306
DB_DATABASE=laravel_k8s
DB_USERNAME=root
DB_PASSWORD=
SESSION_DRIVER=database
SESSION_LIFETIME=120
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> kubectl exec -it laravel-575b8c55bf-5sn7c -- bash
root@laravel-575b8c55bf-5sn7c:/var/www/html# exit
exit
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> minikube service laravel-nodeport
NAMESPACE NAME TARGET PORT URL
default laravel-nodeport 80 http://192.168.49.2:30007
Starting tunnel for service laravel-nodeport.
NAMESPACE NAME TARGET PORT URL
default laravel-nodeport http://127.0.0.1:56406
Opening service default/laravel-nodeport in default browser...
Because you are using a Docker driver on windows, the terminal needs to be open to run it.

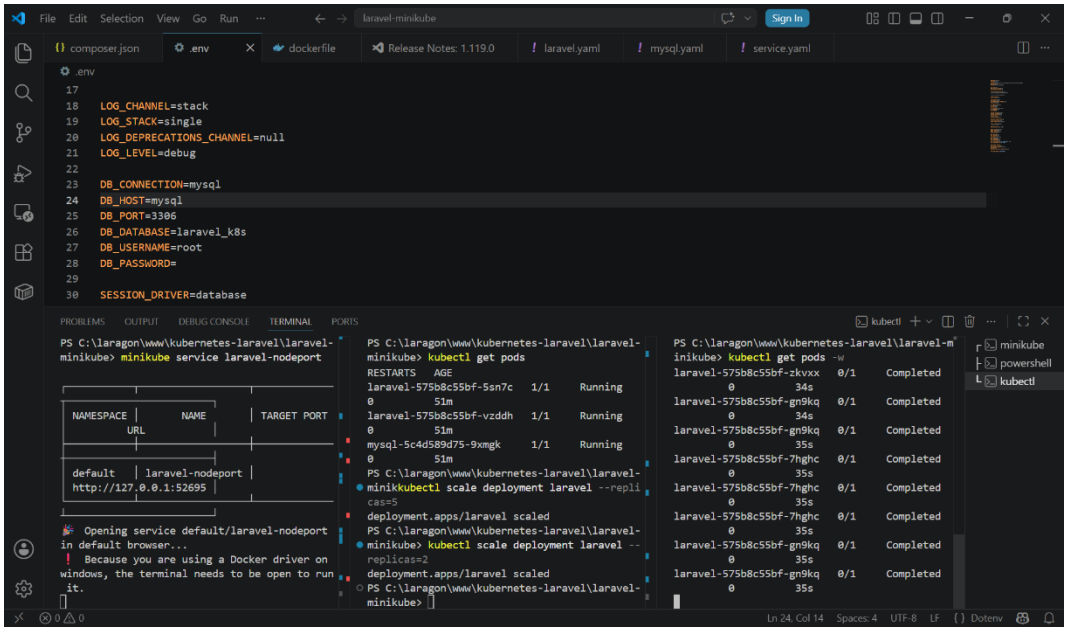
.env
LOG_CHANNEL=stack
LOG_STACK=single
LOG_DEPRECATIONS_CHANNEL=null
LOG_LEVEL=debug
DB_CONNECTION=mysql
DB_HOST=mysql
DB_PORT=3306
DB_DATABASE=laravel_k8s
DB_USERNAME=root
DB_PASSWORD=
SESSION_DRIVER=database
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> minikube service laravel-nodeport
NAMESPACE | NAME | TARGET PORT | URL
default | laravel-nodeport | http://127.0.0.1:52695
Opening service default/laravel-nodeport in default browser...
Because you are using a Docker driver on windows, the terminal needs to be open to run it.
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> kubectl get pods
RESTARTS AGE
laravel-575b8c55bf-5sn7c 1/1 Running 0 51m
laravel-575b8c55bf-vzddh 1/1 Running 0 51m
mysql-5c4d589d75-9xmgk 1/1 Running 0 51m
PS C:\laragon\www\kubernetes-laravel\laravel-minikubectl scale deployment laravel --replicas=5
deployment.apps/laravel scaled
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> kubectl scale deployment laravel --replicas=2
deployment.apps/laravel scaled
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> kubectl get pods -w
laravel-575b8c55bf-zkvxx 0/1 Completed 0 34s
laravel-575b8c55bf-gn9kq 0/1 Completed 0 34s
laravel-575b8c55bf-gn9kq 0/1 Completed 0 35s
laravel-575b8c55bf-7hghc 0/1 Completed 0 35s
laravel-575b8c55bf-7hghc 0/1 Completed 0 35s
laravel-575b8c55bf-7hghc 0/1 Completed 0 35s
laravel-575b8c55bf-gn9kq 0/1 Completed 0 35s
laravel-575b8c55bf-gn9kq 0/1 Completed 0 35s

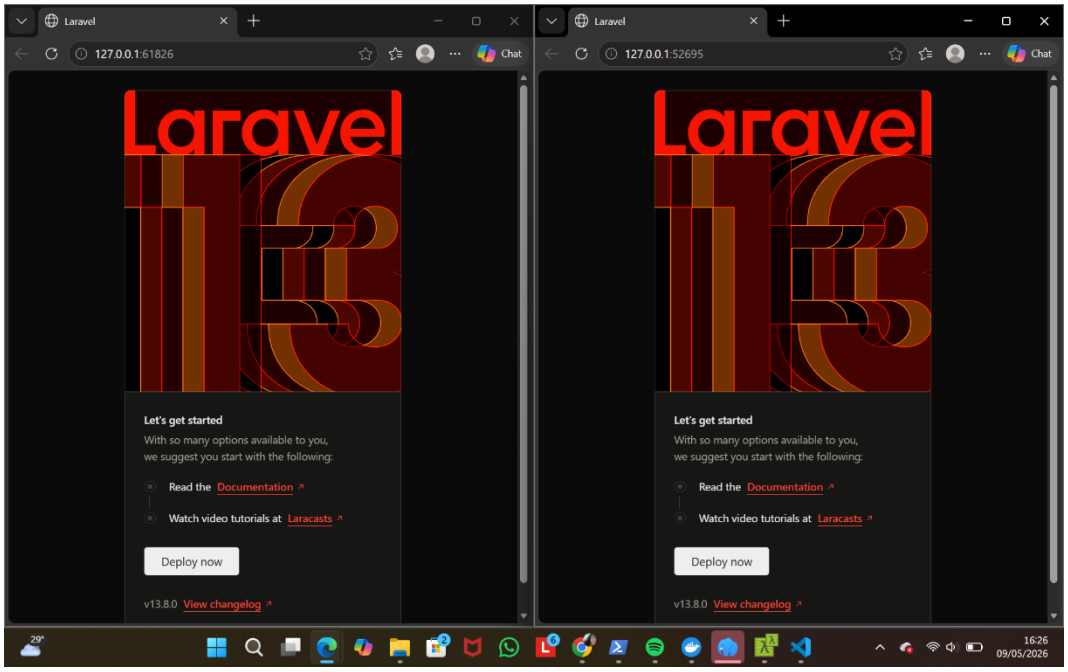
Laravel
127.0.0.1:61826
127.0.0.1:52695
Let's get started
With so many options available to you, we suggest you start with the following:
Read the Documentation
Watch video tutorials at Laracasts
Deploy now
v13.8.0 View changelog

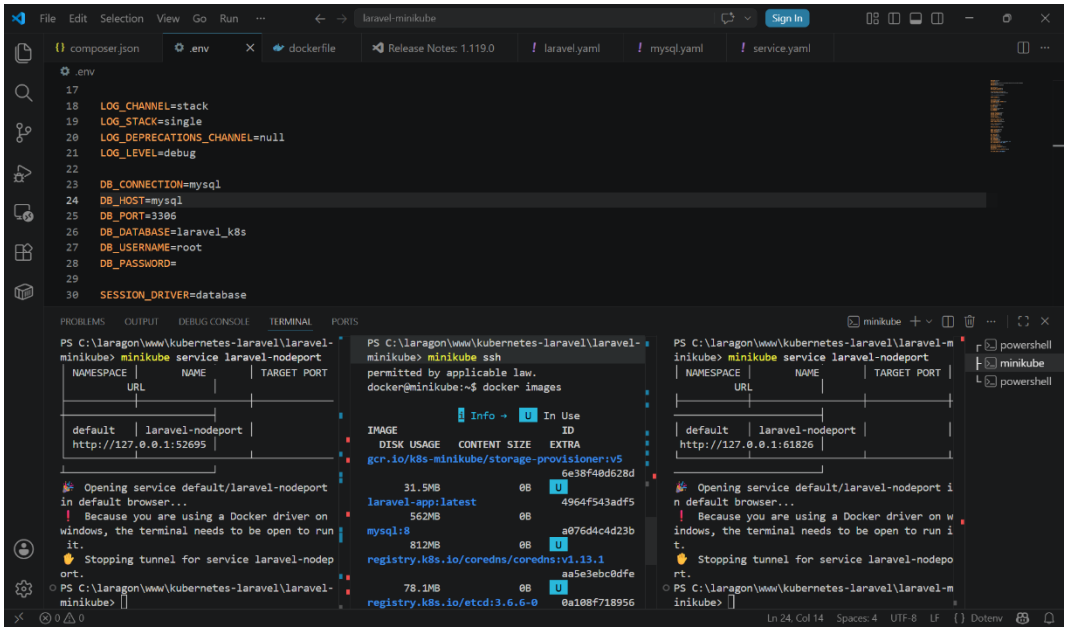
.env
LOG_CHANNEL=stack
LOG_STACK=single
LOG_DEPRECATIONS_CHANNEL=null
LOG_LEVEL=debug
DB_CONNECTION=mysql
DB_HOST=mysql
DB_PORT=3306
DB_DATABASE=laravel_k8s
DB_USERNAME=root
DB_PASSWORD=
SESSION_DRIVER=database
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> minikube service laravel-nodeport
default | laravel-nodeport | http://127.0.0.1:52695
Opening service default/laravel-nodeport in default browser...
Because you are using a Docker driver on windows, the terminal needs to be open to run it.
Stopping tunnel for service laravel-nodeport.
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> minikube ssh
docker@minikube:~$ docker images
IMAGE DISK USAGE CONTENT SIZE EXTRA ID
gcr.io/k8s-minikube/storage-provisioner:v5 31.5MB 0B 6e38f40d628d
laravel-app:latest 562MB 0B 4964f543adf5
mysql:8 812MB 0B a076d4c4d23b
registry.k8s.io/coredns/coredns:v1.13.1 78.1MB 0B aa5e3ebc0dfe
registry.k8s.io/etcd:3.6.6-0 0a108f718956
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> minikube service laravel-nodeport
default | laravel-nodeport | http://127.0.0.1:61826

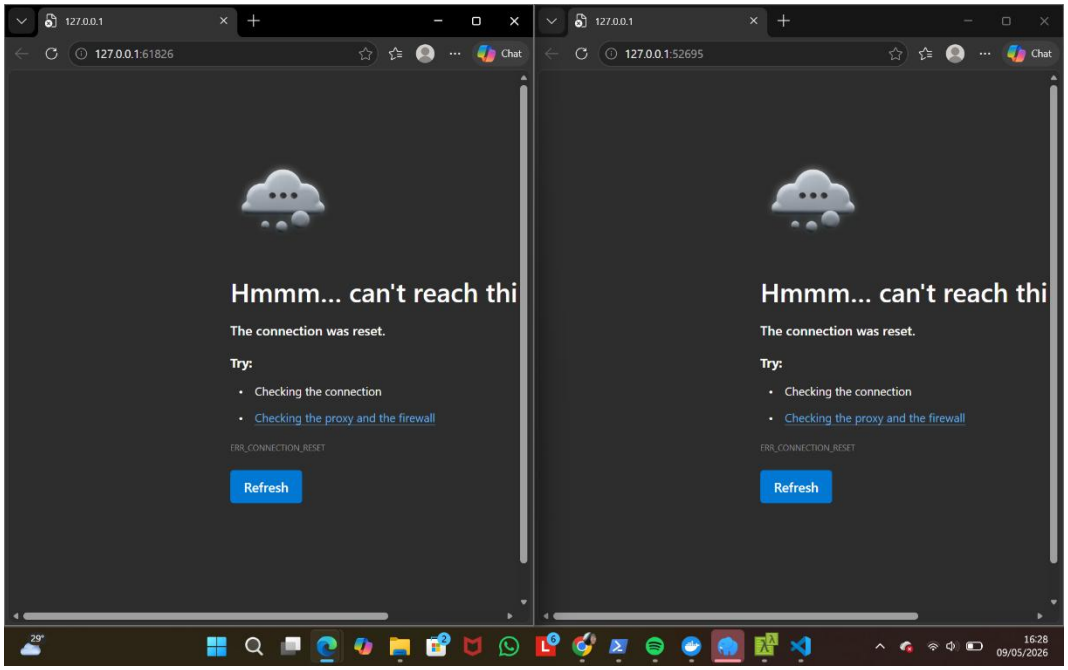
127.0.0.1:61826
Hmmm... can't reach thi
The connection was reset.
Try:
Checking the connection
Checking the proxy and the firewall
ERR_CONNECTION_RESET
Refresh
127.0.0.1:52695
Hmmm... can't reach thi
The connection was reset.
Try:
Checking the connection
Checking the proxy and the firewall
ERR_CONNECTION_RESET
Refresh

File Edit Selection View Go Run ... laravel-minikube Sign In

composer.json | .env | dockerfile | Release Notes: 1.119.0 | laravel.yaml | mysql.yaml | service.yaml

.env

```
17
18  LOG_CHANNEL=stack
19  LOG_STACK=single
20  LOG_DEPRECATIONS_CHANNEL=null
21  LOG_LEVEL=debug
22
23  DB_CONNECTION=mysql
24  DB_HOST=mysql
25  DB_PORT=3306
26  DB_DATABASE=laravel_k8s
27  DB_USERNAME=root
28  DB_PASSWORD=
29
30  SESSION_DRIVER=database
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS powershell

```
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> minikube service laravel-nodeport

|-----------|----------------|-------------|---------------------------|
| NAMESPACE |      NAME      | TARGET PORT |            URL            |
|-----------|----------------|-------------|---------------------------|
| default   | laravel-nodeport |           | http://127.0.0.1:52695    |
|-----------|----------------|-------------|---------------------------|

🎉  Opening service default/laravel-nodeport in default browser...
❗  Because you are using a Docker driver on windows, the terminal needs to be open to run it.
```

```
PS C:\laragon\www\kubernetes-laravel\laravel-minikubectl scale deployment laravel --replicas=5
deployment.apps/laravel scaled
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> kubectl scale deployment laravel --replicas=2
deployment.apps/laravel scaled
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> kubectl delete deployment laravel
deployment.apps "laravel" deleted from default namespace
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> docker rmi laravel-app
Untagged: laravel-app:latest
Deleted: sha256:629d3b1a0a0b4bebc5131ef6b86b2ecfb2a249ce4a791a0205e3d017db2dee7e
PS C:\laragon\www\kubernetes-laravel\laravel-minikube>
```

```
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> minikube service laravel-nodeport

|-----------|----------------|-------------|---------------------------|
| NAMESPACE |      NAME      | TARGET PORT |            URL            |
|-----------|----------------|-------------|---------------------------|
| default   | laravel-nodeport |           | http://127.0.0.1:61826    |
|-----------|----------------|-------------|---------------------------|

🎉  Opening service default/laravel-nodeport in default browser...
❗  Because you are using a Docker driver on windows, the terminal needs to be open to run it.
```

minikube
powershell
minikube

Ln 24, Col 14 Spaces: 4 UTF-8 LF {} Dotenv

File Edit Selection View Go Run ... laravel-minikube Sign In

composer.json | .env | dockerfile | Release Notes: 1.119.0 | laravel.yaml | mysql.yaml | service.yaml

.env

```
17
18  LOG_CHANNEL=stack
19  LOG_STACK=single
20  LOG_DEPRECATIONS_CHANNEL=null
21  LOG_LEVEL=debug
22
23  DB_CONNECTION=mysql
24  DB_HOST=mysql
25  DB_PORT=3306
26  DB_DATABASE=laravel_k8s
27  DB_USERNAME=root
28  DB_PASSWORD=
29
30  SESSION_DRIVER=database
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS powershell

```
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> docker system prune -a --volumes
jtgj8ptmciga882fgppvksph7
68oj83ga8udembti5319ogsd
5j8qjc0ubk1z7jii1gc3ohfxc
9x1hibhy7xlbvfoysadcswtkn
z99jbz4p1k04clz8qofo8wb35
wb1u5brqn16skv7365bjty369
h046q3hpi8iiisqds05xa8t67
wsw5rbq7y45rljih0vns8z687
rwvu8tdrsolt1dzy6ap8u2fgm
oeh6fpipah4qsipzgu1lh1cke
3jkqt7uulwvv5783rccd5bndo
43atcnh45vd5du9suyv4bfz6m
j8vqvyxq9pyqlx5abuke4lam2

Total reclaimed space: 1.568GB
PS C:\laragon\www\kubernetes-laravel\laravel-minikube> docker builder prune -a
WARNING! This will remove all build cache. Are you sure you want to continue? [y/N] y
Total:  0B
```

Ln 24, Col 14 Spaces: 4 UTF-8 LF {} Dotenv