



Assignment Project Exam Help

<https://powcoder.com>
CS 6340 + LLVM Primer

Add WeChat powcoder

Mayur Naik



Roadmap

Welcome! This primer has four parts:

Assignment Project Exam Help

- Part I: Overview of LLVM
- Part II: Structure of LLVM IR
- Part III: The LLVM API
- Part IV: Navigating the Documentation

<https://powcoder.com>

Add WeChat powcoder




Assignment Project Exam Help

<https://powcoder.com>


Part I: Overview of LLVM

Add WeChat powcoder


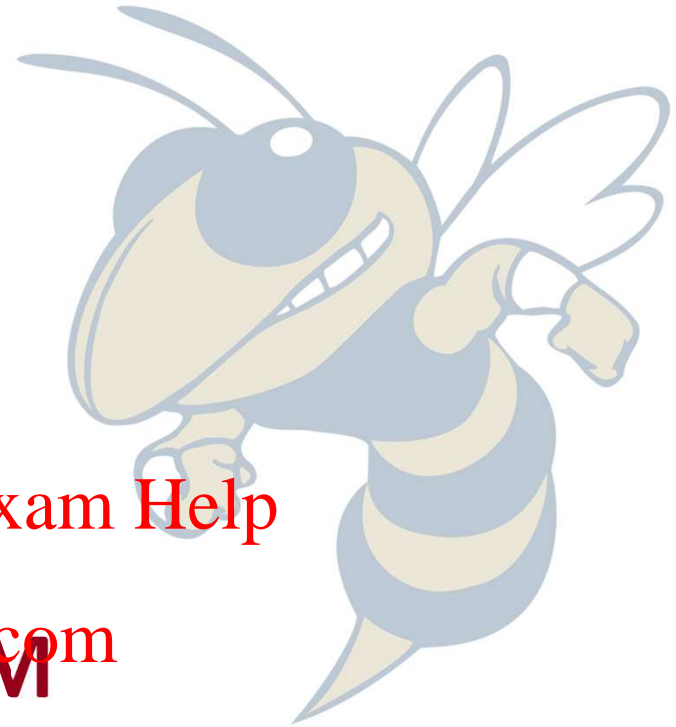


What is LLVM?


A modular and reusable compiler framework supporting multiple front-ends and back-ends.

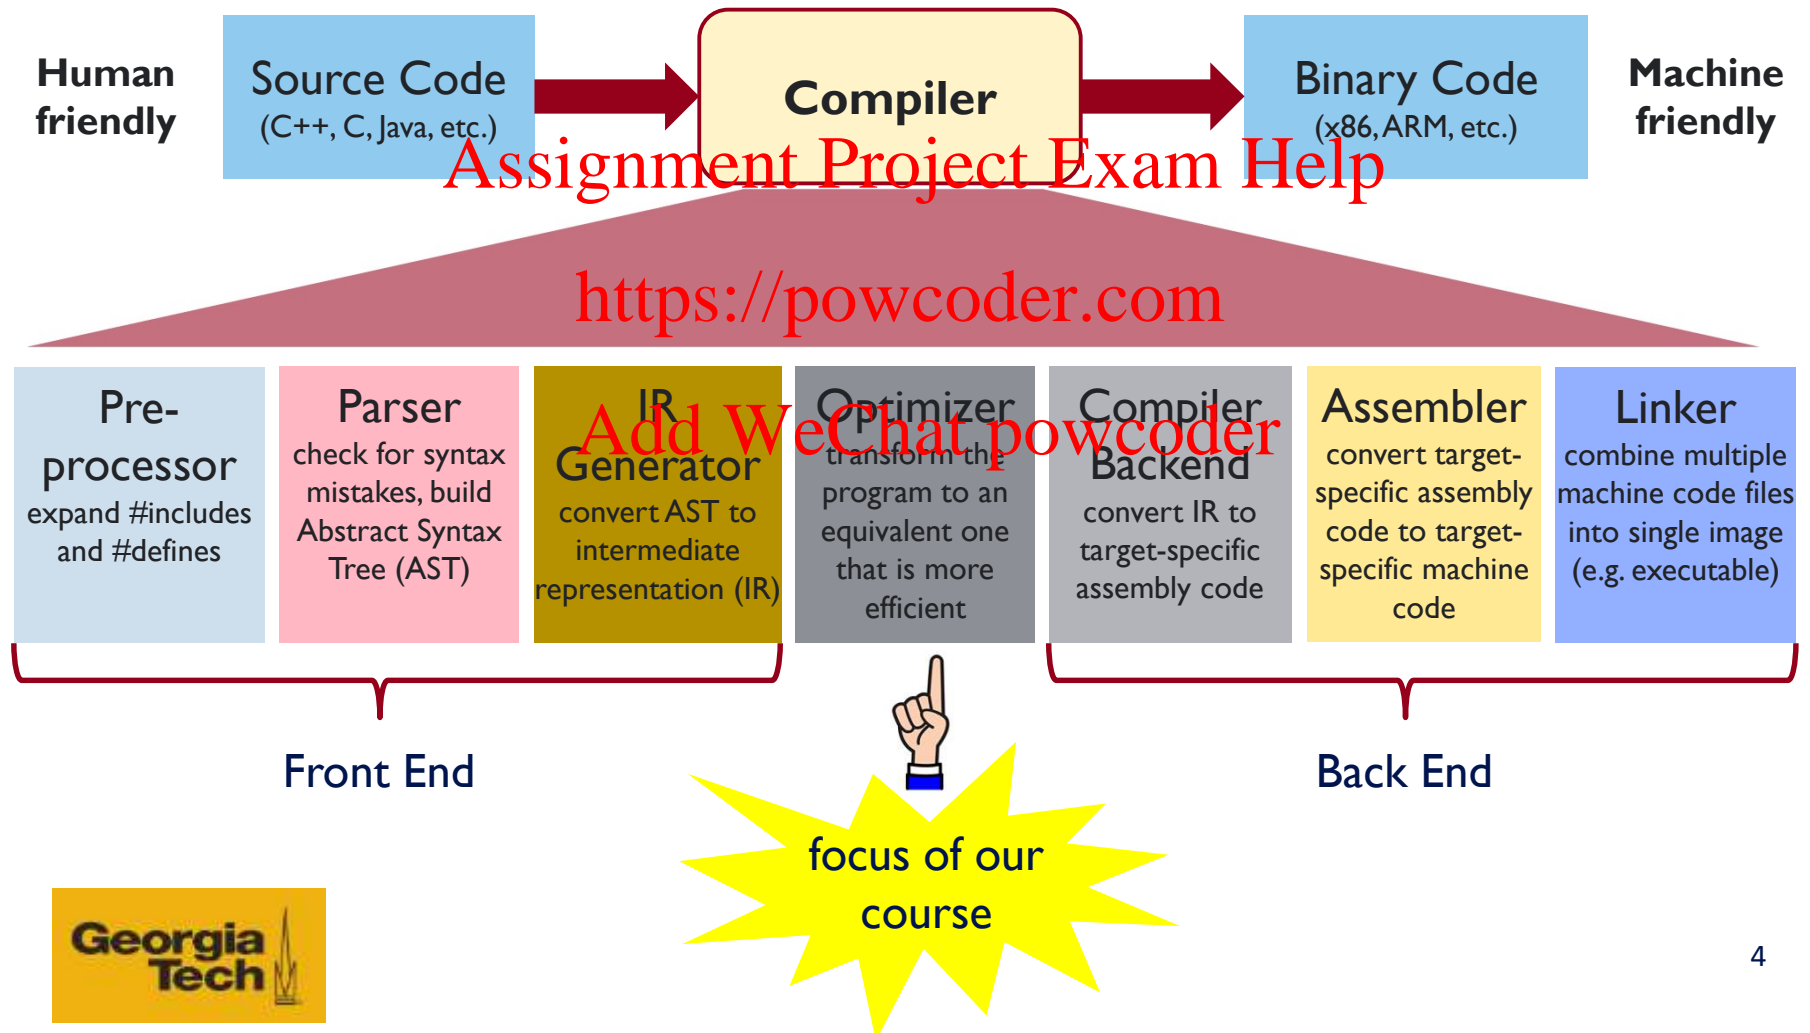

Architecture of LLVM

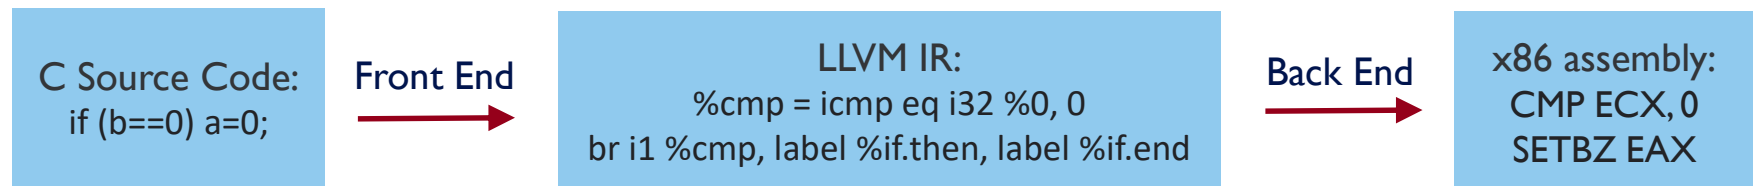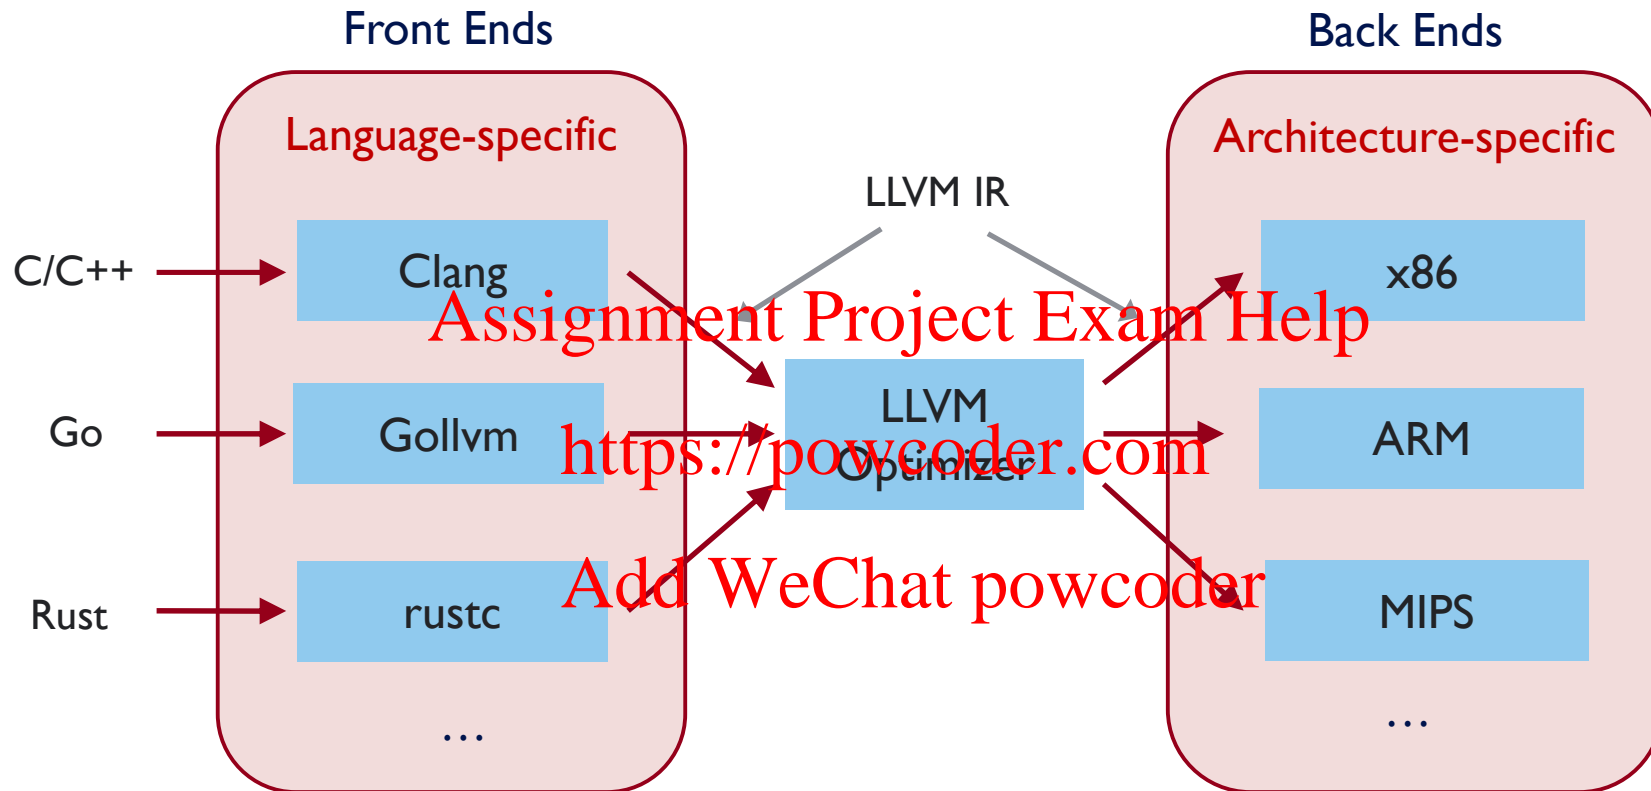

LLVM Passes

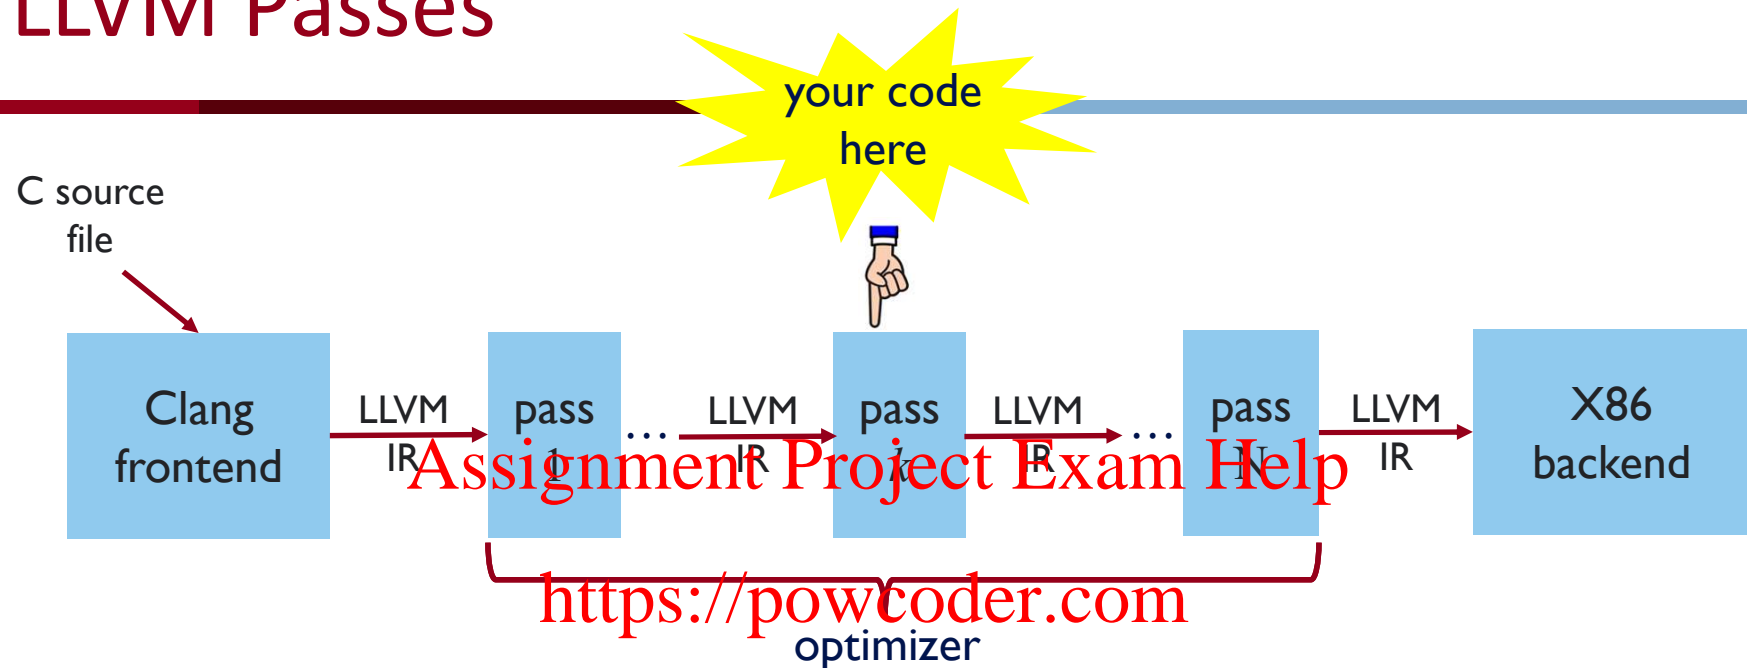

- The LLVM Optimizer (**opt**) is a series of "passes" that run one after another
- Two kinds of passes: **analysis** and **transformation**
 - Analysis pass analyzes LLVM IR to *check* program properties
 - Transformation pass transforms LLVM IR to *monitor* or *optimize* the program
- => Analysis passes do not change code; transformation passes do

LLVM is typically extended by implementing new passes that look at and change the LLVM IR as it flows through the compilation process.

Example: Factorial Program

Factorial.c

```
#include <stdio.h>
#include <stdint.h>

int64_t factorial(int64_t n) {
    int64_t acc = 1;
    while (n > 0) {
        acc = acc * n;
        n = n - 1;
    }
    return acc;
}
```

Factorial.ll

```
define @factorial(%n) {
    %1 = alloca
    %acc = alloca
    store %n, %1
    store 1, %acc
    br label %start

start:
    %3 = load %1
    %4 = icmp sgt %3, 0
    br %4, label %then, label %else

then:
    %6 = load %acc
    %7 = load %1
    %8 = mul %6, %7
    store %8, %acc
    %9 = load %1
    %10 = sub %9, 1
    store %10, %1
    br label %start

else:
    %12 = load %acc
    ret %12
}
```

Factorial.s

```
_factorial:
## BB#0:
    pushl %ebp
    movl %esp, %ebp
    subl $8, %esp
    movl 8(%ebp), %eax
    movl %eax, -4(%ebp)
    movl $1, -8(%ebp)
LBB0_1:
    cmpl $0, -4(%ebp)
    jle LBB0_3
## BB#2:
    movl -8(%ebp), %eax
    imull -4(%ebp), %eax
    movl %eax, -8(%ebp)
    movl -4(%ebp), %eax
    subl $1, %eax
    movl %eax, -4(%ebp)
    jmp LBB0_1
LBB0_3:
    movl -8(%ebp), %eax
    addl $8, %esp
    popl %ebp
    retl
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Why LLVM IR?

- Easy to translate from the level above
- Easy to translate to the level below
- Narrow interface (simpler phases/optimizations)
- The IR language is independent of the source and target languages in order to maximize the compiler's ability to support multiple source and target languages.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Example: Source language might have “while”, “for”, and “foreach” loops

- IR language might have only “while” loops and sequence
- Translation eliminates “for” and “foreach”



LLVM IR Normal Form

Instead of handling AST of “((1 + X4) + (3 + (X1 * 5)))”

```
Add(Add(Const 1, Var X4),  
      Add(Const 3, Mul(Var X1,  
                        Const 5))))
```

Assignment Project Exam Help

we have to handle:

<https://powcoder.com>


```
tmp0 = 1 + X4  
tmp1 = X1 * 5  
tmp2 = 3 + tmp1  
tmp3 = tmp0 + tmp2
```

Add WeChat powcoder

- Translation makes the order of evaluation explicit.
- Names intermediate values.
- Introduced temporaries are never modified.



Generate LLVM IR Yourself!

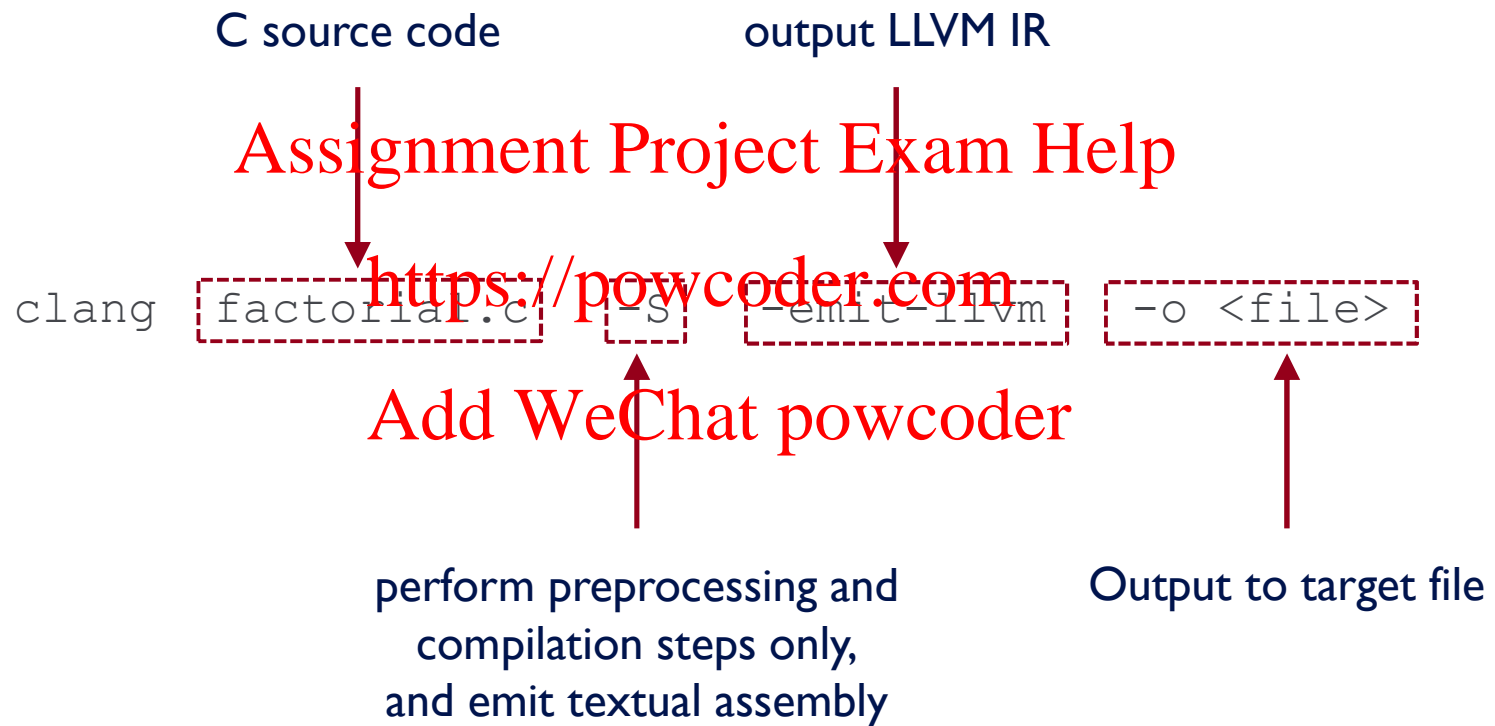

History of LLVM

- The LLVM project was initially developed by Vikram Adve and Chris Lattner at the University of Illinois at Urbana-Champaign in 2000. Their original purpose was to develop dynamic compilation techniques for static and dynamic programming languages.

Assignment Project Exam Help

- In 2005, Lattner entered Apple and continued to develop LLVM.

<https://powcoder.com>

Add WeChat powcoder

- In 2013, LLVM initially represented Low-Level Virtual Machines, but as the LLVM family grew larger, the original meaning was no longer applicable.
- Today, LLVM + Clang comprise a total LOC of 2.5 million lines of C++ code.



Where is LLVM Used?

- Traditional C/C++ toolchain: Qualcomm Snapdragon LLVM compiler for **Android**
- Programming languages: Pyston – performance oriented **Python** implementation by LLVM
- Language runtime systems: LLVM-based **.NET** MSIL compiler
- GPU: Majority of **OpenCL** implementations based on Clang/LLVM
- Linux/FreeBSD: **Debian** experimenting with Clang/LLVM as an additional compiler




Contributing companies

Source: “Where is LLVM being used today?”, <https://llvm.org/devmtg/2016-01/slides/fosdem-2016-llvm.pdf>

Assignment Project Exam Help

<https://powcoder.com>
Part II: Structure of LLVM IR

Add WeChat powcoder

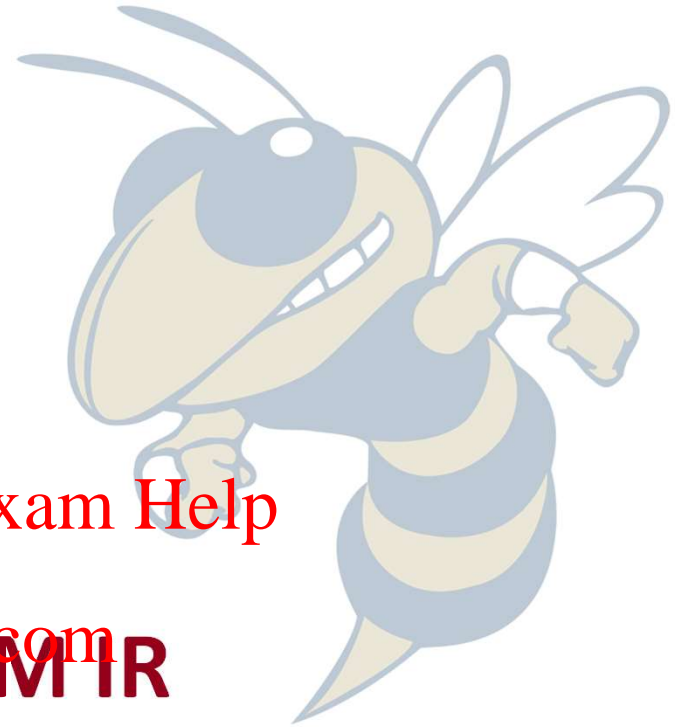


LLVM IR

Three formats:

- **In-memory**: binary in-memory format, used during compilation process
- **Bitcode**: binary on-disk format, suitable for fast loading
(Obtained by “clang -emit-llvm -c factorial.c -o xxx.bc”)
- **Assembly**: human-readable format
(Obtained by “clang -emit-llvm -S factorial.c -o xxx.ll”)

Assignment Project Exam Help

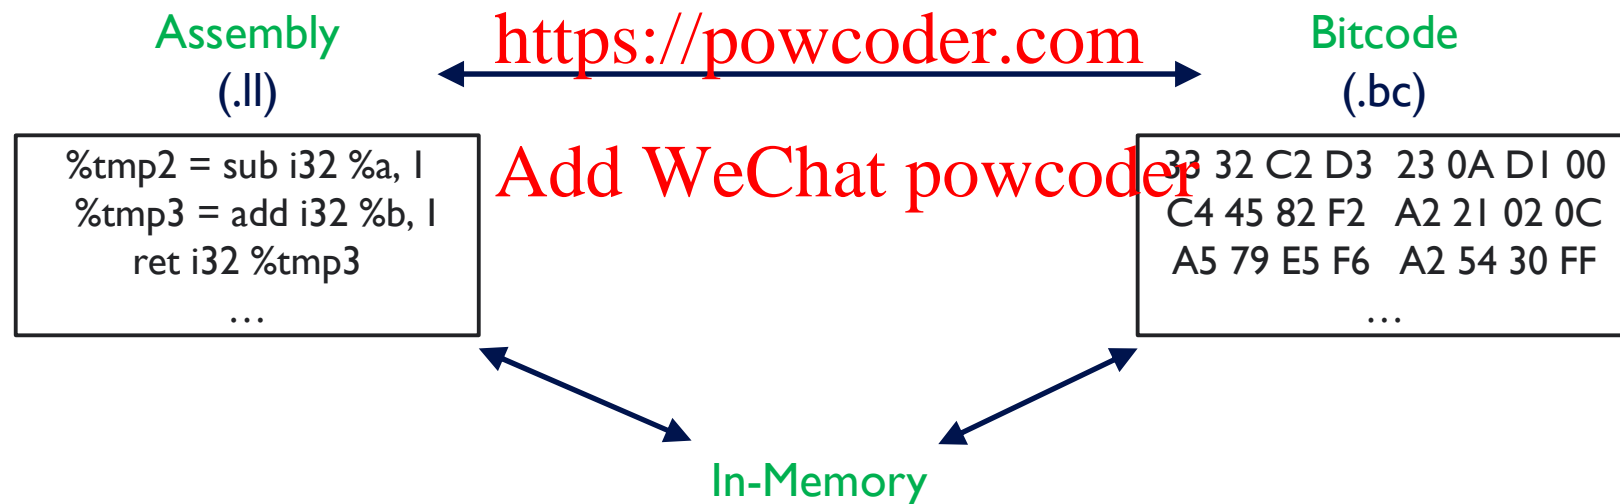


Compare to Java: instead of .class (bytecode), you get .bc



Program Structure in LLVM IR

Instruction \subset Basic Block \subset Function \subset Module

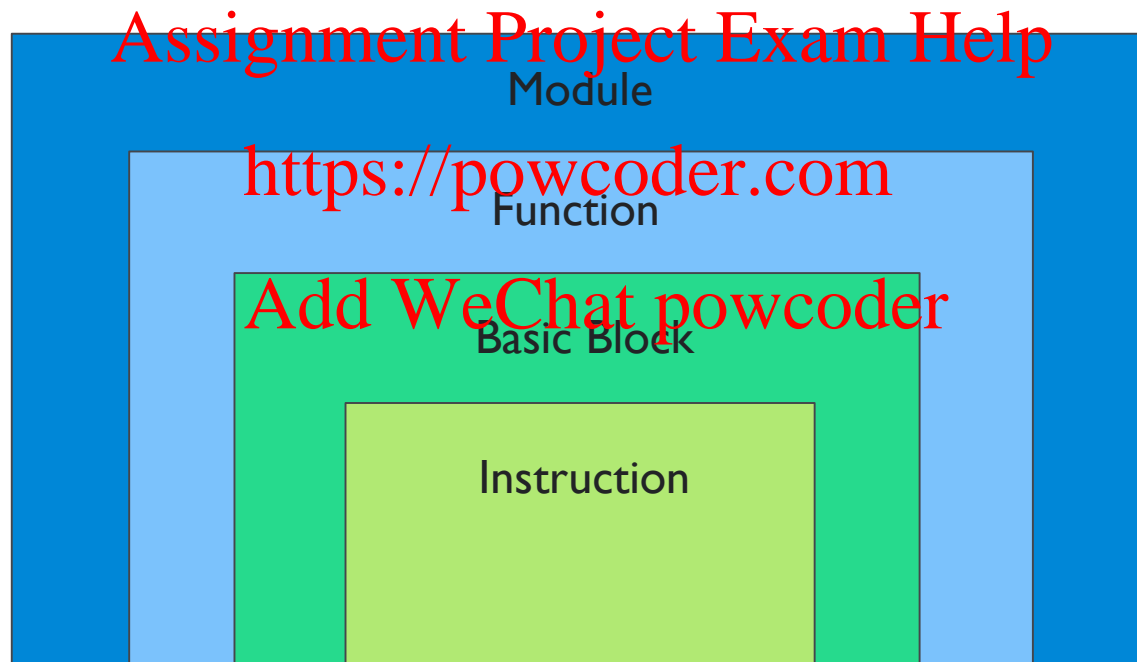

Program Structure in LLVM IR

Module is a top-level container of LLVM IR, corresponding to each translation unit of the front-end compiler.

Function is a function in a programming language, including a function signature and several basic blocks. The first basic block in a function is called an entry basic block.


<https://powcoder.com>

Basic Block is a set of instructions that are executed sequentially, with only one entry and one exit, and non-head and tail instructions will not jump to other instructions in the order they are executed.

Instruction is the smallest executable unit in LLVM IR; each instruction occupies a single line.



LLVM IR Iterators

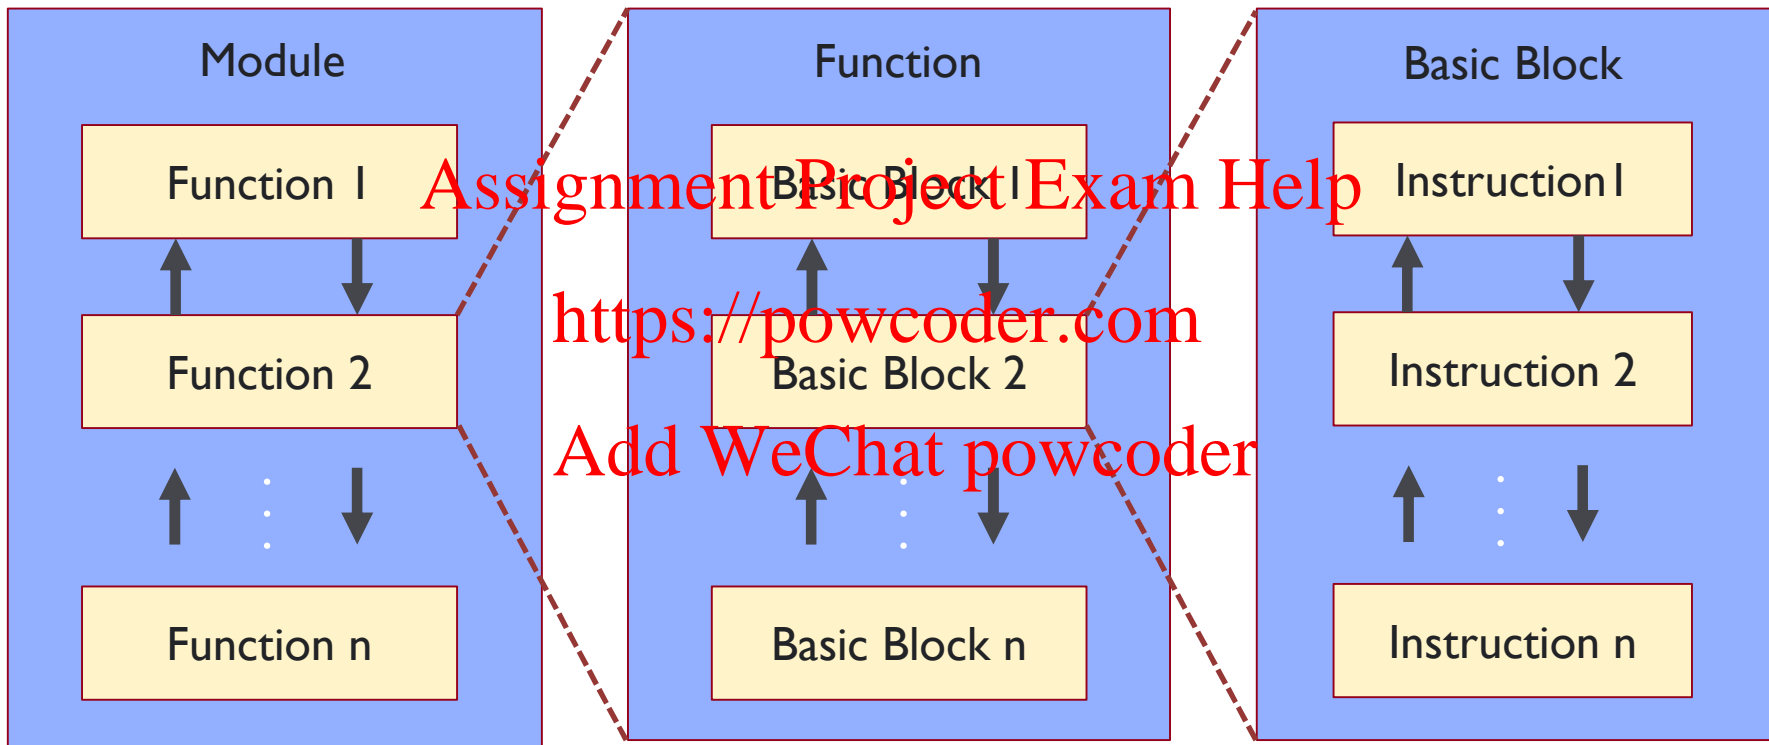

LLVM IR Iterators

Iterator types:

- Module::iterator
- Function::iterator
- BasicBlock::iterator
- Value::use_iterator
- User::op_iterator

Example uses:

Approach 1 (using STL iterator):

```
for (Function::iterator FI = F->begin(); FI != F->end(); FI++) {  
    for (BasicBlock::iterator BI = FI->begin(); BI != FI->end(); BI++) {  
        // some operations  
    }  
}
```

<https://powcoder.com>

Approach 2 (using auto keyword):

```
for (auto FI = F->begin(); FI != F->end(); FI++) {  
    for (auto BI = FI->begin(); BI != FI->end(); BI++) {  
        // some operations  
    }  
}
```

Approach 3 (using InstIterator):

```
#include llvm/IR/InstIterator.h  
for (inst_iterator It = inst_begin(F), E = inst_end(F); It != E; ++It){  
    // some operations  
}
```



Variables and Types

Two kinds of variables: local and global

“%” indicates local variables: `%1 = add nsw i32 %a, %tmp`

“@” indicates global variables: `@g = global i32 20, align 4`

Two kinds of types: primitive (e.g. integer, floating-point) and derived (e.g. pointer, struct)

Integer type is used to specify an integer of defined bit width:

i1 A single-bit integer

i32 A 32-bit integer

Pointer type is used to specify memory locations:

i32** A pointer to a pointer to an integer.

i32 (i32*) * A pointer to a function that takes as argument a pointer to an integer, and returns an integer as result.

More details at <https://llvm.org/docs/LangRef.html#type-system>



The SSA Form

The Static Single Assignment (SSA) form requires that every variable be defined only **once**, but may be used multiple times.

SSA was proposed in 1988 and an efficient algorithm was developed in IBM, which is still in use in many compilers.

C Code

```
int square(int x)
{
    x = x * x;
    return x;
}
```

SSA Form

```
int square(x_1)
{
    x_2 = x_1 * x_1;
    return x_2;
}
```

<https://powcoder.com>

Add WeChat powcoder

Notice how a new assignment to variable “x” is represented as an assignment to a new variable “x_2”

More about the SSA form:

https://en.wikipedia.org/wiki/Static_single_assignment_form



The SSA Form

SSA is commonly used in compilers because it simplifies and improves a variety of compiler optimizations.

LLVM IR makes use of the SSA form.

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

C Code

```
int square(int x)
{
    x = x * x;
    return x;
}
```

SSA Form

```
int square(x_1)
{
    x_2 := x_1 * x_1;
    return x_2;
}
```

LLVM IR

```
define i32 @square(i32) local_unnamed_addr #0
{
    %2 = mul nsw i32 %0, %0
    ret i32 %2
}
```

Phi Nodes

A problem arises with SSA when the same variable is modified in multiple branches.

In the example, to return variable “x”, the SSA form has two choices “x_2” and “x_3” depending on the path taken.

A Phi node abstracts away this complexity by defining a new variable “x_3” which is assigned the value of “x_1” or “x_2”.

C Code

```
x = 0;
if (y < 1) {
    x++;
} else {
    x--;
}
return x;
```

SSA Code

```
x_1 := 0;
if (y_1 < 1) {
    x_2 := x_1 + 1;
} else {
    x_3 := x_1 - 1;
}
// do I return x_2 or x_3?

x_4 := phi(x_2, x_3);
// return x_4 instead

return x_4;
```



C Program and its LLVM IR Counterpart

C code: Factorial.c

```
int factorial(int n)
{
    int acc = 1;
    while (n > 0) {
        acc = acc * n;
        n = n - 1;
    }
    return acc;
}
```

LLVM IR: Factorial.ll

```
entry:
    %n.addr = alloca i32, align 4
    %acc = alloca i32, align 4
    store i32 %n, i32* %n.addr, align 4
    store i32 1, i32* %acc, align 4
    br label %while.cond

while.cond:                                ; preds = %while.body, %entry
    %0 = load i32, i32* %n.addr, align 4
    %cmp = icmp sgt i32 %0, 0
    br i1 %cmp, label %while.body, label %while.end

while.body:                                ; preds = %while.cond
    %1 = load i32, i32* %acc, align 4
    %2 = load i32, i32* %n.addr, align 4
    %mul = mul nsw i32 %1, %2
    store i32 %mul, i32* %acc, align 4
    %3 = load i32, i32* %n.addr, align 4
    %sub = sub nsw i32 %3, 1
    store i32 %sub, i32* %n.addr, align 4
    br label %while.cond

while.end:                                ; preds = %while.cond
    %4 = load i32, i32* %acc, align 4
    ret i32 %4
}
```


Assignment Project Exam Help

<https://powcoder.com>


Add WeChat powcoder



Basic Blocks & Control Flow Graph (CFG)

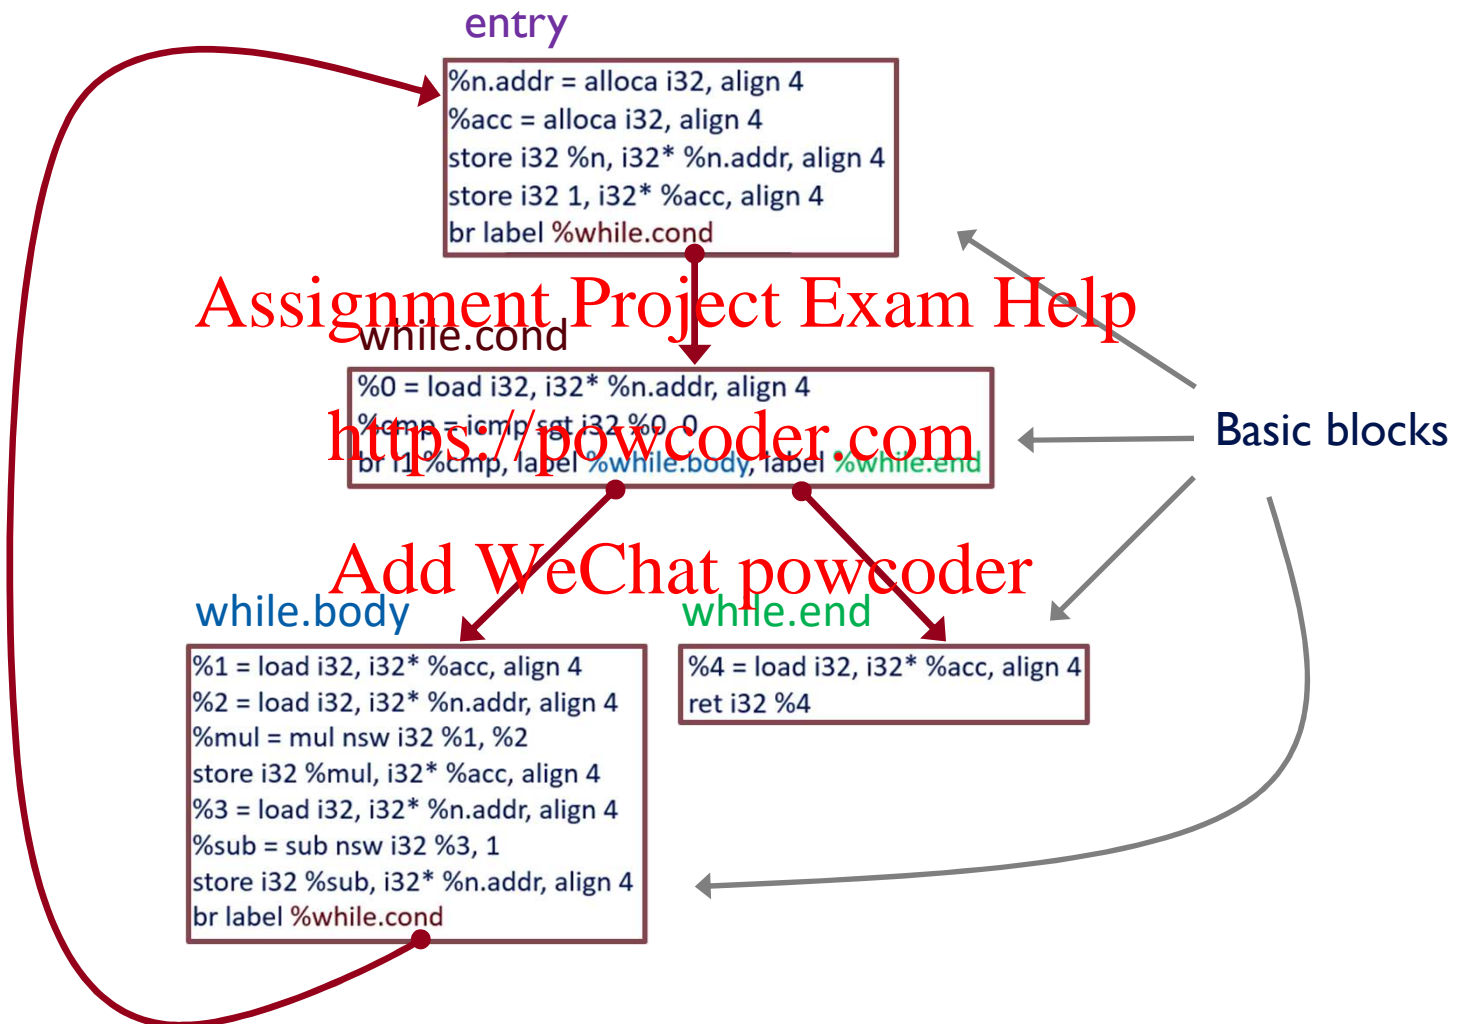

LLVM Class Hierarchy

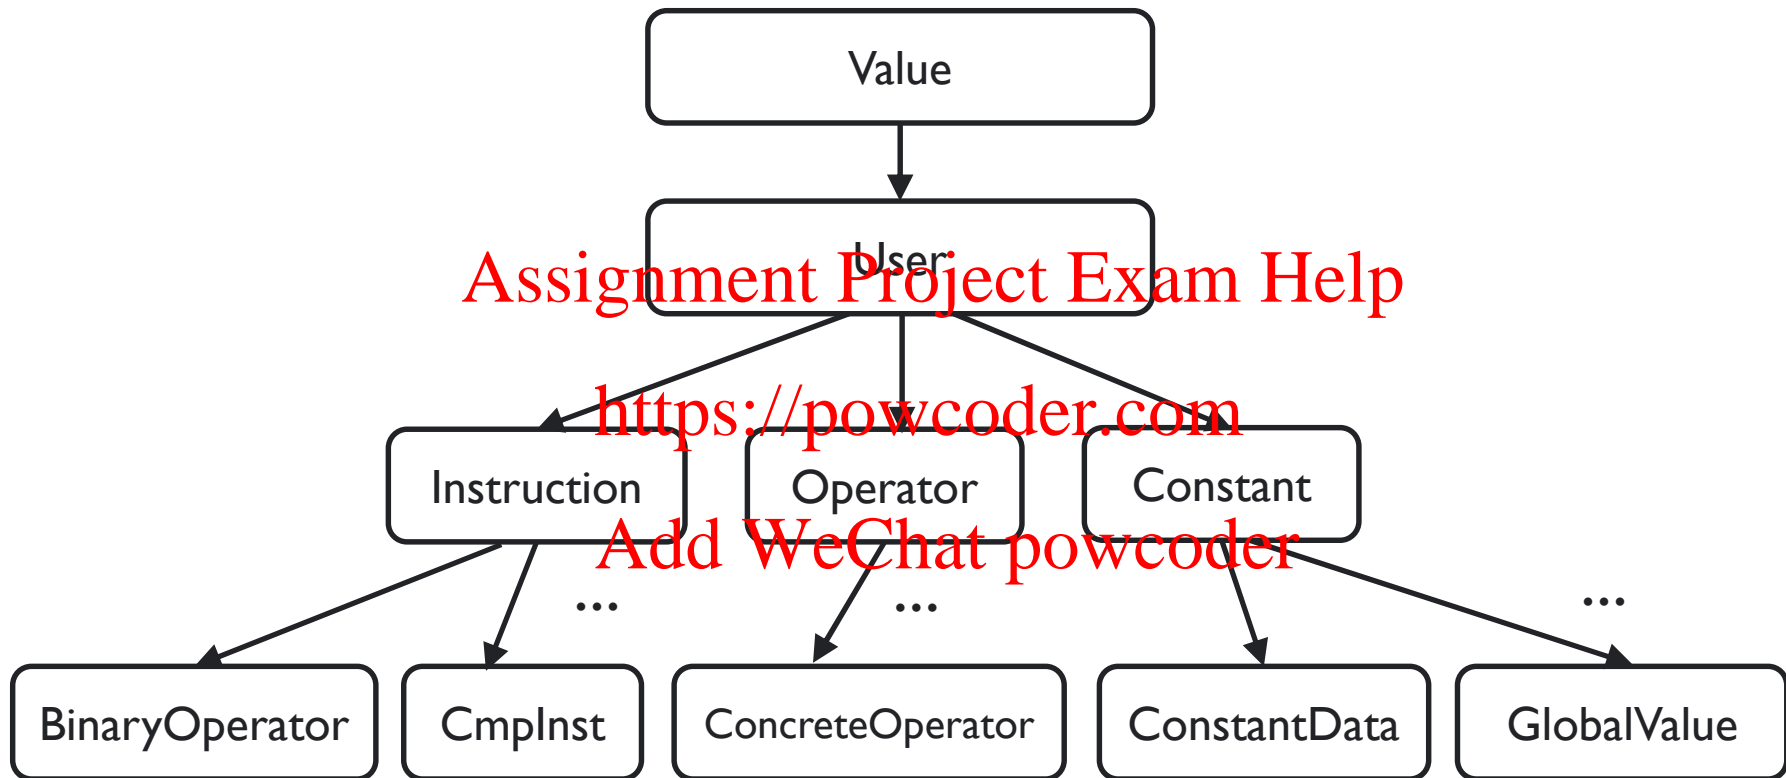

More classes at https://llvm.org/doxygen/classllvm__I__IValue.html

Instructions and Variables



Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Each Variable \Leftrightarrow the Instruction that assigns to it.

There is a unique instruction assigning to each variable since LLVM IR uses the SSA form.

Thus, each instruction can be viewed as the name of the assigned variable.

LLVM IR example

...

```
%0 = load i32, i32* %x, align 4
```

...

```
%1 = load i32, i32* %y, align 4
```

```
%add = add nsw i32 %0, %1
```

Instruction I

```
llvm::outs() << *I.getOperand(0);  
will not output the operand variable "%0"; it  
will output the instruction that assigns to it:  
"%0 = load i32, i32* %x, align 4"
```



Printing Information

Use **outs()** and **errs()** to print instead of using `std::cout`, `std::cerr`, and `printf`. Also, there is no equivalent of `std::endl` in LLVM.

- Example 1 - printing a function name (Function* F):
~~`std::cout << F->getName().str() << std::endl;`~~
`outs() << F->getName() << "\n";`
- Example 2 - printing an instruction (Instruction* I):
`I->dump() or outs() << *I << "\n";`
- Example 3 - printing a basic block (BasicBlock* BB):
`BB->dump() or outs() << *BB << "\n";`

Instruction: AllocInst

An instruction to allocate memory on the stack.

`int z;`

`%z = alloca i32, align 4`

Assignment Project Exam Help

`alloca:` Allocate memory in stack

`i32:` Integer of size 32 bits

`align:` Memory alignment (4 bytes)

<https://powcoder.com>

`int* z;`

Add WeChat powcoder

`%z = alloca i32*, align 8`

`alloca:` Allocate memory in stack

`i32*:` Pointer to 32-bit integer

`align:` Memory alignment (8 bytes)

More details at https://llvm.org/doxygen/classllvm_1_1AllocInst.html



Instruction: StoreInst

An instruction for storing to memory.

E.g. store T v , $T^* \%y$

Store value v of type T into location pointed to by register $\%y$.

The value may be a constant or a register.

$T = i32$

$\text{int } x = 5;$

$\%x = \text{alloca } i32, \text{ align } 4$

store $i32$ 5, $i32^* \%x$, align 4

store: Set value of integer pointed
to by register $\%x$ to 1

$T = i32^*$

$\text{int}^* x = 0;$

$\%x = \text{alloca } i32^*, \text{ align } 8$

store $i32^*$ null, $i32^{**} \%x$, align 8

store: Set value of pointer pointed
to by register $\%x$ to NULL

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

More details at https://llvm.org/doxygen/classllvm_1_1StoreInst.html



Instruction: LoadInst

An instruction for reading from memory.

E.g. `%x = load T, T* %y`

Load value of type **T** into register `%x` from location pointed to by register `%y`.

T = i32	<div><div>int x = ...; ... = 1 / x;</div><div><code>%x = alloca i32, align 4</code> <code>%1 = load i32, i32* %x</code> <code>%div = sdiv i32 1, %1</code> load: Load integer value into register %1 from location pointed to by register %x</div></div>
T = i32*	<div><div>int *x = ...; if (x) ...</div><div><code>%x = alloca i32*, align 8</code> <code>%1 = load i32*, i32** %x</code> <code>%tobool = icmp ne i32* %1, null</code> load: Load pointer value into register %1 from location pointed to by register %x</div></div>

More details at https://llvm.org/doxygen/classllvm_1_1LoadInst.html



Instruction: BinaryOperator

An instruction for binary operations.

```
int x = 0;           %1 = load i32, i32* %y, align 4
int y = 2;           %2 = load i32, i32* %x, align 4
z = y + x;           %z = add nsw i32 %1, %2
```

Assignment Project Exam Help
<https://powcoder.com>
Add WeChat powcoder

Could be +, -, *, / Could be add, sub, mul, udiv, sdiv

add: Store the sum of %1 and %2 in %z
(nsw: no signed wrap)

More details at https://llvm.org/doxygen/classllvm_1_1BinaryOperator.html



Instruction: BinaryOperator operations

- **'add'** Instruction: The 'add' instruction returns the sum of its two operands.

$\langle \text{result} \rangle = \text{add } \langle \text{ty} \rangle \langle \text{op1} \rangle, \langle \text{op2} \rangle$

- **'sub'** Instruction: The 'sub' instruction returns the difference of its two operands.

$\langle \text{result} \rangle = \text{sub } \langle \text{ty} \rangle \langle \text{op1} \rangle, \langle \text{op2} \rangle$

- **'mul'** Instruction: The 'mul' instruction returns the product of its two operands.

$\langle \text{result} \rangle = \text{mul } \langle \text{ty} \rangle \langle \text{op1} \rangle, \langle \text{op2} \rangle$

- **'udiv'** Instruction: The 'udiv' instruction returns the **unsigned integer** quotient of its two operands.

$\langle \text{result} \rangle = \text{udiv } \langle \text{ty} \rangle \langle \text{op1} \rangle, \langle \text{op2} \rangle$

- **'sdiv'** Instruction: The 'sdiv' instruction returns the **signed integer** quotient of its two operands.

$\langle \text{result} \rangle = \text{sdiv } \langle \text{ty} \rangle \langle \text{op1} \rangle, \langle \text{op2} \rangle$



Instruction: ReturnInst

Return a value (possibly void), from a function.

Assignment Project Exam Help

return void;

ret void

<https://powcoder.com>

Add WeChat powcoder

return 0;

ret i32 0

More details at https://llvm.org/doxygen/classllvm_1_1ReturnInst.html



Instruction: CmpInst

This instruction returns a bool value or a vector of bool values based on comparison of its two integer, integer vector, or pointer operands.

Assignment Project Exam Help

<https://powcoder.com>

int a = (x==y)

%cmp = icmp eq i32 %x, %y

Add WeChat powcoder

icmp eq: Compare %x and %y, and set %cmp to 1 if %x is equal to %y, and to 0 otherwise

More details at https://llvm.org/doxygen/classllvm_1_1CmpInst.html



Instruction: Cmplnst <cond>

Possible conditions <cond>:

- eq: equal
- ne: not equal
- ugt: unsigned greater than
- uge: unsigned greater or equal
- ult: unsigned less than
- ule: unsigned less or equal
- sgt: signed greater than
- sge: signed greater or equal
- slt: signed less than
- sle: signed less or equal

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Instruction: BranchInst

Conditional branch instruction.

```
If (a==0) {                                %cmp = icmp eq i32 %a, 0
    // br1                                br i1 %cmp, label %IfEqual, label %IfUnequal
    return 0;
} else {
    // br2                                IfEqual:
    return 1;                            ret i32 0
}                                         IfUnequal:
                                         ret i32 1
```

br: Determine which branch should be executed;
jump to %IfEqual if %cmp is true, and to %IfUnequal otherwise

More details at https://llvm.org/doxygen/classllvm_1_1BranchInst.html



Instruction: PHINode

The 'phi' instruction is used to implement the 'phi' node in the SSA form.

```
int x = 0;
if (y < 1)
    x++;
else
    x--;
return x;
```

PHI instruction:

```
br il %cmp, label %then, label %else
then:                                ; preds = %entry
%inc = add nsw i32 0, 1
br label %if.end
else:                                ; preds = %entry
%dec = add nsw i32 0, -1
br label %end
end:                                  ; preds = %else, %then
%x = phi i32 [ %inc, %then ], [ %dec, %else ]
ret i32 %x
```

Assignment Project Exam Help
<https://powcoder.com>
Add WeChat powcoder

phi: Assign to %x the value of:

- %inc if predecessor basic block is %then, and
- %dec if predecessor basic block is %else

More details at https://llvm.org/doxygen/classllvm_1_1PHINode.html



Checking Instruction Type

A dynamic cast converts an instruction to a more specific type in its class hierarchy at runtime:

```
auto *AI = dyn_cast<CastInst>(Instruction)
```

Assignment Project Exam Help

<https://powcoder.com>

Pointer that points to the
target type instruction

Target type
instruction

Instruction you
want to cast

Add WeChat powcoder

If target type is not in original instruction's class hierarchy, AI will point to NULL. This property can be used to check if an instruction is of a particular type:

```
if (LoadInst *LI = dyn_cast<LoadInst>(I)) {  
    // if I can be converted to LoadInst, do something  
}
```



Write your own LLVM Pass!

An LLVM pass is created by extending a subclass of the Pass class. We illustrate this for a function pass.

ID is the identifier of the pass class and must be explicitly defined outside the class definition.

runOnFunction will be called for each function in the module. It must return true if it modifies the LLVM IR, and false otherwise.

The RegisterPass class is used to register the pass. The template argument is the name of the pass class and the constructor takes 4 arguments: the name of the command line argument, the name of the pass, a bool if it modifies the CFG, and a bool if it is an analysis pass.

Upon compiling using cmake, a shared static library file "MyAnalysis.so" will be created.

To invoke this pass, run the following command:

```
opt -load MyAnalysis.so -MyAnalysis factorial.ll
```

```
#include "llvm/Pass.h"
#include "llvm/IR/Function.h"

using namespace llvm;

class MyAnalysis: public FunctionPass {
public:
    static char ID;
    MyAnalysis() : FunctionPass(ID) {}
    bool runOnFunction(Function &F);
}

char MyAnalysis::ID = 1;

bool MyAnalysis::runOnFunction(Function &F) {
    // Your function analysis goes here
    return false;
}

static RegisterPass<MyAnalysis> X(
    "MyAnalysis", "MyAnalysis", false, false
);
```



More details at <https://llvm.org/docs/WritingAnLLVMPass.html>

Assignment Project Exam Help

Part III: The LLVM API

<https://powcoder.com>

Add WeChat powcoder



The Name of a Module

Class llvm::Module

constStringRef getName() const

- Get a short "name" for the module, useful for debugging or logging.

Example:

<https://powcoder.com>

Module M = ...

outs() << "Module name is:" << M.getName() << "\n";



Iterating over Functions in a Module

Class `llvm::Module`

`const_iterator_range<iterator> functions()`

- Get an iterator over functions in module.

Example:

<https://powcoder.com>

```
Module M = ...  
for (auto &F : M.functions()) {  
    // some operations here  
}
```

Counting Instructions in a Function

Class `llvm::Function`

`unsigned getInstructionCount() const`

- Return the number of non-debug IR instructions in this function.
- This is equivalent to the sum of the sizes of all the basic blocks contained in the function.

Example:

<https://powcoder.com>

```
Module M = ...  
for (auto &f : M.functions()) { // Get number of instructions in function f  
    NumOfFunctions += 1;  
    NumOfInstructions += f.getInstructionCount();  
}
```

Checking an Instruction's Kind

Class `llvm::Instruction`

`unsigned getOpcode() const`

- Return a member of one of the enums, e.g. `Instruction::Add`.

Example:

<https://powcoder.com>

```
Instruction instr = ...  
switch (instr.getOpcode()) {  
case Instruction::Br:  
    NumOfBranchInstrs += 1;  
    break;  
}
```

Checking an Instruction's Kind

Class llvm::Instruction

constbool isBinaryOp() const

- Check if the instruction is a binary instruction.

Example:

<https://powcoder.com>

```
Instruction instr = ...  
if (instr.isBinaryOp()) {  
    NumOfBinaryInstrs += 1;  
}
```


Getting an Instruction's Operands

Class `llvm::User`

`Value* llvm::User::getOperand(unsigned i) const`

- Return the operand of this instruction, 0 for first operand, 1 for second operand.

Example:

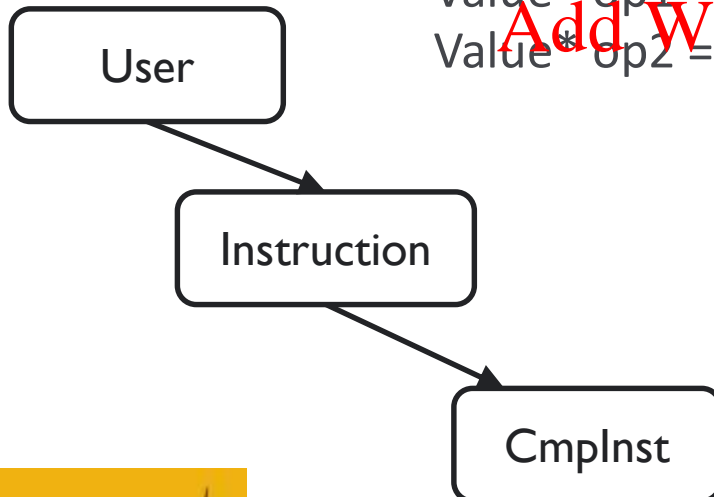

<https://powcoder.com>
Add WeChat powcoder

Also, any public function defined in a super-class can be called by an object of a sub-class



Getting an Instruction's Operands

Class `llvm::Value`

`Type* getType() const`

- All values are typed; get the type of this value.

Example:

<https://powcoder.com>
`BinaryOperator *BO = ...`
`Type* t = BO->getOperand(0)->getType();`
Add WeChat powcoder

Getting an Operand's Type

Class `llvm::Type`

`bool isIntegerTy() const`

- True if this is an instance of `IntegerType`.

Example:

```
BinaryOperator *BO = ...  
if (!BO->getOperand(1)->getType()->isIntegerTy())  
    return;
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



Evaluating a Conditional Expression

Class `llvm::CmpInst`

`bool llvm::CmpInst::isTrueWhenEqual() const`

`bool llvm::CmpInst::isFalseWhenEqual() const`

- Determine if this is true/false when both operands are the same (e.g. `0 == 0` TODO).

Example:

```
CastInst *CI = ...  
if (CI->isTrueWhenEqual()) {  
    // some operations  
}  
if (CI->isFalseWhenEqual()) {  
    // some operations  
}
```



Store Instruction Operands

Class llvm::StoreInst

Value* getValueOperand()

- Return 1st operand of store instruction.

Value* getPointerOperand()

- Return 2nd operand of store instruction.

Example:

```
StoreInst* SI = ...  
Value* S = SI -> getValueOperand();  
// same as Value* S = SI -> getOperand(0);  
Value* P = SI -> getPointerOperand();  
// same as Value* P = SI -> getOperand(1);
```

store i32 0, i32* %x align 4

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Load Instruction Operand

Class llvm::LoadInst

Value* getPointerOperand()

- Return operand of load instruction.

Example:

```
LoadInst *LI = ...  
Value* L = LI->getPointerOperand();  
// same as Value* L = LI->getOperand(0);
```

%1 = load i32, i32* %x

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder

Getting the Value of a Constant

Class `llvm::Constant`

`Constant* get(Type* Ty, uint64_t V, bool isSigned = false)`

- If `Ty` is a vector type, return a `Constant` with a splat of the given value.
- Otherwise return a `ConstantInt` for the given value.

Example:

```
Type *IntType = ...  
DebugLoc Debug = ...  
Value* Line = llvm::ConstantInt::get(IntType, Debug.getLine());  
Value* Col = llvm::ConstantInt::get(IntType, Debug.getCol());
```



Checking if Constant is Zero

Class llvm::Constant

bool isZeroValue() const

- Return true if the value is zero or NULL.

Assignment Project Exam Help

<https://powcoder.com>

Example:

Value* V = ...
if (ConstantData *CD = dyn_cast<ConstantData>(V))
 return CD->isZeroValue();

Add WeChat powcoder



Getting the Constant Value of PHINode

Class llvm::PHINode

Value* hasConstantValue() const

- If the specified PHI node always merges the same value, return the value, otherwise return null.

Assignment Project Exam Help

<https://powcoder.com>

Example:

Add WeChat powcoder

```
PHINode *PHI = ...
```

```
Value* cv = PHI->hasConstantValue();
```



Getting Incoming Values of PHINode

Class Ilvm::PHINode

unsigned getNumIncomingValues() const

- Return the number of incoming values into a PhiNode instruction.

Example:

<https://powcoder.com>

PHINode *PHI;
unsigned int n = PHI->getNumIncomingValues();

Assignment Project Exam Help

Add WeChat powcoder



Getting an Instruction's Debug Location

Class `llvm::Instruction`

`const DebugLoc& getDebugLoc() const`

- Return the debug location of an instruction as a `DebugLoc` object.

Example:

<https://powcoder.com>

Instruction instr = ...
`const DebugLoc& Debug = instr.getDebugLoc();`

Getting a Debug Location's Line

Class `llvm::DebugLoc`

`unsigned getLine() const`

- Get the line number information from a `DebugLoc` object.

Example:

<https://powcoder.com>

```
DebugLoc Debug = ...  
unsigned DebugLine = Debug.getLine();
```



Getting a Debug Location's Column

Class `llvm::DebugLoc`

`unsigned getCol() const`

- Get the column number information from a `DebugLoc` object.

Example:

<https://powcoder.com>

```
DebugLoc Debug = ...  
unsigned DebugLine = Debug.getCol();
```



Creating a Function Type

Class `llvm::FunctionType`

```
FunctionType* FunctionType::get(Type* Result,  
                                ArrayRef< Type*> Params,  
                                bool isVarArg)
```

- Create a `FunctionType` with given types of return result and parameters.

Example:

```
LLVMContext Ctx = ...  
Type *ArgsTypes[] = ...  
FunctionType* FType = FunctionType::get(  
    Type::getVoidTy(Ctx), ArgsTypes, false);
```



Inserting a Function in a Module

Class `llvm::Module`

`FunctionCallee getOrInsertFunction(StringRef Name,
FunctionType* T,
AttributeList* AttributeList)`

- Look up or insert the specified function in the module symbol table.
- Four possibilities: If it does not exist, add a prototype for the function and return it. Otherwise, if the existing function has the correct prototype, return the existing function. Finally, the function exists but has the wrong prototype, return the function with a `constantexpr` cast to the right prototype. In all cases, the returned value is a `FunctionCallee` wrapper around the 'FunctionType T' passed in, as well as a 'Value' either of the Function or the bitcast to the function.

Example:

```
Module *M = ...  
Value* Sanitizer = M->getOrInsertFunction(  
    SanitizerFunctionName, FType);
```



Creating a Call Instruction

Class `llvm::CallInst`

```
static CallInst* Create(FunctionCallee Func,  
                        ArrayRef<Value*> Args,  
                        const Twine & NameStr,  
                        Instruction * InsertBefore = nullptr)
```

- Create a `CallInst` object.

Example:

```
Function *Fun = ...  
std::vector<Value*> Args = ...  
CallInst *Call = CallInst::Create(Fun, Args, "", &I);
```



Getting Global Information

Class `llvm::Value`

`LLVMContext& getContext() const`

- Get global information about program including types and constants.

Example:

<https://powcoder.com>

```
Module* M =  
LLVMContext& Ctx = M->getContext(),
```



Getting the Int32 Type

Class `llvm::Type`

`IntegerType* getInt32Ty(LLVMContext& C)`

- Get an instance of Int32 type.

Example:

<https://powcoder.com>

```
LLVMContext Ctx = ...  
Type* IntType = Type::getInt32Ty(Ctx);
```

Assignment Project Exam Help

Add WeChat powcoder



Getting the Void Type

Class `llvm::Type`

`Type* getVoidTy(LLVMContext& C)`

- Get an instance of void type.

Example:

```
LLVMContext Ctx = ...  
Type* voidType = Type::getVoidTy(Ctx);
```

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder



Assignment Project Exam Help

Part IV: Navigating the Documentation

<https://powcoder.com>

Add WeChat powcoder



Know Your LLVM Version



The links in this section may yield inaccurate information for uncommon APIs, since they point to the latest LLVM version whereas we use **LLVM 8**.

The LLVM version changes often due to frequent releases; so a naive web search could also produce inaccurate information.

Assignment Project Exam Help

<https://powcoder.com>

E.g. the return type of `llvm::Module::getOrInsertFunction()` in different LLVM versions:

Add WeChat powcoder

LLVM-8.0.0

vs.

LLVM-9.0.0

Constant*

`getOrInsertFunction(
StringRef Name, Type *RetTy, ArgsTy...Args)`

FunctionCallee

`getOrInsertFunction(
StringRef Name, Type *RetTy, ArgsTy...Args)`

LLVM Programmer's Manual

<https://llvm.org/docs/ProgrammersManual.html>

A simple and basic way to find what functions you want. Highlights some of the important classes and interfaces available in the LLVM source-base.

<https://powcoder.com>

Useful content for the labs:

- The `isa<>`, `cast<>` and `dyn_cast<>` templates: A way to convert one class to the desired class.
- The Core LLVM Class Hierarchy Reference: Overview of important functions in each class.
- Helpful Hints for Common Operations: Simple transformations of LLVM code (traversing, creating, etc.).



LLVM Doxygen Sources

<https://llvm.org/doxygen/>


Very detailed and complete list guide of LLVM classes and functions.

- Inheritance graph: Relationships between different classes.
- APIs: List of functions for this class, Details and description about those members (arguments, syntax, etc.).
- Source code: Source code (C/C++) is provided.
- “References” / “Referenced by” sections: Relationship between functions.



LLVM Doxygen Sources

Inheritance graph (example of Instruction Class)

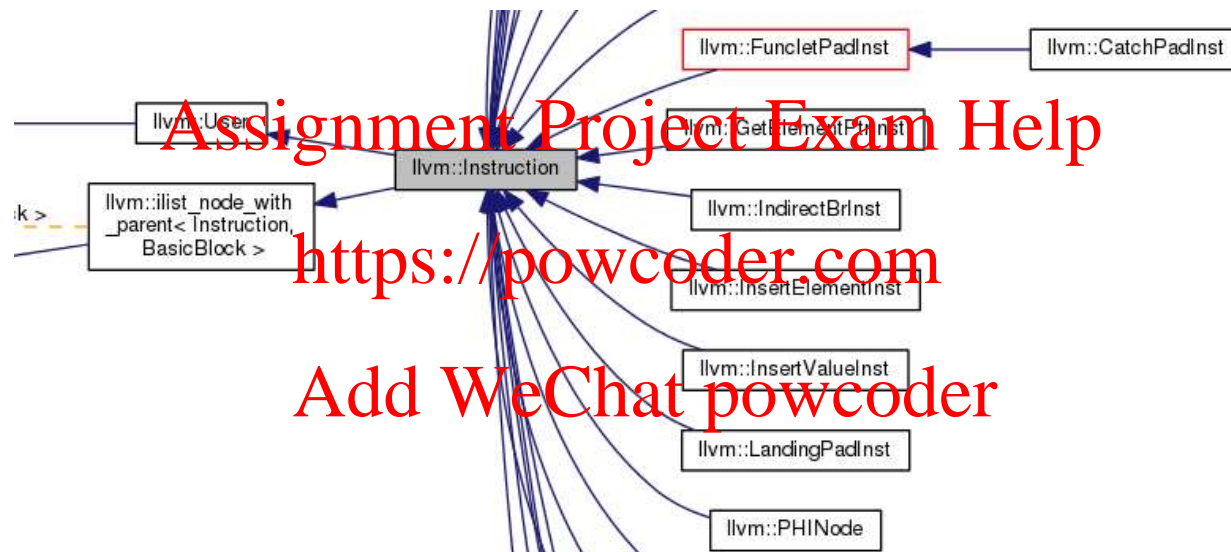

- Go left to find super-classes, go right to find sub-classes
E.g. User is the super-class of instruction; PHINode is the sub-class of instruction.
- Public function from Left-hand side classes can be used in Right-hand side classes
E.g. Public functions from Instruction class can be used for PHINode objects.

LLVM Doxygen Sources

APIs (example of Instruction Class)

Assignment Project Exam Help
<https://powcoder.com>
Add WeChat powcoder

Function name: `getOpcode()`

Function syntax: `unsigned llvm::Instruction::getOpcode() const`

Function description: Returns a member of one of the enums like `Instruction::Add`.

References/Referenced information: Definition at line 160 of file `Instruction.h`. Referenced by `alwaysAvailable()`, `AreSequentialAccesses()`, `buildNew()`.

Left click

```
160 unsigned getOpcode() const { return getValueID() - InstructionVal; }
161
```

LLVM Doxygen Sources

Source code (example of Instruction Class)

Hover your cursor on /
left click these “blue” links
for more information

•getSuccessor()

BasicBlock * Instruction::getSuccessor (unsigned idx) const

Return the specified successor. This instruction must be a terminator.

Definition at line 687 of file Instruction.cpp.

References `getOpcode()`, and `llvm_unreachable`.

Referenced by `allPredecessorsComeFromSameSource()`, `alwaysAvailable`, `llvm::FunctionComparator::compare()`, `llvm::OpenMPIRBuilder::Create`, `llvm::Inst::BrInst::getDestination()`, `llvm::DOTGraphTraits< DOTFun`, `GetSortedValueDataFromCallTargets()`, `llvm::GetSuccessorNumber()`.

```
BasicBlock * Instruction::getSuccessor(unsigned idx) const {  
    switch (getOpcode()) {  
#define HANDLE_INST(N, OPC, CLASS)  
    case Instruction::OPC:  
        return static_cast<const CLASS *>(this)->getSuccessor(idx);  
#include "llvm/IR/Instruction.def"  
    default:  
        break;  
    }  
    llvm_unreachable("not a terminator");  
}
```

Left click

```
}  
llvm_unreachable("not a terminator");  
}  
  
void Instruction::getSuccessor(unsigned idx, BasicBlock *B) {  
    switch (getOpcode()) {  
#define HANDLE_INST(N, OPC, CLASS)  
    case Instruction::OPC:  
        return static_cast<const CLASS *>(this)->getSuccessor(idx, B);  
#include "llvm/IR/Instruction.def"  
    }  
}
```

llvm_unreachable

`llvm_unreachable(unsigned idx, BasicBlock *B)`

`#define llvm_unreachable(msg)`

Marks that the current location is not supposed to be reachable.

Definition: ErrorHandling.h:136

`static_cast<const CLASS *>(this)->setSuccessor(idx, B);`

`#include "llvm/IR/Instruction.def"`



LLVM Doxygen Sources

References/Referenced by sections (example of Instruction Class)

Assignment Project Exam Help
<https://powcoder.com>
Add WeChat powcoder

getSuccessor() references getOpcode() here

```
BasicBlock * Instruction::getSuccessor(unsigned idx) const {
    switch (getOpcode()) {
        #define HANDLE_TERM_INST(N, OPC, CLASS)
        case Instruction::OPC:
            return static_cast<const CLASS *>(this->getSuccessor(idx));
        #include "llvm/IR/Instruction.def"
        default:
            break;
    }
    llvm_unreachable("not a terminator");
}
```

Return the specified successor. This instruction must be a terminator.
Definition at line 687 of file Instruction.cpp.
References `getOpcode()` and `llvm_unreachable`.
Referenced by `allPredecessorsComeFromSameSource()`, `alwaysAvailable`, `llvm::FunctionComparator::compare()`, `llvm::OpenMPBuilder::Create`, `llvm::IndirectBrInst::getDestination()`, `llvm::DOTGraphTraits<DOTFun`, `GetSortedValueDataFromCallTargets()`, `llvm::GetSuccessorNumber()`.

getSuccessor() is referenced by GetSuccessorNumber()

```
unsigned llvm::GetSuccessorNumber(const BasicBlock *BB,
    const BasicBlock *Succ) {
    const Instruction *Term = BB->getTerminator();
    #ifndef NDEBUG
    unsigned e = Term->getNumSuccessors();
    #endif
    for (unsigned i = 0; i < e; ++i) {
        assert(i < e && "Didn't find edge?");
        if (Term->getSuccessor(i) == Succ)
            return i;
    }
}
```


Google / Stack Overflow

Google your question:

- APIs & Classes: Google **Assignment Project Exam Help** `linux` [class/APIs you want to search] directly.
(Normally it will lead you to doxygen documentation)

<https://powcoder.com>

Use Stack Overflow: **Add WeChat powcoder**

- Search for or ask your question at <https://stackoverflow.com/>

Further Reading

- Language Frontend with LLVM Tutorial
<https://llvm.org/docs/tutorial/MyFirstLanguageFrontend/index.html>
- LLVM Programmer's Manual
<http://llvm.org/docs/ProgrammersManual.html>
- LLVM Language Reference Manual
<http://llvm.org/docs/LangRef.html>
- Writing an LLVM Pass
<http://llvm.org/docs/WritingAnLLVMPass.html>
- LLVM's Analysis and Transform Passes
<http://llvm.org/docs/Passes.html>
- LLVM Internal Documentation
<http://llvm.org/docs/doxygen/html/>
- LLVM Coding Standards
<http://llvm.org/docs/CodingStandards.html>

Assignment Project Exam Help

<https://powcoder.com>

Add WeChat powcoder