

Android Product Documentation

Contents

EMM for Android.....	4
Android Enterprise Setup – Initial Setup.....	4
Analytical Dashboard.....	5
Total Devices.....	5
Provisioning Devices	6
Enrolled Devices	6
Not Enrolled Devices	7
Online	7
Offline.....	7
Device Online Summary	8
OS Distribution	8
Device Distribution.....	8
Export CSV.....	9
Creating a Policy.....	9
How to create a Policy – Fully Managed Device.....	9
How to create a Policy – Work Profile.	11
How to create a Policy – Single App.....	13
How to create a Policy – Kiosk Launcher.	15
How to create a Policy – Tectoro Launcher.....	17
Editing a Policy.....	19
Cloning a Policy	20
Deleting a Policy	20
Device Enrolment.....	21
ZTE (Zero Touch Enrollment).....	21
QR Code Enrolment	21
Creating Token for enrollment.....	22
Cards for configuring a Policy	24
General Settings.....	25
Password Settings	26
Network Settings	28
Restrictions.....	31
Android Updates	37
Wi-Fi Settings.....	38

User Account Settings	39
Status Report.....	40
Setup Actions	40
Applications.....	41
Configurations.....	45
Management Sets.....	46
Fully Managed Device	46
Work Profile.....	46
Dedicated Device.....	46
Single App	47
Kiosk Launcher	47
Tectoro Launcher	47
Devices	47
Apps	48
Launcher	51
Bulk Requests	56

EMM for Android


Tectoro Enterprise Mobility Management (EMM) for Android focuses on providing tools and solutions to manage, monitor, and secure Android devices within an organization. Here are some key features and benefits:

1. **Device Management:** Easily enrol, configure, and manage Android devices, ensuring they meet your organization's policies and standards.
2. **Application Management:** Deploy, update, and manage apps on Android devices, ensuring employees have the tools they need while maintaining security.
3. **Security:** Implement security policies to protect data on Android devices, including encryption, remote wipe, and secure access controls.
4. **Compliance:** Ensure devices comply with industry regulations and internal policies through automated compliance checks and reporting.
5. **Productivity:** Enable employees to work efficiently from anywhere with secure access to corporate resources and applications.

Android Enterprise Setup – Initial Setup

To setup your enterprise for android devices in your organization you are required to add your google play store account as an enterprise. This process is called “Android Enterprise Setup”. To complete the Android Enterprise Setup, you will have to log in to Tectoro EMM Portal using the tenant ID, username, and password provided by our team, and navigate to the setup page and do the following.

Navigation: Homepage >> Android >> Setup

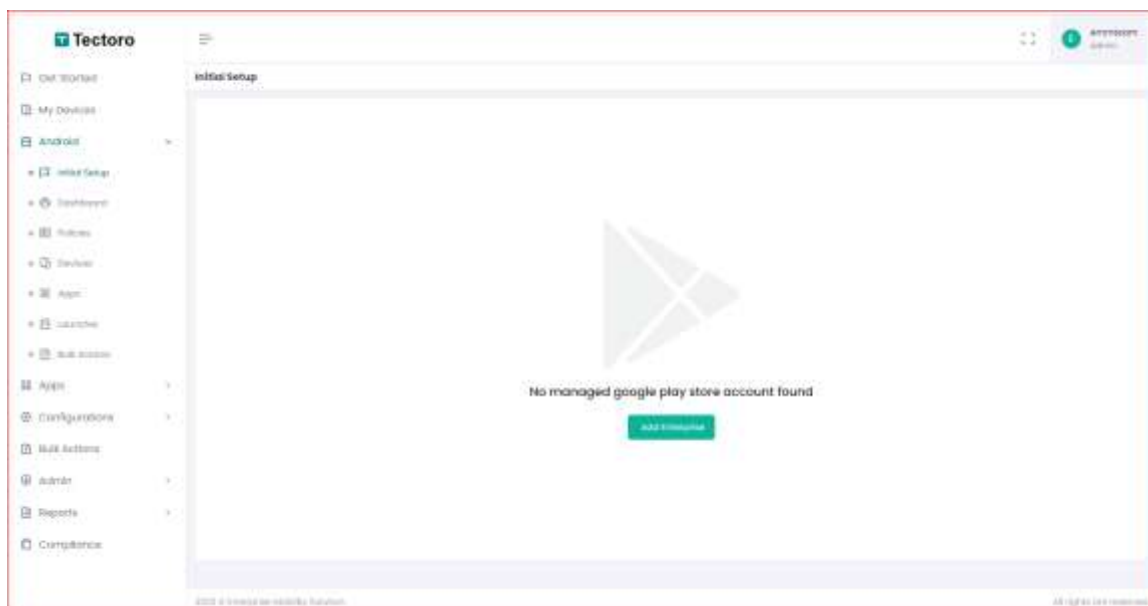

How to Setup:

Step 1: Click on "Setup" and then Click on "Add Enterprise" to add an enterprise account.

Step 2: Click OK to proceed on the pop up displayed.

Step 3: You'll be redirected to the Google Play page. Click on the "Sign In" option to add your email ID.

Step 4: Log in with your email ID for ownership. You can use the same email ID that was used to create the tenant or choose a different one.

Step 5: After Log in, click on "Get Started".

Step 6: Enter the Business name/ Domain name in this field. The EMM provider is auto filled as Tectoro Consulting Private Ltd.

Step 7: Enter details for Data Protection Officer or EU Representative.

Step 8: Click on "Complete Registration".

After clicking on Complete Registration, you will be redirected to Android Enterprise page. You can view the following details

Detail	Description
Enterprise ID	ID of Enterprise generated
Enterprise Name	Name of your Enterprise
Activated On	Date on which Enterprise has been added to portal
Status	Status of the enterprise (Active or Inactive)


Analytical Dashboard

Dashboard is the way of representing the overall data in one screen.

Dashboard displays the following information.


Total Devices

Combination of New Devices, Active Devices, Provisioning Devices, Disabled Devices and Deleted Devices fall under Total Devices.

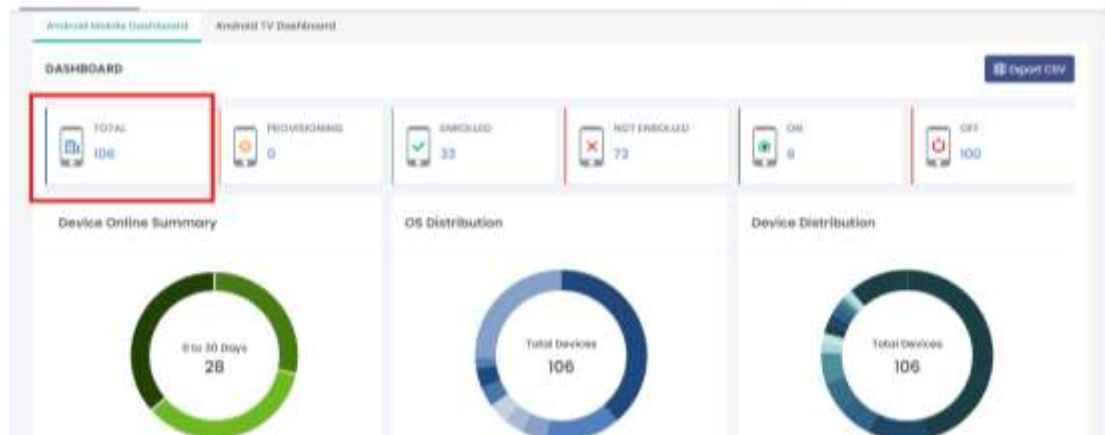


Provisioning Devices

The devices which have started the enrollment process and did not complete the enrollment process, are displayed as Provisioning devices.

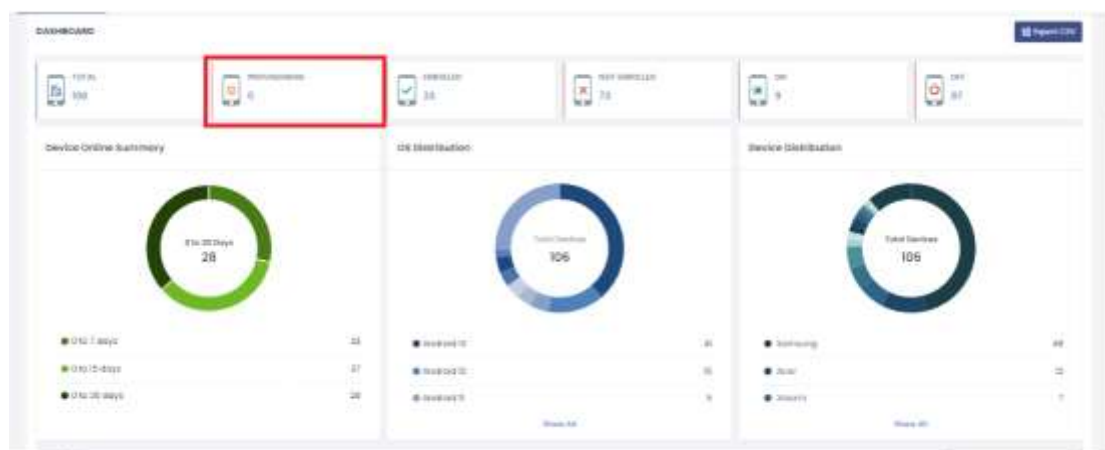


Enrolled Devices

The devices which are successfully enrolled into the portal are displayed in Active Devices.

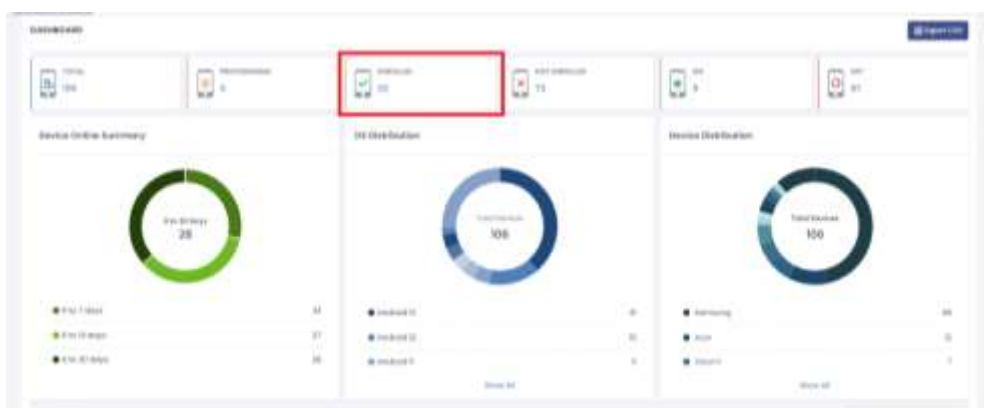


Not Enrolled Devices

The devices which are enrolled in EMM, performed factory reset and re-enrollment of the device is not performed then those devices are displayed in Not enrolled devices.

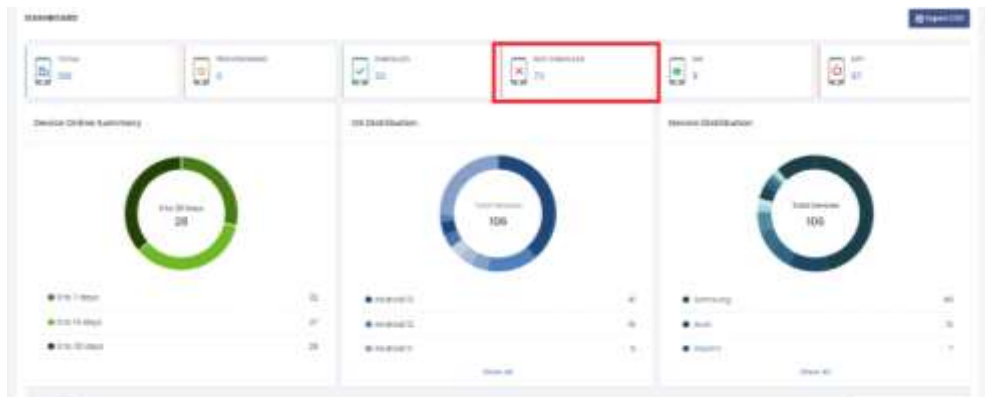


Online

The devices which are connected to Internet in the past 24 hours are displayed in online

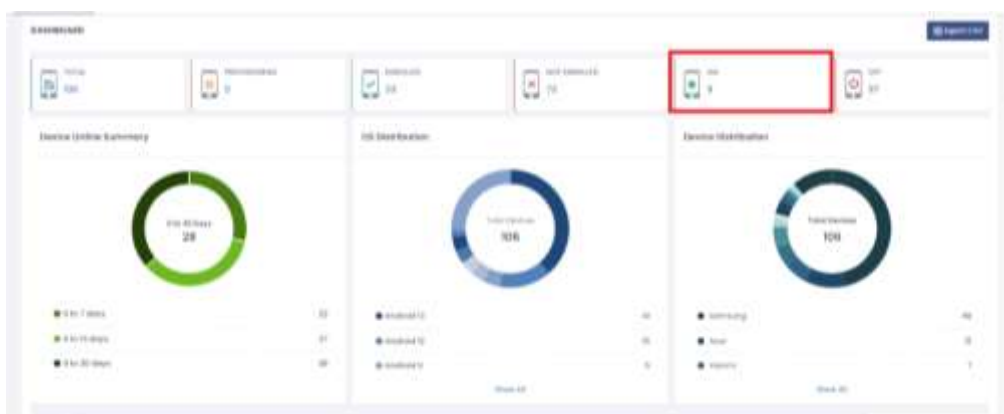

Offline

The devices which are not connected to Internet in the past 24 hours are displayed in offline

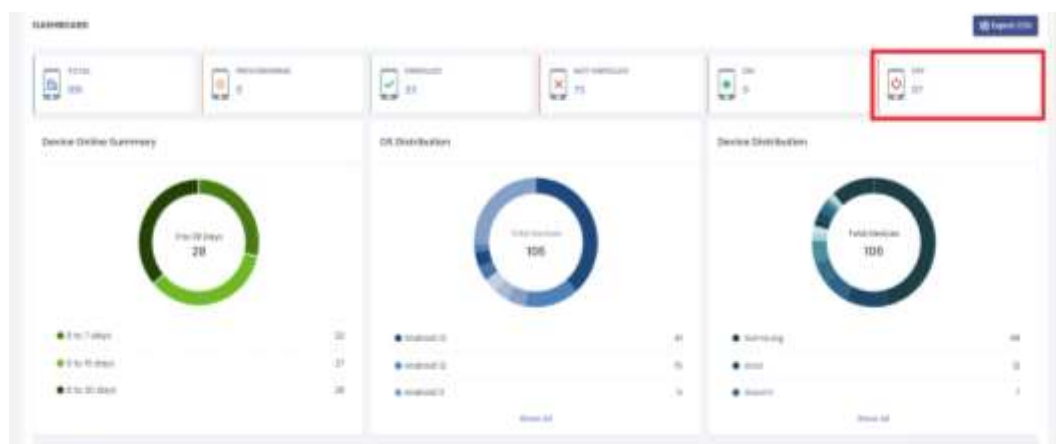


Device Online Summary

Devices which are connected to internet

0-7 days – Number of devices which are connected to internet in between 0-7 days are represented in 0-7 days


0-15 days – Number of devices which are connected to internet in between 0-15 days are represented in 0-15 days

0-30 days – Number of devices which are connected to internet in between 0-30 days are represented in 0-30 days

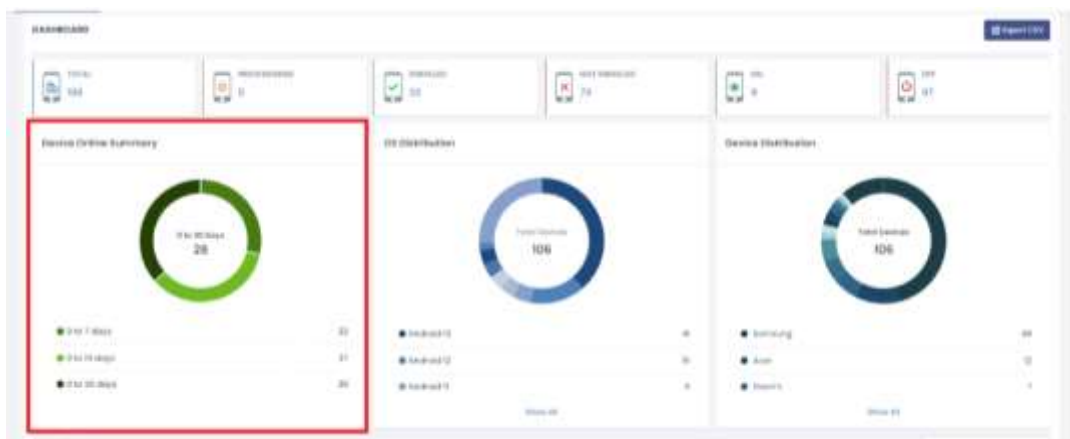


OS Distribution

OS distribution is done based on Android versions of enrolled devices, as different devices have different versions.

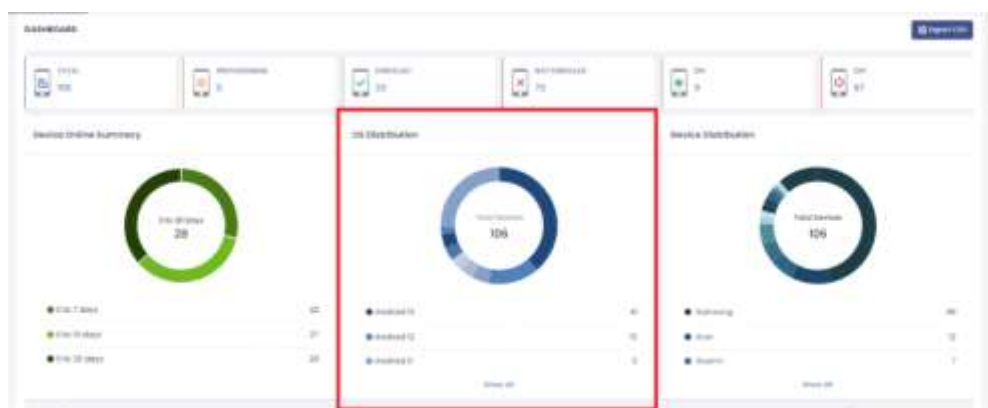

Device Distribution

Device distribution is done based on different Android manufacturers of enrolled devices, as different devices have different manufacturers.

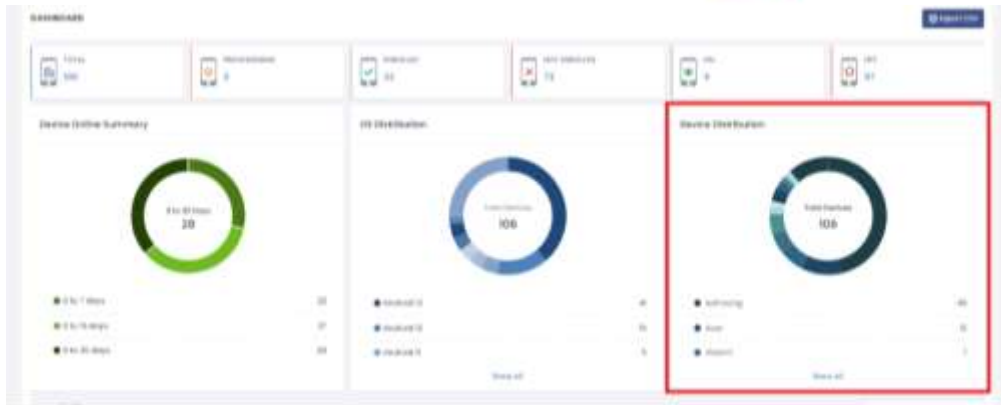

Export CSV

Admin can export Overall Dashboard in the form of CSV



Creating a Policy

To integrate EMM in your organisation the android devices must be enrolled in a Policy. A policy is a set of rules or guidelines that help manage and control behaviour of a device. In Tectoro Enterprise Mobility Management (EMM), a policy defines the restrictions and settings applied to enrolled devices to ensure they are secure and compliant.

Tectoro Enterprise Mobility Management (EMM) has multiple Management Sets in which a policy can be configured.

Types of Management Sets in Tectoro Android EMM:


1. Fully Managed Device
2. Work Profile and
3. Dedicated Device.

Dedicated Device further has three subsets Single App, Kiosk Launcher and Tectoro Launcher.


How to create a Policy – Fully Managed Device

Navigation: Homepage >> Android >> Policy


Step 1: Go to Android Policies and Click on Add New

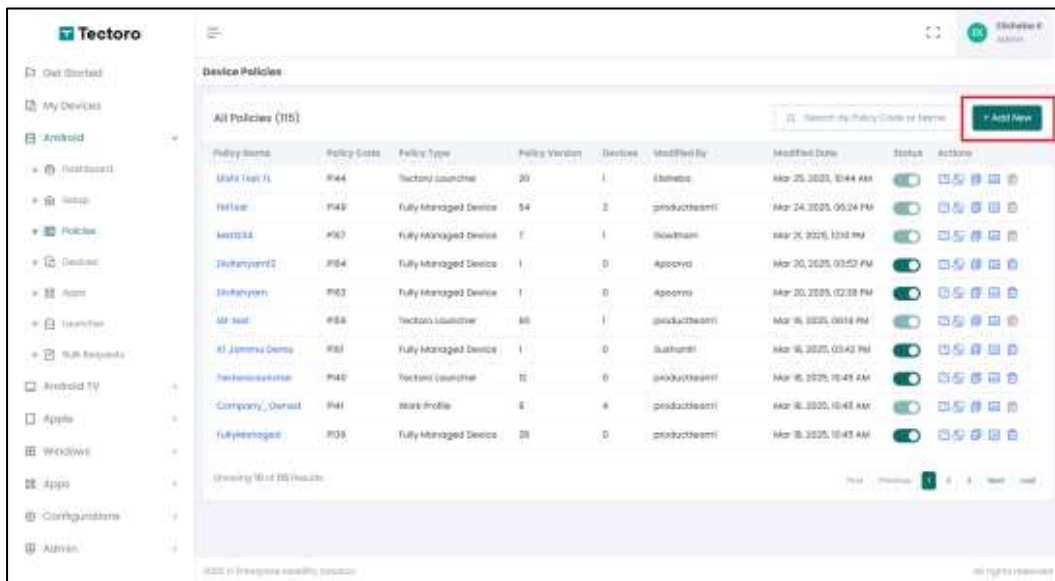

Step 2: Select Fully Managed Device and click on Proceed.

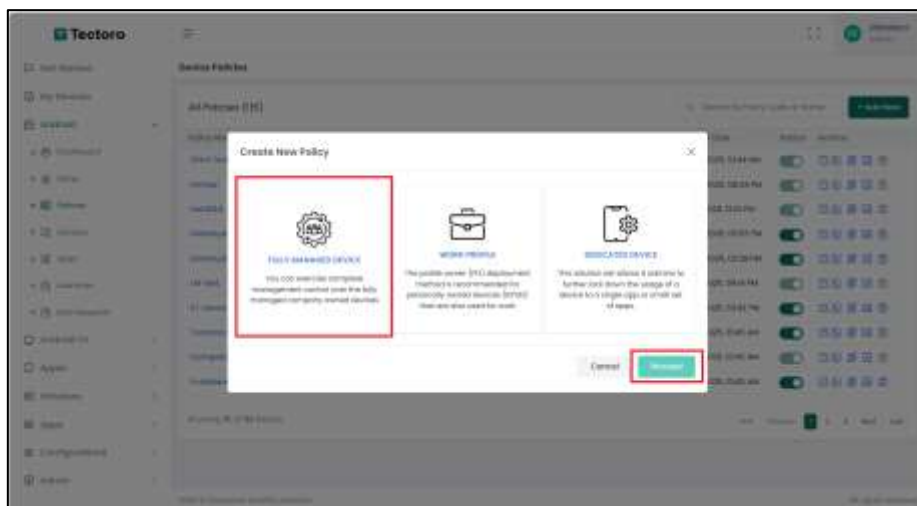


Step 3: Enter Policy Name.

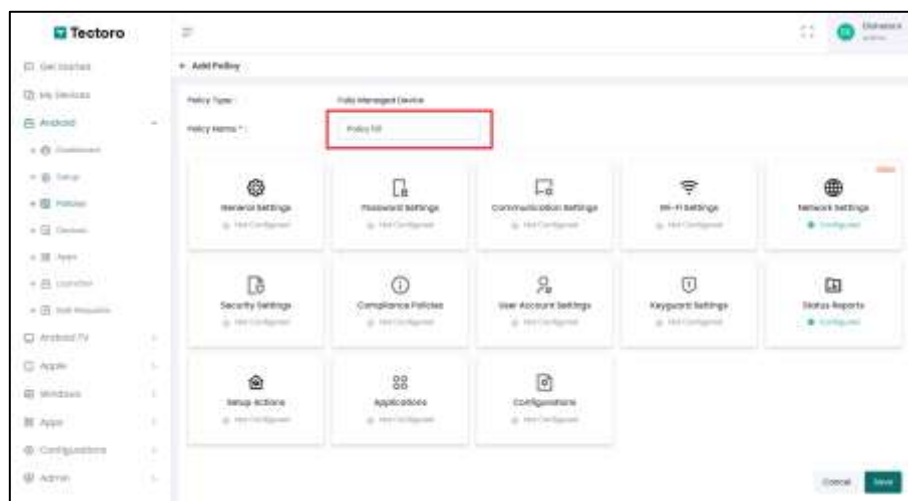

Step 4: Configure the Policy as per your organisations requirement.

Step 5: Click on Save.

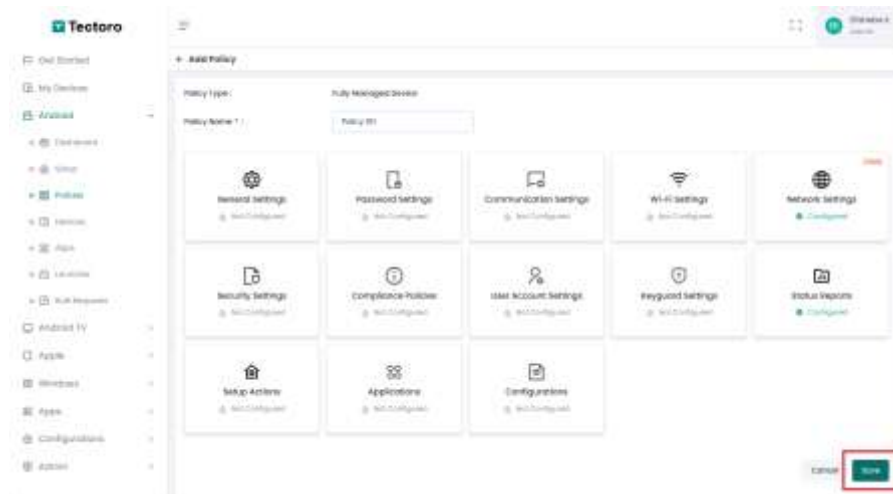


After creating a policy, you must generate a token to enroll the device in a policy.


How to create a Policy – Work Profile.

Navigation: Homepage >> Android >> Policy


Step 1: Go to Android Policies and Click on Add New

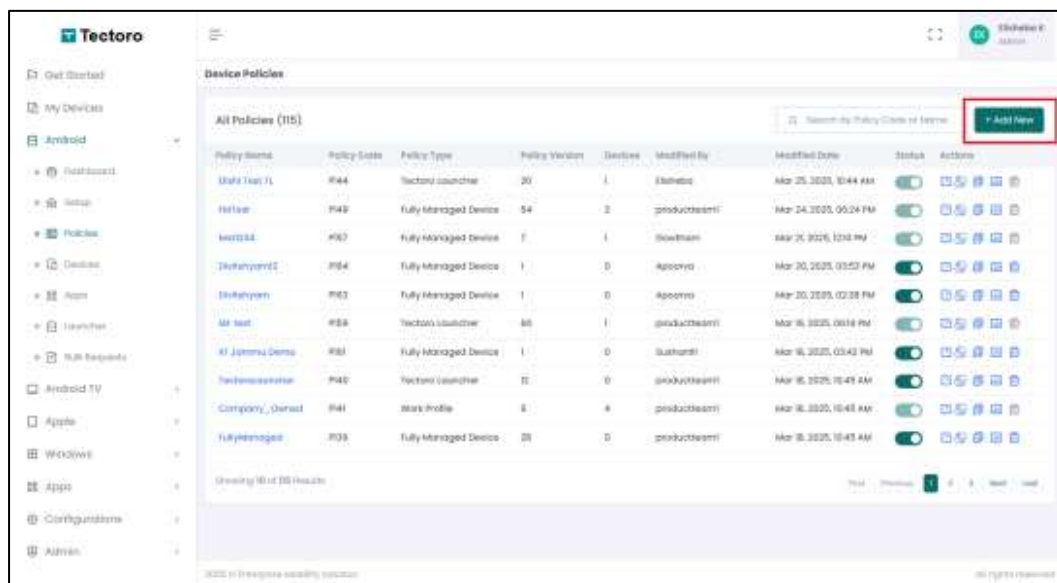

Step 2: Select Work Profile and click on Proceed.

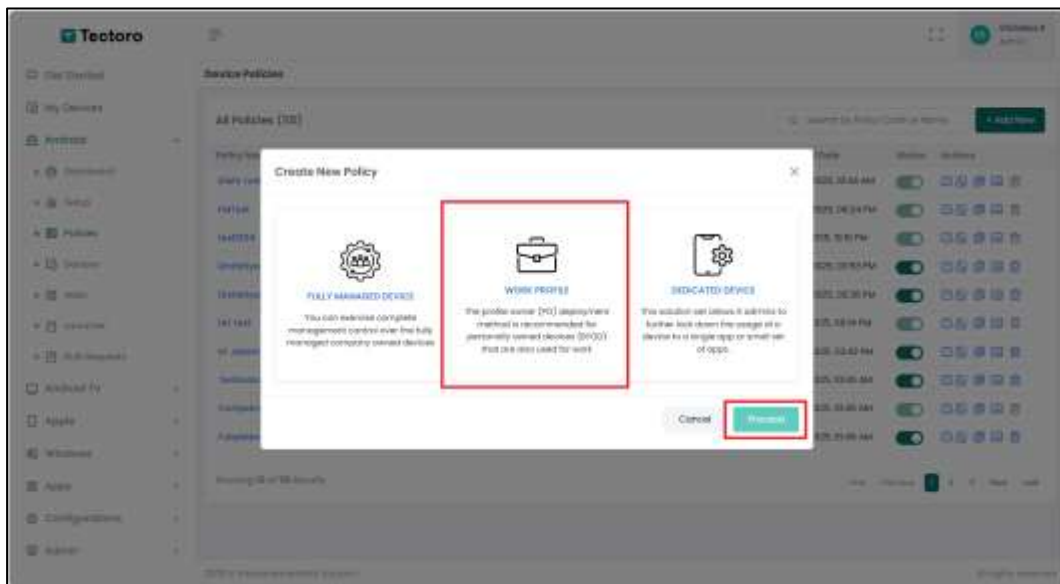


Step 3: Enter Policy Name.

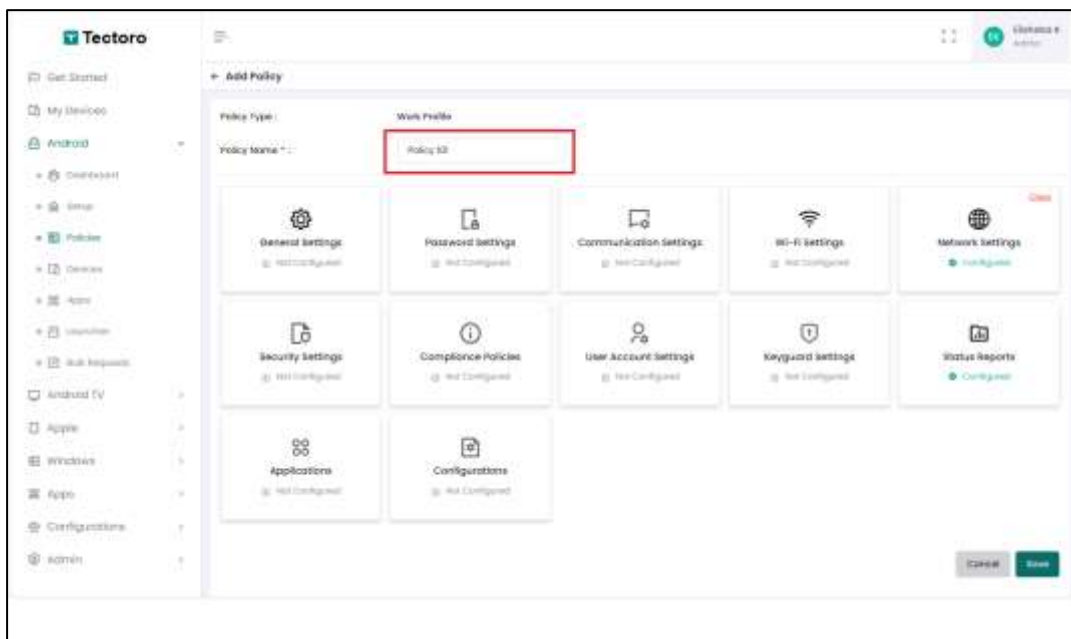

Step 4: Configure the Policy as per your organisations requirement.

Step 5: Click on Save.

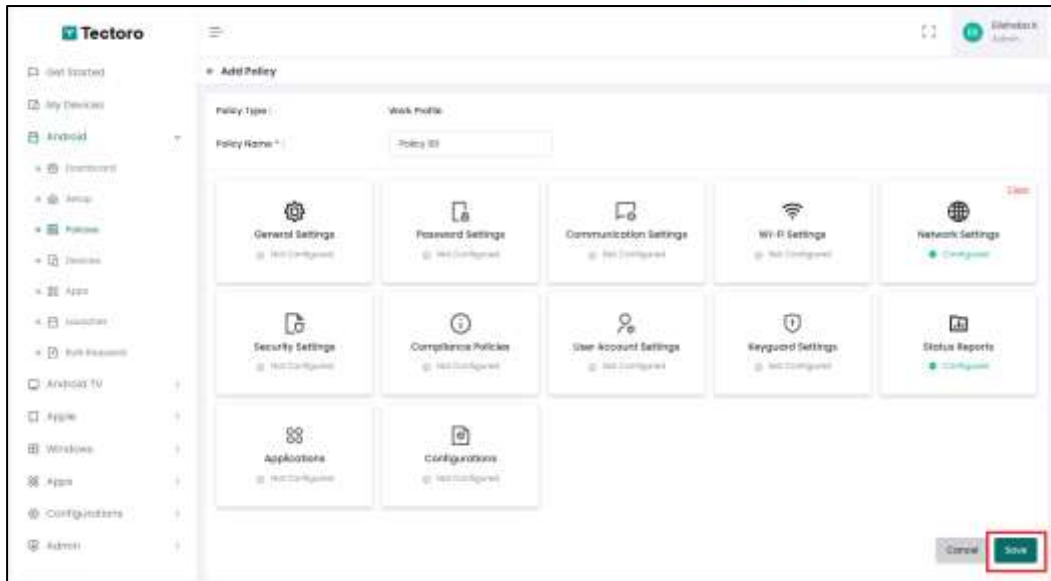


After creating a policy, you must generate a token to enroll the device in a policy.


How to create a Policy – Single App.

Navigation: Homepage >> Android >> Policy


Step 1: Go to Android Policies and Click on Add New.

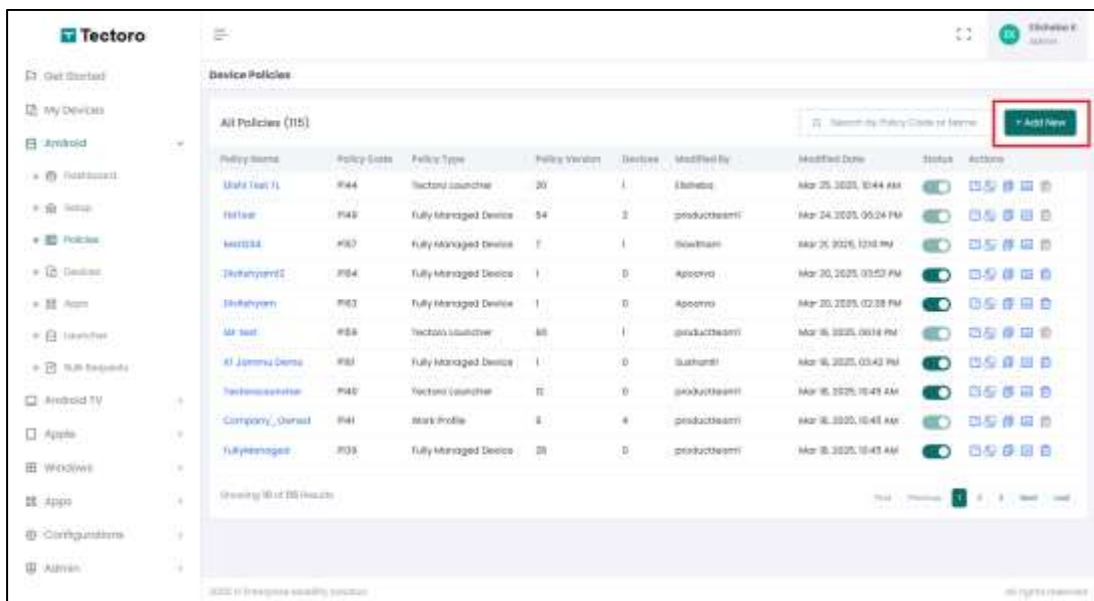


Step 2: Click on Dedicated Device.

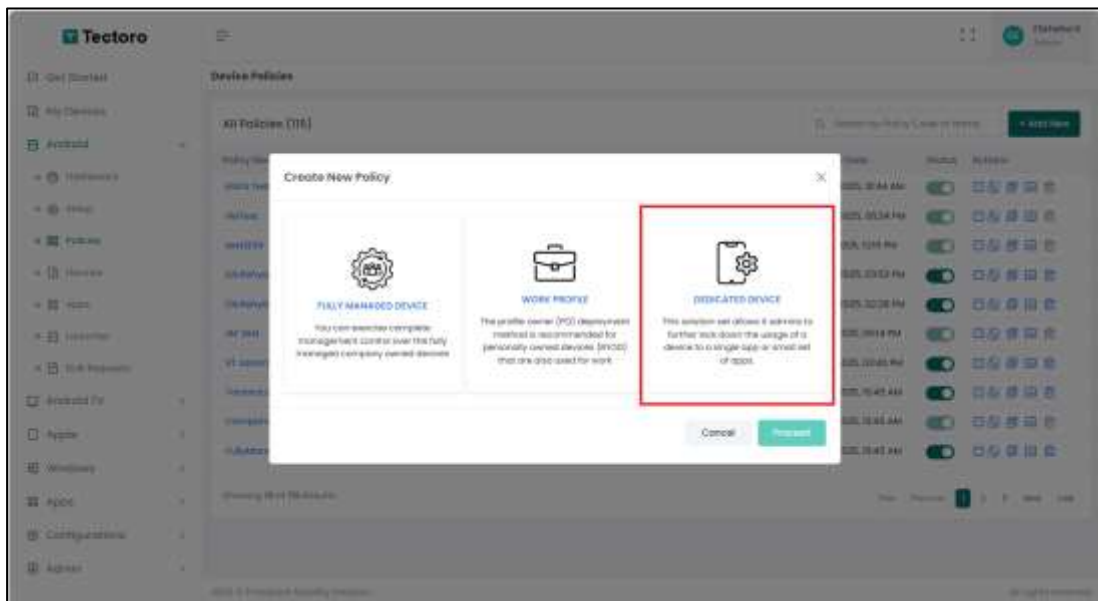

Step 3: Select "Single App" and click on Proceed.

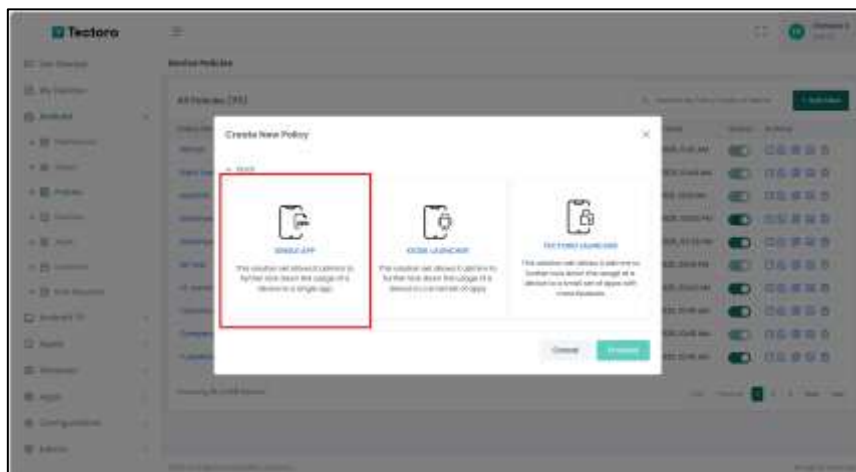


Step 4: Enter Policy Name

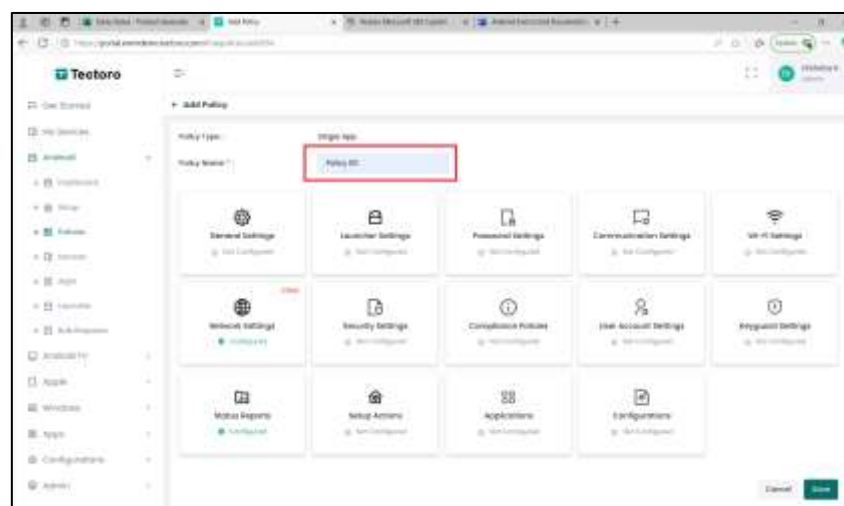

Step 5: Configure "Policy Cards" as per your organisations requirement.

Step 6: Click on Save.

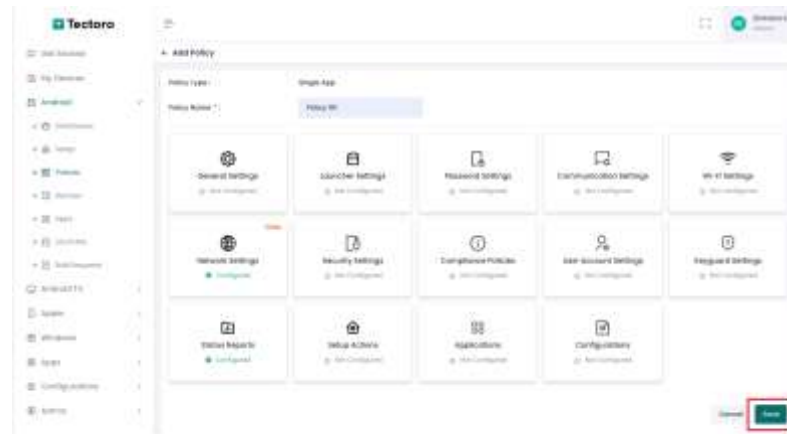


After creating a policy, you must generate a token to enroll the device in a policy.


How to create a Policy – Kiosk Launcher.

Navigation: Homepage >> Android >> Policy


Step 1: Go to Android Policies and Click on Add New

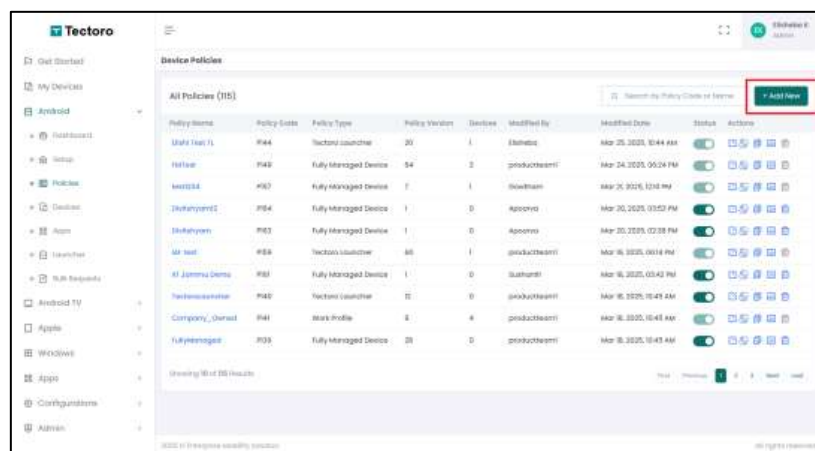


Step 2: Click on Dedicated Device

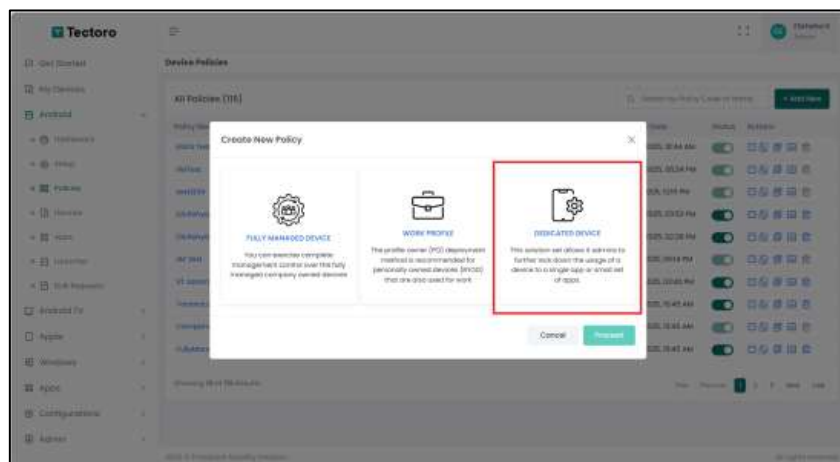

Step 3: Select "Kiosk Launcher" and click on Proceed.

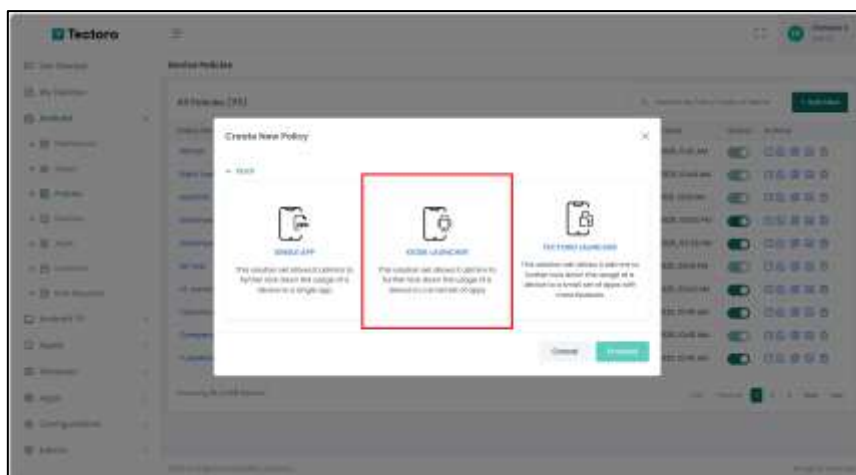


Step 4: Enter Policy Name

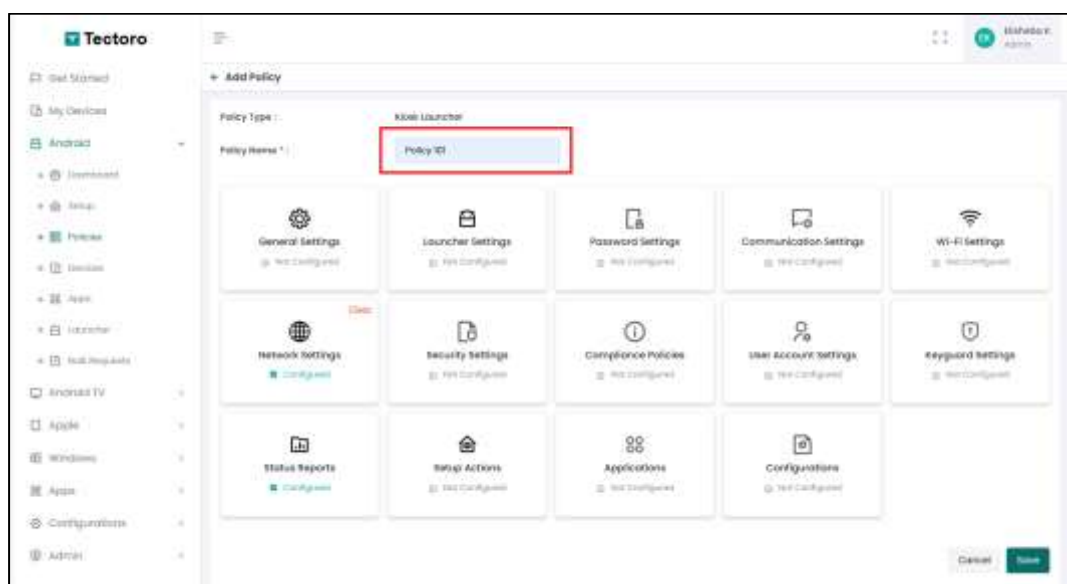

Step 5: Configure "Policy Cards" as per your organisations requirement.

Step 6: Click on Save.

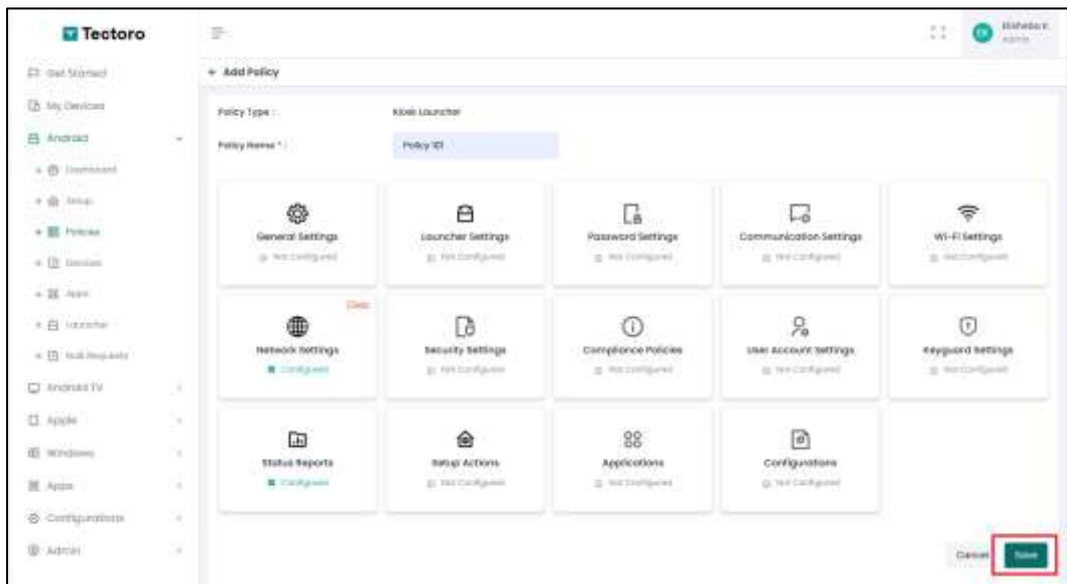


After creating a policy, you must generate a token to enroll the device in a policy.


How to create a Policy – Tectoro Launcher.

Navigation: Homepage >> Android >> Policy


Step 1: Go to Android Policies and Click on Add New

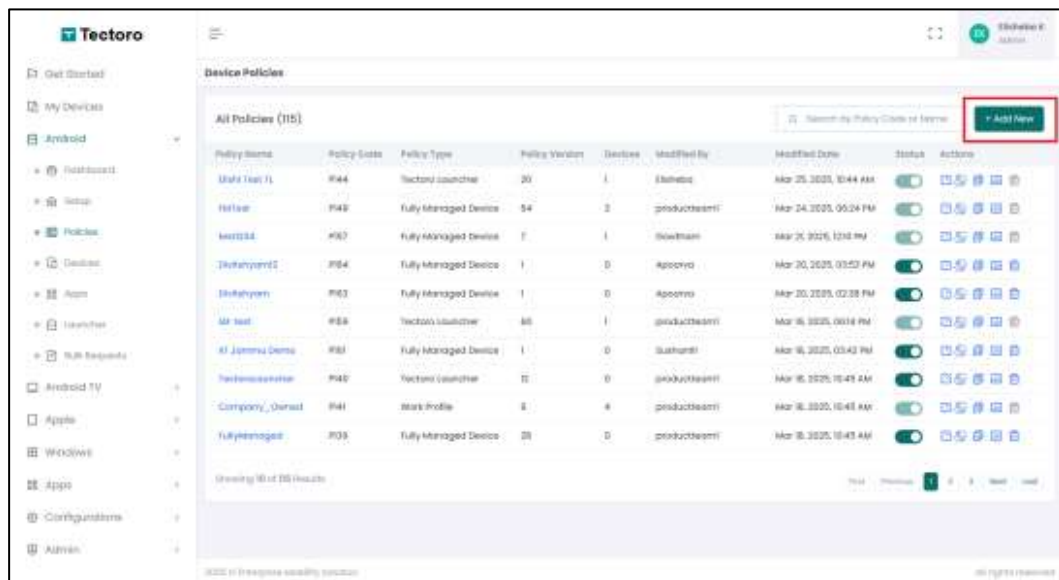


Step 2: Click on Dedicated Device

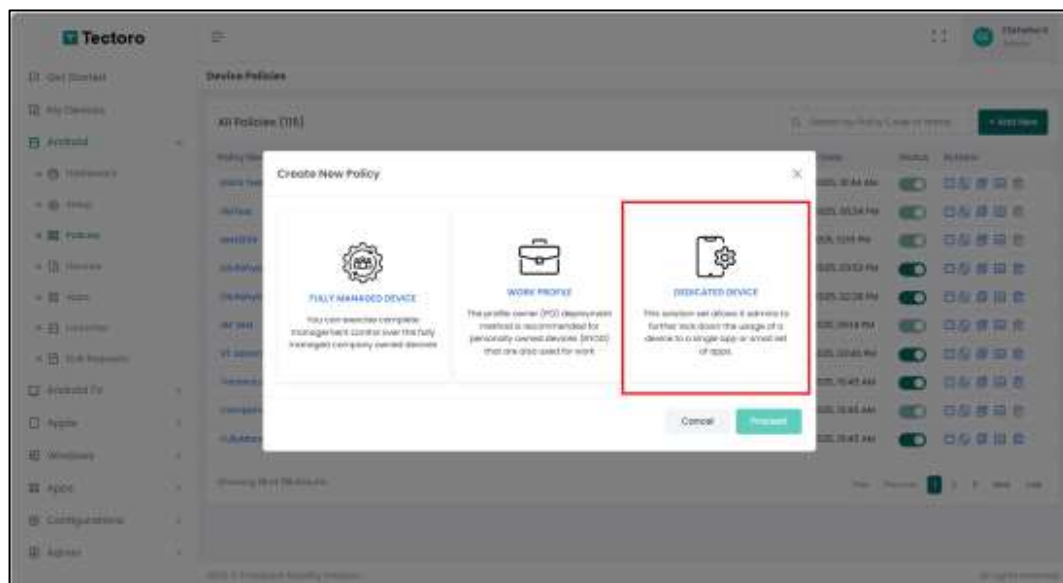

Step 3: Select "Tectoro Launcher" and click on Proceed.

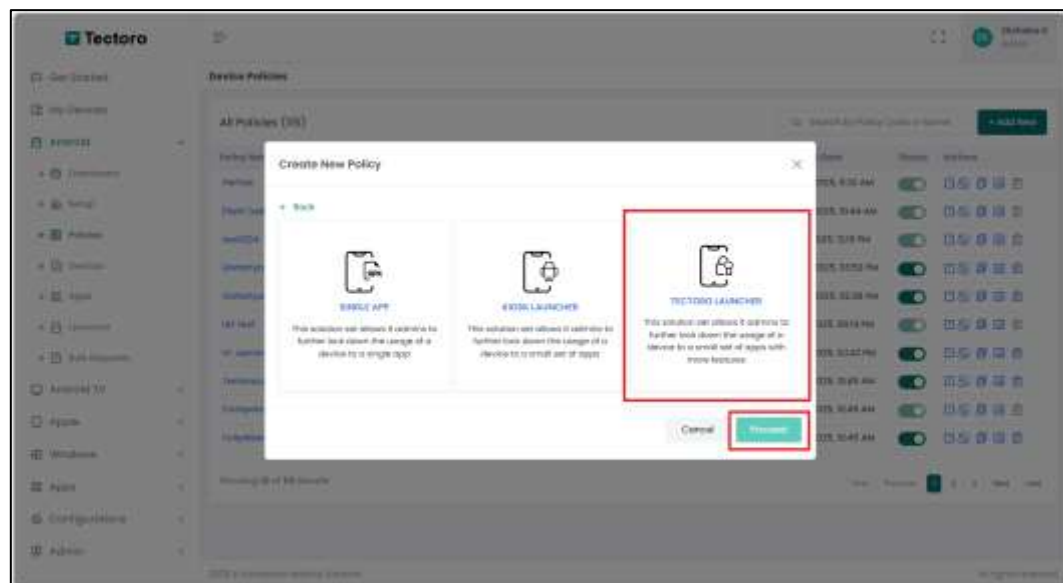


Step 4: Enter Policy Name.

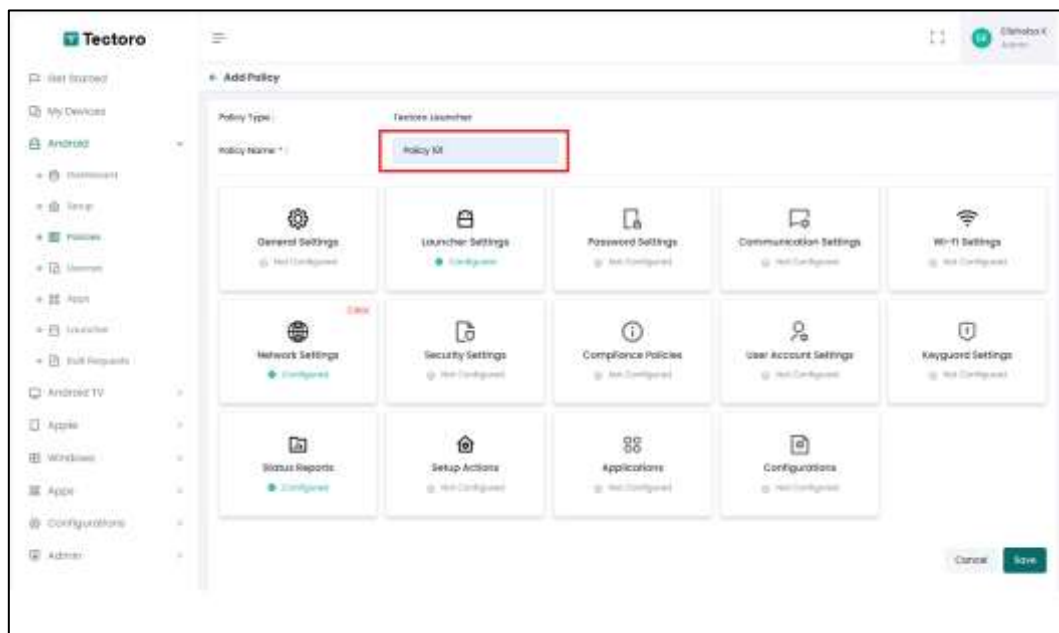

Step 5: Configure "Policy Cards" as per your organisations requirement.

Step 6: Click on Save.

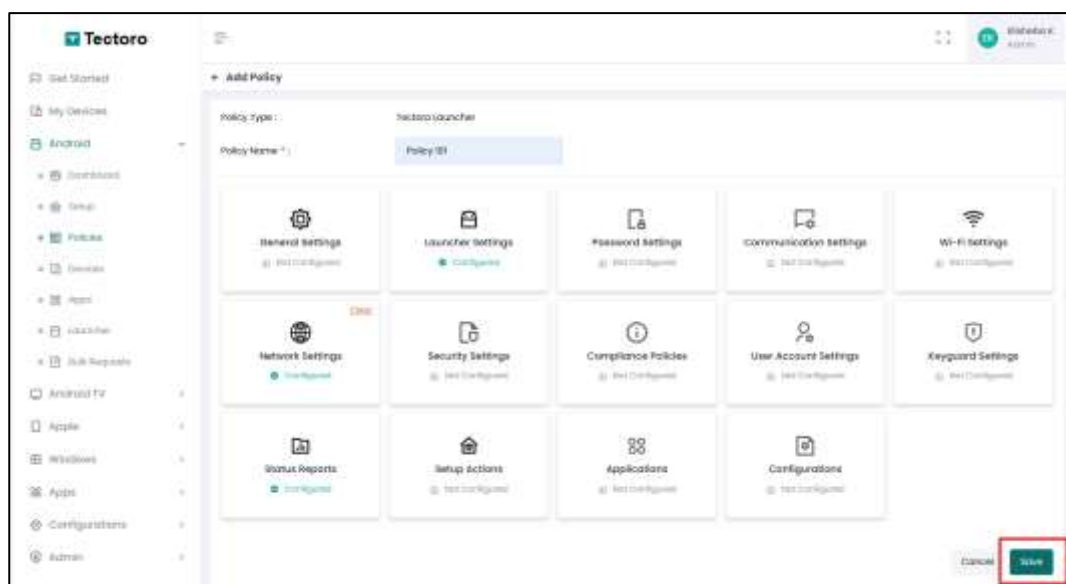

After creating a policy, you must generate a token to enroll the device in a policy.

Editing a Policy

Editing a policy allows you to update its details to reflect any changes. To edit a policy in the policy page, click on the edit icon against the policy you want to edit in the actions column.

Navigation: Homepage >> Android >> Policy >> Edit Policy



How to edit a Policy

Step 1: Go to the policy page in Tectoro EMM portal.

Step 3: In the actions column of the policy, click on the edit icon.

Step 4: Make changes to the policy and click on save

Step 5: Now the policy will be updated with the new changes.

Cloning a Policy

To clone a policy, in the policy page, click on clone icon against the policy you want to edit in the actions column.

Navigation: Homepage >> Android >> Policy >> Clone Policy



Step 1: Go to the policy page in Tectoro EMM portal.

Step 2: Find the policy you want to assign the device to in the list.

Step 3: In the actions column of the policy, click on the clone icon.


Step 4: Click on "Yes, Clone it"

Step 5: A new policy with the same configuration will be created. (The name of this new policy will include the word "copy" as a suffix to indicate it is a duplicate of the original policy.)

Deleting a Policy

To delete a policy, click on delete icon against the policy you want to edit in the actions column in the policy page.

Navigation: Homepage >> Android >> Policy >> Delete

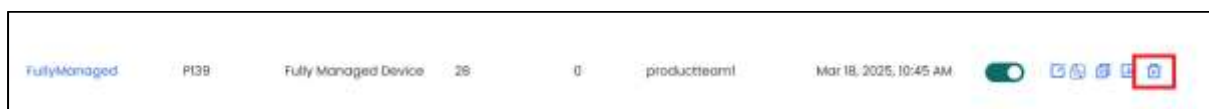

Step 1: Go to the policy page in Tectoro EMM portal.

Step 2: Find the policy you want to delete in the list.

Step 3: In the actions column of the policy, click on the delete icon.

Step 4: A pop-up will appear asking, "Are you sure you want to delete this policy?" with two options: "yes, delete it" or "close".

Step 5: Click on "yes, delete it" to confirm and delete the policy.

Step 6(Optional): If you change your mind, click on "close" to cancel the deletion.

Note: You cannot delete a policy if it is assigned to devices if you want to delete a policy which is assigned to devices you have remove the devices from the policy and then delete

Device Enrolment

Device enrollment is the process of registering and configuring devices to be managed and secured within an organization's IT infrastructure. This process, known as Device Enrollment, can be accomplished through Zero Touch, QR Code, or Token methods.

ZTE (Zero Touch Enrollment)

Zero Touch Enrollment (ZTE) is a hassle-free enrollment process where users can easily enroll their devices with enterprise management. It is an alternative to manually entering large fleet out devices into the software. This method helps the admin easily allow thousands of devices parallely, saving the time. This enrolment supports Android 9.0 and later versions.

Admin:

Step 1: Create Policy and Generate EMM Token in Tectoro EMM Portal.

Step 2: Add IMEI/Serial No. of the Device in the ZTE Portal, a ZTE Profile will be created.

Step 3: Link the ZTE profile with EMM Token.

End User (Device) Steps:

Step 1 : In the Device follow the instructions shown on screen till the enrollment process is completed.

Step 2 : Device is enrolled in the policy.

QR Code Enrolment

This is the method where you can enrol the device using the unique QR code generated specific to each policy that is created. All the required features are configured by the admin in the policy. Once the policy is created, you must scan the QR code in the device even before setting up. This enrollment is used when there are a small fleet of devices.

Admin steps:

Step 1 : Create a Policy in Tectoro EMM Portal.

Step 2 : Generate Token without Login.

Step 3 : Click on "View enrollment options".

Step 4 : Open QR Code.

Step 5 : Share the QR Code with End User.

End User (Device) Steps:

- Step 1 :** On the welcome page of a factory-reset device, tap six times to open camera.
- Step 2 :** Scan the shared QR Code.
- Step 3 :** Follow the on-screen steps till the enrollment process is completed.
- Step 4 :** Device will be enrolled in the policy.

Creating Token for enrollment

Enrollment Token is a unique code used to enroll devices into Tectoro EMM. When users enter or scan this token on their device, it connects to the EMM server and applies the necessary settings and policies. This ensures that only authorized devices are managed by the EMM.


Navigation: Homepage >> Android >> Policy >> Enrollment Token

How to create a token?


Step 1: Click on the 'Enrollment token' icon in Actions section on Policy page.



Step 2: Click on "+ Create New Token" in Enrollment page.

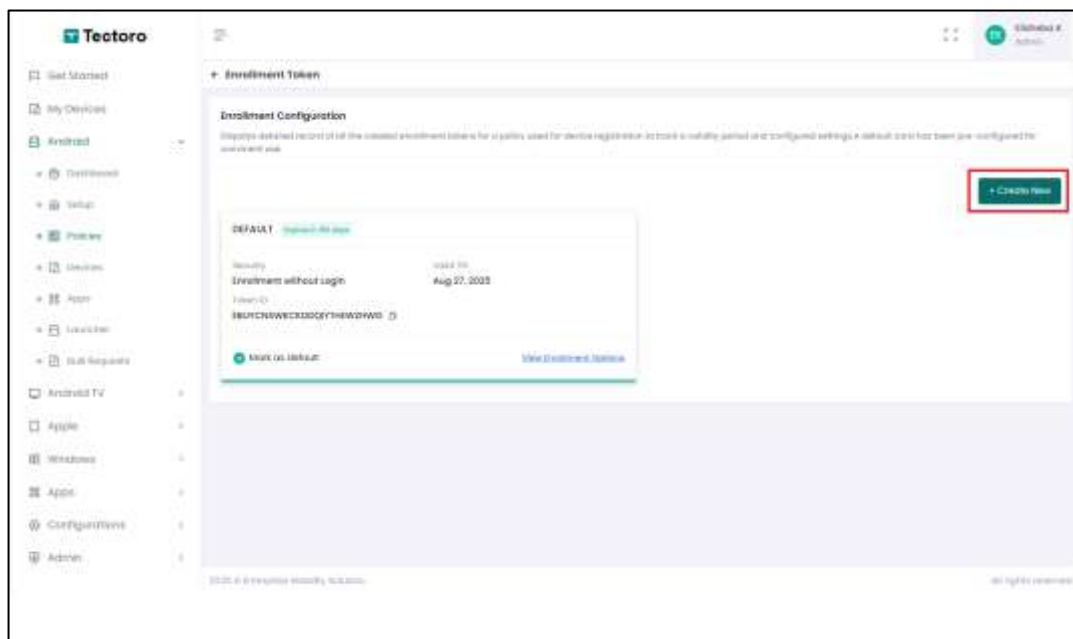

Step 3: Enter Configuration Name and select duration of the Token in “Token Expiration” in the pop up shown.

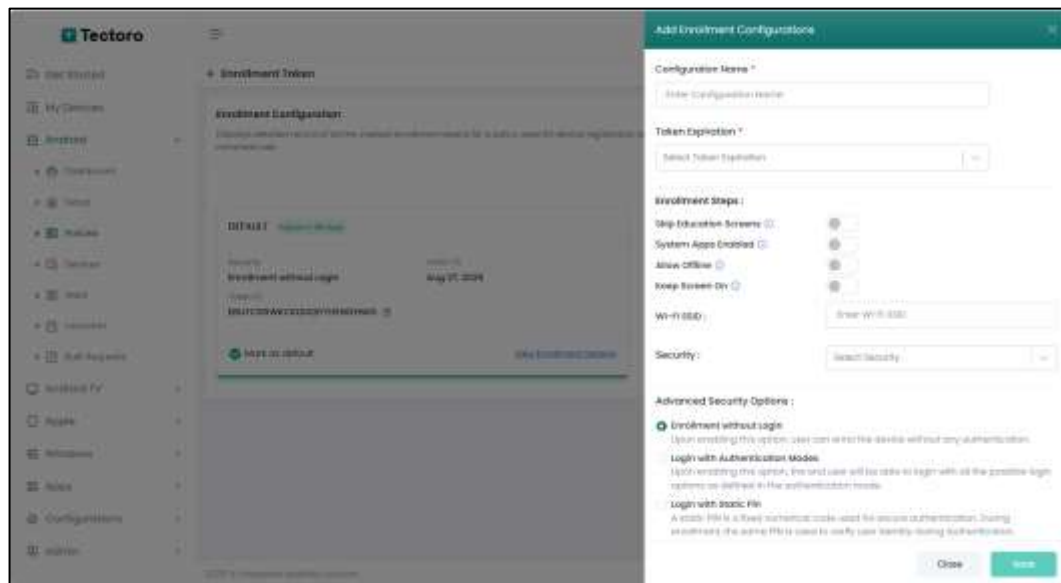

Step 4: Configure the enrolment steps.

- Skip Education Screens:* Enabling this feature will give guidance to the user regarding the enrolment.
- System Apps Enabled:* System apps are also called in-built apps. These apps will be provided in the device by default such as camera, browser, etc
- Allow Offline:* This feature determines whether the device to enroll with the policy in offline mode.
- Keep Screen On:* Keeps the screen on all the time.
- Wi-fi SSID:* You can preconfigure Wi-fi by entering SSID and password so that device directly connects to Wi-Fi during enrolment process.

Step 5: Configure the Advanced Security Options as per below:

- Enrollment without Login:* Users can easily enroll their devices without needing authentication.
- Login with Authentication Modes:* User will have to enter authentication credentials to enrol a device. To enroll by this method, user should be registered in portal.
- Login with Static PIN:* To enroll a device with Static PIN, user will have to enter PIN that is set by Admin in the portal.

Step 6: Click on Save

Step 7: A Token ID will be generated

The generated Token ID will be used in Zero Touch Enrollment (ZTE).

Steps to generate QR:

- Step 1 :** Click on view enrollment options
- Step 2 :** Expand the QR Code
- Step 3 :** Scan the QR Code.

To generate a QR code for QR enrollment, click on "View Enrollment Options" in your device or management console. This will provide you with the necessary QR code to scan and complete the enrollment process.

Cards for configuring a Policy

To configure a policy, you are provided with multiple cards. Each card represents a specific setting that you can adjust. By selecting a card, you can access and modify the associated setting to tailor the policy to your needs. This approach allows for a structured and organized way to manage various aspects of the policy, ensuring that each setting is clearly defined and easily accessible.

Cards	Description
General Settings	Configure fun game mode, auto time zone, stay plugged modes, volume controls, create windows, lock screen owner details, support messages, skip first use hints, keyguard settings, and cell broadcasts configuration.
Password Settings	Set password requirements and allow the admin to dictate the password.
Network Settings	Control mobile networks, Wi-Fi, tethering networks, VPN, and USB data sharing.
Restrictions	Restriction settings allow you to configure restrictions on screen capture, external storage, factory reset, saving credentials, app installations/uninstallations, Google Play Protect, untrusted apps, developer settings, camera access, FRP admin emails, phone calls, SMS, Bluetooth, NFC Beam, location accuracy, location sharing, printing, microphone, permissions, Bluetooth contact sharing, network reset, USB data access, encryption, Google account management, Play Store mode, wallpaper changes, screen timeout, cross-profile actions, work profile widgets, and USB file transfer.
Android Updates	Android Update card allows you to configure policies for automatic app updates and the type of system updates, giving you control over how and when updates are applied to your Android device.
Launcher Settings	This card is available only for Dedicated Devices and allows you to configure launcher settings.
Wi-fi Settings	This card allows you to configure Wi-fi Settings.
User Account Settings	User Account Settings card allows you to configure user account details, ensuring secure access control and proper management of user-related information.
Status Reports	This card allows you to view the reports enabled by super admin

Cards	Description
Setup Actions	This card is available for Dedicated Devices and Fully Managed Devices and allows you to configure apps which are to be installed while the device is enrolling.
Applications	This card allows you to configure applications that you want to be reflected in the devices enrolled in the policy. You can also block and allow apps.
Configurations	This card allows you to configure system preferences and customize the behaviour of applications, ensuring optimal performance and alignment with user needs.

General Settings

This card allows you to configure fun game mode, auto time zone, stay plugged modes, volume controls, create windows, lock screen owner details, support messages, skip first use hints, keyguard settings, and cell broadcasts configuration.

You can configure "General Settings" based on details below

FEATURE	MANAGEMENT SETS APPLICABLE FOR	DESCRIPTION
Allow Fun Game	Fully Managed /Kiosk Launcher /Tectoro Launcher	The stay on plugged mode specifies when the device's screen stays: If set to ac: the device stays on while charging via a wall adapter. If set to USB: the device's screen stays on while charging through a USB connection. If set to wireless: the device's screen stays on while charging wirelessly. If set to unspecified: the device's screen will follow its normal power settings.
Allow Auto Time zone	Fully Managed /Kiosk Launcher /Tectoro Launcher	Adjusting the device volume is permitted when allowed, blocking this feature restricts volume changes.
Stay on plugged Modes	Fully Managed /Kiosk Launcher /Tectoro Launcher	Allows apps to create windows outside their own app for overlays and pop-ups, blocking this prevents apps from creating such windows.
Allow Volume Controls	Fully Managed /Kiosk Launcher /Tectoro Launcher	Adjusting the device volume is permitted when allowed, blocking this feature restricts volume changes.
Allow Create Windows	Fully Managed/ Single App/ Kiosk Launcher/ Tectoro Launcher	Allows apps to create windows outside their own app for overlays and pop-ups, blocking this prevents apps from creating such windows.
Lock Screen Owner Details	Fully Managed/ Single App/ Kiosk Launcher/ Tectoro Launcher	The admin can set custom information (e.g., name or contact details) to display on the user's lock screen. If left blank, no information is shown to the user.

FEATURE	MANAGEMENT SETS APPLICABLE FOR	DESCRIPTION
Short Support Message	Fully Managed/ Single App/ Work Profile/ Kiosk Launcher/ Tectoro Launcher	The admin can configure a brief explanation (under 200 characters) to be displayed to users When they attempt to access restricted features.
Long Support Message	Fully Managed/ Single App/ Work Profile/ Kiosk Launcher/ Tectoro Launcher	The admin can configure a detailed explanation to be displayed to users when they attempt to access restricted features. This message is accessed by clicking "View" in the initial notification, providing a comprehensive reason behind the restriction.
Skip First Use Hints Enabled	Fully Managed/ Single App/ Work Profile/ Kiosk Launcher/ Tectoro Launcher	Apps can skip tutorials and onboarding for a smoother experience, though they may still display them if necessary.
Allow Keyguard	Fully Managed/ Single App/ Work Profile/ Kiosk Launcher/ Tectoro Launcher	Keyguard features, such as customizing lock screen securities and widgets, are activated or deactivated based on this setting.
Keyguard Disabled Features	Fully Managed/ Single App/ Work Profile/ Kiosk Launcher/ Tectoro Launcher	Admin can disable specific key guard features like camera, notifications, biometrics, smart lock, shortcuts) Use all features to restrict all customizations, while keeping the lock screen active.
Allow Cell Broadcasts Config (from Android 7.0)	Fully Managed/ Kiosk Launcher/ Tectoro Launcher	Allows devices to receive cell broadcast messages, including government or emergency alerts, blocking this prevents delivery of such messages

Password Settings

This card allows you to configure Password settings, including user choice, simple and complex configurations, password types, maximum failed attempts before a wipe, password history, expiration timeouts, minimum length, special characters, lower-case and upper-case requirements, and container lock settings.

You can configure "Password Settings" based on details below

FEATURE	MANAGEMENT SETS APPLICABLE FOR	DESCRIPTION
Password Configuration - User Choice	Fully Managed/ Single App/ Work Profile/ Kiosk Launcher/ Tectoro Launcher	The "User choice" option lets users decide whether to enable a lock screen and choose their preferred lock type, such as a pin, password, pattern, or biometric option. The available options depend on the device's capabilities.

FEATURE	MANAGEMENT SETS APPLICABLE FOR	DESCRIPTION
Password Configuration - Simple Password Type	Fully Managed/ Single App/ Work Profile/ Kiosk Launcher/ Tectoro Launcher	If alphabetic is selected: the password must include letters. If numeric is selected: the password must include numbers.
Maximum Failed Attempts for Wipe	Fully Managed/ Single App/ Work Profile/ Kiosk Launcher/ Tectoro Launcher	This option determines how many incorrect password attempts are allowed Before the device is automatically wiped. If set to "Never", auto-wipe is disabled, allowing unlimited password attempts.
Maximum Password History	Fully Managed/ Single App/ Work Profile/ Kiosk Launcher/ Tectoro Launcher	This option specifies the number of prior passwords the device stores to prevent users from reusing them. If set to "None" the feature is disabled, allowing users to reuse prior passwords without restriction.
Password Expiration Timeout	Fully Managed/ Single App/ Work Profile/ Kiosk Launcher/ Tectoro Launcher	This option determines how long a password remains valid before users are required to change it. If set to "Never expires", the password will not expire, allowing users to keep the same password permanently without needing to update it.
Password Configuration - Complex Password type	Fully Managed/ Single App/ Work Profile/ Kiosk Launcher/ Tectoro Launcher	The Alphanumeric Password Quality rule ensures that passwords must contain both letters (alphabetic characters) or Special Characters and numbers (0-9), This requirement helps create stronger, more secure passwords that are harder for others to guess or crack.
Minimum Password Length	Fully Managed/ Single App/ Work Profile/ Kiosk Launcher/ Tectoro Launcher	This option determines the minimum number of characters required for a password. If set to 0, there is no minimum length requirement. This rule applies only to certain password types, Such as numeric or alphanumeric passwords.
Minimum Number of Special Character	Fully Managed/ Single App/ Work Profile/ Kiosk Launcher/ Tectoro Launcher	This option determines the minimum number of special characters required in a password.
Minimum Number of Lower-Case Allowed	Fully Managed/ Single App/ Work Profile/ Kiosk Launcher/ Tectoro Launcher	This option determines the minimum number of lowercase letters required in a password.
Minimum Number of Upper-Case Allowed	Fully Managed/ Single App/ Work Profile/ Kiosk Launcher/ Tectoro Launcher	This option determines the minimum number of uppercase letters required in a password.

FEATURE	MANAGEMENT SETS APPLICABLE FOR	DESCRIPTION
Maximum Failed Attempts for Wipe	Fully Managed/ Single App/ Work Profile/ Kiosk Launcher/ Tectoro Launcher	This option determines how many incorrect password attempts are allowed before the device is automatically wiped. If set to "Never", auto-wipe is disabled, allowing unlimited password attempts.
Maximum Password History	Fully Managed/ Single App/ Work Profile/ Kiosk Launcher/ Tectoro Launcher	This option specifies the number of prior passwords the device stores to prevent users from reusing them. If set to "None" the feature is disabled, allowing users to reuse prior passwords without restriction.
Password Expiration Timeout	Fully Managed/ Single App/ Work Profile/ Kiosk Launcher/ Tectoro Launcher	This option determines how long a password remains valid before users are required to change it. If set to "Never expires", the password will not expire, allowing users to keep the same password permanently without needing to update it.
Container Lock Settings	Work Profile	The option specifies the container lock settings behaviour for work and personal profiles. If set to unspecified: a single lock will be allowed for both work and personal profiles by default. If set to allow unified lock: a shared lock can be used for both personal and work profiles. If set to require separate lock: a separate lock will be required for the work profile, distinct from the personal profile.

Network Settings

Network settings allow you to configure network preferences, mobile network changes, data roaming, VPNs, Wi-Fi state, airplane mode, Ultra-Wideband, 2G connectivity, Wi-Fi security, Wi-Fi connections, Wi-Fi Direct, tethering, and Wi-Fi SSID policies.

You can configure "Network Settings" based on details below

FEATURE	MANAGEMENT SETS APPLICABLE FOR	DESCRIPTION
Preferential Network Service	Work Profile	The preferential network service setting enables organizations to prioritize Specific networks, such as a dedicated 5g connection, for work profile traffic. It applies only to work data and does not impact personal apps or fully managed devices
Allow Mobile Network Changes	Fully Managed / Work Profile (COPE) /Kiosk Launcher /Tectoro Launcher	Allows users to modify mobile network settings like APNS and roaming, blocking this locks the settings.
Allow Data Roaming (from Android 7.0)	Fully Managed/Kiosk Launcher /Tectoro Launcher	Data roaming is accessible when allowed, disabling it prevents the device from using roaming networks.
Network Escape Hatch Enabled	Fully Managed/Kiosk Launcher /Tectoro Launcher	If a network connection can't be made at boot time, the escape hatch prompts the user to temporarily connect to a network in order to refresh the device policy. After applying policy, the temporary network will be forgotten, and the device will continue booting
Enable Configuring VPN	Fully Managed /Work Profile /Single App /Kiosk Launcher /Tectoro Launcher	VPN settings, including adding, modifying, or deleting profiles, can be configured when permitted, blocking this restricts changes.
Wi-Fi State (from Android 13.0)	Fully Managed /Single App /Kiosk Launcher /Tectoro Launcher	The Wi-Fi state controls wi-fi state and user permissions: If set to: unspecified (defaults to user choice). If set to: user choice (allows users to enable/disable wi-fi). If set to: enabled (forces wi-fi on) or disabled (forces wi-fi off).
Airplane Mode State	Fully Managed /Single App /Kiosk Launcher /Tectoro Launcher	The airplane mode state controls airplane mode state and user permissions: If set to: unspecified (defaults to user choice). If set to: user choice (allows users to toggle airplane mode). If set to: disabled (forces airplane mode off).

FEATURE	MANAGEMENT SETS APPLICABLE FOR	DESCRIPTION
Ultra Wideband State (from Android 14 and above.)	Fully Managed /Single App /Kiosk Launcher /Tectoro Launcher	This ultra-wideband state specifies ultra-wideband (UWB), a high-frequency, Short-range wireless technology designed for precise location tracking and fast data transfer If set to unspecified: (defaults to user choice). If set to: user choice (allows users to toggle UWB). If set to: disabled (forces UWB off).
Cellular 2G State (from Android 14 and above.)	Fully Managed /Single App /Kiosk Launcher/Tectoro Launcher	This option manages the 2g cellular network setting on android 14 and above, determining whether users can enable or disable 2g on their devices
Minimum Wi-Fi Security Level (from Android 13 and above.)	Fully Managed /Single App /Kiosk Launcher /Tectoro Launcher	"The minimum Wi-Fi security level defines the minimum wi-fi security level required for device connections, ensuring devices only connect to networks that meet or exceed the specified security standard: If set to unspecified: defaults to allowing all Wi-Fi networks. If set to open networks: device can connect to any Wi-Fi network. If set to personal networks: requires secured networks (wep/wpa2-psk) and blocks open networks. If set to enterprise networks: requires enterprise-level security and blocks personal and open networks. If set to 192-bit enterprise networks: requires highest security and blocks all lower-level networks.
Configure Wi-Fi	Fully Managed /Single App /Kiosk Launcher /Tectoro Launcher	The Configure Wi-Fi specifies, Wi-Fi control privileges: If set to unspecified: applies no restrictions. If set to allow configuring wi-fi: grants full control to manage networks. If set to disallow add wi-fi config: prevents adding new networks but allows switching between existing ones. If set to disallow configuring wi-fi: removes existing networks and only keeps admin-configured networks.

FEATURE	MANAGEMENT SETS APPLICABLE FOR	DESCRIPTION
Wi-Fi Direct Settings	Fully Managed /Single App /Kiosk Launcher /Tectoro Launcher	The Wi-Fi direct settings option enables users to connect devices directly without a wi-fi network or router. Wi-fi direct makes it easy to share files, print documents, or stream media wirelessly If set to unspecific: wi-fi direct depends on device defaults. If set to allow wi-fi direct: allows wi-fi direct on devices. If set to disallow wi-fi direct: disables wi-fi direct on devices.
Tethering Settings	Fully Managed /Single App /Kiosk Launcher /Tectoro Launcher	The Tethering setting controls tethering options on the device: If set to Unspecified: No restrictions are applied, tethering behaviour depends on device defaults. If set to Allow Tethering: All tethering types (Wi-Fi, USB, etc.) are enabled. If set to Disallow Wi-Fi Tethering: Only Wi-Fi tethering is blocked, other tethering types remain allowed. If set to Disallow All Tethering: All tethering types are blocked.
Wi-Fi SSID Policy Type (from Android 13 and above.)	Fully Managed /Single App /Kiosk Launcher /Tectoro Launcher	Use deny to block specific wi-fi networks or allow to restrict access to approved SSIDs. Ensure Wi-Fi SSIDs is configured correctly for enforcement
Wi-Fi SSID (from Android 13 and above.)	Fully Managed /Single App /Kiosk Launcher/Tectoro Launcher	Enter the wi-fi network name (SSID) to specify which networks are allowed or need to be blocked. This field is required to enforce wi-fi access policies.

Restrictions

Restriction settings allow you to configure restrictions on screen capture, external storage, factory reset, saving credentials, app installations/uninstallations, Google Play Protect, untrusted apps, developer settings, camera access, FRP admin emails, phone calls, SMS, Bluetooth, NFC Beam, location accuracy, location sharing, printing, microphone, permissions, Bluetooth contact sharing, network reset, USB data access,

encryption, Google account management, Play Store mode, wallpaper changes, screen timeout, cross-profile actions, work profile widgets, and USB file transfer.

You can configure "Restrictions" based on details below

FEATURE	MANAGEMENT SETS APPLICABLE FOR	DESCRIPTION
Allow Screen Capture	Fully Managed / Work Profile /Single App /Kiosk Launcher /Tectoro Launcher	Allows users to take screenshots and record the screen, blocking this disables both features.
Allow External Storage	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	External storage, like SD cards and USB drives, can be mounted when permitted, blocking this prevents access.
Allow user to do (Perform) factory reset	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Factory resets can be performed when allowed, blocking this prevents device resets.
Allow Saving Credentials	Fully Managed / Single/Kiosk/Tectoro	Saving credentials on the device is permitted when allowed, blocking this restricts credential management.
Allow App Installations	Fully Managed / Work Profile /Kiosk Launcher/Tectoro Launcher	Apps can be installed on the device when allowed. If this is blocked, app installations will not be permitted. When disabled, even the admin cannot remotely install apps from the portal to the device.
Allow App Uninstallations	Fully Managed / Work Profile /Kiosk Launcher/Tectoro Launcher	Apps can be uninstalled from the device when allowed. If this is blocked, app removals will not be permitted. When disabled, even the admin cannot remotely uninstall apps from the portal
Google Play Protect Verify Apps	Fully Managed / Work Profile /Single App /Kiosk Launcher /Tectoro Launcher	The google play protect verify apps specifies, how Play Protect app verification is applied. If set to enforced, app verification happens automatically. If set to user choice, users decide whether to verify apps. If left unspecified, it defaults to enforced app verification.

FEATURE	MANAGEMENT SETS APPLICABLE FOR	DESCRIPTION
Untrusted Apps Policy	Fully Managed / Work Profile /Single App /Kiosk Launcher /Tectoro Launcher	The untrusted apps policy specifies untrusted app installation behaviour: If set to unspecified: untrusted app installations are blocked by default. If set to disallow untrusted app installations: all untrusted apps are blocked. If set to allow untrusted app installations: they can be installed device wide. If set to allow untrusted app installations in personal profile: they are allowed only in the personal profile on work-profile devices.
Developer Settings	Fully Managed / Work Profile /Single App /Kiosk Launcher /Tectoro Launcher	The developer options specifies developer settings behaviour If set to unspecified: developer settings access is restricted by default. If set to disable: developer settings are blocked. If set to allowed: full access to developer settings is granted.
Camera Access	Fully Managed / Work Profile /Kiosk Launcher/Tectoro Launcher	The camera access specifies camera access behaviour: If set to unspecified: it defaults to user choice for camera access. If set to user choice: users can toggle camera access on or off. If set to enable: camera access is forced on. If set to disable: camera access is blocked entirely
FRP Admin Emails	Fully Managed / Work Profile (COPE) / Single App /Kiosk Launcher/Tectoro Launcher	The FRP admin emails field specifies the admin email required for factory reset protection (FRP). After a reset, this email must be used to unlock the device. If left empty, FRP is disabled.
Allow Outgoing Phone Calls (from Android 7.0)	Fully Managed/Kiosk Launcher/Tectoro Launcher	Outgoing calls can be made when allowed, blocking this restricts call functionality.
Allow Send/Receive SMS (from Android 7.0)	Fully Managed/Kiosk Launcher/Tectoro Launcher	Sending and receiving text messages is permitted when allowed, blocking this disables messaging.
Allow Bluetooth	Fully Managed/Kiosk Launcher/Tectoro Launcher	Bluetooth functionality is active when allowed, blocking this prevents Bluetooth use.

FEATURE	MANAGEMENT SETS APPLICABLE FOR	DESCRIPTION
Allow Bluetooth Config (from Android 7.0)	Fully Managed/Kiosk Launcher/Tectoro Launcher	Bluetooth configuration, such as pairing or adjusting settings, can be managed when allowed Blocking this disables all changes
Allow NFC Beam	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Sharing app data via NFC (android beam) is permitted when allowed, blocking this disables data sharing.
Location Accuracy (MODE)	Fully Managed/ Single App/Kiosk Launcher /Tectoro Launcher	The Location mode determines whether location services are available and who can control on the device If set to unspecific: the device follows its default behaviour. If set to user choice: the user can enable or disable location services freely. If set to enforce: location services are always enabled and cannot be turned off by the user. If set to disable: location services are completely disabled, preventing the user from turning them on.
Allow user to share location	Fully Managed/ Work Profile/Kiosk Launcher /Tectoro Launcher	Location sharing is permitted when allowed, blocking this restricts sharing.
Printing Policy	Fully Managed/ Work Profile/Tectoro Launcher	The printing policy specifies the printing policy of the device: If set to unspecific: the device follows its default behaviour or other settings determine printing access. If set to allowed: printing is enabled for users. If set to disallowed: printing is completely blocked.
Allow Microphone	Fully Managed/Kiosk Launcher/Tectoro Launcher	The allow microphone setting controls microphone use on devices: If set to unspecified: the device follows the system default behaviour. If set to user choice: users can toggle microphone access on or off. If set to disabled: the microphone is turned off and cannot be used. If set to enforced: the microphone remains always on without user control.

FEATURE	MANAGEMENT SETS APPLICABLE FOR	DESCRIPTION
Default Permission Policy	Fully Managed / Work Profile /Single App /Kiosk Launcher /Tectoro Launcher	The default permission policy specifies the default permission policy on the device: If set to Unspecified: The app follows the system's default permission behaviour. If set to Grant: All permissions are automatically approved. If set to Prompt: The user is asked to approve or deny permissions. If set to Deny: All permissions are automatically blocked.
Allow Bluetooth Contact Sharing	Work Profile	Sharing contacts via Bluetooth is permitted when allowed, blocking this prevents contact sharing
Allow the user to reset network	Fully Managed/ Work Profile (COPE)Kiosk Launcher /Tectoro Launcher	Resetting network settings, including wi-fi, mobile data, and Bluetooth, is permitted when allowed, blocking this restricts resets.
USB Data Access	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	The USB data access specifies USB data transfer behaviour: If set to unspecified: The device follows the system default behaviour. If allow USB data transfer: Users can transfer files and connect USB peripherals. If disallow USB file transfer: Users can connect USB devices like a mouse or keyboard but cannot transfer files. If disallow USB data transfer: Both file transfers and peripheral connections are completely blocked.
Encryption Policy (from Android 10 and above.)	Fully Managed / Work Profile /Single App /Kiosk Launcher /Tectoro Launcher	The encryption policy specifies encryption policy on the device: If set to encryption policy unspecified: This value is ignored, and no encryption is required. If encryption with password: Encryption is required, but no password is needed to boot. If encryption without password: Encryption is required with a password needed to boot.
Controls user access on adding/removing Google accounts	Fully Managed / Work Profile /Single App /Kiosk Launcher /Tectoro Launcher	If the admin chooses 'enabled,' the user can add or remove accounts on the device. If not, adding or removing accounts on the device is blocked.

FEATURE	MANAGEMENT SETS APPLICABLE FOR	DESCRIPTION
Play Store Mode	Fully Managed/ Single App/Kiosk Launcher/Tectoro Launcher	The play store mode specifies the Play Store app installation for the device: If set to whitelist: only approved apps can be installed. If set to blacklist: all apps are allowed except those explicitly blocked in the policy. If set to play store mode unspecified: defaults to whitelist, allowing only approved apps by default.
Allow user to change wallpaper (from Android 7.0)	Fully Managed/Kiosk Launcher/Tectoro Launcher	Allowing this setting permits wallpaper changes, while blocking it prevents users and even admins from modifying the device wallpaper.
Screen Time Out	Fully Managed/ Single App/Kiosk Launcher/Tectoro Launcher	Allowing this setting permits wallpaper changes, while blocking it prevents users and even admins from modifying the device wallpaper.
Cross Profile Copy Paste	Work Profile	The cross-profile copy paste specifies cross-profile copy-paste behaviour on the device: If set to unspecified: work-to-personal copying is blocked by default. If disallowed: work-to-personal copying is completely blocked. If allowed: copy-paste between work and personal profiles is permitted.
Cross Profile Data Sharing	Work Profile	The cross profile data sharing specifies cross-profile data sharing behaviour on the device: If set to unspecified: work-to-personal data sharing is restricted by default. If disallowed: all data sharing between personal and work profiles is blocked. If work to personal disallowed: data sharing from work to personal is blocked. If allowed: users can share data between personal and work profiles.
Show Work Contacts in Personal Profile	Work Profile	The show work contacts in personal profile specifies whether personal apps can access work contacts: If set to unspecified: Work contacts are shown in the personal profile by default. If allowed: Personal apps can access work contacts, If disallowed: Personal apps cannot access or look up work contact

FEATURE	MANAGEMENT SETS APPLICABLE FOR	DESCRIPTION
Allowed Work Profile Widgets	Work Profile	The allowed work profile widgets specifies whether work profile apps can add widgets to the home screen. If set to unspecified: Work profile widgets are blocked by default. If allowed: Work profile apps can add widgets to the home screen. If disallowed: Adding work profile widgets to the home screen is blocked.
Allow USB File Transfer	Fully Managed / Single/Kiosk/Tectoro	USB file transfers between the device and a computer are permitted when allowed, blocking this prevents data movement

Android Updates

Android Update card allows you to configure policies for automatic app updates and the type of system updates, giving you control over how and when updates are applied to your Android device.



You can configure Android Updates based on details below

FEATURE	MANAGEMENT SETS APPLICABLE FOR	DESCRIPTION
App Auto Update Policy	Fully Managed / Work Profile /Single App /Kiosk Launcher /Tectoro Launcher	The app auto-update policy, which controls when automatic app updates can be applied. If set to unspecified: The auto-update policy defaults to user choice. If user choice: The user controls auto-updates. If never: Apps are not auto updated. If Wi-Fi only: Apps update only over Wi-Fi. If always, apps update at any time, which may include data charges.
System Update Type	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	The System Update Type specifies how system updates are managed on the device If set to unspecified: The device follows its default update behaviour, usually requiring user approval. If set to automatic: Updates install immediately when available. If windowed: Updates install automatically within a daily maintenance window. If postpone: Non-security updates can be delayed for up to 30 days.

Wi-Fi Settings

Allows you to configure Wi-fi to which devices can connect when enrolled in the policy.

To Configure Wi-fi click on "+Add new Wi-Fi"





The image shows a 'Wi-Fi Settings' configuration window. It includes fields for 'Wi-Fi Name', 'Service Set Identifier (SSID)', 'Security' (with a dropdown menu), and 'Hidden SSID' (with a checkbox). There are 'Cancel' and 'Save' buttons at the bottom right.

You can configure Wi-fi Settings based on details below

FEATURE	MANAGEMENT SETS APPLICABLE FOR	DESCRIPTION
Wi-fi Name	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Enter Wi-fi Name
Service Set Identifier (SSID)	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Enter SSID for Identification of the wireless network to connect to
Security Type	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Wireless network encryption to use when connecting
		You can select from None, WPA2-PSK
Hidden SSID	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Controls if SSID is displayed or not

User Account Settings

User Account Settings card allows you to configure user account details, ensuring secure access control and proper management of user-related information.

You can configure User Account Settings based on details below



The image shows a 'User Account Settings' configuration window. It includes three toggle switches: 'Add User', 'Remove User', and 'Allow Set User from'. There are 'Cancel' and 'Save' buttons at the bottom right.

FEATURE	MANAGEMENT SETS APPLICABLE FOR	DESCRIPTION
Add User	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Enabling this allows user to add users in the device
Remove User	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Enabling this allows user to remove other users from the device
Allow Set User Icon	Fully Managed /Single App /Kiosk Launcher /Tectoro Launcher	Enabling this allows user to set user icon


Status Report

This card allows you to view the reports enabled by super admin. You cannot configure this card but view what reports have been enabled. You will be able to generate reports from the reports panel.



Setup Actions

This card allows you to define initial setup processes, ensuring streamlined onboarding and proper configuration of essential system components.

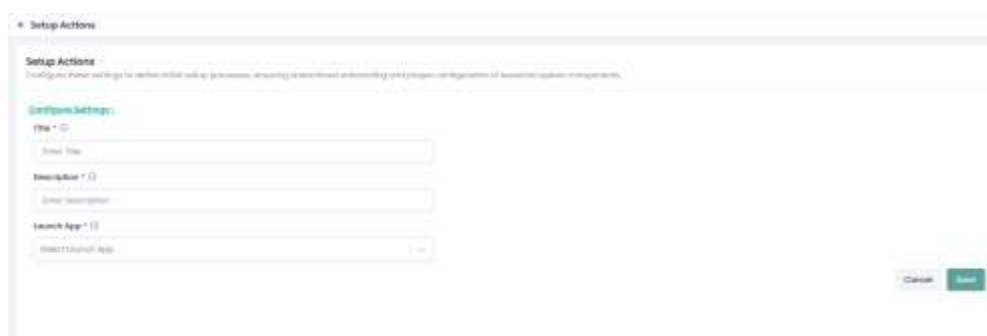

You can configure this card based on details below


FEATURE	MANAGEMENT SETS APPLICABLE FOR	DESCRIPTION
Title	Fully Managed /Single App /Kiosk Launcher /Tectoro Launcher	Enter Title of the App

Description	Fully Managed/Single App /Kiosk Launcher /Tectoro Launcher	Enter Description of the App
Launch App	Fully Managed /Single App /Kiosk Launcher /Tectoro Launcher	Select the application from the drop-down that must be launched soon after enrollment

Applications


The Applications card enables you to manage the applications you want on end-user devices. It consists of two tabs: "Applications" and "Packages".

- In the Applications tab, you can select the apps that need to be installed on devices enrolled in the policy.
- In the Packages tab, you can manage application permissions by allowing or blocking specific applications.

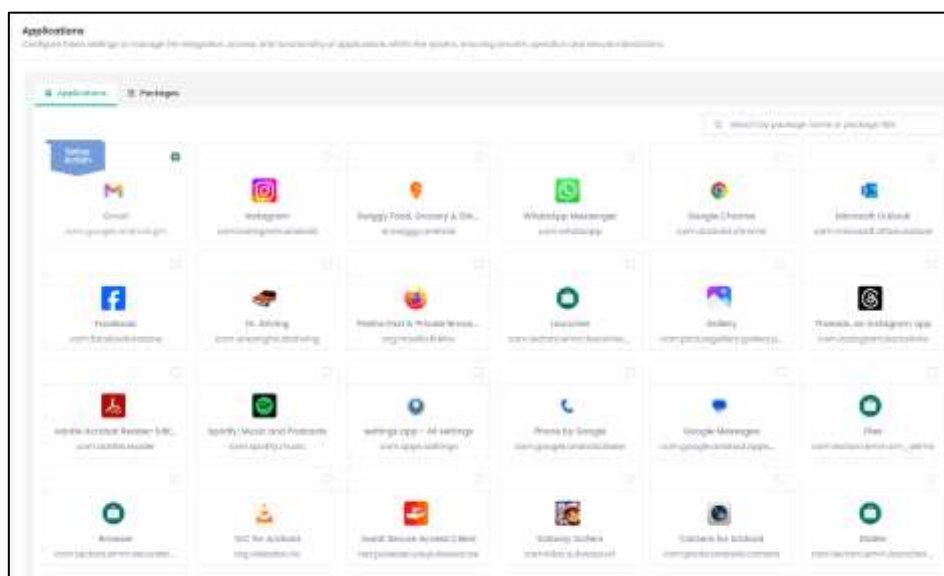

You can configure the application details by clicking on the app this is applicable for all management sets except "Single App"

You can configure the app details based on details below

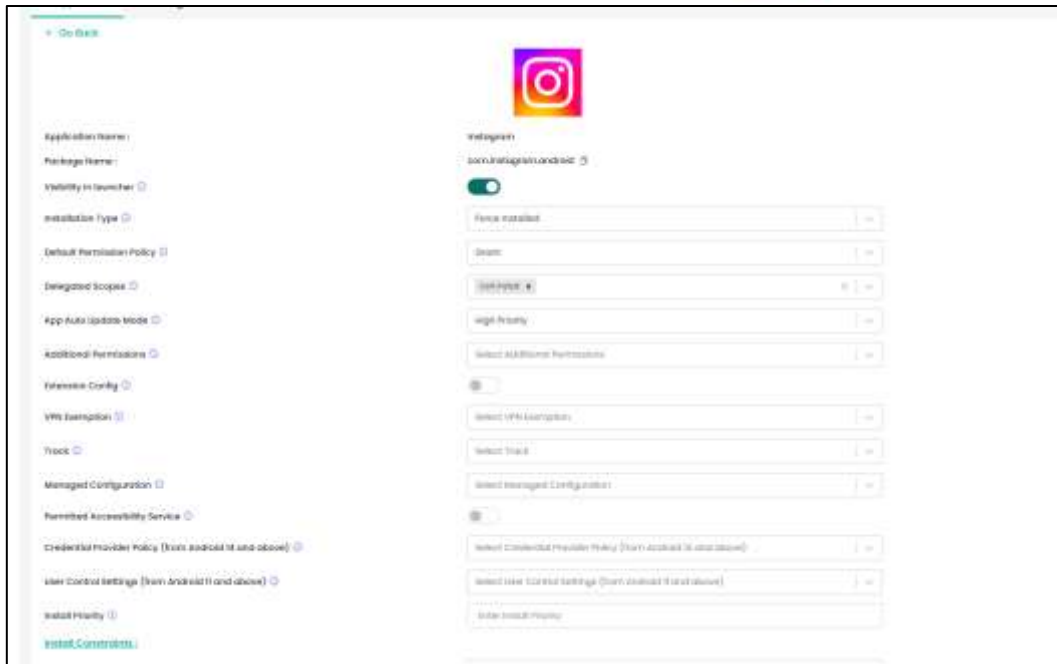


FEATURE	MANAGEMENT SETS APPLICABLE FOR	DESCRIPTION
Application Name	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Name of the application is displayed
Package Name	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Package Name of the application is displayed
Visibility in launcher	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Enabling this will show app in launcher in agent app
Installation Type	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Defines the Installation type You can select from drop down Available Force Installed Pre-installed Required for setup
Default Permission Policy	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	The default permission for all permissions requested by the app You can select from Unspecific Prompt Grant Deny

FEATURE	MANAGEMENT SETS APPLICABLE FOR	DESCRIPTION
Delegated SCOPEs	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Assign delegated sCOPE for the application by selecting from the following from a dropdown Delegated SCOPE Unspecified Managed Configurations Block Uninstall Permission Grant Package Access Enable System App Network Activity Logs Security Logs Cert Install Cert Selection
App Auto Update Mode	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Allows you enable App auto update mode or defer an update You can select from Unspecific, Default, Postponed and high priority
Additional Permissions	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Add additional permissions you can select from the following Manage External Storage Package Usage Stats Read Call Log Read Contacts Read External Storage Read Phone State Read Privileged Phone State Receive Boot Completed
Extension Config	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Configuration to enable an app as an extension app, with the capability of interacting with Android Device Policy offline. For Android versions 13 and above, extension apps are exempt from battery restrictions so will not be placed into the restricted App Standby Bucket. Extensions apps are also protected against users clearing their data or force-closing the application, although admins can continue to use the clear app data command on extension apps if needed for Android 13 and above.
VPN Exemption	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Define VPN Extension by selecting from Always on VPN Lockdown exemption unspecified VPN lockdown enforced VPN lockdown exemption

FEATURE	MANAGEMENT SETS APPLICABLE FOR	DESCRIPTION
Track	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	
Managed Configuration	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Select the managed configuration for this app that has already been created against each app
Permitted Accessibility Service	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Enabling this will give permitted Access
Credential Provider Policy (from Android 14 and above)	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Select if the app is allowed to act as a credential provider in Android 14 or above You can select from Unspecified and Allowed
User Control Settings (from Android 11 and above)	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Specifies whether user control is permitted for the app. User control includes user actions like force stopping and clearing app data. Supported on Android 11 and above. You can select from "Unspecified", "Allowed" and "Disallowed"
Install Priority	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	This controls relative priority of installation. A value of 0(default) means this app has no priority over other apps. For value between 0 to 10,000 a lower value means higher priority. Values outside the range of 0 to 10,000 are rejected.
Network Type Constraint	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Allows to restrict application installation based on network type You can select from Unspecified Installed on network Install on unmetered network
Charging Constraint	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Allows you to define if the app should be installed while charging or not You can select from Unspecified Charging not required Install only when charging
Device Idle Constraint	Fully Managed / Work Profile (COPE) /Single App /Kiosk Launcher /Tectoro Launcher	Allows you to define if the app should be installed when idle or not You can select from Unspecified Idle not required Install only during idle

Packages:

You can configure packages that are allowed and that are blocked in this header

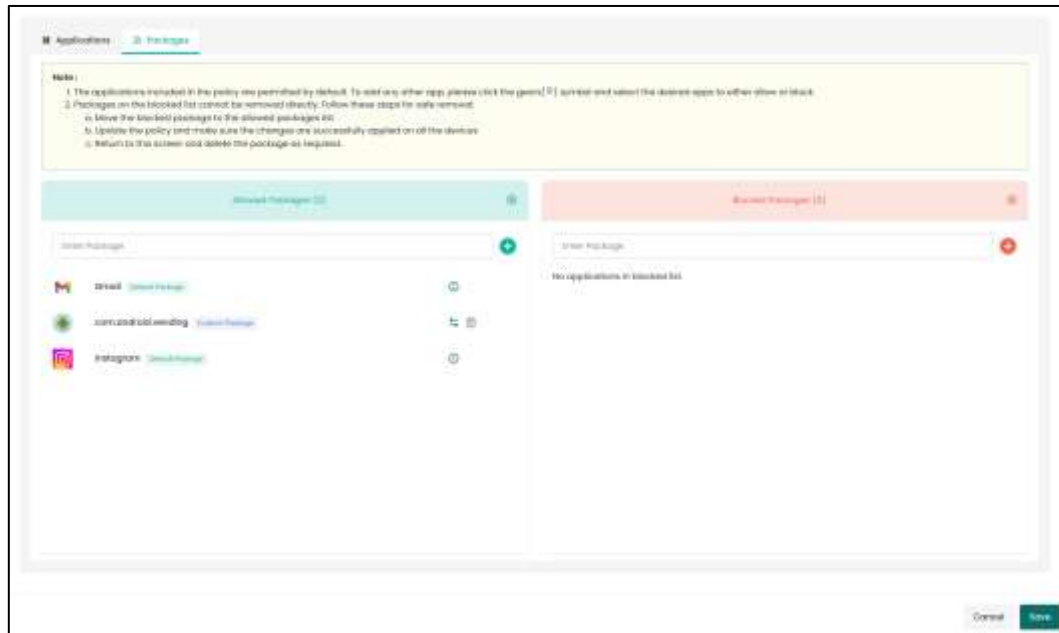

The applications included in the policy are permitted by default. To add any other app, click the gears symbol and select the desired apps to either allow or block.

Packages on the blocked list cannot be removed directly. Follow these steps for safe removal:

1. Move the blocked package to the allowed packages list
2. Update the policy and make sure the changes are successfully applied on all the devices
3. Return to this screen and delete the package.

Configurations

This card allows you to configure system preferences and customize the behaviour of applications, ensuring optimal performance and alignment with user needs.

All the configurations are configured in Configurations tab. You can select the configuration you want to apply from dropdown.



Management Sets

Management sets are predefined groups of configurations and settings that can be applied to a collection of devices. These sets help streamline the management process by allowing administrators to apply consistent rules and configurations across multiple devices simultaneously. Each set has specific configurations tailored to its use case.

Types of Management Sets in Tectoro Android EMM:

1. Fully Managed Device
2. Work Profile and
3. Dedicated Device.

Dedicated Device further has three subsets Single App, Kiosk Launcher and Tectoro Launcher.

Fully Managed Device

A fully managed device is a company-owned device that is configured and controlled entirely by an organization's IT department. These devices are intended for work use only and are associated with a single user. Fully managed devices allow IT administrators to enforce a wide range of policies and settings, ensuring that the device is secure and compliant with organizational standards.

Work Profile

A work profile device is an Android device that has a separate, secure area for work-related apps and data, distinct from personal apps and data. This setup allows users to use the same device for both personal and work purposes without compromising security or privacy.

Dedicated Device

A dedicated device is a company-owned device that is configured for a specific purpose or set of functions, often used exclusively for business tasks. These devices

are fully managed by an organization's IT department and are not intended for personal use

Single App

Admin can configure the policy where the user can allow only one app in the device

Kiosk Launcher

Admin can configure the policy where the user can choose a few select apps which the user can you. No other applications apart from the selected ones can be accessed.

Tectoro Launcher

Tectoro Launcher is an extension of kiosk launcher with add on customisations.

Devices

The Android Devices Dashboard provides a centralized interface to manage and monitor enrolled Android devices. It displays key metrics, such as total devices, new enrollments, active and deleted devices, and device-specific details.

At the top of the dashboard, key metrics are displayed

Total Devices	The total number of enrolled devices.
New Devices	The number of devices recently added.
Provisioning	Number of devices currently in provisioning.
Active Devices	Devices that are currently online and operational.
Disabled Devices	Devices that have been disabled.
Deleted Devices	Devices that have been removed from the system.

Here are the details available for each device:

Last Contact	Indicates the last time the device connected to the system.
Serial	Unique identifier for the device.
Device Name	Custom name assigned to the device.
Sequence	Unique hardware identifier.
IMEI	Unique hardware identifier.
Android Version	OS version installed on the device.
Manufacturer	Device brand (Samsung, Xiaomi, Lenovo, Acer, etc.).
Policy View	The applied security and usage policy.
Policy Version	Version number of the policy applied.
Group	The device's assigned group
Device Status	Displays if the device is Active, Deleted, or in another state
Battery	Displays battery percentage if available.

Username	Associated user for the device.
Custom Field	Field added during bulk upload of devices.
Violations	Violations from geo fence
Actions	These Actions can be performed Notes, Reboot, Lock, See Device on Map, Reset Password, Scream, Lost Mode, Factory Reset, Retire.

Search and Filters

Search Bar	Allows searching by Serial, Notes, IMEI, and Enrollment Date.
More Filters	Enables advanced filtering options to refine device selection.
Bulk Action	Perform actions on multiple devices at once.
Export All	Export device data for reporting purposes.


Apps

From this tab, you can manage your apps efficiently. It allows you to view existing apps, publish new ones, and add new apps seamlessly. This centralized control makes app management straightforward and convenient.


Navigation: Homepage >> Android >> Apps

Steps to add a new App from Play Store:


Step 1: Click on "+ Add New".

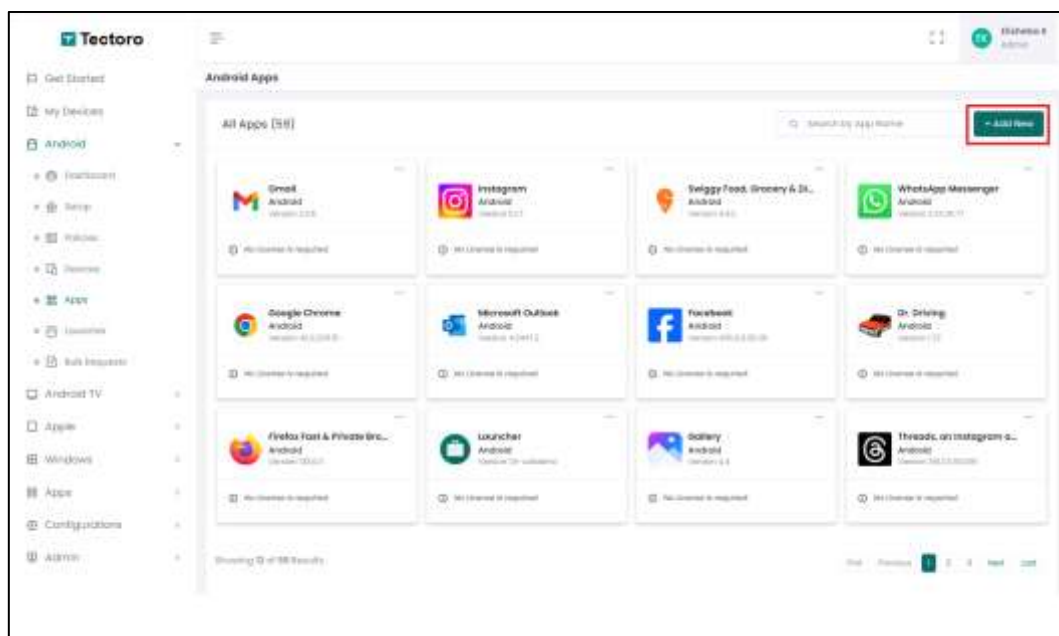


Step 2 : You will be taken to play store

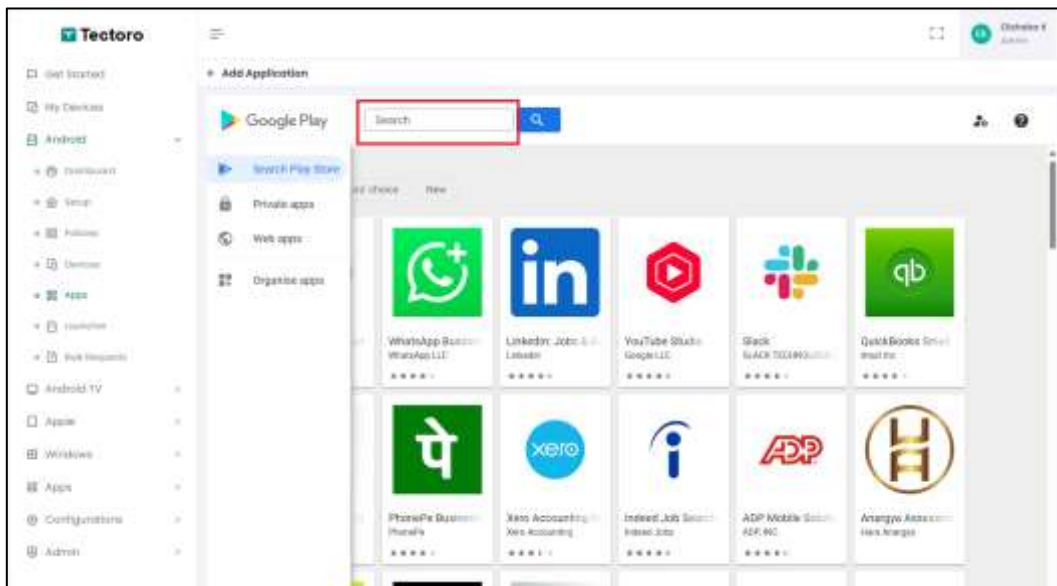

Step 3 : Select the app you want to add to Tectoro EMM.

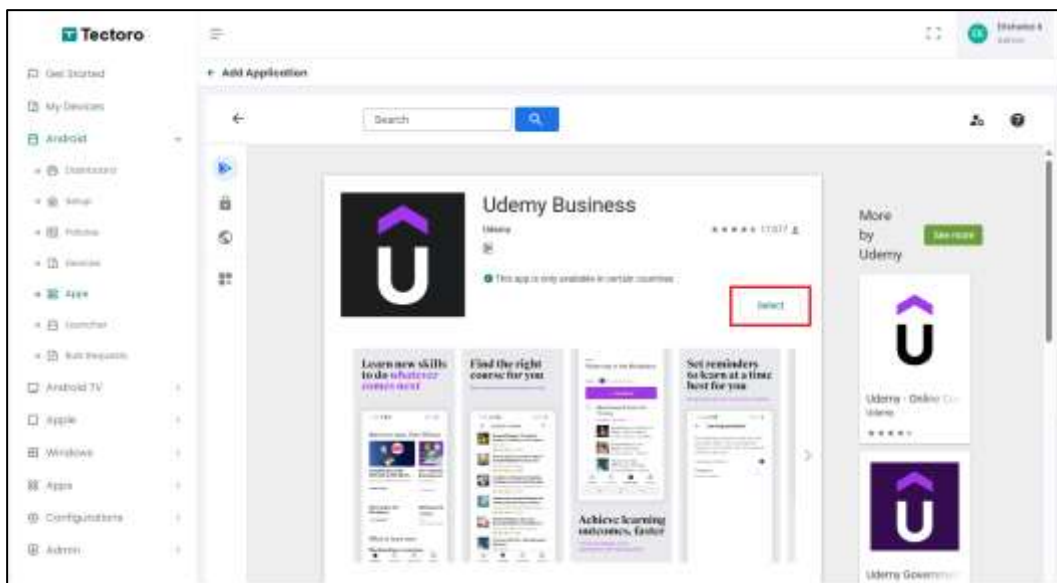


Step 4 :Application will be added to "All Apps" in Android.

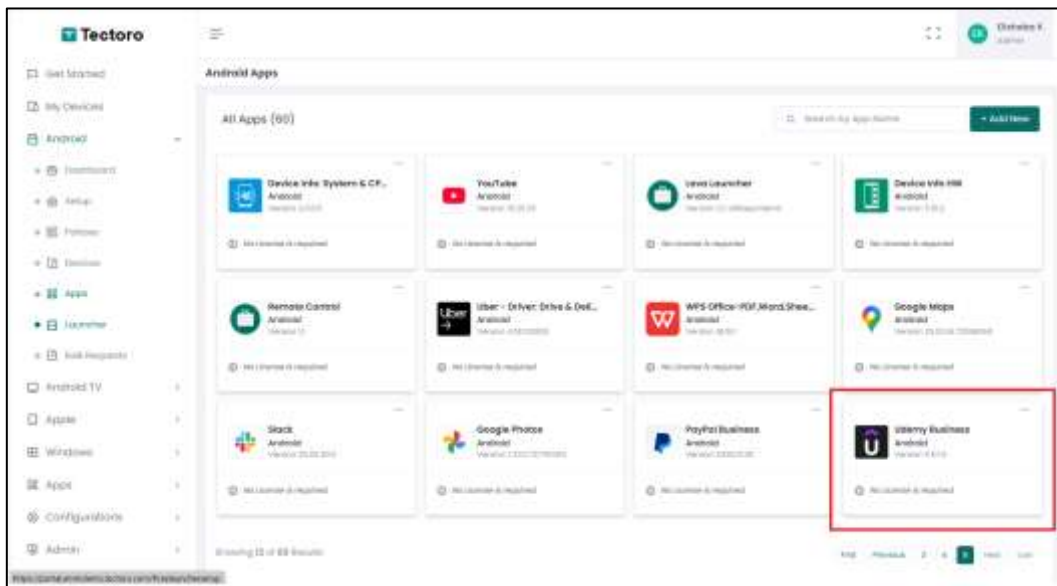


Steps to Add "Enterprise App":


Step 1: Click on "+ Add New".

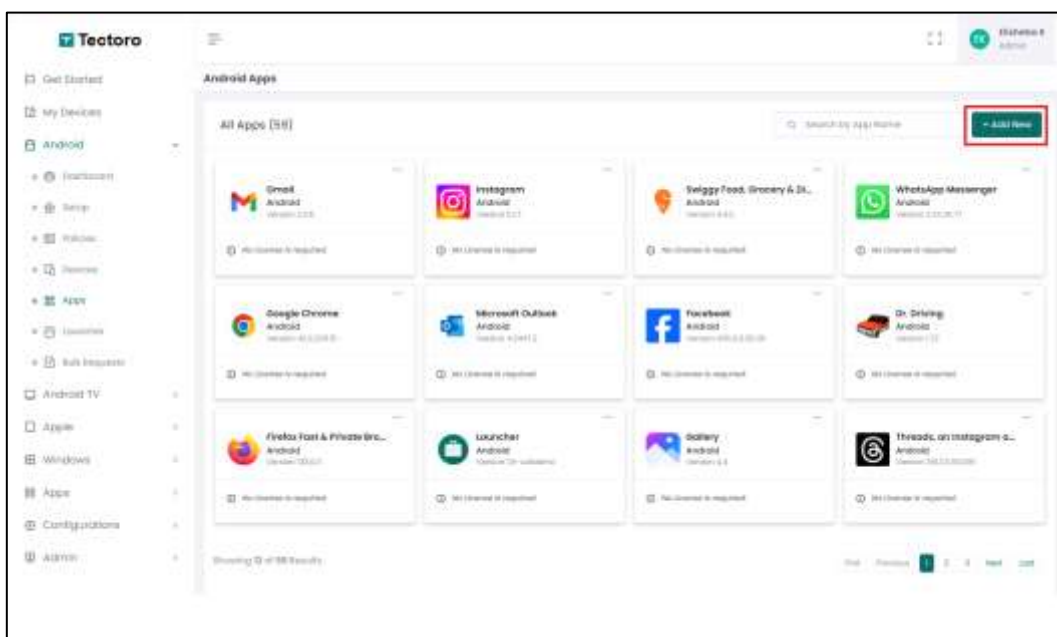

Step 2 : You will be taken to play store, click on private apps.

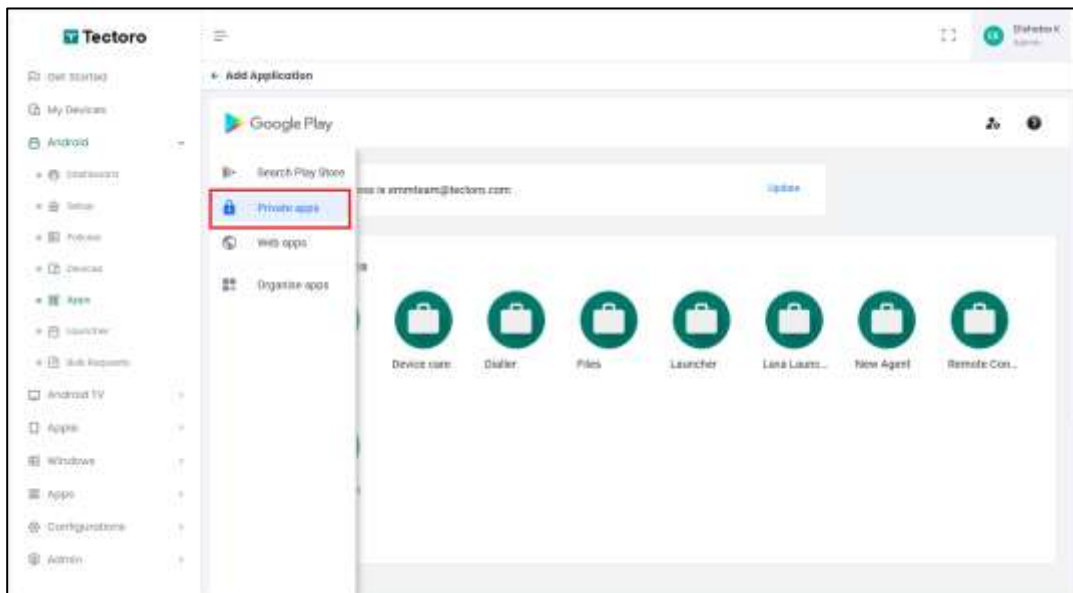

Step 3 : You will be able to view the customs apps published by your organisation. If required Tectoro can publish Apps on your behalf Select the app you want to add to Tectoro EMM.

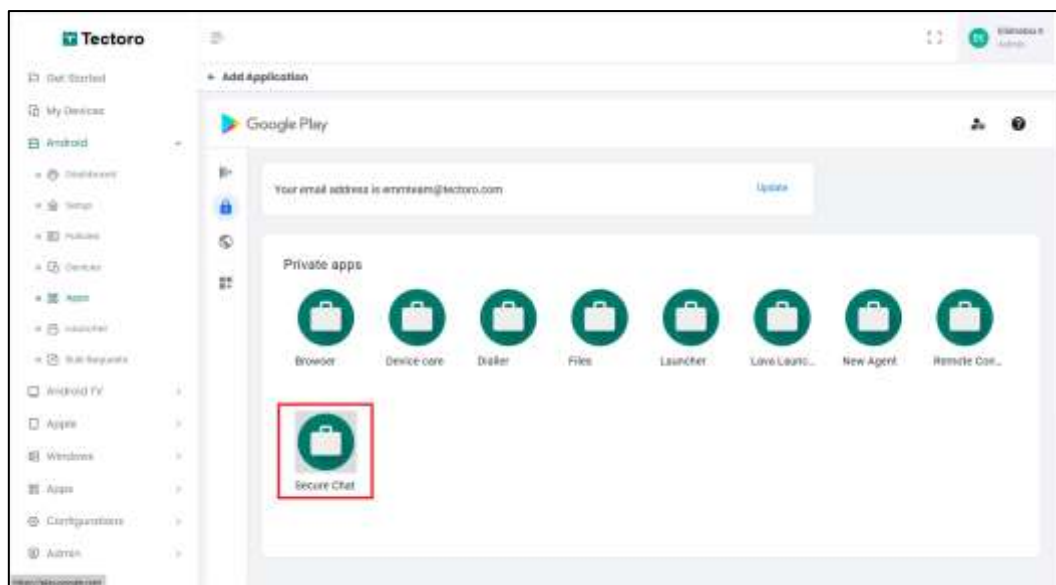

Step 4 : Application will be added to "All Apps" in Android.

Launcher

Launcher is a custom tab provided to users who opt for Tectoro Launcher as a Management Set.

Navigation: Homepage >> Android >> Launcher


You can view, edit and delete existing configurations and add new configurations in this tab.

To Add a new configuration, click on "Add New" and configure the launcher under the following headers

1. Branding
2. Admin and
3. Application Settings
4. Metrics

Branding


You can customise how the display looks in your devices using branding.

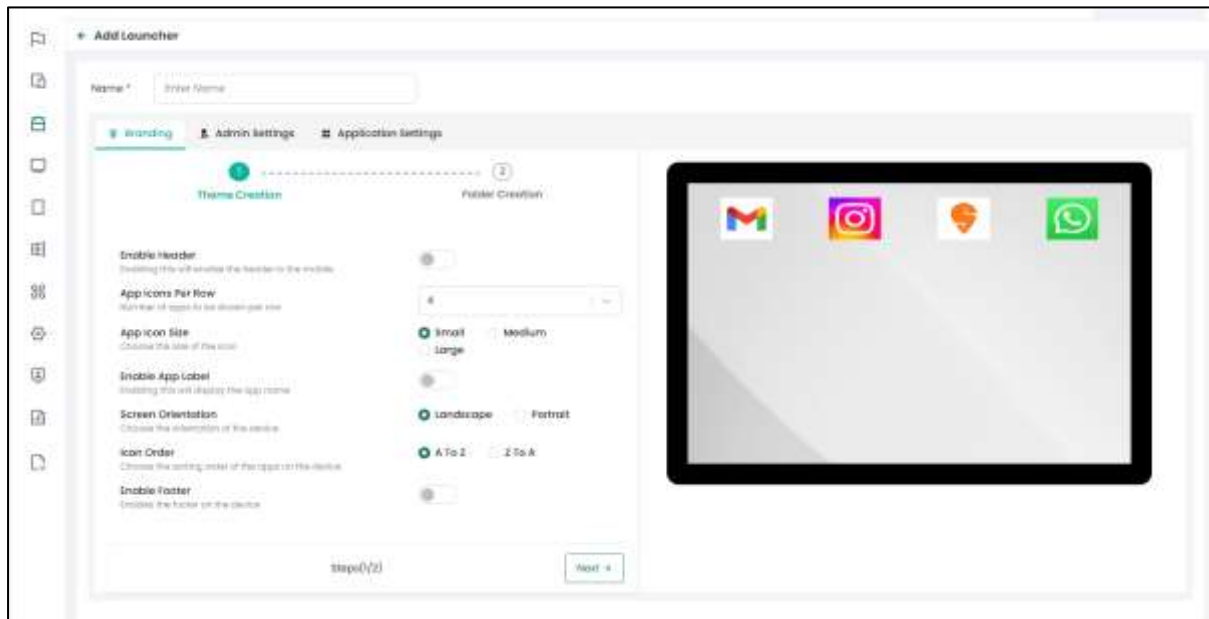

You can configure **Theme Creation**, based on details below

Enable Header	Enabling this will enable the header in the mobile
App Icons Per Row	Number of apps to be shown per row You can select a maximum of 5 apps
App Icon Size	Choose the size of the icon - Small, Medium, Large
Enable App Label	Enabling this will display the app name
Screen Orientation	Choose the orientation of the device - Landscape, Portrait, Icon Order
Choose the sorting order of the apps on the device	A To Z Z To A
Enable Footer	Enables the footer on the device


You can configure **Folder Creation**, based on details below

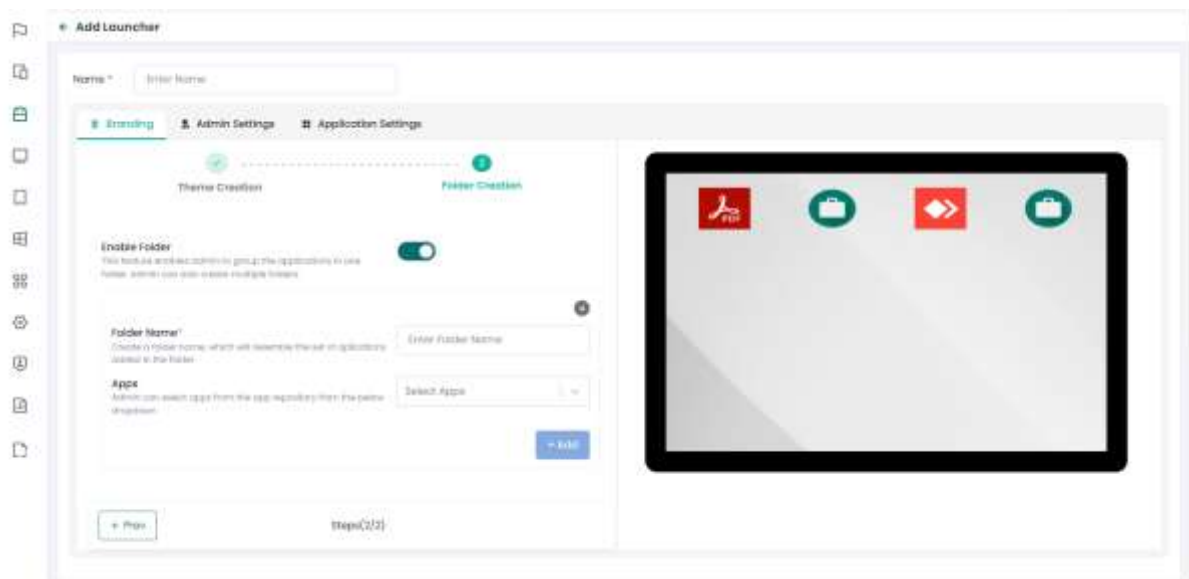

Enable Folder	This feature enables admin to group the applications in one folder. Admin can also create multiple folders.
Folder Name	Create a folder name, which will resemble the set of applications added in the folder
Apps	Admin can select apps from the app repository from the dropdown

Admin Settings

In Admin settings you can configure how device user will be able to access different settings

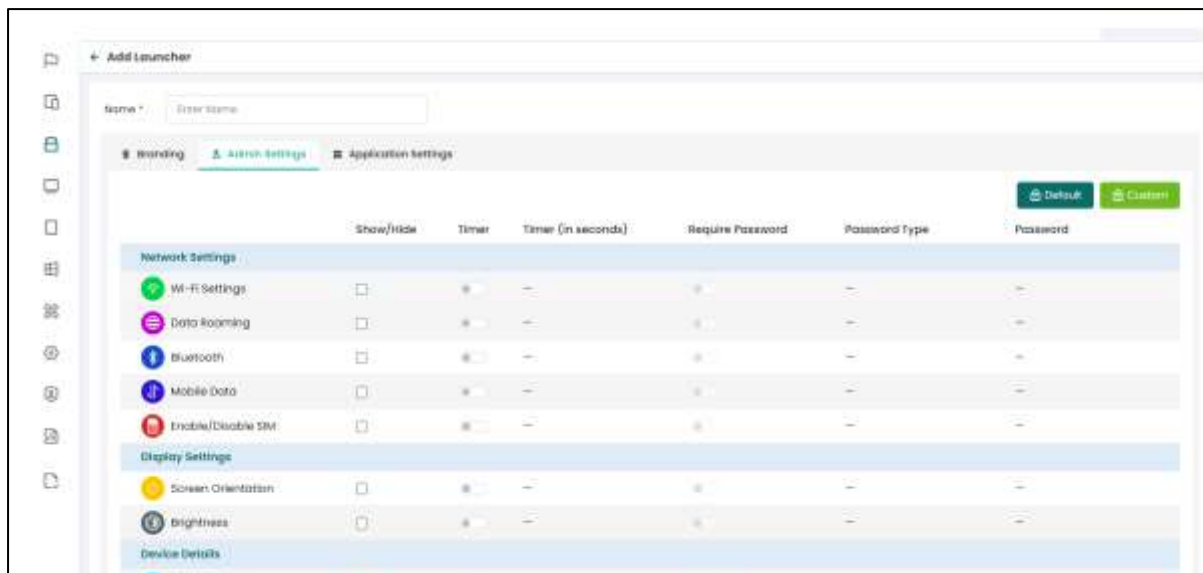

You can set default password and custom password

Default password: When a tenant is created, a default password is assigned and when a feature has default password selected, device user should enter the default password to the feature

Custom password: This password can be created by admin and when a feature has custom password selected, device user should enter the custom password to the feature

The following features can be restricted in launcher

Network Settings	Wi-Fi Settings, Data Roaming, Bluetooth, Mobile Data, Enable/Disable SIM
Display Settings	Screen Orientation, Brightness
Device Details	Device details, Device Policy
Control Settings	System Settings, Keyboard Settings
Refresh Screen Settings	Wi-Fi


For the features listed above, you can perform several actions. These include showing or hiding the feature, setting a timer, specifying the timer duration in seconds, requiring a password, and selecting the type of password. This comprehensive set of actions ensures you have full control over the feature settings.

Show/Hide	If this is checked, only then the feature will be shown in the device
Timer	If this enabled user will be able to use the feature only for the time specified in Timer (in seconds) column
Timer (in seconds)	If Timer is enabled, you need to enter the time (in seconds) for which the user can use the feature after opening it
Require Password	If this is enabled user must enter password to access the feature
Password Type	Admin can select between default and custom password

Application Settings:

In Application Settings you will be able to configure "Auto Launch Apps", "Always Running App", "Battery Optimisation (Apps)" and "Data Saver" based on details below

Auto Launch Apps	The added applications will auto-launch on startup or restart, ensuring they are ready for use without manual opening
Always Running App	The added applications will run continuously in the background and cannot be terminated by the user.
Battery Optimisation (Apps)	This feature depends on ODM and allows you to set battery optimisation for selected apps.
Data Saver	This feature depends on ODM and allows you restrict users from changing data saver mode of select applications.

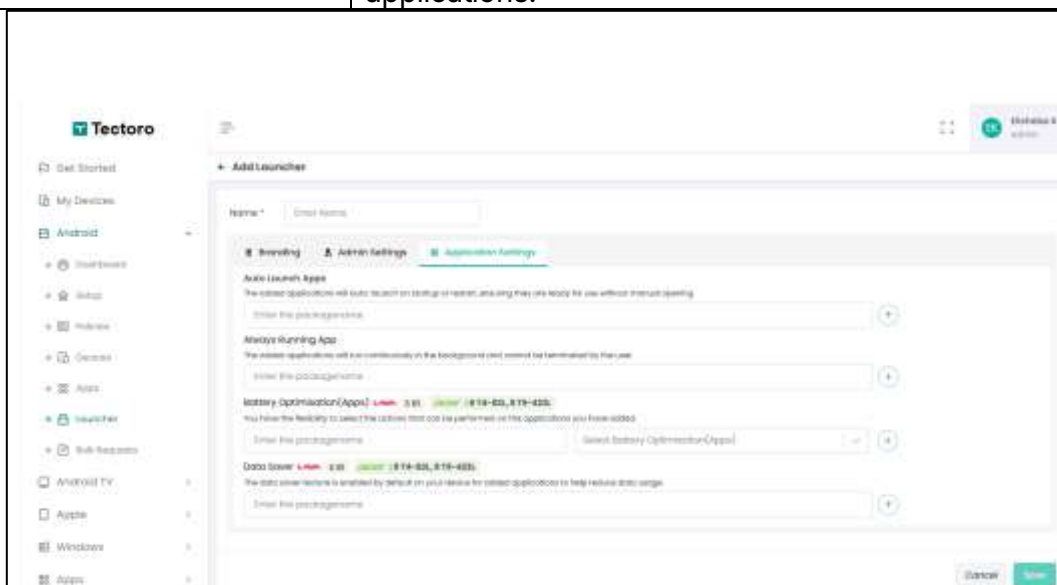

Metrics

You can configure how the device location details are collected at what frequency which helps you define the accuracy of location details


You can configure Metrics based on details below for Basic Category



Enable location tracking	Enabling this allows to access your current geographical location.
--------------------------	--

Category – Basic	Select this to capture approximate location while optimizing battery life
Time frequency	Select 15 mins, 30 mins, 1 hour, 24 hours from the drop-down device location will be collected in this frequency

You can configure Metrics based on details below for Advance Category

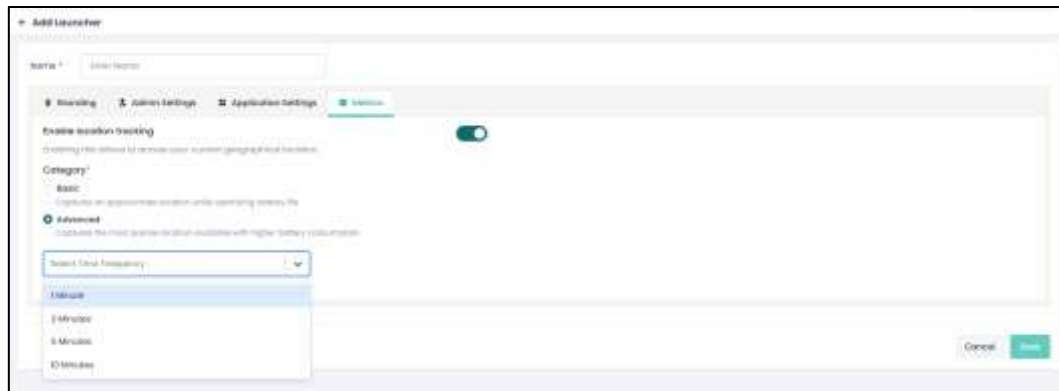

Enable location tracking	Enabling this allows to access your current geographical location.
Category – Advanced	Select this to capture the most precise location available with higher battery consumption
Time frequency	Select 1 mins, 3 mins, 5 mins, 10 mins from the drop-down device location will be collected in this frequency

Bulk Requests

You can efficiently manage and update device details in bulk. This process allows admins to perform various actions such as adding or updating notes on devices, bulk uploading devices, performing factory resets, locking devices, rebooting devices, retiring devices, updating device groups, and applying new policies.


Navigation: Homepage >> Android >> Bulk Requests

The following are the fields/configuration that can be bulk updated

Field/Configuration	Data required
Add/Update Notes on Device	Serial Number, Notes
Bulk upload Devices	Serial, Policy_Code, Imei1, Imei2, Group_Code, Notes, User_Email, User_Name, User_Phone_Number, Sim1, Sim2, Supplier, Device_Name
Device Factory Reset	Serial Number, IMEI Number
Lock Device	Serial Number, IMEI Number
Reboot Device	Serial Number, IMEI Number
Retire Device	Serial Number, IMEI Number
Update Device Group on Device	Serial Number, Group Code

To ensure accurate data capture before importing it into the portal, follow these steps:

1. **Download the Sample File:** Click on "Export," select the desired action, and then click "OK" to download the sample file.

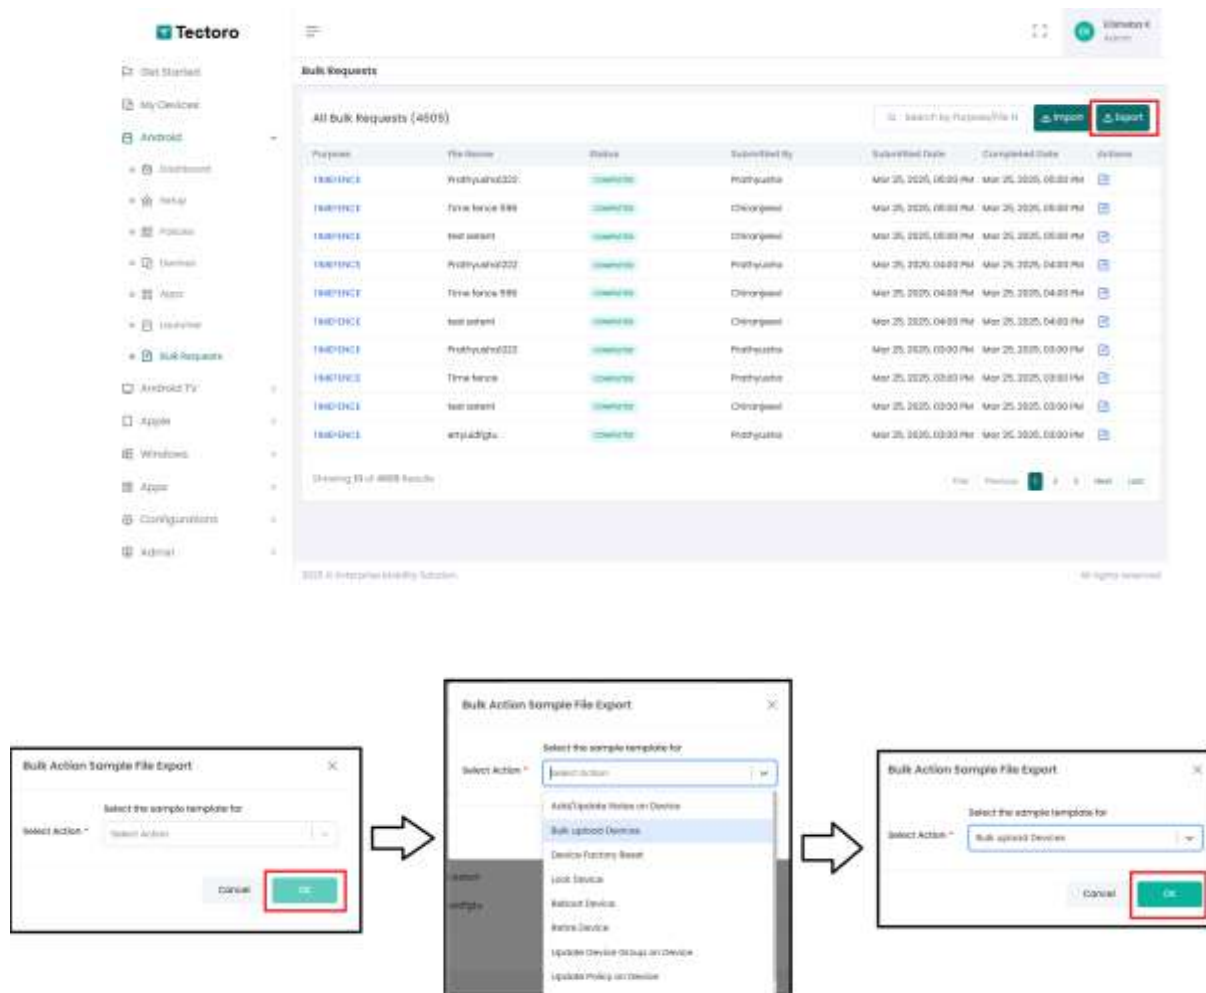

2. **Update the File:** Make the necessary updates to the downloaded file.
3. **Upload the Updated File:** Click on "Import," select the action, and upload the updated file, enter Purpose and click on Okay.

Tectoro

- Get Started
- My Devices
- Android
 - Dashboard
 - Setup
 - Policies
 - Devices
 - Apps
 - Launcher
 - Bulk Requests**
- Android TV
- Apple
- Windows
- Apps
- Configurations
- Admin

Bulk Requests

All Bulk Requests (4609)

Search by Purpose/File Name

Import Export

Purpose	File Name	Status	Submitted By	Submitted Date	Completed Date	Actions
IMPORTANCE	Prothyusha022	COMPLETED	Prothyusha	Mar 25, 2025, 05:00 PM	Mar 25, 2025, 05:00 PM	
IMPORTANCE	Time fence 596	COMPLETED	Chiranjeevi	Mar 25, 2025, 05:00 PM	Mar 25, 2025, 05:00 PM	
IMPORTANCE	test extent	COMPLETED	Chiranjeevi	Mar 25, 2025, 05:00 PM	Mar 25, 2025, 05:00 PM	
IMPORTANCE	Prothyusha022	COMPLETED	Prothyusha	Mar 25, 2025, 04:00 PM	Mar 25, 2025, 04:00 PM	
IMPORTANCE	Time fence 596	COMPLETED	Chiranjeevi	Mar 25, 2025, 04:00 PM	Mar 25, 2025, 04:00 PM	
IMPORTANCE	test extent	COMPLETED	Chiranjeevi	Mar 25, 2025, 04:00 PM	Mar 25, 2025, 04:00 PM	
IMPORTANCE	Prothyusha022	COMPLETED	Prothyusha	Mar 25, 2025, 03:00 PM	Mar 25, 2025, 03:00 PM	
IMPORTANCE	Time fence	COMPLETED	Prothyusha	Mar 25, 2025, 03:00 PM	Mar 25, 2025, 03:00 PM	
IMPORTANCE	test extent	COMPLETED	Chiranjeevi	Mar 25, 2025, 03:00 PM	Mar 25, 2025, 03:00 PM	
IMPORTANCE	entpudgta	COMPLETED	Prothyusha	Mar 25, 2025, 03:00 PM	Mar 25, 2025, 03:00 PM	

Showing 10 of 4609 results

1 2 3 Next Last

Bulk Action Upload File

Select Action *

Bulk upload Devices

Purpose *

Bulk upload - Batch 3

Attachement :

Drag & Drop your files or Browse

Cancel

OK