

# IQ World



# User Manual


# Device Application

# LOGIN

**RIDSYS**

No: 21, Jancy Street Indira Gandhi Nagar, Orleanpet, Puducherry - 605 001. INDIA.  
Ph : +91 413 - 4500111 Mob : +91 9489834442 W : [www.ridsys.com](http://www.ridsys.com) E : [info@ridsys.com](mailto:info@ridsys.com)


## LOGIN – SELECT ROLE OF PORTAL

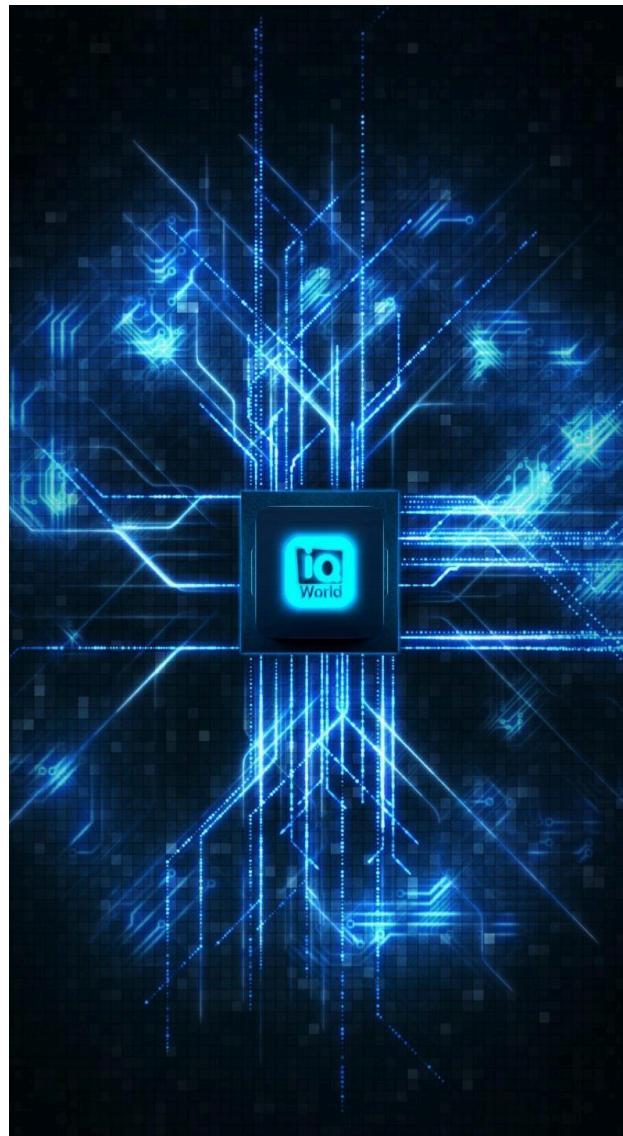

Wait for the splash screen to be displayed before proceeding

**Locate and identify the options available on the first page:**

### 1. Scan QR Code 2. Unique Number

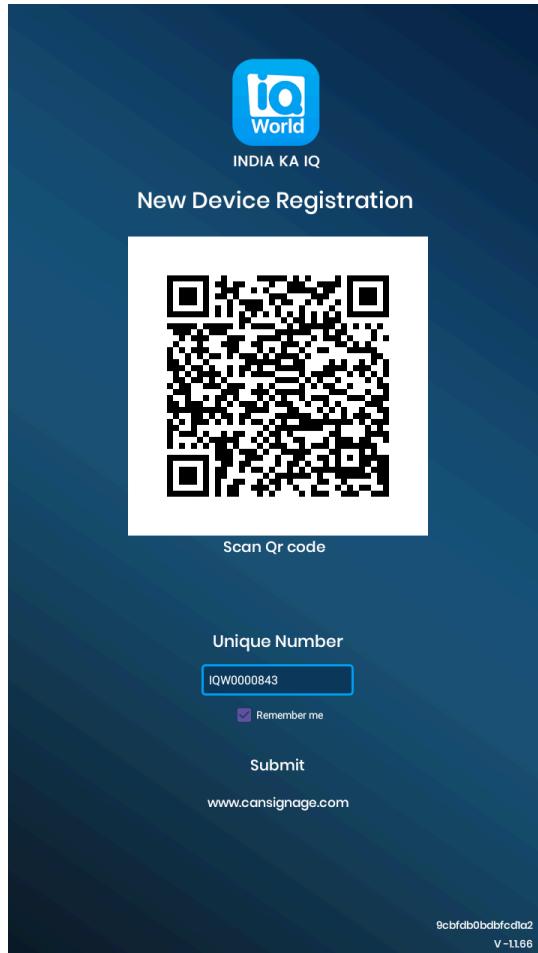


(Figure 1.1)

1.QR Code

2 .Please Enter The Customer Unique Number

**In reference to figure1.1, there are two potential methods for Device Registration.**

1. Instruct the user to utilize a device for scanning a QR code, followed by clicking on the 'Open' button to access The registration form.

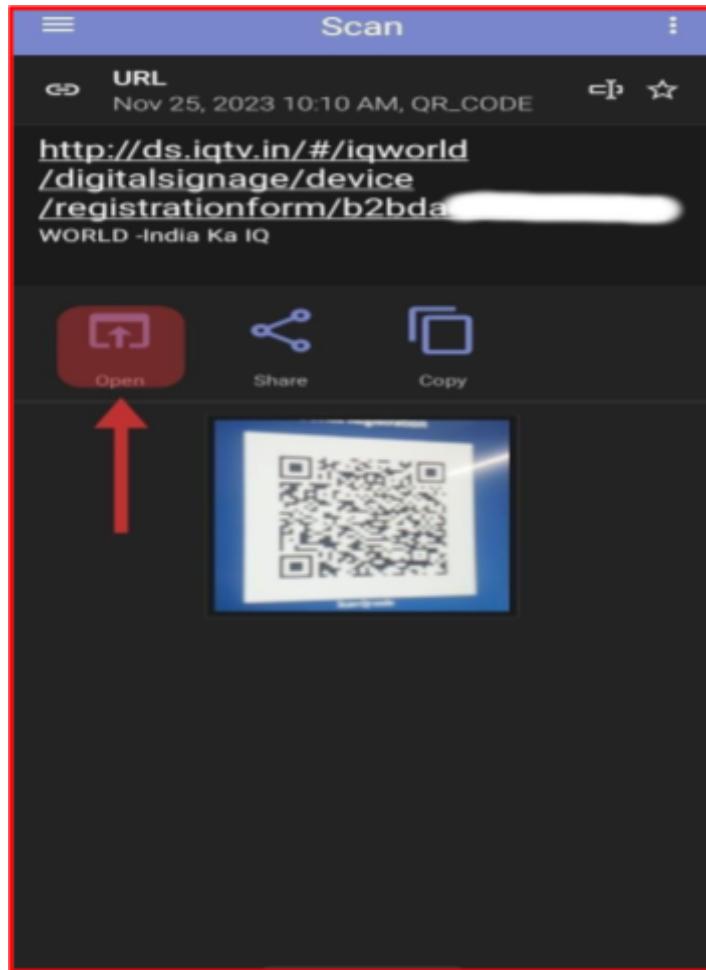

( Figure 1.2)

**Refer Figure 1.2** After scanning the QR code, the page redirects to the Device registration form.

To view the Device registration form and fill in the details provided below.

Fill in the Mandatory information (\*) and then proceed to Register the form.

## New Device Registration Form:

**New Device Registration**

Customer Id \* → I

**get details**

State \* → II

District \* → III

Enter City ?  
City \* → IV

Enter Location ?  
Location \* → V

Enter Landmark → VI

Choose Model Name \* → VII

Choose Plan  
BASIC → VIII

Orientation  
 Vertical → IX  
 Horizontal

I Have Read And Agree To The Terms  
Accept Terms Is Required → X

**Register** → XI   **Reset**

(Figure 1.3)

No: 21, Jancy Street Indira Gandhi Nagar, Orleanpet, Puducherry - 605 001. INDIA.

Ph : +91 413 - 4500111 Mob : +91 9488834442 W : [www.ridsys.com](http://www.ridsys.com) E : [info@ridsys.com](mailto:info@ridsys.com)



EXPLORING THE DIGITAL WORLD



RIDSYS


No: 21, Jancy Street Indira Gandhi Nagar, Orleanpet, Puducherry - 605 001. INDIA.

Ph : +91 413 - 4500111 Mob : +91 9489834442 W : [www.ridsys.com](http://www.ridsys.com) E : [info@ridsys.com](mailto:info@ridsys.com)

**Refer figure 1.3**

- 1.** Kindly input the Customer ID (\*) and click on the 'Get Details' button. Subsequently, the system will auto-populate the relevant information, with the exception of the Model Name field, which requires manual entry. The pre-filled details correspond to the most recent device registration submission. If any modifications are necessary, please feel free to make the appropriate changes.
  
- 2.** "Navigate to the State menu and choose your respective state from the dropdown menu "
  
- 3.** Select the District from the available options
  
- 4.** Select or Enter the City field.
  
- 5.** Enter a Location from the available options.
  
- 6.** Enter a Landmark from the available options.
  
- 7.** Choose model name from the available options.
  
- 8.** Choose Plan from the options - (Basic and Lite and Pro).
  
  
- 9.** Ensuring customer convenience necessitates the provision of diverse orientation options.  
Vertical  
Horizontal
  
- 10.** To continue, kindly tick the checkbox to indicate your acknowledgment of having read the Terms and Conditions, followed by clicking the 'Accept' button.
  
- 11.** Please finalize the device registration process by clicking on the 'Register' button.

- 12.** In the event of pending device activation registration, an alert message will be issued

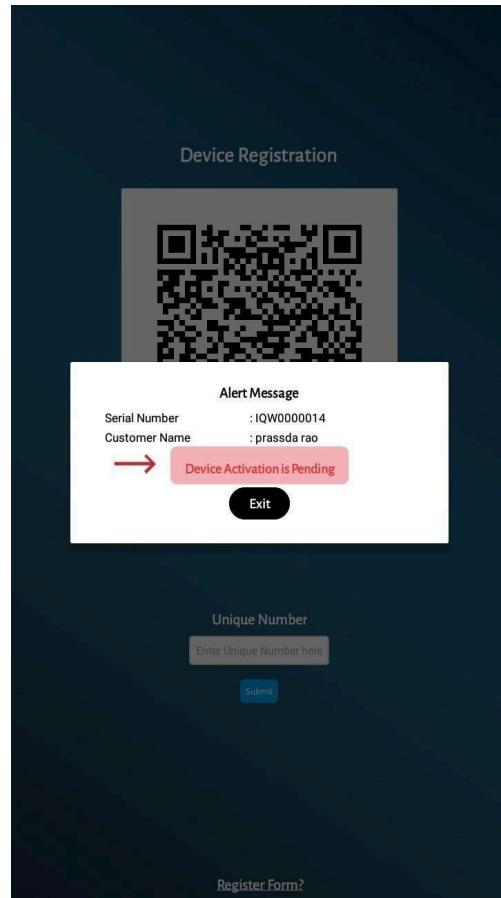

(Figure 1.4)

In the Admin panel, the '**Pending Approval**' option displays Device IDs alongside customer names and their respective statuses.

Clicking the 'Pending' button confirms the completion of your device activation.

#### **Refer figure 1.4**


If your device is not yet registered, please proceed with registration using the Unique Number provided. Enter the Unique Number as prompted

Please finalize the device registration process by clicking on the 'Submit' button.

We are pleased to introduce an **additional option for customers to register their devices**. A registration form is conveniently located below the page for easy access. Please refer to page 3 and Figure 1.1 for further details .


- i ) Server Level Content
- ii ) Schedule Content
- iii ) Default Content Available in playlist

In instances where scheduled content is unavailable at the designated time, the device will automatically display default content.

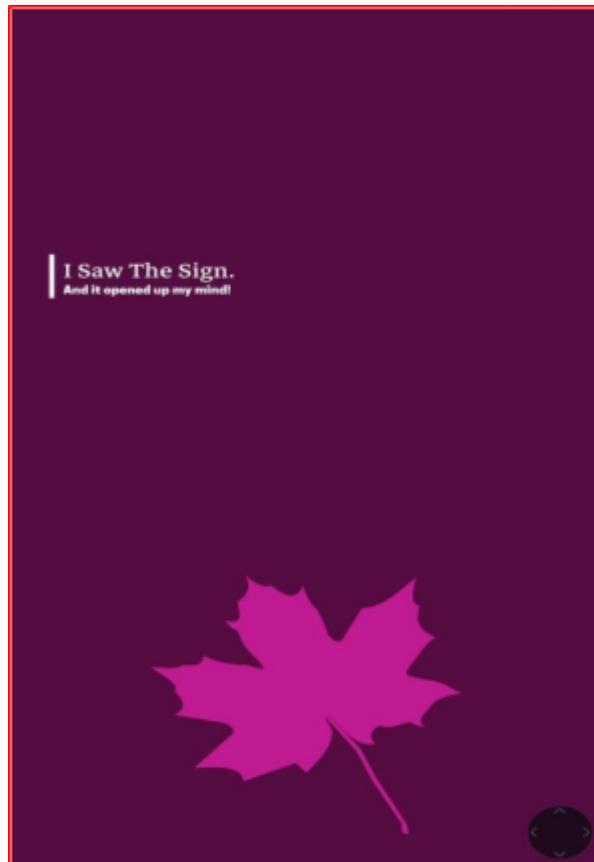


**(Figure 1.5)**

**Single Showing like this**  
zonecount:3 (1080x640)

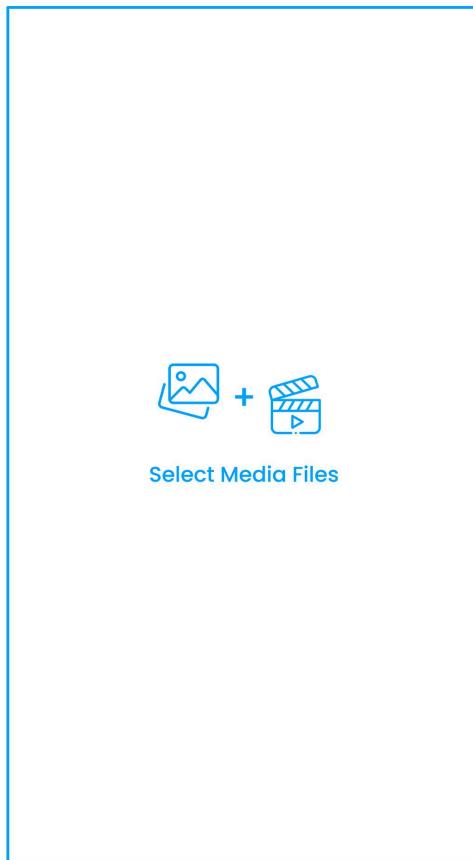

**Split screen Showing like this**  
zonecount:3 upto 9 (1080x640)

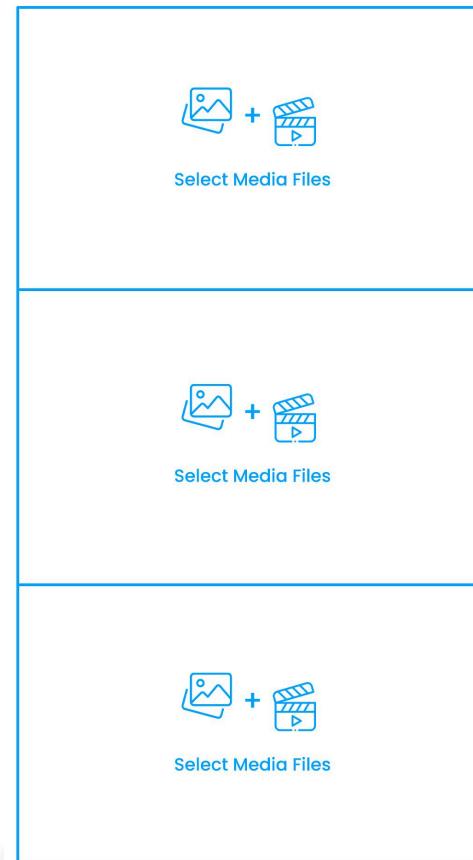

(Figure 1.6)

**Note \*:- Only one zone is allowed for video content.**

### Single Screen Supported (Zone count =1 )

Image (PNG , JPEG , GIF )

Video ,(MOV , MP4 , MKV , FLV , WMV)

PDF ,

Youtube

### Split screen (above Zone count =2 )



Image (PNG , JPEG , GIF )

Video (MOV , MP4 , MKV , FLV , WMV)

## Add Scroller in Playlist

### Step 1: Click "New Scroller"

- Opens a **popup form**.

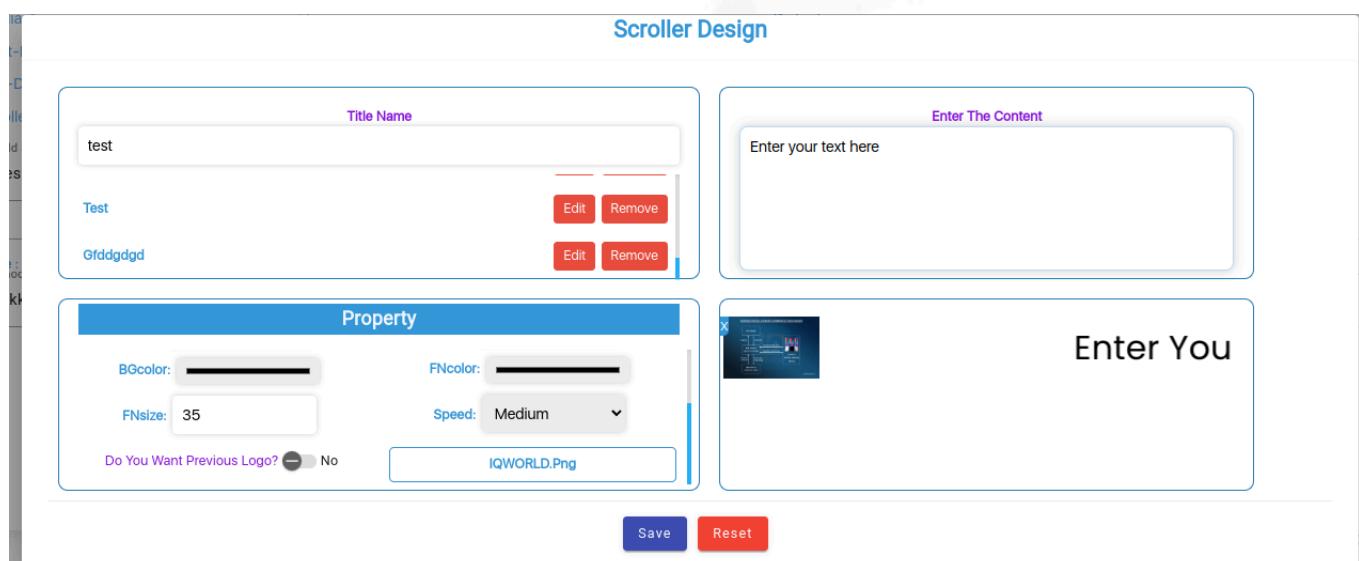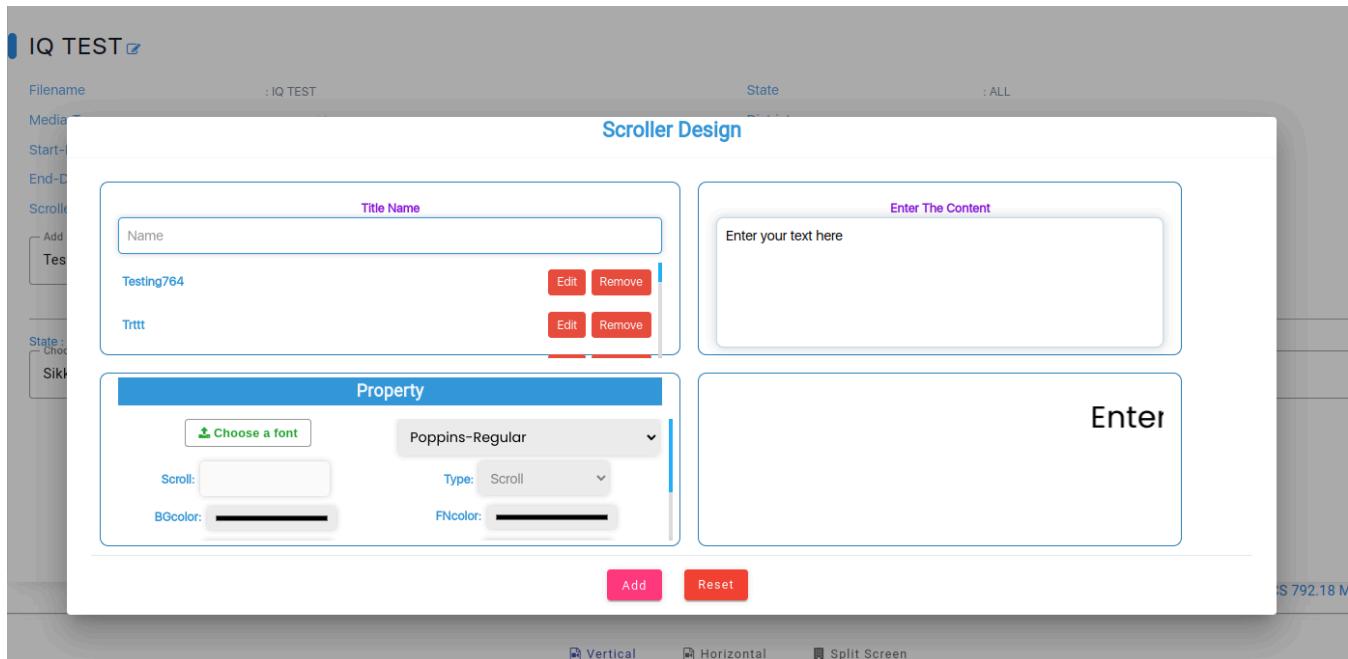

(Figure 1.7)

## Step 2: Fill in Scroller Details

The form includes the following fields:

1. **Title Name** – Input field for the scroller title.
2. **Content** – Text area to enter scrolling text.
3. **Font** – Dropdown to select the font style.
4. **Background Color (Bgcolor)** – Color picker.
5. **Font Color (FN Colour)** – Color picker.
6. **Font Size (FN Size)** – Dropdown or input for font size.
7. **Speed** – Slider or input to set scrolling speed.
8. **Logo (Optional) –**
  - Checkbox: "Do you want to add a logo?"
  - If checked: Show "**Choose Logo**" button to upload/select image.

## Step 3: Submit Scroller

- Once all required fields are filled, click "**Add**" to save the scroller.

## Step 4: Select Scroller Title for Playlist

- After adding, the user can **choose from the list of saved scroller titles** to apply to a specific playlist item.
- Choose Scroller Position like Top and Bottom



**IQ TEST**

Filename	: IQ TEST	State	: ALL
Media-Type	: Image/Video	District	: ALL
Start-Date	: Apr 9, 2025, 3:36:00 PM	City	: Mangan
End-Date	: Apr 9, 2025, 3:38:22 PM	Location	: MANGAN
Scroller	<input checked="" type="checkbox"/> <input type="button" value="New Scroller"/>		
<input type="button" value="Add Scroller"/> Testing764, TRTTT, RET... ▾		Scroller Position	TOP
<input type="checkbox"/> #####		District :	Choose District North District, Puducherry
<input type="checkbox"/> 35@#_#		City :	Choose City Mangan
<input checked="" type="checkbox"/> test		Location :	Choose Location MANGAN
<input checked="" type="checkbox"/> gfddggdgd		Device Location :	Choose Device Location Mangan
<input type="checkbox"/> testt		Device :	Choose Devices IQW0000021
<input type="button" value="Save"/> <input type="button" value="Submit"/>			

© 06 700 10 MB © 06 700 26 MB

(Figure 1.8)

## OTA (OVER -THE -AIR UPDATE)

### 1. Click on the Install button:

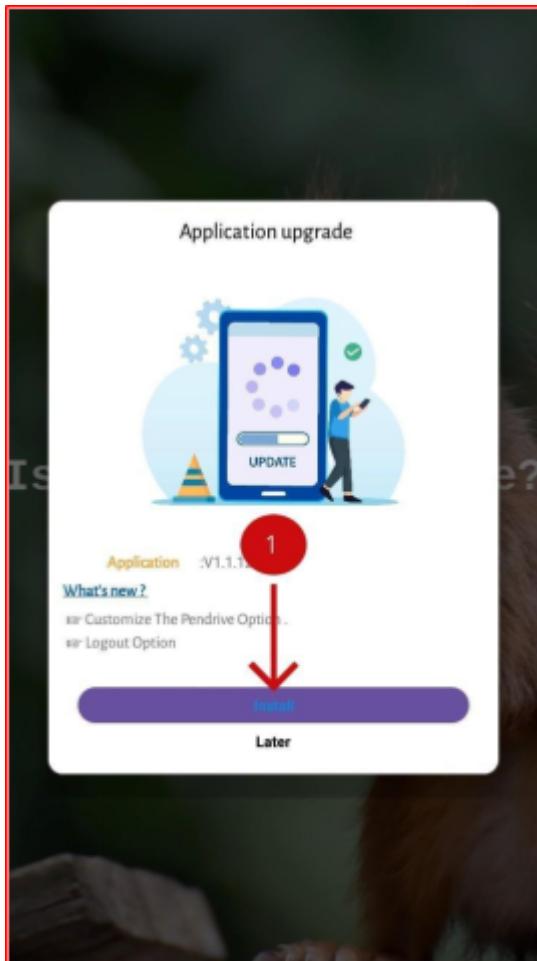


Figure 1.9

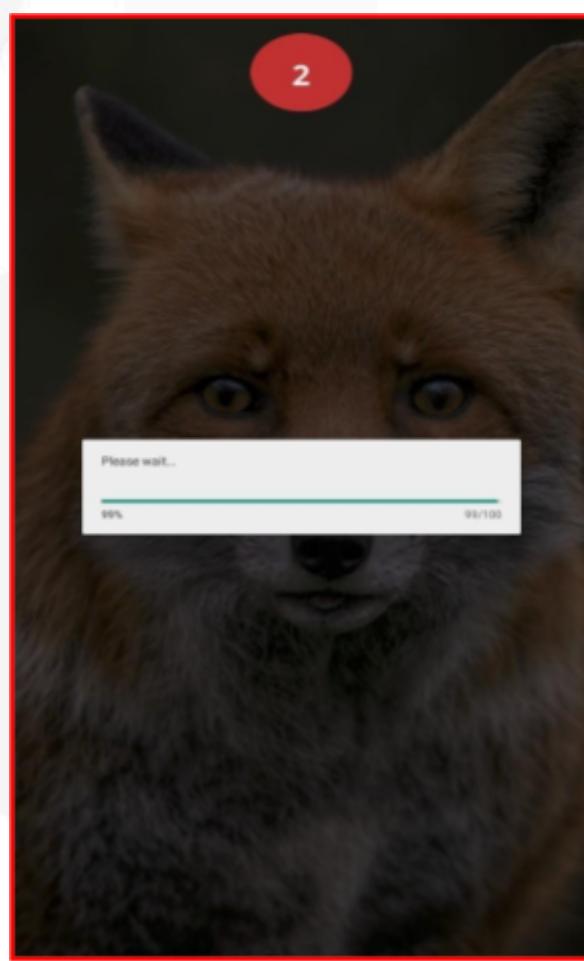


Figure 1.10

RIDSYS

No: 21, Jancy Street Indira Gandhi Nagar, Orleanpet, Puducherry - 605 001. INDIA.

Ph : +91 413 - 4501111 Mob : +91 948634442 W : www.ridsys.com E : info@ridsys.com

Please be patient as the application undergoes processing

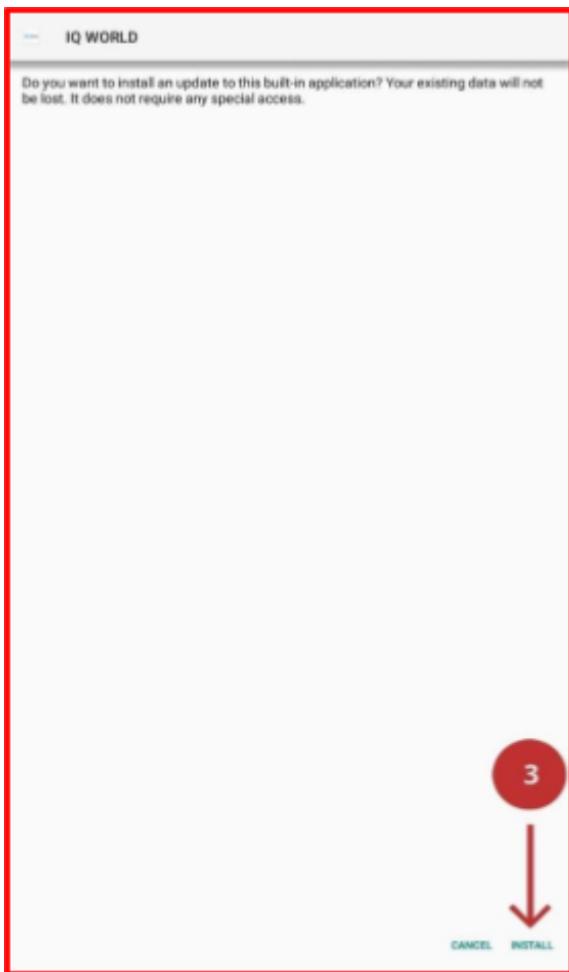


Figure 1.11


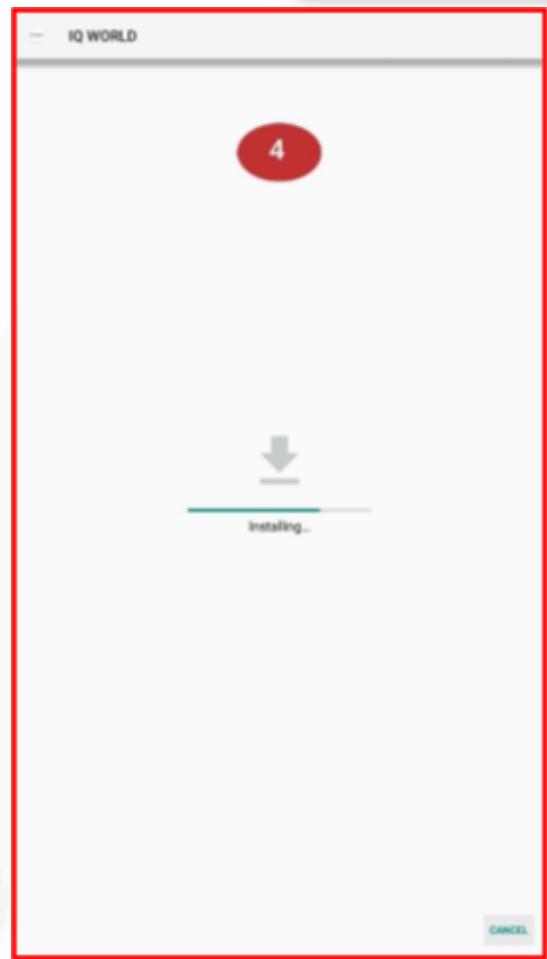


Figure 1.12

Kindly proceed by clicking the '**Install**' button and confirming to initiate the installation process.

## Setting Options

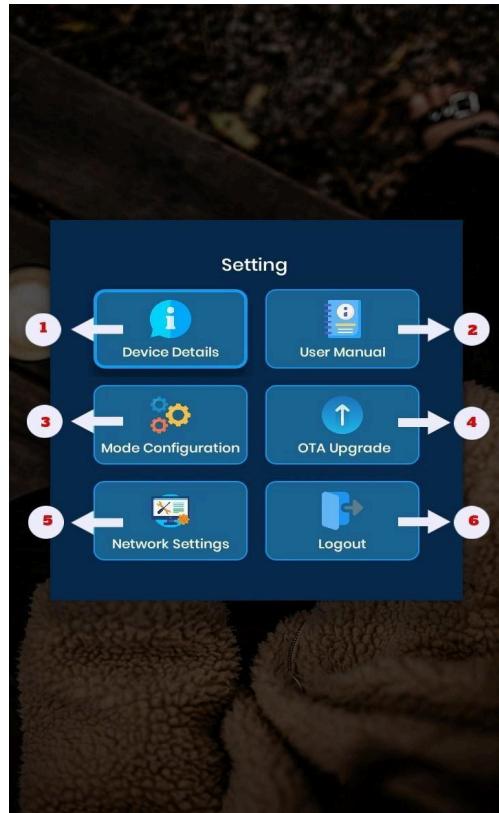


(Figure 1.13)

Press **Menu** button Showing Popup

## Device details

1. The settings page will present Six options: Device Details, User Manual, Mode Configuration, OTA Upgrade, Network Settings, and Logout.


Please select 'Device Details' to access comprehensive information regarding your device.

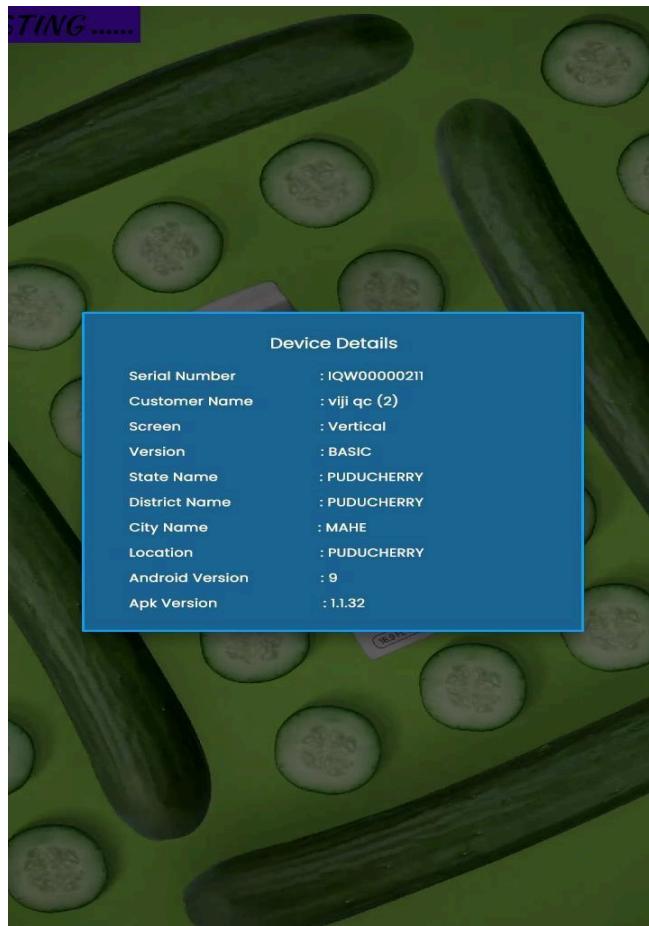

(Figure 1.14)

## 2. User manual :

Kindly click on the '**User Manual**' option to access detailed information regarding the IQ World device application.

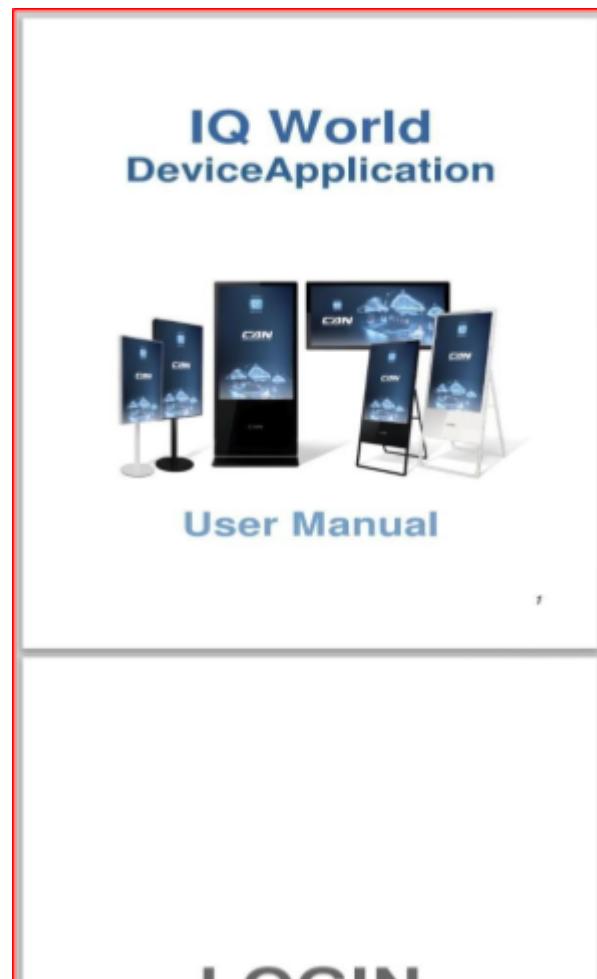

(Figure 1.15)

### 3. Mode configuration:

Select the 'Mode Configuration' option to view a list of three available modes: Pen drive.

## Pendrive

- ❖ Please establish an 'IQ' folder on the pen drive and populate it with the designated media files.
- ❖ After copying the content, there is no requirement to insert the pen drive again. In the future, to play the same content, simply press 'Pen drive' (Mode Configuration), and it will play directly from the internal memory.

### Pendrive Settings:


- ❖ To utilize multiple options from the settings menu for the pen drive functionality.
- ❖ Copy content to device – i).The pendrive content will be dynamically saved when the 'Copy content to device' option is enabled.
- ❖ The pendrive content will only be displayed if the pendrive is inserted. If the user disables the 'Copy content to device' option, the pendrive content will Not be copied to the device

Its play from internal memory - No limit for storage

- ❖ Clear and copy – i) If enable copy content to device option after inserting the pendrive , the pendrive content will save on device side automatically
- ❖ When a pendrive is inserted, it will display the pendrive content along with internal storage. If the user disable “Clear & Copy” option, this action will prevent any content from being cleared or copied.
- ❖ Clear Storage – This will clear internal storage
- ❖ Image Delay – Users can set fixed durations for image display time on the Digital signage.

### Click on OTA

- 1) If Over-The-Air (OTA) update is available, an OTA Popup will be displayed
- 2) If Over-The-Air (OTA) update is not available, a notification stating ' There is No latest version available' will be displayed

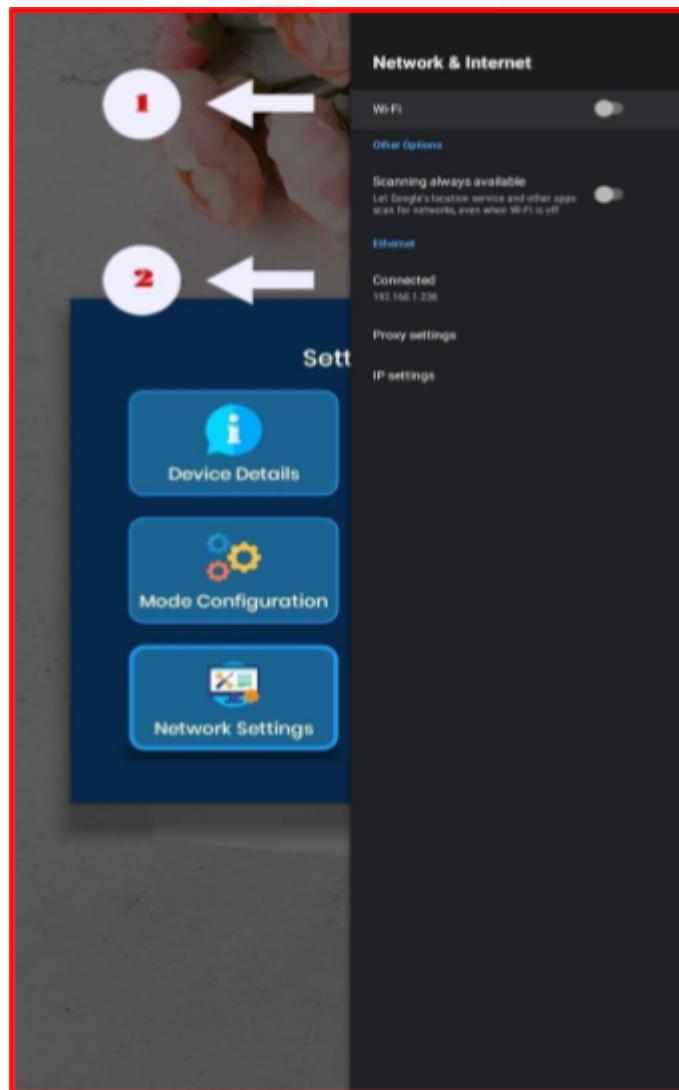

(Figure 1.16)

**Refer figure 1.16**

To proceed with the Wi-Fi selection process

To configure the IP address

**Refer figure 1.17**

**6.** Please proceed by clicking the 'Logout' button.


- ❖ To view the alert message, please confirm logout by selecting 'yes'.



**(Figure 1.17)**

**Refer figure 1.18**

If you click the 'Yes' button, a popup similar to the image below will be displayed

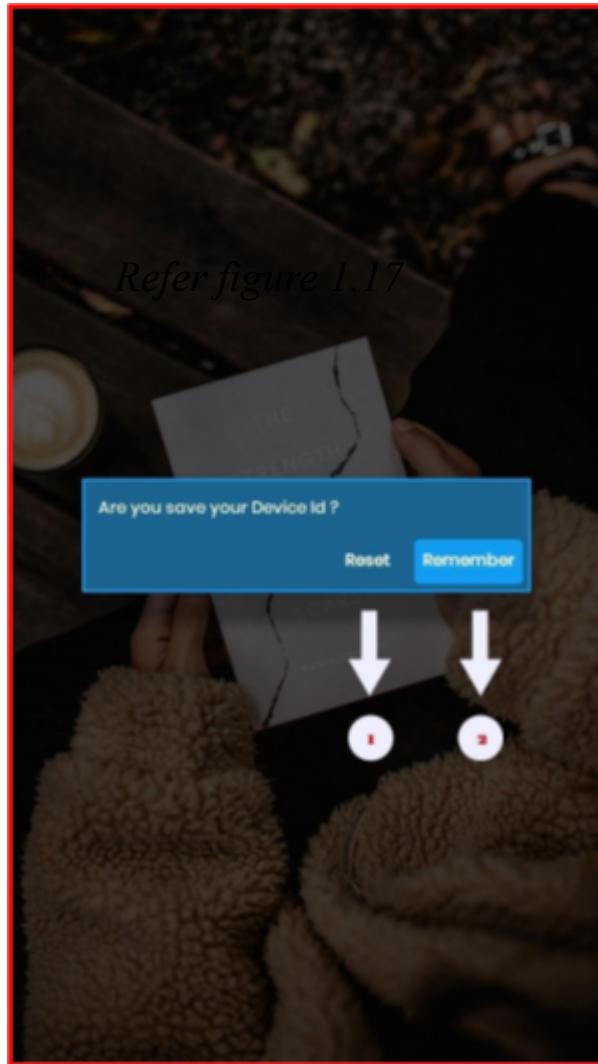


(Figure 1.18)

**Click the Remember button.**

Selecting the 'Remember' button will save your device ID.

**Click the Reset button.**

Clicking the 'Reset' button will delete your device ID

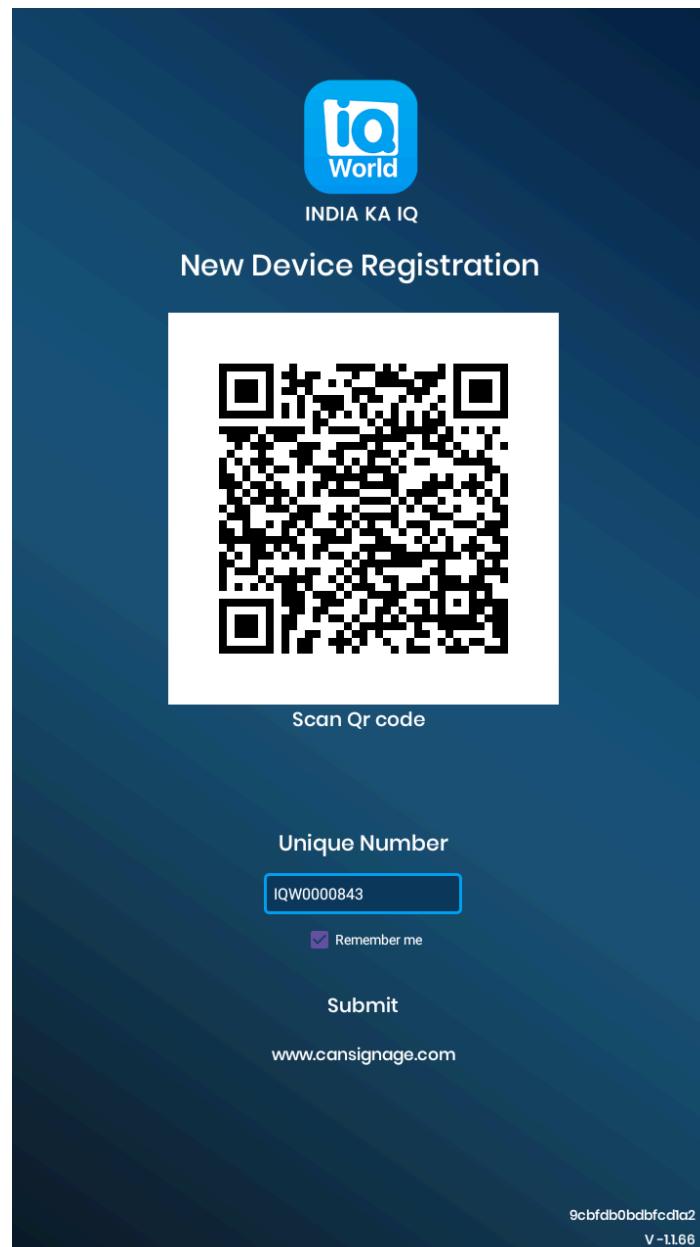


(Figure 1.19)

Then Appear on the screen


## Important Notes

Online Device and Completed Content Download process Showing like

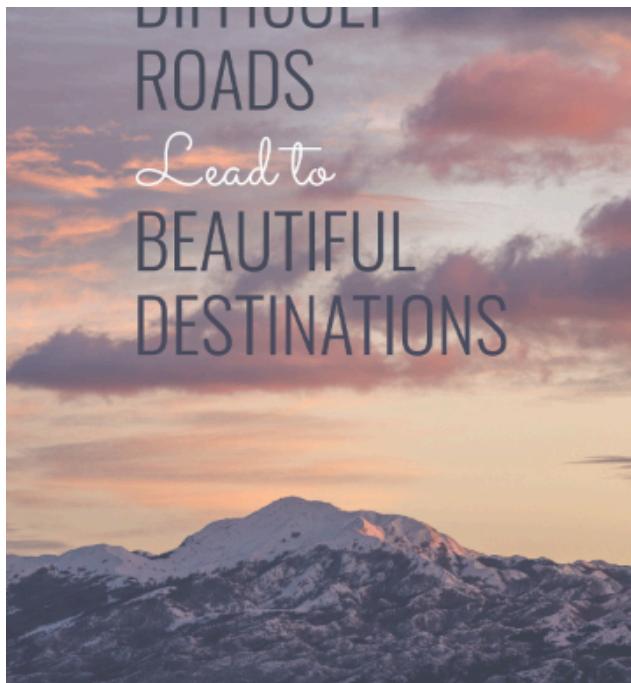

(Figure 1.20)

Online and Content Downloading process completed at the moment in Blue Icon

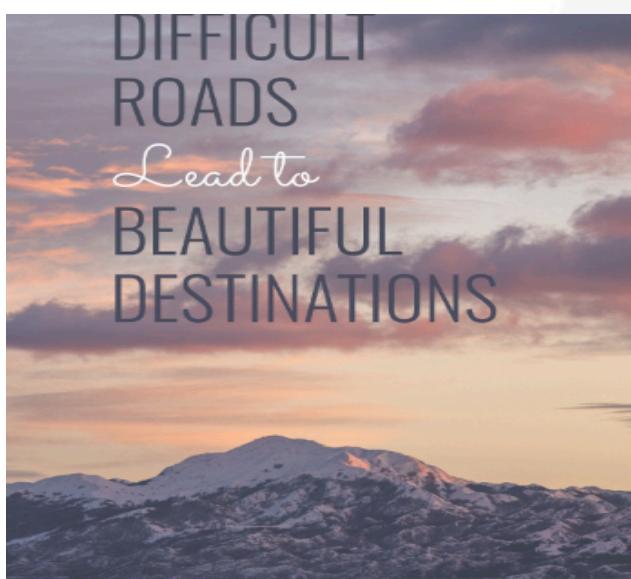

Your content has been internally downloaded

**RIDSYS**


No: 21, Jancy Street Indira Gandhi Nagar, Orleanpet, Puducherry - 605 001, INDIA.

Ph : +91 413 - 4500111 Mob : +91 9489834442 W : [www.ridsys.com](http://www.ridsys.com) E : [info@ridsys.com](mailto:info@ridsys.com)


(Figure 1.21)

**Red Colour Tower Icon indicates Offline .**

If no internet connection is available and the required content is not present in the device's internal storage, display a fallback image indicating "No Internet Available", and optionally provide access to content from an external USB (pendrive) source. Refer 1.22

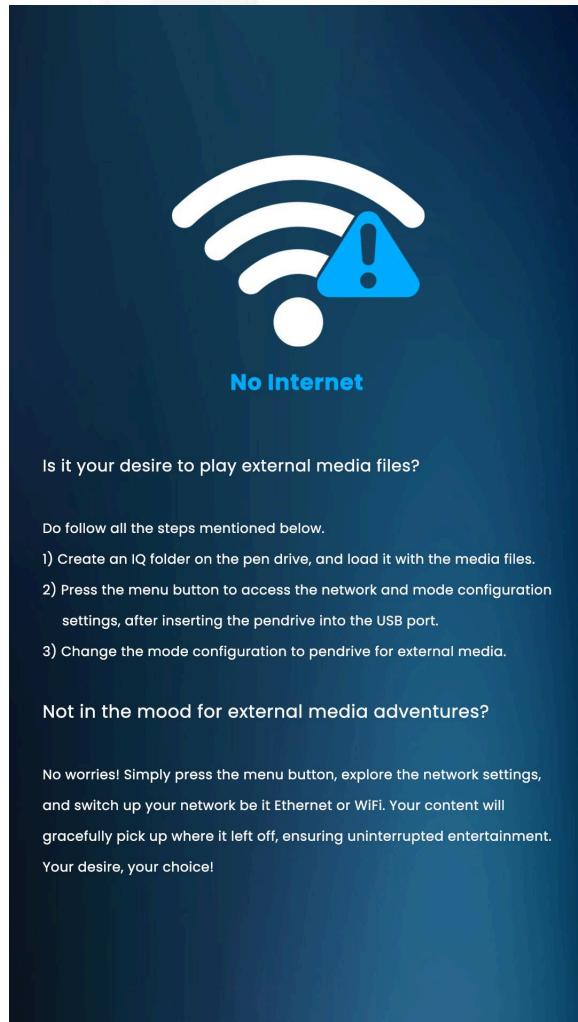

- ❖ "The content download process will begin based on the availability of internal storage."
- ❖ "The OTA (Over-the-Air) file download will initiate depending on internal memory capacity."
- ❖ "The scrolling font download process will start based on the availability of internal storage."
- ❖ "YouTube videos do not support offline playback in this context."
- ❖ The PDF will be displayed only after it has been fully downloaded.
- ❖ Hardware Info

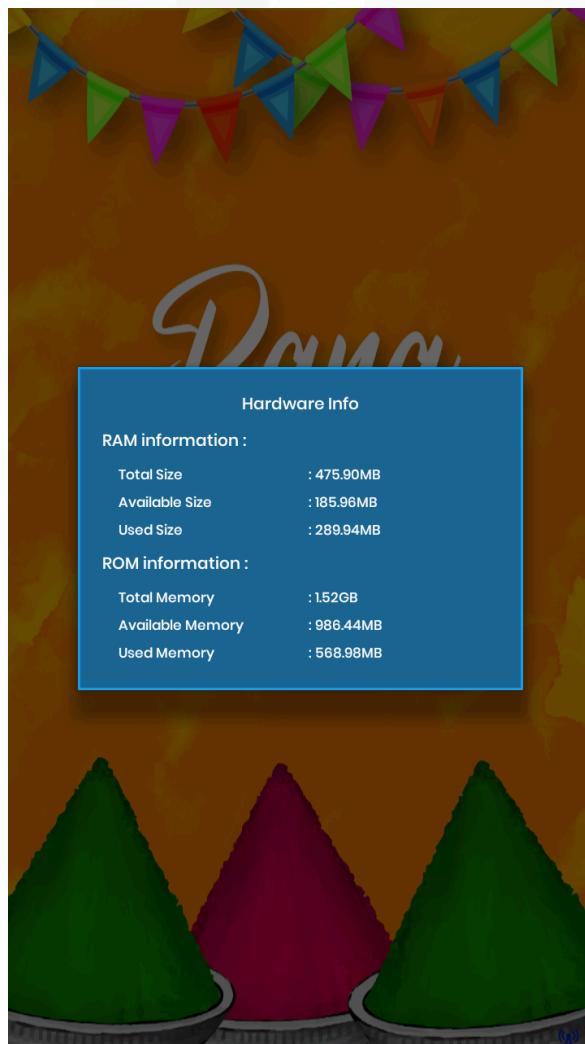

Hardware information access must be explicitly enabled on this device. Once enabled, press the Menu button to view the 'Hardware Info' option.



# Thank you

---

**RIDSYS**

No: 21, Jancy Street Indira Gandhi Nagar, Orleanpet, Puducherry - 605 001. INDIA.  
Ph : +91 413 - 4500111 Mob : +91 9489834442 W : [www.ridsys.com](http://www.ridsys.com) E : [info@ridsys.com](mailto:info@ridsys.com)



EXPLORING THE DIGITAL WORLD



RIDSYS

No: 21, Jancy Street Indira Gandhi Nagar, Orleanpet, Puducherry - 605 001. INDIA.

Ph : +91 413 - 4500111 Mob : +91 9489834442 W : [www.ridsys.com](http://www.ridsys.com) E : [info@ridsys.com](mailto:info@ridsys.com)



EXPLORING THE DIGITAL WORLD



RIDSYS

No: 21, Jancy Street Indira Gandhi Nagar, Orleanpet, Puducherry - 605 001. INDIA.

Ph : +91 413 - 4500111 Mob : +91 9489834442 W : [www.ridsys.com](http://www.ridsys.com) E : [info@ridsys.com](mailto:info@ridsys.com)



EXPLORING THE DIGITAL WORLD



RIDSYS

No: 21, Jancy Street Indira Gandhi Nagar, Orleanpet, Puducherry - 605 001. INDIA.

Ph : +91 413 - 4500111 Mob : +91 9489834442 W : [www.ridsys.com](http://www.ridsys.com) E : [info@ridsys.com](mailto:info@ridsys.com)



EXPLORING THE DIGITAL WORLD



RIDSYS

No: 21, Jancy Street Indira Gandhi Nagar, Orleanpet, Puducherry - 605 001. INDIA.

Ph : +91 413 - 4500111 Mob : +91 9489834442 W : [www.ridsys.com](http://www.ridsys.com) E : [info@ridsys.com](mailto:info@ridsys.com)



EXPLORING THE DIGITAL WORLD



RIDSYS

No: 21, Jancy Street Indira Gandhi Nagar, Orleanpet, Puducherry - 605 001. INDIA.

Ph : +91 413 - 4500111 Mob : +91 9489834442 W : [www.ridsys.com](http://www.ridsys.com) E : [info@ridsys.com](mailto:info@ridsys.com)



EXPLORING THE DIGITAL WORLD



RIDSYS

No: 21, Jancy Street Indira Gandhi Nagar, Orleanpet, Puducherry - 605 001. INDIA.

Ph : +91 413 - 4500111 Mob : +91 9489834442 W : [www.ridsys.com](http://www.ridsys.com) E : [info@ridsys.com](mailto:info@ridsys.com)