GENERIC CLOUD PASSINGS PROTOCOL FOR WICLAX

Generic cloud passings protocol for Wiclax 1

Object 1

1. Access point 1
2. Device identifier 1
3. Protocol 1
4. Service Setup 2
5. Wiclax acquisition 2

OBJECT

This document specifies how you can implement a connection to Wiclax passing cloud service and send some data that will become available for download using a cloud acquisition in Wiclax.

This specification applies to Wiclax versions upper or equal to 9.2

1. ACCESS POINT

Your program or device has to open a connection at address **wiclax.com** and port **35014**. No https.

2. DEVICE IDENTIFIER

On both ends you'll need to use a unique device id value (also called serial number in the context). This value is free, however we highly recommend that you include a prefix from your company in order to avoid any risk of confusion. For example: GENJALP_REMR1

NB: this device Id can be modified following your needs. In case you're developing an App for example, it will rather represent a timing session than a physical device. So the App will typically be configurable to set a contextual Id identifying for example a user or a location. Only matters that the service is aware of this Id and the Wiclax used for receiving data is plugged on it.

3. PROTOCOL

Data is to be sent as GET http requests. (note that GET requests are limited in length so you may have to split your emissions in different blocks. Future implementation will probably also bring possibility of a POST request with a body payload).

Example of request:

```
http://wiclax.com:35014?user=myChronoCompany&deviceId=myChronoCompany72&passings=3205@8329035@20220322172545824;3206@8310019@20220322172545956
```

```
user = your wiclax account username
```

```
deviceId = the serial number you declared for the device
passings = a list of passing data, separated by ; chars
```

Format of a passing is:

```
<num-1>@<chip_id-1>@<time-1>;<num-2>@<chip_id-2>@<time-2>; etc...
```

Time format is `YYYYMMDDHHmmssSSS`

Acknowledgment:

In case the passing data has been successfully integrated by the service, the http answer will be 'ok'. Same data can be sent multiple times with no detrimental effect.

4. Service Setup

On your [service administration page online](), you can register some devices by selecting ***Wiclax generic*** as manufacturer and entering the device id as serial number.

Main menu / Bind a new reader to your account

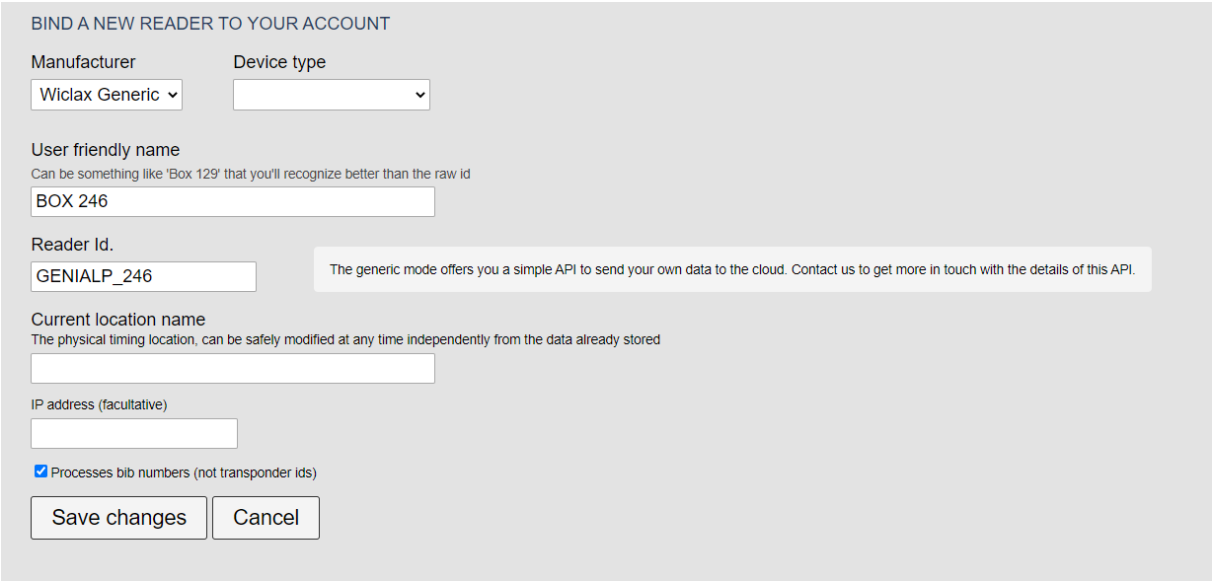

Note that you may also need to specify here that the device is sending **bib number** information, opposed to the default case where a device sends **chip ids** instead.

5. Wiclax Acquisition

In Wiclax, an acquisition has to be created, type Online passings and plugged on the Wiclax service:

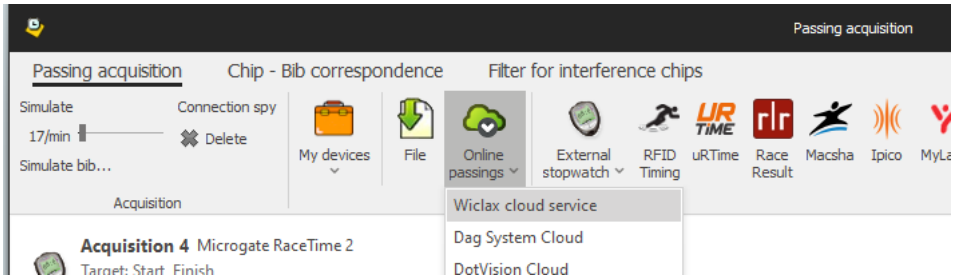

Settings of the acquisition will be mainly your wiclax account as username. Then you can select the device/file from the dropdown list:

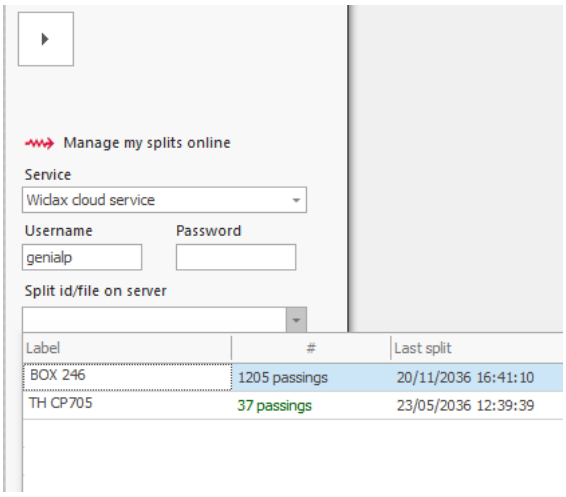

Note that the current protocol doesn't include any heartbeat data flow so the status online or offline of the device won't be much relevant apart from moments when some data is transmitted.