

Laboratory work 3

DML

1

The screenshot shows the pgAdmin 4 interface with the 'airline_db/postgres@PostgreSQL 17' connection selected. The 'Query' tab is active, displaying the following SQL code:

```
--1)
INSERT INTO airport (
  airport_id,
  airport_name,
  country,
  state,
  city,
  created_at,
  updated_at
)
SELECT
  (SELECT COALESCE(MAX(airport_id), 0) FROM airport) + gs,
  'Airport-' || gs,
  'Country-' || gs,
  'State-' || gs,
  'City-' || gs,
  CURRENT_TIMESTAMP,
  CURRENT_TIMESTAMP
FROM generate_series(1, 200) AS gs;
```

The 'Data Output' tab shows the result of the query: 'INSERT 0 200'. A message below states: 'Query returned successfully in 106 msec.'

Total rows: Query complete 00:00:00.106 CRLF Ln 5, Col 13

The screenshot shows the pgAdmin 4 interface with the 'airline_db/postgres@PostgreSQL 17' connection selected. The 'Query' tab is active, displaying the following SQL code:

```
--1)
INSERT INTO airport (
  airport_id,
  airport_name,
  country,
  state,
  city,
  created_at,
  updated_at
)
SELECT
  (SELECT COALESCE(MAX(airport_id), 0) FROM airport) + gs,
  'Airport-' || gs,
  'Country-' || gs,
  'State-' || gs,
  'City-' || gs,
  CURRENT_TIMESTAMP,
  CURRENT_TIMESTAMP
FROM generate_series(1, 200) AS gs;

SELECT COUNT(*) FROM airport;
```

The 'Data Output' tab shows the result of the query:

count
205

Showing rows: 1 to 1 Page No: 1 of 1 CRLF Ln 21, Col 1

2

pgAdmin 4

File Object Tools Edit View Window Help

Object Explorer

- FTS Configurations
- FTS Dictionaries
- FTS Parsers
- FTS Templates
- Foreign Tables
- Functions
- Materialized Views
- Operators
- Procedures
- Sequences
- Tables (16)
 - airline
 - airline_3nf
 - airport
 - airport_3nf
 - baggage
 - baggage_check
 - boarding_pass
 - booking
 - booking_3nf
 - booking_flight
 - booking_passenger_3nf
 - flight_3nf
 - flights
 - passenger_3nf
 - passengers
 - security_check
- Trigger Functions
- Types
- Views

airline_db/postgres@PostgreSQL 17

Query Query History

```
20
21 SELECT COUNT(*) FROM airport;
22
23 --2)
24 INSERT INTO airline (
25     airline_id,
26     airline_code,
27     airline_name,
28     airline_country,
29     created_at,
30     updated_at
31 )
32 SELECT
33     COALESCE(MAX(airline_id), 0) + 1,
34     'KAZ',
35     'KazAir',
36     'Kazakhstan',
37     CURRENT_TIMESTAMP,
38     CURRENT_TIMESTAMP
39 FROM airline;
40
```

Data Output Messages Notifications

INSERT 0 1

Query returned successfully in 80 msec.

Total rows: Query complete 00:00:00.080 CRLF Ln 24, Col 1

pgAdmin 4

File Object Tools Edit View Window Help

Object Explorer

- FTS Configurations
- FTS Dictionaries
- FTS Parsers
- FTS Templates
- Foreign Tables
- Functions
- Materialized Views
- Operators
- Procedures
- Sequences
- Tables (16)
 - airline
 - airline_3nf
 - airport
 - airport_3nf
 - baggage
 - baggage_check
 - boarding_pass
 - booking
 - booking_3nf
 - booking_flight
 - booking_passenger_3nf
 - flight_3nf
 - flights
 - passenger_3nf
 - passengers
 - security_check
- Trigger Functions
- Types
- Views

airline_db/postgres@PostgreSQL 17

Query Query History

```
27     airline_name,
28     airline_country,
29     created_at,
30     updated_at
31 )
32 SELECT
33     COALESCE(MAX(airline_id), 0) + 1,
34     'KAZ',
35     'KazAir',
36     'Kazakhstan',
37     CURRENT_TIMESTAMP,
38     CURRENT_TIMESTAMP
39 FROM airline;
40
41 SELECT *
42 FROM airline
43 WHERE airline_name = 'KazAir';
44
45
46
47
```

Data Output Messages Notifications

Showing rows: 1 to 1 Page No: 1 of 1

airline_id [PK] integer	airline_code character varying (30)	airline_name character varying (50)	airline_country character varying (50)	created_at timestamp without time zone	updated_at timestamp without time zone
1	6	KAZ	KazAir	2026-09-27 22:40:34.028072	2026-09-27 22:40:34.028072

Total rows: 1 Query complete 00:00:00.174 CRLF Ln 41, Col 1

Successfully run. Total query runtime: 174 msec. 1 rows affected.

3

pgAdmin 4

File Object Tools Edit View Window Help

Object Explorer

- FTS Configurations
- FTS Dictionaries
- FTS Parsers
- FTS Templates
- Foreign Tables
- Functions
- Materialized Views
- Operators
- Procedures
- Sequences
- Tables (16)
 - airline
 - airline_3nf
 - airport
 - airport_3nf
 - baggage
 - baggage_check
 - boarding_pass
 - booking
 - booking_3nf
 - booking_flight
 - booking_passenger_3
 - flight_3nf
 - flights
 - passenger_3nf
 - passengers
 - security_check
- Trigger Functions
- Types
- Views

airline_db/postgres@PostgreSQL 17

Query

```
35 'KazAir',
36 'Kazakhstan',
37 CURRENT_TIMESTAMP,
38 CURRENT_TIMESTAMP
39 FROM airline;
40
41 SELECT *
42 FROM airline
43 WHERE airline_name = 'KazAir';
44
45 --3)
46 UPDATE airline
47 SET airline_country = 'Turkey'
48 WHERE airline_name = 'KazAir';
49
50
51
52
53
54
55
```

Query History

Scratch Pad

Data Output Messages Notifications

UPDATE 1

Query returned successfully in 129 msec.

Total rows: Query complete 00:00:00.129

✓ Query returned successfully in 129 msec. X

CRLF Ln 45, Col 1

pgAdmin 4

File Object Tools Edit View Window Help

Object Explorer

- FTS Configurations
- FTS Dictionaries
- FTS Parsers
- FTS Templates
- Foreign Tables
- Functions
- Materialized Views
- Operators
- Procedures
- Sequences
- Tables (16)
 - airline
 - airline_3nf
 - airport
 - airport_3nf
 - baggage
 - baggage_check
 - boarding_pass
 - booking
 - booking_3nf
 - booking_flight
 - booking_passenger_3
 - flight_3nf
 - flights
 - passenger_3nf
 - passengers
 - security_check
- Trigger Functions
- Types
- Views

airline_db/postgres@PostgreSQL 17

Query

```
35 'KazAir',
36 'Kazakhstan',
37 CURRENT_TIMESTAMP,
38 CURRENT_TIMESTAMP
39 FROM airline;
40
41 SELECT *
42 FROM airline
43 WHERE airline_name = 'KazAir';
44
45 --3)
46 UPDATE airline
47 SET airline_country = 'Turkey'
48 WHERE airline_name = 'KazAir';
49
50 SELECT *
51 FROM airline
52 WHERE airline_name = 'KazAir';
53
54
55
```

Query History

Scratch Pad

Data Output Messages Notifications

Showing rows: 1 to 1 Page No: 1 of 1

airline_id	airline_code	airline_name	airline_country	created_at	updated_at
[PK] integer	character varying (30)	character varying (50)	character varying (50)	timestamp without time zone	timestamp without time zone
1	6 KAZ	KazAir	Turkey	2026-09-27 22:40:34.028072	2026-09-27 22:40:34.028072

Total rows: 1 Query complete 00:00:00.127

CRLF Ln 50, Col 1

4

The screenshot shows the pgAdmin 4 interface. On the left, the Object Explorer displays the database structure, including tables like `airline`, `airline_3nf`, `airport`, `airport_3nf`, `baggage`, `baggage_check`, `boarding_pass`, `booking`, `booking_3nf`, `booking_flight`, `booking_passenger_3nf`, `flight_3nf`, `flights`, `passenger_3nf`, `passengers`, `security_check`, `Trigger Functions`, `Types`, and `Views`. The main query editor is active, showing a SQL query to insert a new airline record into the `airline` table. The query is as follows:

```
--(4)
INSERT INTO airline (
    airline_id,
    airline_code,
    airline_name,
    airline_country,
    created_at,
    updated_at
)
SELECT
    MAX(airline_id) + 1,
    'AE',
    'AirEasy',
    'France',
    CURRENT_TIMESTAMP,
    CURRENT_TIMESTAMP
FROM airline
UNION ALL
SELECT
```

The Data Output tab shows the result of the query: `INSERT 0 3`. The Messages tab shows the query returned successfully in 87 msec. The status bar at the bottom indicates "Total rows: Query complete 00:00:00.087" and "CRLF Ln 55, Col 1".

The screenshot shows the pgAdmin 4 interface. On the left, the Object Explorer displays the database structure, including tables like `airline`, `airline_3nf`, `airport`, `airport_3nf`, `baggage`, `baggage_check`, `boarding_pass`, `booking`, `booking_3nf`, `booking_flight`, `booking_passenger_3nf`, `flight_3nf`, `flights`, `passenger_3nf`, `passengers`, `security_check`, `Trigger Functions`, `Types`, and `Views`. The main query editor is active, showing a SQL query to insert another airline record into the `airline` table. The query is as follows:

```
74 SELECT
75     MAX(airline_id) + 2,
76     'FH',
77     'FlyHigh',
78     'Brazil',
79     CURRENT_TIMESTAMP,
80     CURRENT_TIMESTAMP
81 FROM airline
82
83 UNION ALL
84
85 SELECT
86     MAX(airline_id) + 3,
87     'FF',
88     'FlyFly',
89     'Poland',
90     CURRENT_TIMESTAMP,
91     CURRENT_TIMESTAMP
92 FROM airline;
93
94
```

The Data Output tab shows the result of the query: `INSERT 0 3`. The Messages tab shows the query returned successfully in 87 msec. The status bar at the bottom indicates "Total rows: Query complete 00:00:00.087" and "CRLF Ln 55, Col 1".

pgAdmin 4

File Object Tools Edit View Window Help

Object Explorer

- FTS Configurations
- FTS Dictionaries
- FTS Parsers
- FTS Templates
- Foreign Tables
- Functions
- Materialized Views
- Operators
- Procedures
- Sequences
- Tables (16)
 - airline
 - airline_3nf
 - airport
 - airport_3nf
 - baggage
 - baggage_check
 - boarding_pass
 - booking
 - booking_3nf
 - booking_flight
 - booking_passenger_3nf
 - flight_3nf
 - flights
 - passenger_3nf
 - passengers
 - security_check
 - Trigger Functions
 - Types
 - Views

Processes

airport_db/postgres@PostgreSQL 17

Query History

```
76 'FH',
77 'FlyHigh',
78 'Brazil',
79 CURRENT_TIMESTAMP,
80 CURRENT_TIMESTAMP
81 FROM airline
82
83 UNION ALL
84
85 SELECT
86 MAX(airline_id) + 3,
87 'FF',
88 'FlyFly',
89 'Poland',
90 CURRENT_TIMESTAMP,
91 CURRENT_TIMESTAMP
92 FROM airline;
93 SELECT airline_id, airline_code, airline_name, airline_country
94 FROM airline
95 WHERE airline_name IN ('AirEasy', 'FlyHigh', 'FlyFly');
```

Data Output

airline_id [PK] integer	airline_code character varying (30)	airline_name character varying (50)	airline_country character varying (50)
1	7 AE	AirEasy	France
2	8 FH	FlyHigh	Brazil
3	9 FF	FlyFly	Poland

Showing rows: 1 to 3 Page No: 1 of 1

Total rows: 3 Query complete 00:00:00.149 CRLF Ln 93, Col 1

5

pgAdmin 4

File Object Tools Edit View Window Help

Object Explorer

- FTS Configurations
- FTS Dictionaries
- FTS Parsers
- FTS Templates
- Foreign Tables
- Functions
- Materialized Views
- Operators
- Procedures
- Sequences
- Tables (16)
 - airline
 - airline_3nf
 - airport
 - airport_3nf
 - baggage
 - baggage_check
 - boarding_pass
 - booking
 - booking_3nf
 - booking_flight
 - booking_passenger_3nf
 - flight_3nf
 - flights
 - passenger_3nf
 - passengers
 - security_check
 - Trigger Functions
 - Types
 - Views

Processes

airport_db/postgres@PostgreSQL 17

Query History

```
86 MAX(airline_id) + 3,
87 'FF',
88 'FlyFly',
89 'Poland',
90 CURRENT_TIMESTAMP,
91 CURRENT_TIMESTAMP
92 FROM airline;
93 SELECT airline_id, airline_code, airline_name, airline_country
94 FROM airline
95 WHERE airline_name IN ('AirEasy', 'FlyHigh', 'FlyFly');
```

Data Output

count bigint
1 0

Showing rows: 1 to 1 Page No: 1 of 1

Total rows: 1 Query complete 00:00:00.089 CRLF Ln 98, Col 1

6

pgAdmin 4

File Object Tools Edit View Window Help

Object Explorer

- FTS Configurations
- FTS Dictionaries
- FTS Parsers
- FTS Templates
- Foreign Tables
- Functions
- Materialized Views
- Operators
- Procedures
- Sequences
- Tables (16)
 - airline
 - airline_3nf
 - airport
 - airport_3nf
 - baggage
 - baggage_check
 - boarding_pass
 - booking
 - booking_3nf
 - booking_flight
 - booking_passenger_3nf
 - flight_3nf
 - flights
 - passenger_3nf
 - passengers
 - security_check
 - Trigger Functions
 - Types
 - Views

Processes

airport_db/postgres@PostgreSQL 17

Query

```

89      'Poland',
90      CURRENT_TIMESTAMP,
91      CURRENT_TIMESTAMP
92  FROM airline;
93  SELECT airline_id, airline_code, airline_name, airline_country
94  FROM airline
95  WHERE airline_name IN ('AirEasy', 'FlyHigh', 'FlyFly');
96
97  --5)
98  SELECT COUNT(*)
99  FROM flights
100 WHERE sch_arrival_time >= '2024-01-01'
101    AND sch_arrival_time < '2025-01-01';
102
103
104  --6)
105  UPDATE booking
106  SET ticket_price = ticket_price * 1.15;
107
108
109

```

Query History

Scratch Pad

Data Output Messages Notifications

UPDATE 5

Query returned successfully in 102 msec.

Total rows: Query complete 00:00:00.102

CRF In 105. Col 1

pgAdmin 4

File Object Tools Edit View Window Help

Object Explorer

- FTS Configurations
- FTS Dictionaries
- FTS Parsers
- FTS Templates
- Foreign Tables
- Functions
- Materialized Views
- Operators
- Procedures
- Sequences
- Tables (16)
 - airline
 - airline_3nf
 - airport
 - airport_3nf
 - baggage
 - baggage_check
 - boarding_pass
 - booking
 - booking_3nf
 - booking_flight
 - booking_passenger_3nf
 - flight_3nf
 - flights
 - passenger_3nf
 - passengers
 - security_check
 - Trigger Functions
 - Types
 - Views

Processes

airport_db/postgres@PostgreSQL 17

Query

```

91      CURRENT_TIMESTAMP
92  FROM airline;
93  SELECT airline_id, airline_code, airline_name, airline_country
94  FROM airline
95  WHERE airline_name IN ('AirEasy', 'FlyHigh', 'FlyFly');
96
97  --5)
98  SELECT COUNT(*)
99  FROM flights
100 WHERE sch_arrival_time >= '2024-01-01'
101    AND sch_arrival_time < '2025-01-01';
102
103
104  --6)
105  UPDATE booking
106  SET ticket_price = ticket_price * 1.15;
107  SELECT booking_id, ticket_price
108  FROM booking;
109
110
111

```

Query History

Scratch Pad

Data Output Messages Notifications

Showing rows: 1 to 5 Page No: 1 of 1

booking_id	ticket_price
1	172.50
2	253.00
3	402.50
4	517.50

Total rows: 5 Query complete 00:00:00.154

CRF In 107. Col 1

7

The screenshot shows the pgAdmin 4 interface. On the left, the Object Explorer displays a tree view of the database schema, including tables like 'airline', 'airline_3nf', 'airport', 'airport_3nf', 'baggage', 'baggage_check', and 'boarding_pass'. The main window is the Query Editor, connected to 'airport_db/postgres@PostgreSQL 17'. The query editor shows a SQL script with line numbers 95 to 112. The script includes a WHERE clause filtering by 'airline_name' and 'sch_arrival_time', followed by a SELECT COUNT(*) query, an UPDATE statement for 'ticket_price', and a DELETE statement for 'booking'.

```
95 WHERE airline_name IN ('AirEasy', 'FlyHigh', 'FlyFly');
96
97 --5)
98 SELECT COUNT(*)
99 FROM flights
100 WHERE sch_arrival_time >= '2024-01-01'
101 AND sch_arrival_time < '2025-01-01';
102
103
104 --6)
105 UPDATE booking
106 SET ticket_price = ticket_price * 1.15;
107 SELECT booking_id, ticket_price
108 FROM booking;
109 --7)
110 DELETE FROM booking
111 WHERE ticket_price < 10000;
112
```

8

The screenshot shows the pgAdmin 4 interface. The Object Explorer on the left shows a tree view of the database schema, including tables like 'airline', 'airline_3nf', 'airport', 'airport_3nf', 'baggage', 'baggage_check', 'boarding_pass', 'booking', 'booking_3nf', 'booking_flight', 'booking_passenger_3nf', 'flight_3nf', 'flights', 'passenger_3nf', 'passengers', 'security_check', 'Trigger Functions', 'Types', and 'Vlaume'. The main window is the Query Editor, connected to 'airport_db/postgres@PostgreSQL 17'. The query editor shows a SQL script with line numbers 96 to 116. The script includes a SELECT COUNT(*) query, an UPDATE statement for 'ticket_price', a DELETE statement for 'booking', and an UPDATE statement for 'airline_code'. The 'Messages' tab at the bottom shows a message: 'UPDATE 0' and 'Query returned successfully in 82 msec.'.

```
96
97 --5)
98 SELECT COUNT(*)
99 FROM flights
100 WHERE sch_arrival_time >= '2024-01-01'
101 AND sch_arrival_time < '2025-01-01';
102
103
104 --6)
105 UPDATE booking
106 SET ticket_price = ticket_price * 1.15;
107 SELECT booking_id, ticket_price
108 FROM booking;
109 --7)
110 DELETE FROM booking
111 WHERE ticket_price < 10000;
112 --8)
113 UPDATE airline
114 SET airline_code = 'UNK'
115 WHERE airline_code IS NULL;
116
```

Messages

```
UPDATE 0
Query returned successfully in 82 msec.
```

Total rows: Query complete 00:00:00.082

✓ Query returned successfully in 82 msec. ✕

CRLF Ln 113, Col 1

9

The screenshot shows the pgAdmin 4 interface. The left sidebar displays the database structure, including tables like `airline`, `airline_3nf`, `airport`, `airport_3nf`, `baggage`, `baggage_check`, `boarding_pass`, `booking`, `booking_3nf`, `booking_flight`, `booking_passenger`, `flight_3nf`, `flights`, `passenger_3nf`, `passengers`, `security_check`, `Trigger Functions`, `Types`, and `Views`. The main query editor shows a SQL query that deletes records from the `baggage_check` table where `created_at` is less than '2023-06-01' and `check_result` is 'Not checked'. The query is highlighted in blue. The bottom status bar shows 'Query returned successfully in 88 msec.' and a green notification bar at the bottom right says 'Query returned successfully in 88 msec.'

```
115 WHERE airline_code IS NULL;
116 --9)
117 SELECT *
118 FROM baggage_check
119 WHERE created_at < '2023-06-01'
120 AND check_result = 'Not checked';
121 DELETE FROM baggage_check
122 WHERE created_at < '2023-06-01'
123 AND check_result = 'Not checked';
124
125
126
127
128
129
130
131
132
133
134
135
```

Data Output Messages Notifications

DELETE 0

Query returned successfully in 88 msec.

✓ Query returned successfully in 88 msec. ✕

10

The screenshot shows the pgAdmin 4 interface. The left sidebar displays the database structure, including tables like `airline`, `airline_3nf`, `airport`, `airport_3nf`, `baggage`, `baggage_check`, `boarding_pass`, `booking`, `booking_3nf`, `booking_flight`, `booking_passenger`, `flight_3nf`, `flights`, `passenger_3nf`, `passengers`, `security_check`, `Trigger Functions`, `Types`, and `Views`. The main query editor shows a SQL query that deletes records from the `airport` table where `state` is NULL and `city` is in ('Mlawe', 'Kepuh'). The query is highlighted in blue. The bottom status bar shows 'Query returned successfully in 74 msec.' and the status bar at the bottom right shows 'CRLF Ln 125, Col 1'.

```
115 WHERE airline_code IS NULL;
116 --9)
117 SELECT *
118 FROM baggage_check
119 WHERE created_at < '2023-06-01'
120 AND check_result = 'Not checked';
121 DELETE FROM baggage_check
122 WHERE created_at < '2023-06-01'
123 AND check_result = 'Not checked';
124 --11)
125 DELETE FROM airport
126 WHERE state IS NULL
127 AND city IN ('Mlawe', 'Kepuh');
128
129
130
131
132
133
134
135
```


Data Output Messages Notifications

DELETE 0

Query returned successfully in 74 msec.

Total rows: Query complete 00:00:00.074 CRLF Ln 125, Col 1

11

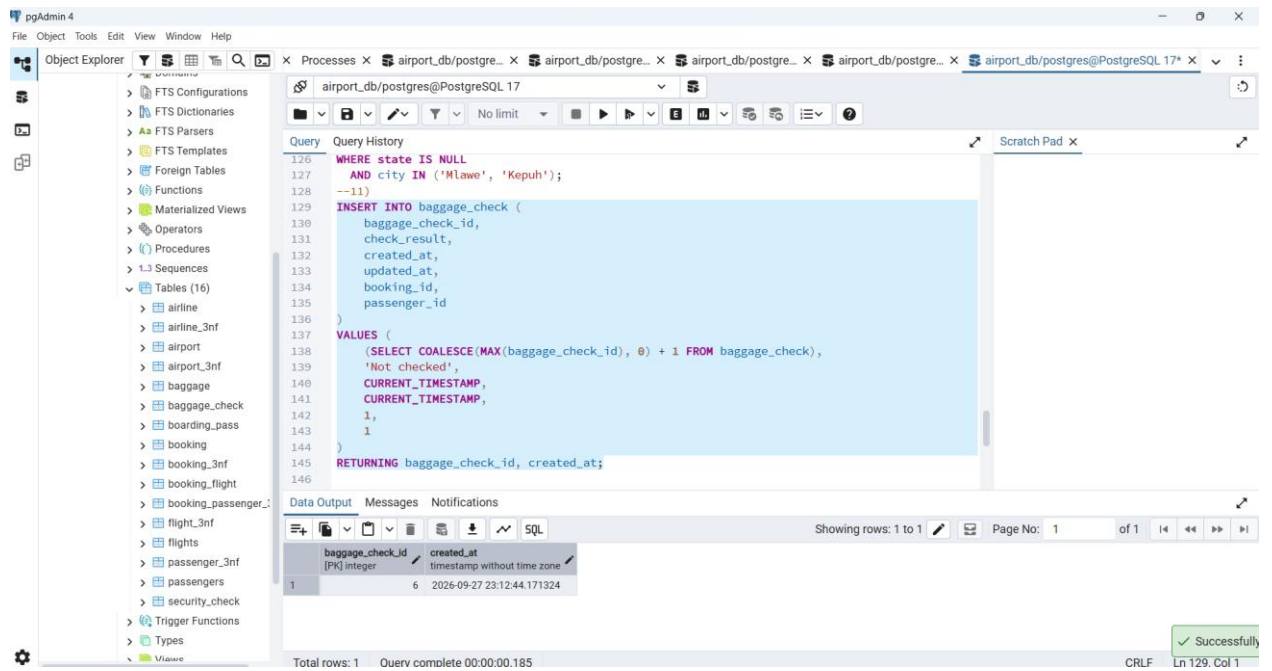

pgAdmin 4

Object Explorer

- FTS Configurations
- FTS Dictionaries
- FTS Parsers
- FTS Templates
- Foreign Tables
- Functions
- Materialized Views
- Operators
- Procedures
- Sequences
- Tables (16)
 - airline
 - airline_3nf
 - airport
 - airport_3nf
 - baggage
 - baggage_check
 - boarding_pass
 - booking
 - booking_3nf
 - booking_flight
 - booking_passenger_3nf
 - flight_3nf
 - flights
 - passenger_3nf
 - passengers
 - security_check
- Trigger Functions
- Types
- Views

Query

```
126 WHERE state IS NULL
127 AND city IN ('Mlawe', 'Kepuh');
128 --11)
129 INSERT INTO baggage_check (
130     baggage_check_id,
131     check_result,
132     created_at,
133     updated_at,
134     booking_id,
135     passenger_id
136 )
137 VALUES (
138     (SELECT COALESCE(MAX(baggage_check_id), 0) + 1 FROM baggage_check),
139     'Not checked',
140     CURRENT_TIMESTAMP,
141     CURRENT_TIMESTAMP,
142     1,
143     1
144 )
145 RETURNING baggage_check_id, created_at;
146
```

Data Output


baggage_check_id (PK) Integer	created_at timestamp without time zone
1	6 2026-09-27 23:12:44.171324

Showing rows: 1 to 1 Page No: 1 of 1

Total rows: 1 Query complete 00:00:00.185

Successfully

12

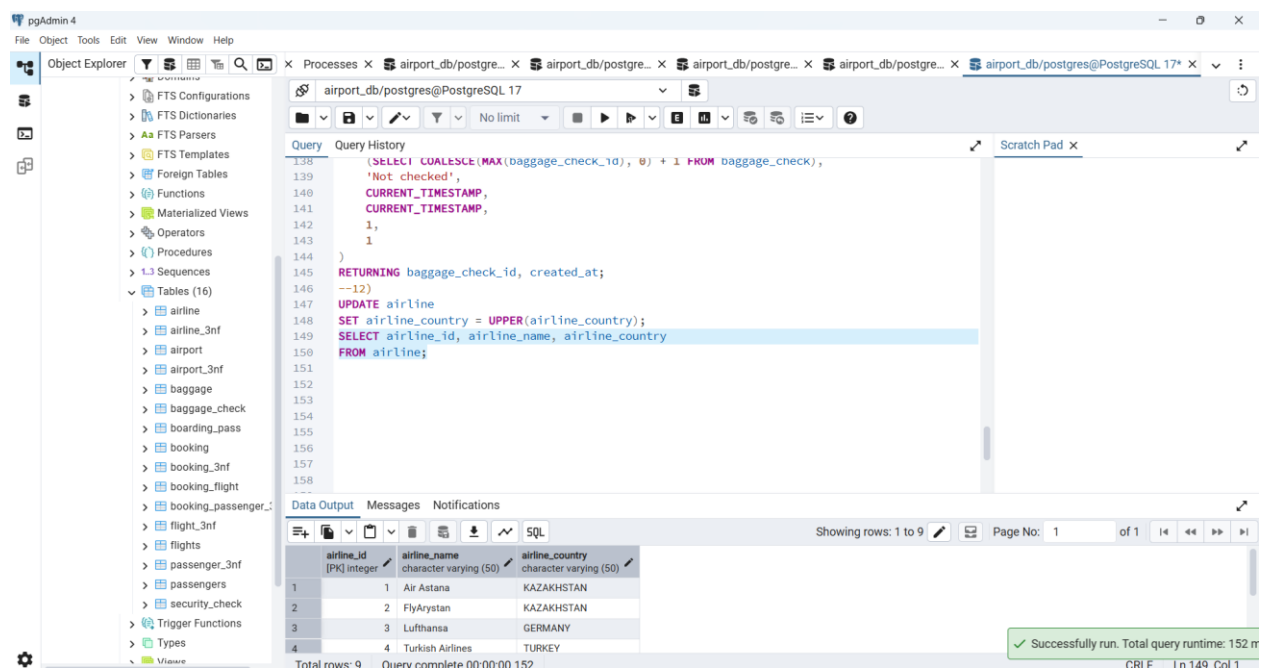

pgAdmin 4

Object Explorer

- FTS Configurations
- FTS Dictionaries
- FTS Parsers
- FTS Templates
- Foreign Tables
- Functions
- Materialized Views
- Operators
- Procedures
- Sequences
- Tables (16)
 - airline
 - airline_3nf
 - airport
 - airport_3nf
 - baggage
 - baggage_check
 - boarding_pass
 - booking
 - booking_3nf
 - booking_flight
 - booking_passenger_3nf
 - flight_3nf
 - flights
 - passenger_3nf
 - passengers
 - security_check
- Trigger Functions
- Types
- Views

Query

```
138 (SELECT COALESCE(MAX(baggage_check_id), 0) + 1 FROM baggage_check),
139 'Not checked',
140 CURRENT_TIMESTAMP,
141 CURRENT_TIMESTAMP,
142 1,
143 1
144 )
145 RETURNING baggage_check_id, created_at;
146 --12)
147 UPDATE airline
148 SET airline_country = UPPER(airline_country);
149 SELECT airline_id, airline_name, airline_country
150 FROM airline;
151
152
153
154
155
156
157
158
159
```

Data Output

airline_id (PK) Integer	airline_name character varying (50)	airline_country character varying (50)
1	1 Air Astana	KAZAKHSTAN
2	2 FlyArystan	KAZAKHSTAN
3	3 Lufthansa	GERMANY
4	4 Turkish Airlines	TURKEY

Showing rows: 1 to 9 Page No: 1 of 1

Total rows: 4 Query complete 00:00:00.152

Successfully run. Total query runtime: 152 m

13

The screenshot shows the pgAdmin 4 interface. The left sidebar displays the database structure, including tables like 'airline', 'airport', 'baggage', 'boarding_pass', 'booking', 'booking_3nf', 'booking_flight', 'booking_passenger', 'flight_3nf', 'flights', 'passenger_3nf', 'passengers', 'security_check', 'trigger_functions', and 'types'. The main query editor contains the following SQL code:

```
--13)
UPDATE airline
SET
    airline_name = 'Global Airways',
    airline_country = 'United Kingdom',
    updated_at = CURRENT_TIMESTAMP
WHERE airline_id = 5;

SELECT airline_id, airline_name, airline_country, updated_at
FROM airline
WHERE airline_id = 5;
```

The 'Data Output' tab shows the result of the query:

airline_id	airline_name	airline_country	updated_at
5	Global Airways	United Kingdom	2026-09-27 23:15:52.40036

A green message bar at the bottom indicates: "Successfully run. Total query runtime: 164 msec. 1 rows affected."

14

The screenshot shows the pgAdmin 4 interface. The left sidebar displays the database structure, including tables like 'airline', 'airport', 'baggage', 'boarding_pass', 'booking', 'booking_3nf', 'booking_flight', 'booking_passenger', 'flight_3nf', 'flights', 'passenger_3nf', 'passengers', 'security_check', 'trigger_functions', and 'types'. The main query editor contains the following SQL code:

```
--13)
UPDATE airline
SET
    airline_name = 'Global Airways',
    airline_country = 'United Kingdom',
    updated_at = CURRENT_TIMESTAMP
WHERE airline_id = 5;

SELECT airline_id, airline_name, airline_country, updated_at
FROM airline
WHERE airline_id = 5;

--14)
UPDATE airport
SET state = 'Capital District'
WHERE city IN ('Astana', 'London', 'Tokyo');
SELECT airport_id, airport_name, state, city
FROM airport
WHERE city IN ('Astana', 'London', 'Tokyo');
```

The 'Data Output' tab shows the result of the query:

airport_id	airport_name	state	city
2	Nursultan Nazarbayev International Airp...	Capital District	Astana

A green message bar at the bottom indicates: "Successfully run. Total query runtime: 164 msec. 1 rows affected."

