1 13.4: Cross Products

Definition. (Cross Product)
Given two nonzero vectors $\mathbf{u}$ and $\mathbf{v}$ in $\mathbb{R}^3$, the **cross product** $\mathbf{u} \times \mathbf{v}$ is a vector with magnitude

$$|\mathbf{u} \times \mathbf{v}| = |\mathbf{u}||\mathbf{v}| \sin\theta,$$

where $0 \leq \theta \leq \pi$ is the angle between $\mathbf{u}$ and $\mathbf{v}$.
The direction of $\mathbf{u} \times \mathbf{v}$ is given by the **right-hand rule**:

> When you put your the vectors tail to tail and let the fingers of your right hand curl from $\mathbf{u}$ to $\mathbf{v}$, the direction of $\mathbf{u} \times \mathbf{v}$ is the direction of your thumb, orthogonal to both $\mathbf{u}$ and $\mathbf{v}$ (Figure 13.56).

When $\mathbf{u} \times \mathbf{v} = \mathbf{0}$, the direction of $\mathbf{u} \times \mathbf{v}$ is undefined.

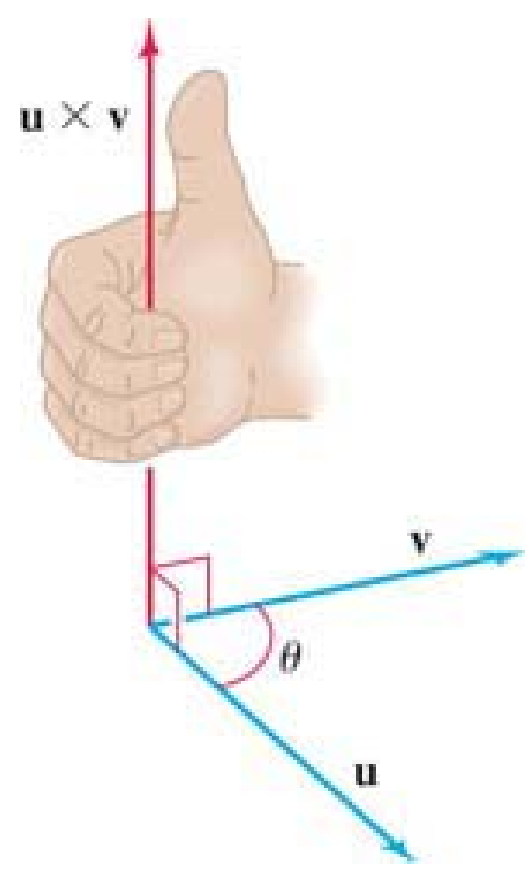

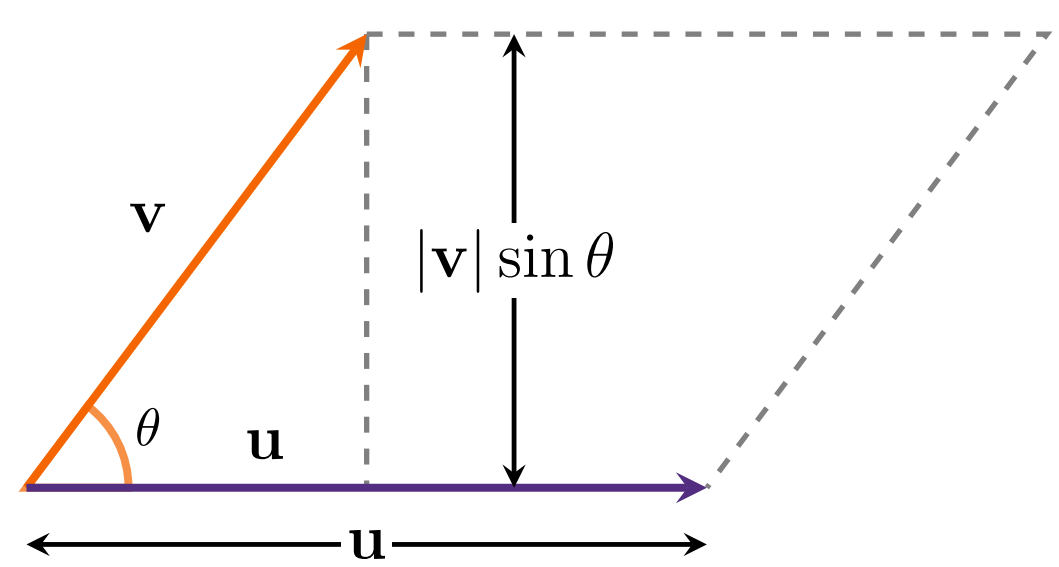

Theorem 13.3: Geometry of the Cross Product
Let $\mathbf{u}$ and $\mathbf{v}$ be two nonzero vectors in $\mathbb{R}^3$.

1. The vectors $\mathbf{u}$ and $\mathbf{v}$ are parallel ($\theta = 0$ or $\theta = \pi$) if and only if $\mathbf{u} \times \mathbf{v} = \mathbf{0}$.
2. If $\mathbf{u}$ and $\mathbf{v}$ are two sides of a parallelogram, then the area of the parallelogram is

$$|\mathbf{u} \times \mathbf{v}| = |\mathbf{u}||\mathbf{v}| \sin\theta$$

Theorem 13.4: Properties of the Cross Product Let $\mathbf{u}$, $\mathbf{v}$, and $\mathbf{w}$ be nonzero vectors in $\mathbb{R}^3$, and let a and b be scalars.

1. $\mathbf{u} \times \mathbf{v} = -(\mathbf{v} \times \mathbf{u})$ — Anticommutative property
2. $(a\mathbf{u}) \times (b\mathbf{v}) = ab(\mathbf{u} \times \mathbf{v})$ — Associative property
3. $\mathbf{u} \times (\mathbf{v} + \mathbf{w}) = (\mathbf{u} \times \mathbf{v}) + (\mathbf{u} \times \mathbf{w})$ — Distributive property
4. $(\mathbf{u} + \mathbf{v}) \times \mathbf{w} = (\mathbf{u} \times \mathbf{w}) + (\mathbf{v} \times \mathbf{w})$ — Distributive property





$\mathbf{i} \times \mathbf{j} = \mathbf{k}$
$\mathbf{j} \times \mathbf{k} = \mathbf{i}$
$\mathbf{k} \times \mathbf{i} = \mathbf{j}$

Theorem 13.5: Cross Products of Coordinate Unit Vectors

$$\mathbf{i} \times \mathbf{j} = -(\mathbf{j} \times \mathbf{i}) = \mathbf{k} \qquad \mathbf{j} \times \mathbf{k} = -(\mathbf{k} \times \mathbf{j}) = \mathbf{i}$$
$$\mathbf{k} \times \mathbf{i} = -(\mathbf{i} \times \mathbf{k}) = \mathbf{j} \qquad \mathbf{i} \times \mathbf{i} = \mathbf{j} \times \mathbf{j} = \mathbf{k} \times \mathbf{k} = \mathbf{0}$$

Using the unit vectors, we can compute $\mathbf{u} \times \mathbf{v}$:

$$\begin{aligned}
\mathbf{u} \times \mathbf{v} &= (u_1\mathbf{i} + u_2\mathbf{j} + u_3\mathbf{k}) \times (v_1\mathbf{i} + v_2\mathbf{j} + v_3\mathbf{k}) \\
&= u_1v_1 \underbrace{(\mathbf{i} \times \mathbf{i})}_{\mathbf{0}} + u_1v_2 \underbrace{(\mathbf{i} \times \mathbf{j})}_{\mathbf{k}} + u_1v_3 \underbrace{(\mathbf{i} \times \mathbf{k})}_{-\mathbf{j}} \\
&+ u_2v_1 \underbrace{(\mathbf{j} \times \mathbf{i})}_{-\mathbf{k}} + u_2v_2 \underbrace{(\mathbf{j} \times \mathbf{j})}_{\mathbf{0}} + u_2v_3 \underbrace{(\mathbf{j} \times \mathbf{k})}_{\mathbf{i}} \\
&+ u_3v_1 \underbrace{(\mathbf{k} \times \mathbf{i})}_{\mathbf{j}} + u_3v_2 \underbrace{(\mathbf{k} \times \mathbf{j})}_{-\mathbf{i}} + u_3v_3 \underbrace{(\mathbf{k} \times \mathbf{k})}_{\mathbf{0}} \\
&= (u_2v_3 - u_3v_2)\mathbf{i} - (u_1v_3 - u_3v_1)\mathbf{j} + (u_1v_2 - u_2v_1)\mathbf{k}
\end{aligned}$$

Theorem 13.6: Evaluating the Cross Product

Let $\mathbf{u} = u_1\mathbf{i} + u_2\mathbf{j} + u_3\mathbf{k}$ and $\mathbf{v} = v_1\mathbf{i} + v_2\mathbf{j} + v_3\mathbf{k}$. Then

$$\mathbf{u} \times \mathbf{v} = \begin{vmatrix} \mathbf{i} & \mathbf{j} & \mathbf{k} \\ u_1 & u_2 & u_3 \\ v_1 & v_2 & v_3 \end{vmatrix} = \begin{vmatrix} u_2 & u_3 \\ v_2 & v_3 \end{vmatrix} \mathbf{i} - \begin{vmatrix} u_1 & u_3 \\ v_1 & v_3 \end{vmatrix} \mathbf{j} + \begin{vmatrix} u_1 & u_2 \\ v_1 & v_2 \end{vmatrix} \mathbf{k}$$

Note:

$$\begin{vmatrix} a & b \\ c & d \end{vmatrix} = ad - bc$$

$$\mathbf{u} \times \mathbf{v} = (u_2v_3 - u_3v_2)\mathbf{i} - (u_1v_3 - u_3v_1)\mathbf{j} + (u_1v_2 - u_2v_1)\mathbf{k}$$

Alternative approach:

$$\left|\begin{array}{ccc|cc} \mathbf{i} & \mathbf{j} & \mathbf{k} & \mathbf{i} & \mathbf{j} \\ u_1 & u_2 & u_3 & u_1 & u_2 \\ v_1 & v_2 & v_3 & v_1 & v_2 \end{array}\right.$$