

# TAP — MikroTik RouterOS syslog to Coralogix

*Device configuration only. RouterOS must send BSD syslog (RFC3164) over UDP. TCP and TLS on RouterOS apply to CEF, not to this format. RFC5424 is not supported.*

## 1. Where this device must send

The collector is already a separate Compose service. This guide only covers the device. Point the device at the Compose host IP, never 127.0.0.1.

| Setting               | Value                              |
|-----------------------|------------------------------------|
| Transport             | UDP only                           |
| Port                  | 5516                               |
| Format                | remote-log-format=syslog (RFC3164) |
| Facility              | daemon                             |
| Coralogix application | mikrotik                           |
| Coralogix subsystem   | routeros                           |

*Replace <COMPOSE\_HOST\_IP> with the address this device can route to. If the host port in .env was changed, use that port, not the default below.*

## 2. WinBox / WebFig

- System → Logging → Actions.
- Add an action. Name: remote-coralogix. Type: remote.
- Remote Address = <COMPOSE\_HOST\_IP>. Remote Port = 5516.
- Remote Log Format = syslog. Do not leave this on default, and do not select cef.
- Syslog Facility = daemon. Syslog Time Format = bsd-syslog.
- System → Logging → Rules. Add one rule per topic, all using action remote-coralogix.
- Minimum rules: info, warning, error, critical. Add firewall, account, and wireless only if you want those streams.

One rule with topics info,warning,error matches nothing. RouterOS ANDs topics on a single rule. Use a separate rule per topic.

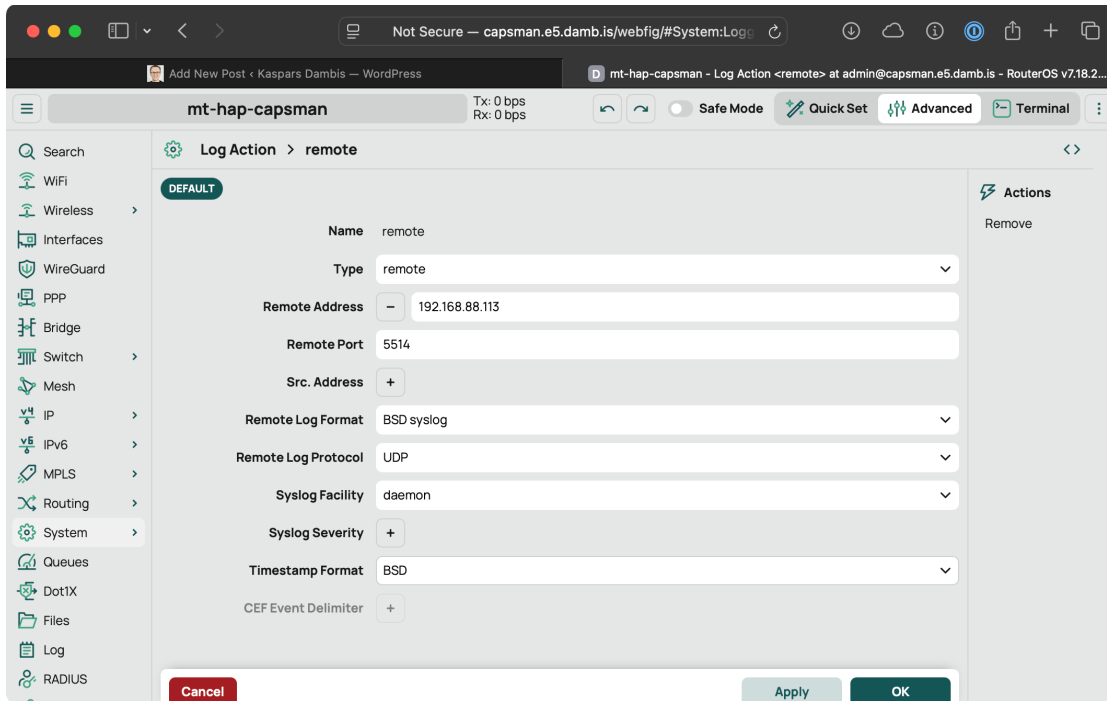


Figure 1: System > Logging > Actions — remote action with Remote Address, Remote Port, Remote Log Format (BSD syslog), Protocol UDP, Syslog Facility daemon. Set the port to 5516 for TAP.

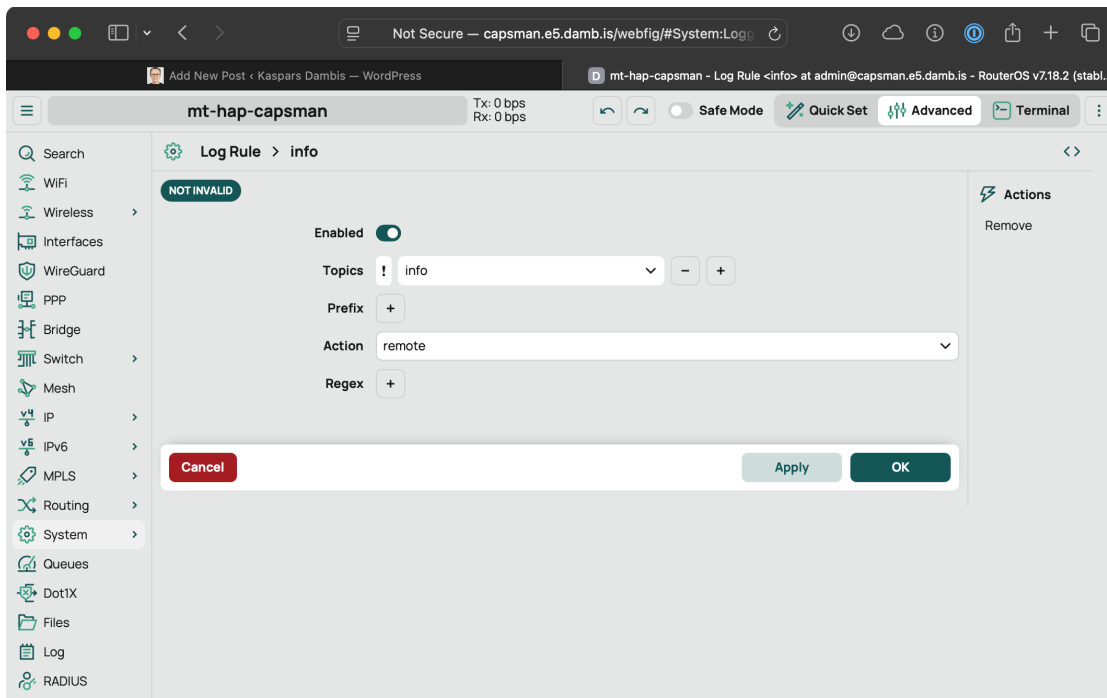


Figure 2: System > Logging > Rules — one rule per topic (here topics=info, action=remote).

### 3. CLI (same result)

Paste on the router. This creates a new action so the built-in remote action is left alone.

```

/system logging action add name=remote-coralogix target=remote \
    remote=<COMPOSE_HOST_IP> remote-port=5516 \
    remote-log-format=syslog syslog-facility=daemon \
    syslog-time-format=bsd-syslog
/system logging add topics=info action=remote-coralogix
/system logging add topics=warning action=remote-coralogix
/system logging add topics=error action=remote-coralogix
/system logging add topics=critical action=remote-coralogix

```

### 3.1 Optional topics

```

/system logging add topics=firewall action=remote-coralogix
/system logging add topics=account action=remote-coralogix
/system logging add topics=wireless action=remote-coralogix

```

firewall only emits lines for rules that already have log=yes. Adding the topic does not turn on firewall logging by itself.

## 4. Confirm what is actually set

```

/system logging action print detail where name=remote-coralogix
/system logging print where action=remote-coralogix

```

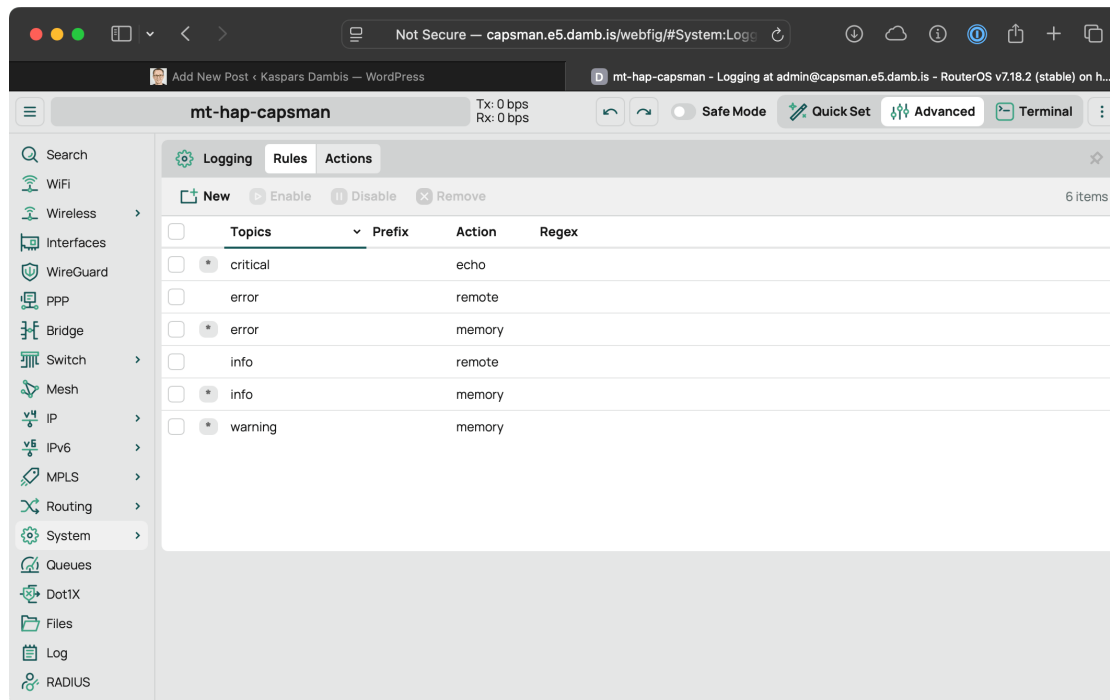


Figure 3: System > Logging > Rules — separate row per topic (RouterOS ANDs topics on one row). Every row for a topic you want forwarded must point at your remote action.

The action print must show remote-log-format=syslog, remote-port=5516, and the Compose host address. remote-protocol stays udp.

A correct on-wire line looks like this (priority, BSD time, identity, message):

```
<30>Oct  7 12:00:00 <identity> system,info,account user admin logged in from  
<ip> via winbox
```

Identity is /system identity. If that name is empty or duplicated across routers, set it before you rely on the hostname in Coralogix.

## 5. Do not do these

- Do not set remote-log-format=default. That line has no timestamp and no hostname. The collector still accepts it, but you cannot tell routers apart.
- Do not set remote-log-format=cef. CEF is a different pipeline. This collector expects BSD syslog.
- Do not set remote-protocol=tcp or tls for this action. RouterOS sends the syslog format over UDP only. TCP/TLS is for CEF.
- Do not add topics=debug or topics=packet. That is a firehose.
- Do not put several topics on one rule.

## 6. Check from the router

- Ping <COMPOSE\_HOST\_IP> from the router (or /ping <COMPOSE\_HOST\_IP>).
- Log in and out of WinBox. An account line should appear under application mikrotik / subsystem routers.
- If you added the firewall topic, touch a rule that has log=yes. A firewall,info line should follow.

## 7. If nothing arrives

| What you see                            | Fix on the router                                                                                                               |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Action exists, print shows no rules     | The action does nothing until a /system logging rule points at it.                                                              |
| One rule with topics=info,warning,error | Delete it. Add one rule per topic.                                                                                              |
| remote-log-format=cef or default        | Set syslog. Restart is not required; the next log uses the new format.                                                          |
| remote-protocol=tcp                     | Set udp. Syslog format will not use the TCP session.                                                                            |
| Ping fails                              | Wrong address, or the router has no route to the Compose host. Set src-address on the action if the router has several WAN IPs. |
| Ping works, no logs                     | UDP 5516 blocked on the collector host, or the rule topics never occur.                                                         |

Source: MikroTik RouterOS Log manual. Remote syslog format is RFC 3164 over UDP. TAP collector listens on UDP 5516, protocol rfc3164.