

TAP — MikroTik RouterOS syslog to Coralogix

Device configuration only. RouterOS must send BSD syslog (RFC3164) over UDP. TCP and TLS on RouterOS apply to CEF, not to this format. RFC5424 is not supported.

1. Where this device must send

The collector is already a separate Compose service. This guide only covers the device. Point the device at the Compose host IP, never 127.0.0.1.

Setting	Value
Transport	UDP only
Port	5516
Format	remote-log-format=syslog (RFC3164)
Timezone	collector parses as Asia/Jakarta (router clock is WIB)
Facility	daemon
Coralogix application	mikrotik
Coralogix subsystem	routeros

Replace <COMPOSE_HOST_IP> with the address this device can route to. If the host port in .env was changed, use that port, not the default below.

2. WinBox / WebFig

- System → Logging → Actions.
- Add an action. Name: remote-coralogix. Type: remote.
- Remote Address = <COMPOSE_HOST_IP>. Remote Port = 5516.
- Remote Log Format = syslog. Do not leave this on default, and do not select cef.
- Syslog Facility = daemon. Syslog Time Format = bsd-syslog.
- System → Logging → Rules. Add one rule per topic, all using action remote-coralogix.
- Minimum rules: info, warning, error, critical. Add firewall, account, and wireless only if you want those streams.

One rule with topics info,warning,error matches nothing. RouterOS ANDs topics on a single rule. Use a separate rule per topic.

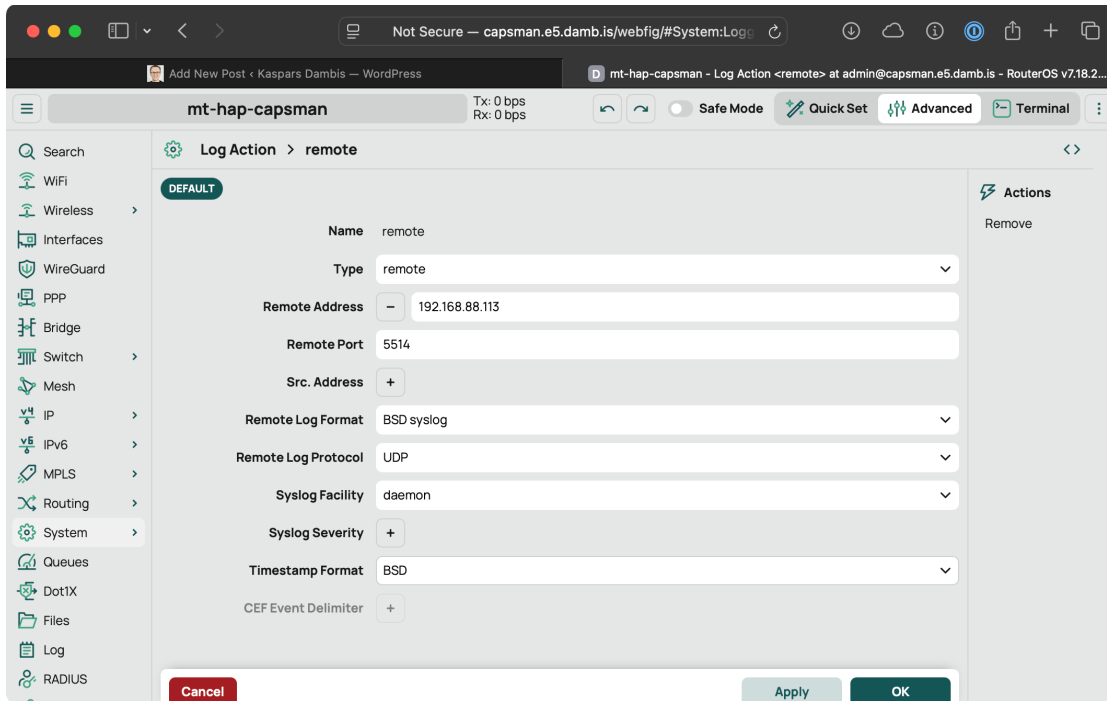


Figure 1: System > Logging > Actions — remote action with Remote Address, Remote Port, Remote Log Format (BSD syslog), Protocol UDP, Syslog Facility daemon. Set the port to 5516 for TAP.

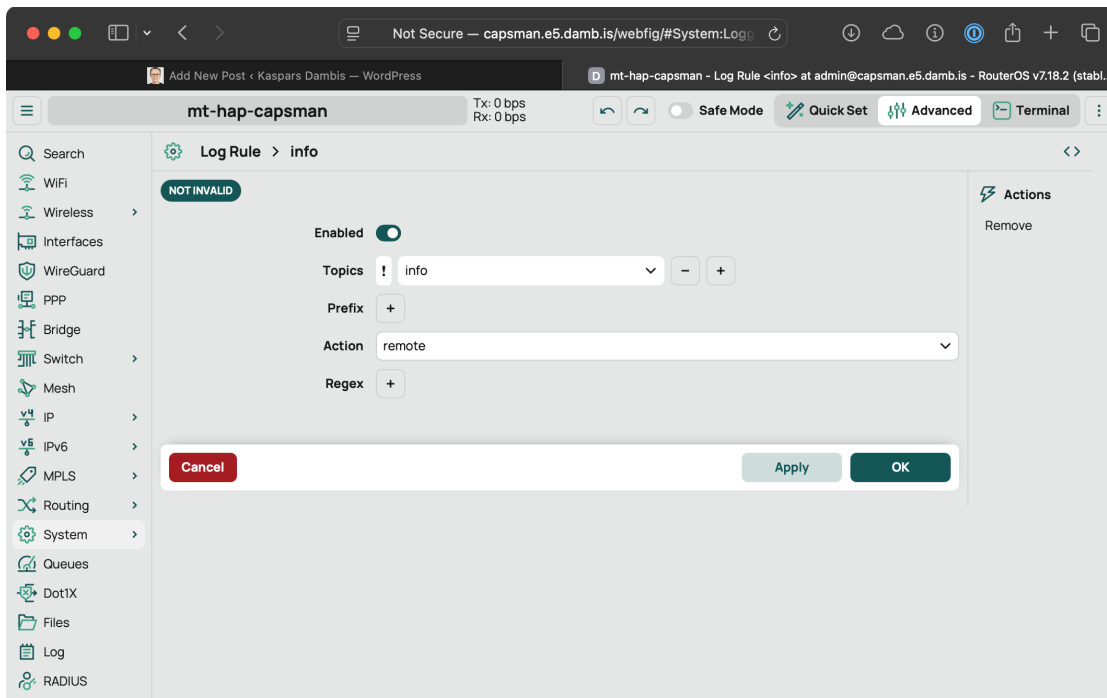


Figure 2: System > Logging > Rules — one rule per topic (here topics=info, action=remote).

3. CLI (same result)

Paste on the router. This creates a new action so the built-in remote action is left alone.

```

/system logging action add name=remote-coralogix target=remote \
    remote=<COMPOSE_HOST_IP> remote-port=5516 \
    remote-log-format=syslog syslog-facility=daemon \
    syslog-time-format=bsd-syslog
/system logging add topics=info action=remote-coralogix
/system logging add topics=warning action=remote-coralogix
/system logging add topics=error action=remote-coralogix
/system logging add topics=critical action=remote-coralogix

```

3.1 Optional topics

```

/system logging add topics=firewall action=remote-coralogix
/system logging add topics=account action=remote-coralogix
/system logging add topics=wireless action=remote-coralogix

```

firewall only emits lines for rules that already have log=yes. Adding the topic does not turn on firewall logging by itself.

4. Confirm what is actually set

```

/system logging action print detail where name=remote-coralogix
/system logging print where action=remote-coralogix

```

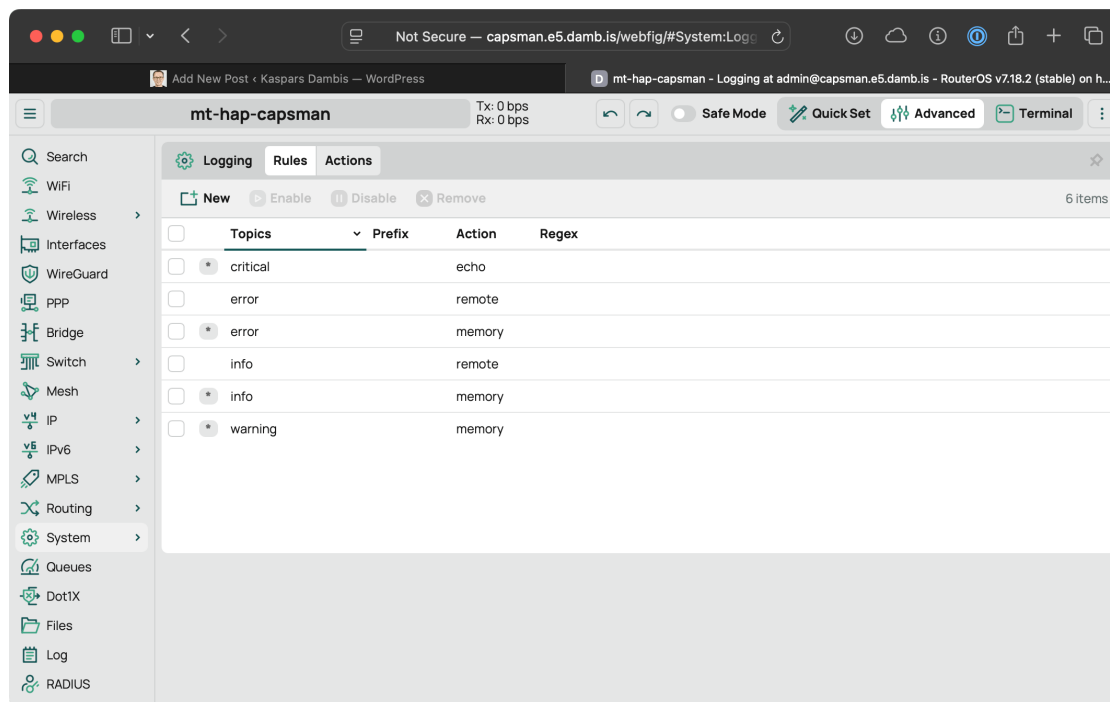


Figure 3: System > Logging > Rules — separate row per topic (RouterOS ANDs topics on one row). Every row for a topic you want forwarded must point at your remote action.

The action print must show remote-log-format=syslog, remote-port=5516, and the Compose host address. remote-protocol stays udp.

A correct on-wire line looks like this (priority, BSD time, identity, message):

```
<30>Oct 7 12:00:00 <identity> system,info,account user admin logged in from  
<ip> via winbox
```

Identity is /system identity. If that name is empty or duplicated across routers, set it before you rely on the hostname in Coralogix.

4.1 Timezone — required

RFC3164 timestamps carry no timezone. The collector parses them using its location setting (default UTC), and this template pins location: Asia/Jakarta because the router clock is WIB. If the router runs in another zone, every record is stamped hours into the future and Coralogix rejects it at ingress with 'log record(s) in the future' — nothing appears in Coralogix and the router logs no error.

- Keep the router clock correct: /system clock print and /system ntp client print.
- If the zone is not Asia/Jakarta, change the collector receiver's location to match. Do not change the router zone just for this.

5. Do not do these

- Do not set remote-log-format=default. That line has no timestamp and no hostname. The collector still accepts it, but you cannot tell routers apart.
- Do not set remote-log-format=cef. CEF is a different pipeline. This collector expects BSD syslog.
- Do not set remote-protocol=tcp or tls for this action. RouterOS sends the syslog format over UDP only. TCP/TLS is for CEF.
- Do not add topics=debug or topics=packet. That is a firehose.
- Do not put several topics on one rule.

6. Check from the router

- Ping <COMPOSE_HOST_IP> from the router (or /ping <COMPOSE_HOST_IP>).
- Log in and out of WinBox. An account line should appear under application mikrotik / subsystem routers.
- If you added the firewall topic, touch a rule that has log=yes. A firewall,info line should follow.

7. If nothing arrives

What you see	Fix on the router
Action exists, print shows no rules	The action does nothing until a /system logging rule points at it.
One rule with topics=info,warning,error	Delete it. Add one rule per topic.
remote-log-format=cef or default	Set syslog. Restart is not required; the next log uses the new format.
remote-protocol=tcp	Set udp. Syslog format will not use the TCP session.
Ping fails	Wrong address, or the router has no route to the Compose host. Set src-address on the action if the router has several WAN IPs.
Ping works, no logs	UDP 5516 blocked on the collector host, or the rule topics never occur.

Collector log shows 'record(s) in the future'	Timezone mismatch — set the collector receiver's location to the router's zone (template default Asia/Jakarta).
---	---

Source: MikroTik RouterOS Log manual. Remote syslog format is RFC 3164 over UDP. TAP collector listens on UDP 5516 with protocol rfc3164 and location Asia/Jakarta (RFC 3164 carries no timezone).