




UIViewController





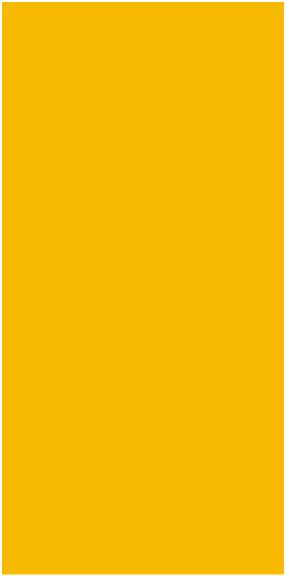


~

```
@IBOutlet func tap(_ sender: UIButton) {
  store.dispatch(SomeEvent.didTapButton)
```



```
override func viewDidLoad() {
  store.subscribe(onNext: { [weak self] state in ]
    self?.label.text = state.name
```





UIViewController

Store

```
UIButton
```

```
@IBOutlet func tap(_ sender: UIButton) {
   store.dispatch(SomeEvent.didTapButton)
}
```

```
override func viewDidLoad() {
  store.subscribe(onNext: { [weak self] state in
      self?.label.text = state.name
  })
}
```

UILabel