

MocoExtendProblem: Interface Between OpenSim and MATLAB for Rapidly Developing Direct Collocation Goals in Moco

Aravind Sundararajan¹✉, Varun Joshi², Brian Umberger², and Matthew O'Neill¹

¹ Department of Anatomy, Midwestern University, Glendale Arizona, USA ² School of Kinesiology, University of Michigan, Ann Arbor, Michigan, USA ✉ Corresponding author

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#) ✉
- [Repository](#) ✉
- [Archive](#) ✉

Editor: [Open Journals](#) ✉

Reviewers:

- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

Summary

MocoExtendProblem (MEP) is a framework to rapidly develop novel goals for biomechanical optimal control problems using OpenSim Moco [Dembia2020] and MATLAB (The Mathworks, Inc., Natick, MA, USA). MEP features several templates for testing and prototyping novel MocoGoals in lieu of rebuilding OpenSim or generating an .omoco file from C++ to load the problem into MATLAB. Instead, users structure custom goals, build them, and call custom goals from MATLAB scripts.

This repository features:

- A build.m script that compiles goals in the custom_goals directory and procedurally constructs the C++/MATLAB class implementations and compiles the MEX interface.
- Compatibility tested with OpenSim 4.2-4.5.
- OpenSim versions lower than 4.5 require unique modifications to the build pipeline since booleans for division by duration, distance and mass were migrated to the abstract MocoGoal.
- The ability to include MEP as a submodule, build, and use valid custom goals.
- Three example custom goals in the custom_goals and custom_goals_compat directories.

Statement of need

OpenSim is an open-source software platform for modeling musculoskeletal structures and creating dynamic simulations of movement (Seth, 2018). OpenSim enables researchers and clinicians to investigate how biological and non-biological structures respond to different loads, postures and activities in both static and dynamic situations. OpenSim has been used to study a wide range of biomechanical problems, such as the mechanics of walking and running (Falisse et al., 2019), the impact of injury or disease on movement (Johnson, 2022), and the effectiveness of rehabilitation exercises (Spomer et al., 2023).

OpenSim Moco (Dembia, 2021) employs an optimization paradigm called direct collocation to solve trajectory optimization problems that range from solving for muscle forces, to tracking experimental data, and fully predictive simulations. Direct collocation is a numerical optimal control method (Kelly, 2017) that is computationally efficient and is used extensively in computational approaches to understanding biological movement. While direct collocation is powerful, Moco only provides a fixed set of optimization goals. It can be daunting for many users to develop custom goals in C++. We developed MEP so Moco users without experience compiling C++ can still write and test custom goals. The OpenSim interfaces are created

40 with SWIG, as opposed to MEX, which can be daunting for even experienced biomechanists.
41 MocoExtendProblem was developed using MATLAB versions 2022a. Running build.m will
42 compile MocoGoals in the custom_goals directory, or in the custom_goals_compat directory
43 for OpenSim versions pre-4.5.

44 CMake and msbuild from Visual Studio 2019 or higher must be added to the system PATH.
45 build.m will procedurally construct both extend_problem.m and ExtendProblem.cpp by parsing
46 the header files of the discovered goals within the custom_goals directory. Both ExtendProb-
47 lem.cpp and extend_problem.m generate bindings to instantiate custom goals placed in the
48 custom_goals directory. Custom goals can be compiled with Visual Studio 2019 or higher
49 and then MATLAB's MEX compiler is used to compile ExtendProblem. ExtendProblem.cpp
50 leverages the C++ library mexplus (Yamaguchi, 2018) to gain access to MEX entry points
51 through C++ macros.

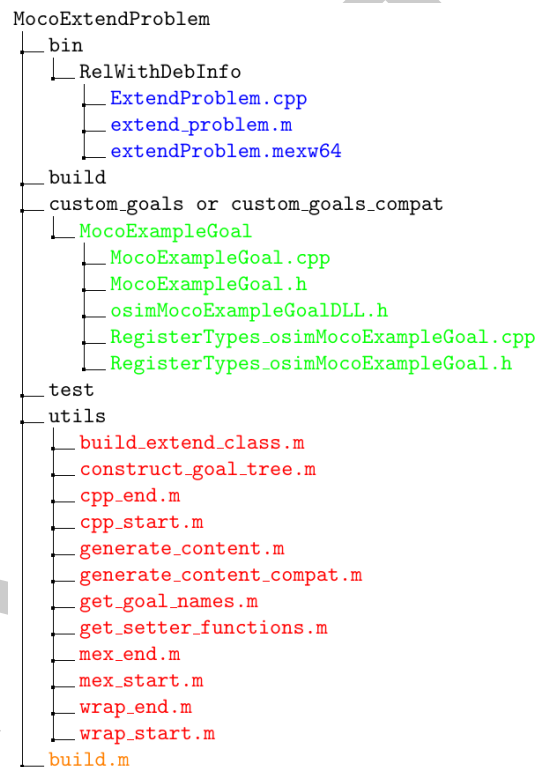


Figure 1: MEP Framework. The researcher runs the build.m script (orange) that subsequently calls methods in the utils folder (red) which are tasked with reading the custom_goals folder (green) and procedurally construct the mex and the interface class that calls the mex (blue). Each custom goal (green) is handled as its own compiled plugin.

52 To create a new goal with MEP:

- 53 1. OpenSim 4.5+ users should copy a goal in the custom_goals directory while 4.2-4.4
- 54 users should copy a goal in custom_goals_compat.
- 55 2. Replace mentions of the original goal name to that of your new custom goal name in
- 56 each of the 5 files and file names, being careful to also modify the include guards in the
- 57 dll and register types header files.
- 58 3. Reimplement constructProperties(), initializeOnModelImpl(), calcIntegrandImpl(), cal-
- 59 cGoalImpl() such that they describe your custom goal.

60 To incorporate extend_problem goals into an existing MATLAB script, a C-style pointer to the
61 instantiated MocoProblem is passed as a constructor argument to the extend_problem.m class

62 that wraps the MEP MEX. Class methods of `extend_problem.m` (Figure 1; blue) are then used
63 to add custom goals to the `MocoProblem`.

```
64 cptr = uint64(problem.getCPtr(problem));
65 ep = extend_problem(cptr);
66 ep.addMocoCustomGoal('custom_goal', weight, power, divide_by_distance);
```

67 This paradigm has implications for OpenSim and MATLAB developers beyond the scope of
68 just incorporating novel MocoGoals; these same tools can be used to extend other classes and
69 easily incorporate them into existing MATLAB-OpenSim scripts. We have posted all tools,
70 instructions and simulation results related to this project on [GitHub](#) and [SimTK.org](#).

71 Requirements

- 72 ■ Download and install OpenSim from [SimTK](#) and follow the documentation for setting
73 up OpenSim's MATLAB scripting environment.
- 74 ■ Follow the instructions (OpenSim) to download necessary dependencies for both scripting
75 in MATLAB and C++ development.
- 76 ■ In MATLAB, configure MEX with `mex -setup C++` to use the MS VisualStudio 2019+.

77 Showcases

78 To demonstrate the utility of this framework, we generated a two-dimensional (2-D) walking
79 simulation using the MATLAB-OpenSim API ([Denton & Umberger, 2023](#)). The base code
80 uses the built-in `MocoControlEffortGoal` and `MocoAverageSpeedGoal` to generate tracking and
81 predictive simulations of minimum effort walking at an average speed of 1.3 m s⁻¹. Additionally,
82 each objective function includes implicit acceleration and auxiliary derivative terms that are
83 minimized to ensure smooth trajectories.

84 Since Moco lacks built-in gait stability goals, we developed three stability goals using MEP
85 `build.m` to create an `ExtendProblem` class that adds these to an existing `MocoProblem` (Figure 1;
86 blue). The first is a base of support ([Equation 1](#)) criterion in which the whole-body center
87 of mass (COM) is optimized to lay between the two hindfeet COMs projected to the ground
88 reference frame, the second is a zero-moment-point goal ([Equation 2](#)) where the center of
89 mass tracks the computed zero-tilting moment location, and the third is a marker acceleration
90 minimization goal ([Equation 3](#)) that minimizes the explicit accelerations of a marker placed on
91 the head (marker location is arbitrary and can be set by the user).

92 MEP's `build.m` was used to generate an `ExtendProblem` class that adds these new stability cost
93 terms:

$$J_{BOS} = W_1 EFF^2 + W_2 ACC_{smoothing} + W_3 BOS \quad (1)$$

$$J_{zmp} = W_1 EFF^2 + W_2 ACC_{smoothing} + W_3 ZMP \quad (2)$$

$$J_{acc} = W_1 EFF^2 + W_2 ACC_{smoothing} + W_3 ACC_{marker} \quad (3)$$

94 The results of each multi-objective predictive simulation, in which the stability criterion was
95 compiled using MEP, is shown against the results from a tracking simulation [[Figure 2](#); [Table 1](#)]
96 that closely-matched experimental data ([Denton & Umberger, 2023](#)). As the purpose was
97 to demonstrate the utility of MEP, we did not tune the stability term weights to match the
98 tracking result as closely as possible.

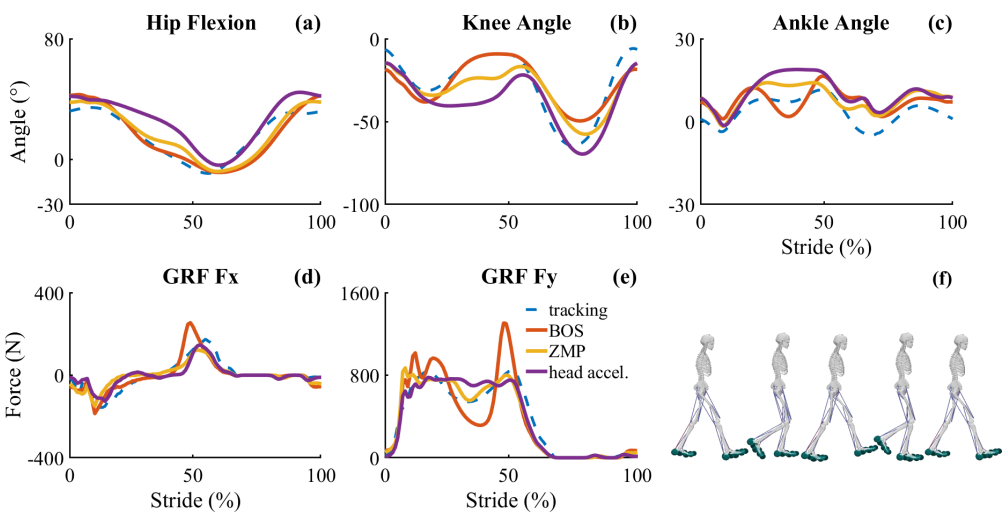


Figure 2: Sagittal plane hip, knee and ankle angles (a-c), vertical and A-P ground reaction forces (d-e), the 11 degree-of-freedom, 18 muscle sagittal plane human walking model used for tracking and predictive simulations (f)

Table 1: Objective cost and term breakdown for three predictive simulations using MEP.

	Objective cost	Effort cost	Smoothing cost	Stability cost
J_{BOS}	3.759046	2.270912	0.683608	0.794155
J_{ZMP}	4.184254	2.751212	0.725837	0.686290
J_{accel}	4.774932	3.797785	0.793123	0.174308

While these examples used planar gait simulations, MEP is agnostic to model complexity or task, and is being used successfully in our ongoing research (Joshi, 2023; Sundararajan, 2023) of locomotor performance in humans and other animals. GNU Octave support would require minimal syntactical modification. An additional benefit of sequestering novel goals into ExtendProblem is being able to back-port goals from a newer OpenSim version to an older version (i.e. taking a goal from OpenSim 4.4 and bringing that functionality to 4.2). Ultimately, MEP offers a modular framework to rapidly develop, test and compare novel MocoGoals for features beyond OpenSim Moco’s current scope.

Funding

This work was supported by the National Science Foundation (BCS 2018436 and BCS 2018523)

References

Dembia, N. A. A. F., C. L. AND Bianco. (2021). OpenSim moco: Musculoskeletal optimal control. *PLOS Computational Biology*, 16(12), 1–21. <https://doi.org/10.1371/journal.pcbi.1008493>

Denton, A. N., & Umberger, B. R. (2023). Computational performance of musculoskeletal simulation in OpenSim moco using parallel computing. *International Journal for Numerical Methods in Biomedical Engineering*, 39(12), e3777. <https://doi.org/10.1002/cnm.3777>

- 117 Falisse, A., Serrancolí, G., Dembia, C. L., Gillis, J., Jonkers, I., & De Groote, F. (2019). Rapid
118 predictive simulations with complex musculoskeletal models suggest that diverse healthy
119 and pathological human gaits can emerge from similar control strategies. *Journal of The*
120 *Royal Society Interface*, 16(157), 20190402. <https://doi.org/10.1098/rsif.2019.0402>
- 121 Johnson, N. A. A. F., R. T. AND Bianco. (2022). Patterns of asymmetry and energy cost
122 generated from predictive simulations of hemiparetic gait. *PLOS Computational Biology*,
123 18(9), 1–26. <https://doi.org/10.1371/journal.pcbi.1010466>
- 124 Joshi, B., V. (2023). Optimal control gait simulations of older adults predict foot placement
125 trends not captured by reflex-based models. In *North American Congress on Biomechanics*.
126 North American Congress on Biomechanics.
- 127 Kelly, M. (2017). An introduction to trajectory optimization: How to do your own direct
128 collocation. *SIAM Review*, 59(4), 849–904. <https://doi.org/10.1137/16M1062569>
- 129 Seth, J. L. A. U., A. AND Hicks. (2018). OpenSim: Simulating musculoskeletal dynamics
130 and neuromuscular control to study human and animal movement. *PLOS Computational*
131 *Biology*, 14(7), 1–20. <https://doi.org/10.1371/journal.pcbi.1006223>
- 132 Spomer, A., Conner, B., Schwartz, M., Lerner, Z., & Steele, K. (2023). Audiovisual biofeedback
133 amplifies plantarflexor adaptation during walking among children with cerebral palsy. *Journal*
134 *of NeuroEngineering and Rehabilitation*, 20. <https://doi.org/10.1186/s12984-023-01279-5>
- 135 Sundararajan, L., A. (2023). Optimal control simulations of 3-d walking in humans and bipedal
136 chimpanzee. In *Proceedings of The American Society of Biomechanics*. Proceedings of
137 The American Society of Biomechanics.
- 138 Yamaguchi, K. (2018). Mexplus. In *GitHub repository*. GitHub. [https://github.com/kyamagu/](https://github.com/kyamagu/mexplus)
139 [mexplus](https://github.com/kyamagu/mexplus)