



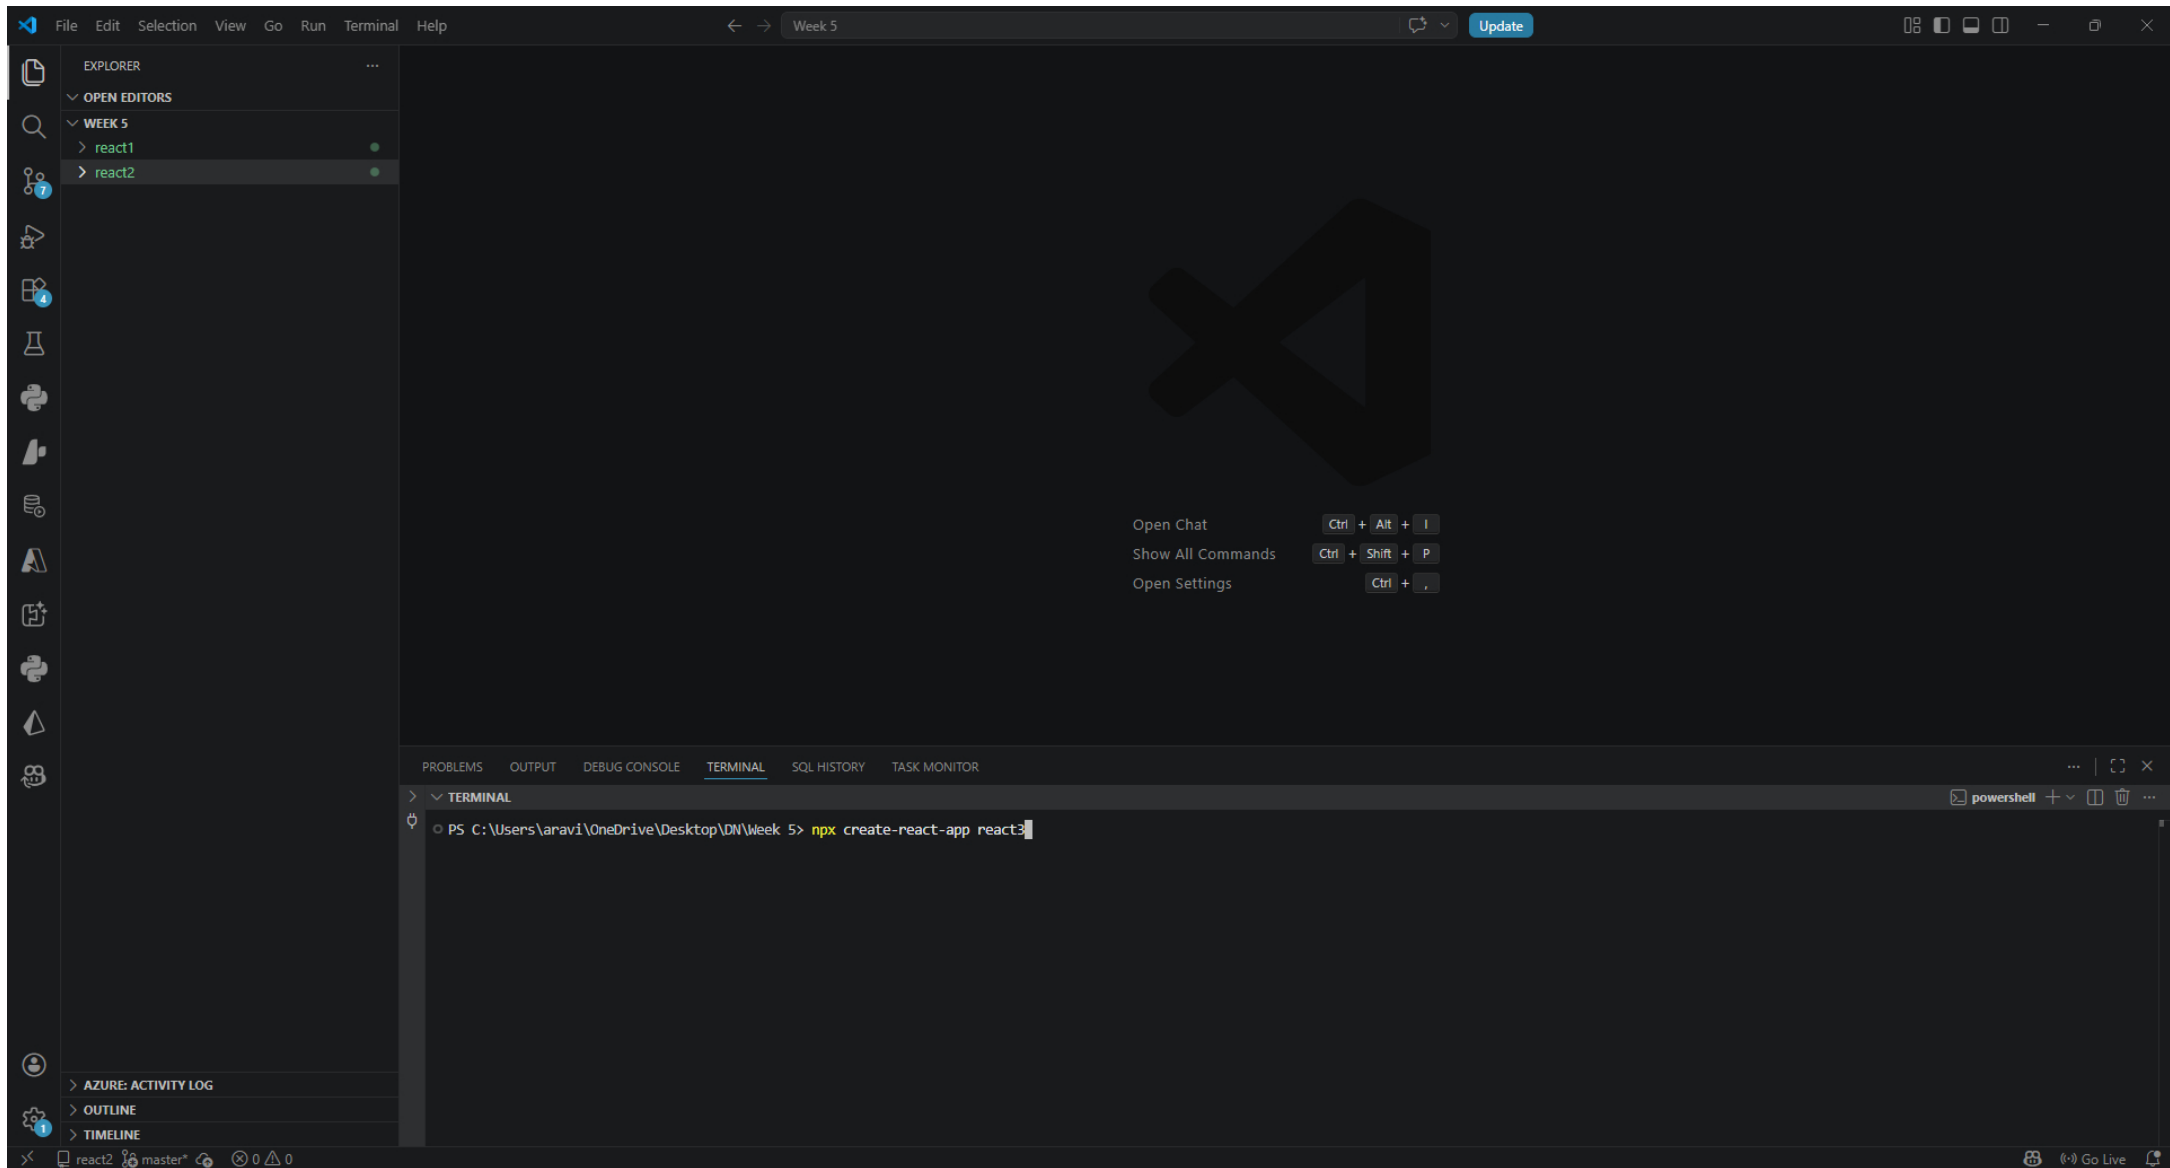

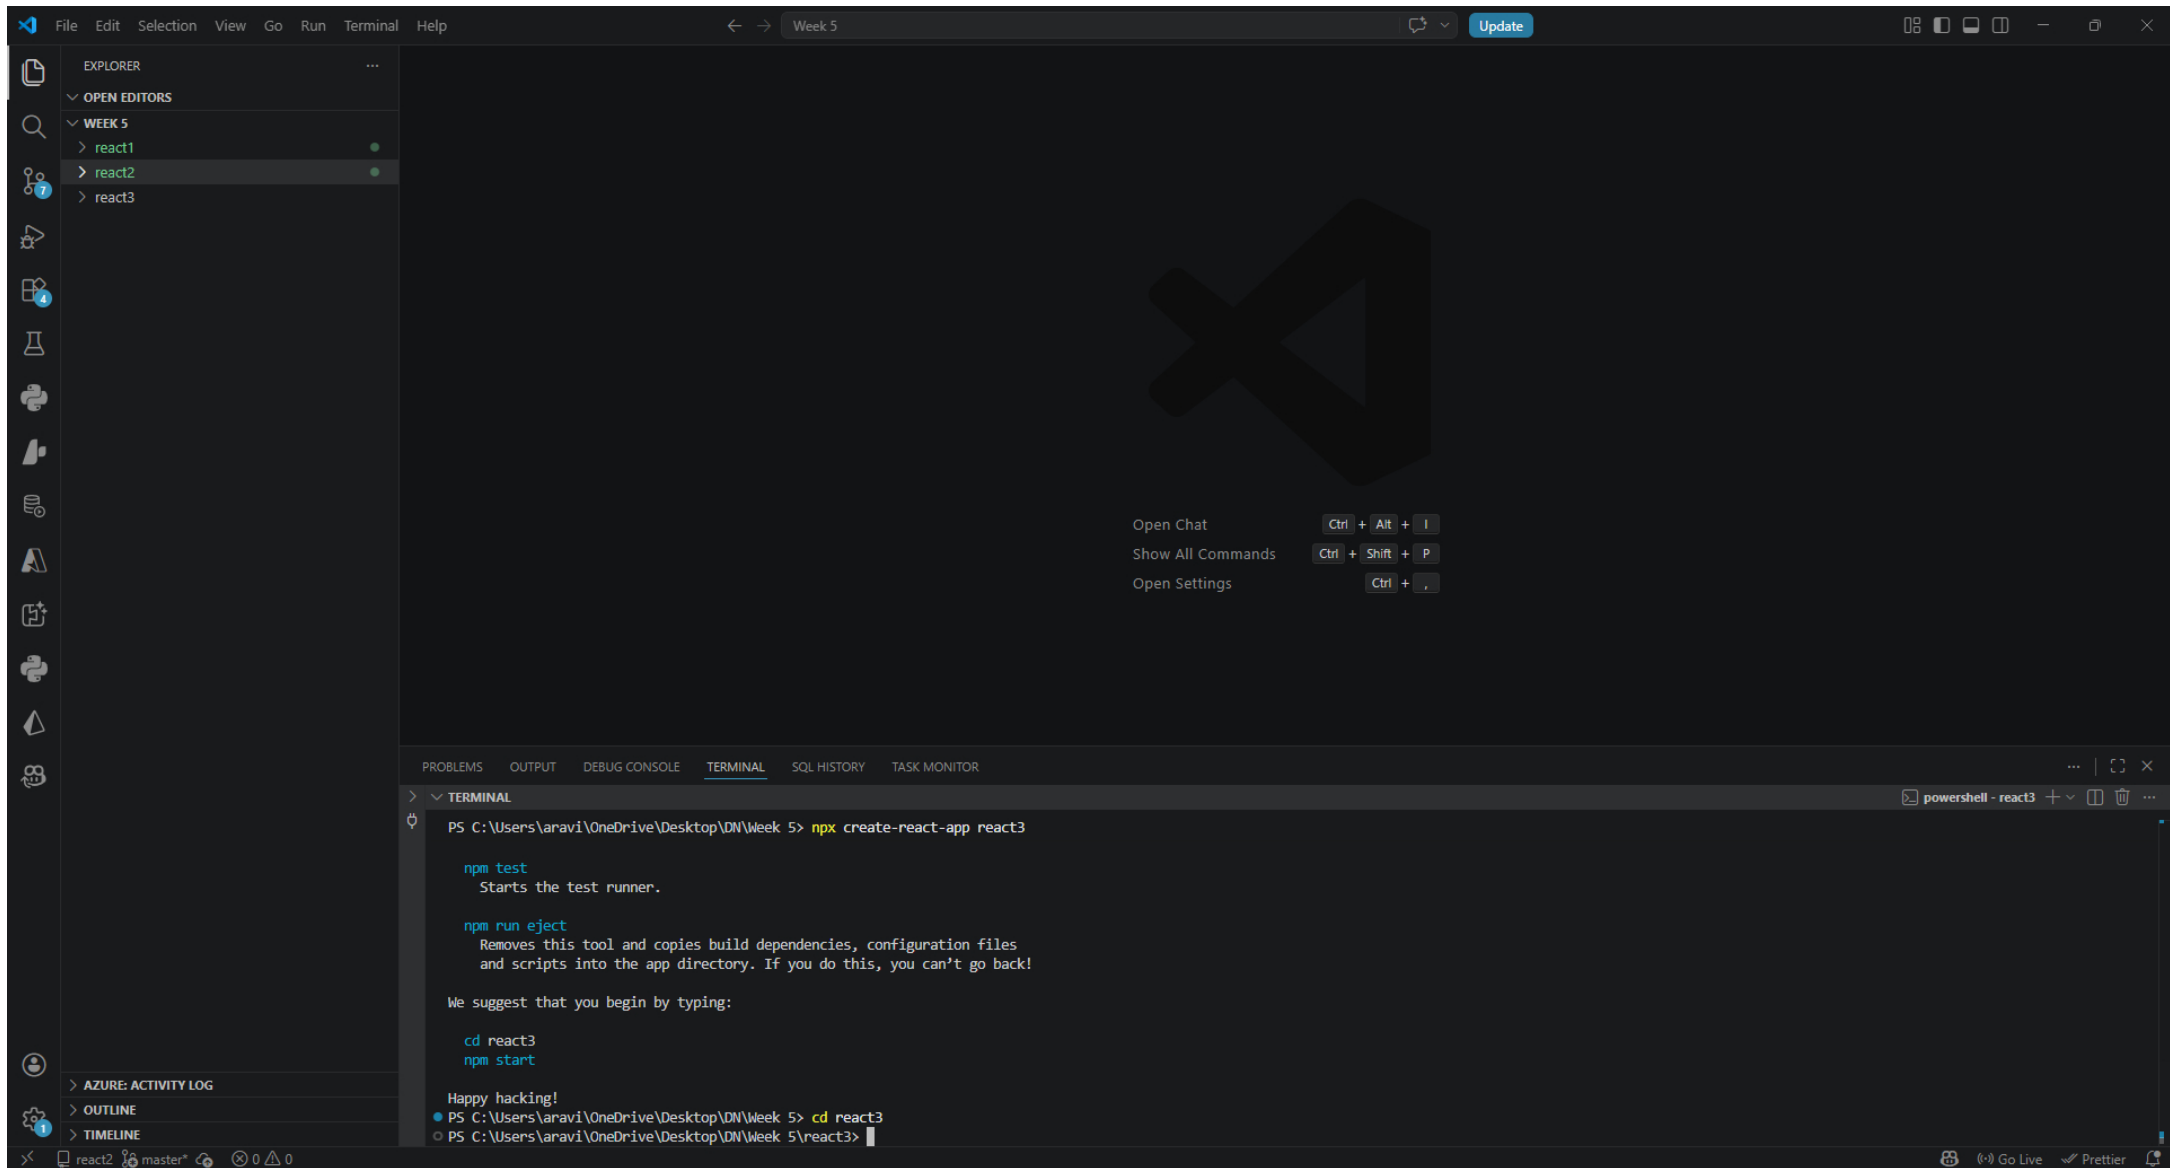

FileEditSelectionViewGoRunTerminalHelp

←→Week 5

Update

EXPLORER

OPEN EDITORS

WEEK 5

react1

react2

react3

node_modules

public

src

Components

App.css

App.js

App.test.js

index.css

index.js

logo.svg

reportWebVitals.js

setupTests.js

.gitignore

package-lock.json

package.json

README.md

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

SQL HISTORY

TASK MONITOR

PS C:\Users\aravi\OneDrive\Desktop\DN\Week 5> npx create-react-app react3

npm test

Starts the test runner.

npm run eject

Removes this tool and copies build dependencies, configuration files and scripts into the app directory. If you do this, you can't go back!

We suggest that you begin by typing:

cd react3

npm start

Happy hacking!

PS C:\Users\aravi\OneDrive\Desktop\DN\Week 5> cd react3

PS C:\Users\aravi\OneDrive\Desktop\DN\Week 5\react3>

react2master*00

Go LivePrettier

FileEditSelectionViewGoRunTerminalHelp

←→Week 5

Update

EXPLORER

OPEN EDITORS

JS CalculateScore.js react3\src\Compone... U

WEEK 5

react1

react2

react3

node_modules

public

src

Components

JS CalculateScore.js U

App.css

App.js

App.test.js

index.css

index.js

logo.svg

reportWebVitals.js

setupTests.js

.gitignore

package-lock.json

package.json

README.md

AZURE: ACTIVITY LOG

OUTLINE

TIMELINE

JS CalculateScore.js U X

react3 > src > Components > JS CalculateScore.js > default

1 import React from 'react';

2 import '../Stylesheets/mystyle.css';

3

4 function CalculateScore(props) {

5 const average = props.Total / props.goal;

6

7 return (

8 <div className="score-card">

9 <h2>Student Score Calculator</h2>

10

11 <p>Name: {props.Name}</p>

12 <p>School: {props.School}</p>

13 <p>Total Score: {props.Total}</p>

14 <p>Goal: {props.goal}</p>

15

16 <h3>Average Score: {average}</h3>

17 </div>

18);

19 }

20

21 export default CalculateScore;

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

SQL HISTORY

TASK MONITOR

TERMINAL

PS C:\Users\aravi\OneDrive\Desktop\DN\Week 5> npx create-react-app react3

npm test

Starts the test runner.

npm run eject

Removes this tool and copies build dependencies, configuration files and scripts into the app directory. If you do this, you can't go back!

We suggest that you begin by typing:

cd react3

npm start

Happy hacking!

PS C:\Users\aravi\OneDrive\Desktop\DN\Week 5> cd react3

PS C:\Users\aravi\OneDrive\Desktop\DN\Week 5> react3

react3 master* 0 0

Ln 21, Col 31 Spaces: 4 UTF-8 CRLF JavaScript Go Live Prettier

File Edit Selection View Go Run Terminal Help

Week 5

Update

EXPLORER

OPEN EDITORS

JS CalculateScore.js react3\src\Compon... U

X # mystyle.css react3\src\Stylesheets U

WEEK 5

react1

react2

react3

node_modules

public

src

Components

JS CalculateScore.js U

Stylesheets

mystyle.css U

App.css

JS App.js

JS App.test.js

index.css

JS index.js

logo.svg

JS reportWebVitals.js

JS setupTests.js

.gitignore

package-lock.json

package.json

README.md

AZURE: ACTIVITY LOG

OUTLINE

TIMELINE

JS CalculateScore.js U

mystyle.css U X

react3 > src > Stylesheets > # mystyle.css > ...

```
1 .score-card {
2   width: 400px;
3   margin: 50px auto;
4   padding: 25px;
5   text-align: center;
6   border: 1px solid black;
7   border-radius: 10px;
8   font-family: Arial, sans-serif;
9 }
10
11 .score-card h2 {
12   margin-bottom: 20px;
13 }
14
15 .score-card p {
16   text-align: left;
17 }
18
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL SQL HISTORY TASK MONITOR

TERMINAL

PS C:\Users\aravi\OneDrive\Desktop\DN\Week 5> npm create-react-app react3

npm test

Starts the test runner.

npm run eject

Removes this tool and copies build dependencies, configuration files and scripts into the app directory. If you do this, you can't go back!

We suggest that you begin by typing:

cd react3

npm start

Happy hacking!

PS C:\Users\aravi\OneDrive\Desktop\DN\Week 5> cd react3

PS C:\Users\aravi\OneDrive\Desktop\DN\Week 5\react3>

react3 master*

0 0

Ln 18, Col 1 Spaces: 4 UTF-8 CRLF CSS Go Live Prettier

File Edit Selection View Go Run Terminal Help

Week 5

Update

EXPLORER

OPEN EDITORS

JS CalculateScore.js react3\src\Compon... U

mystyle.css react3\src\Stylesheets U

JS App.js react3\src M

WEEK 5

react1

react2

react3

node_modules

public

src

Components

JS CalculateScore.js U

Stylesheets

mystyle.css U

App.css

JS App.js M

JS App.test.js

index.css

index.js

logo.svg

reportWebVitals.js

setupTests.js

.gitignore

package-lock.json

package.json

README.md

react3 > src > JS App.js > default

1 import CalculateScore from './Co

2

3 function App() {

4 return (

5 <div>

6 <CalculateScore

7 Name="Aravind"

8 School="SRM Institute of

9 Total={450}

10 goal={5}

11 </div>

12 </div>

13);

14 }

15

16 export default App;

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL

TERMINAL

PS C:\Users\aravi\OneDrive\Desktop\DN\

You can now view react3 in the browser.

Local: http://localhost:3000

On Your Network: http://192.168.1.6:3000

Note that the development build is not optimized.

To create a production build, use npm run build.

webpack compiled successfully

react3 master*

0 0 0

React App

localhost:3000

Ask Gemini

Student Score Calculator

Name: Aravind

School: SRM Institute of Science and Technology

Total Score: 450

Goal: 5

Average Score: 90

Ln 16, Col 20 Spaces: 2 UTF-8 LF JavaScript Go Live Prettier