

HTML Attributes

HTML attributes provide **extra information about HTML elements**

```
<element attribute="value">Content</element>
```

1. href

```
<a href="https://www.google.com">Visit Google</a>
```

→ <a> → anchor/link element

→ href → attribute

→ "<https://www.google.com>" → attribute value

2. src

```

```

tells the browser where to find the image

3. alt

alternative text for an image

```

```

If fish.jpg cannot load, the browser can display the text **"fish jas"**.

4. width and height

specify the dimensions of an image.

```

```

5. title

The title attribute provides additional information

```
<p title="This is a paragraph">Move your mouse here</p>
```

6. class

The class attribute is commonly used to identify elements for **CSS styling** or JavaScript

```
<p class="highlight">This is important.</p>
```

7. id

The id attribute gives an element a **unique identifier**.

```
<h1 id="main-heading">Welcome</h1>
```

Example Using Multiple Attributes

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Html Attributes</title>
</head>
<body>
  <h1 id="heading" class="title">HTML Attributes</h1>


  <a href="https://www.instagram.com" title="Go to instagram">
    Visit instagram
  </a>

  <br><br>

</body>
</html>
```

Output;

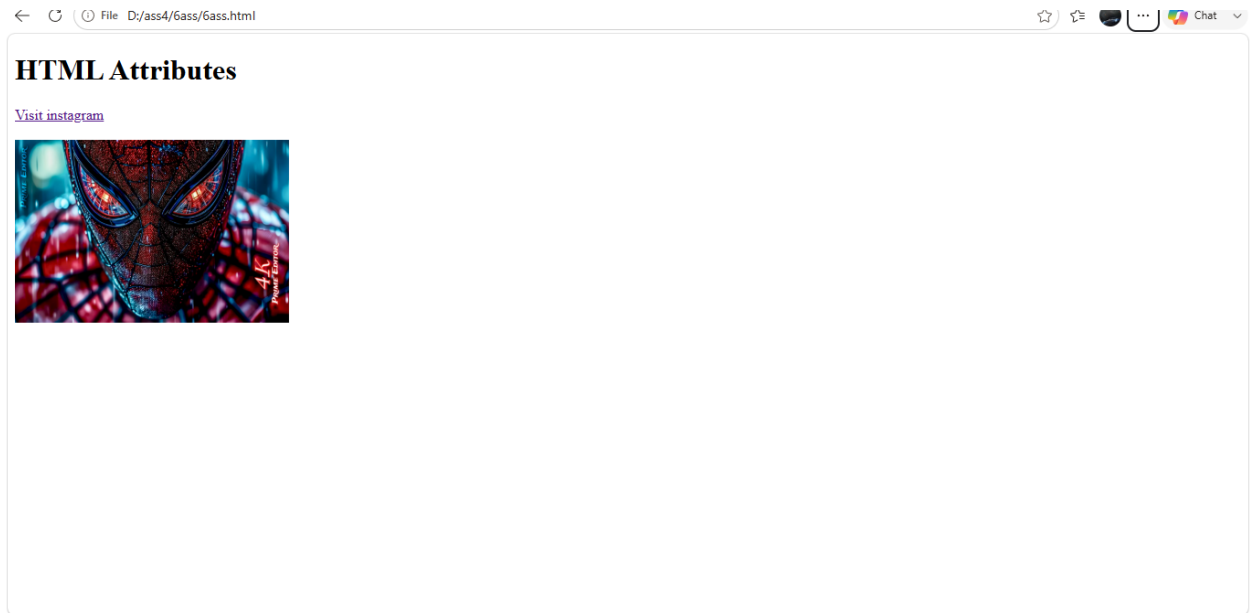

Creating Hyperlinks with href in HTML

The <a> (anchor) element is used to create hyperlinks. The **href attribute** specifies where the link should go.

1. Basic Hyperlink

```
<a href="https://www.instagram.com">Visit instagram</a>
```

Clicking **Visit instagram** opens the Google website.

2. Absolute Link

```
<a href="https://www.google.com">Google</a>
```

```
<a href="https://www.youtube.com">YouTube</a>
```

```
<a href="https://www.wikipedia.org">Wikipedia</a>
```

An **absolute link** contains the complete URL of an external website

3. Relative Link

my-website/

|

└─ index.html

└─ about.html

└─ contact.html

A **relative link** points to a file or page within your own website/project

4. Linking to a File in a Folder

my-website/

|

└─ index.html

└─ pages/

└─ services.html

`<a href="pages/services.html">Our Services</a>`

Example;

Index.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Hyperlink</title>

</head>

<body>
  <h1>My Hyperlinks</h1>


  <h2>Absolute Links</h2>

  <a href="https://www.google.com">Google</a><br>
  <a href="https://www.youtube.com">YouTube</a><br>
  <a href="https://www.wikipedia.org">Wikipedia</a>

  <h2>Relative Links</h2>

  <a href="about.html">About Page</a><br>
  <a href="contact.html">Contact Page</a>
</body>
</html>
```

Output;

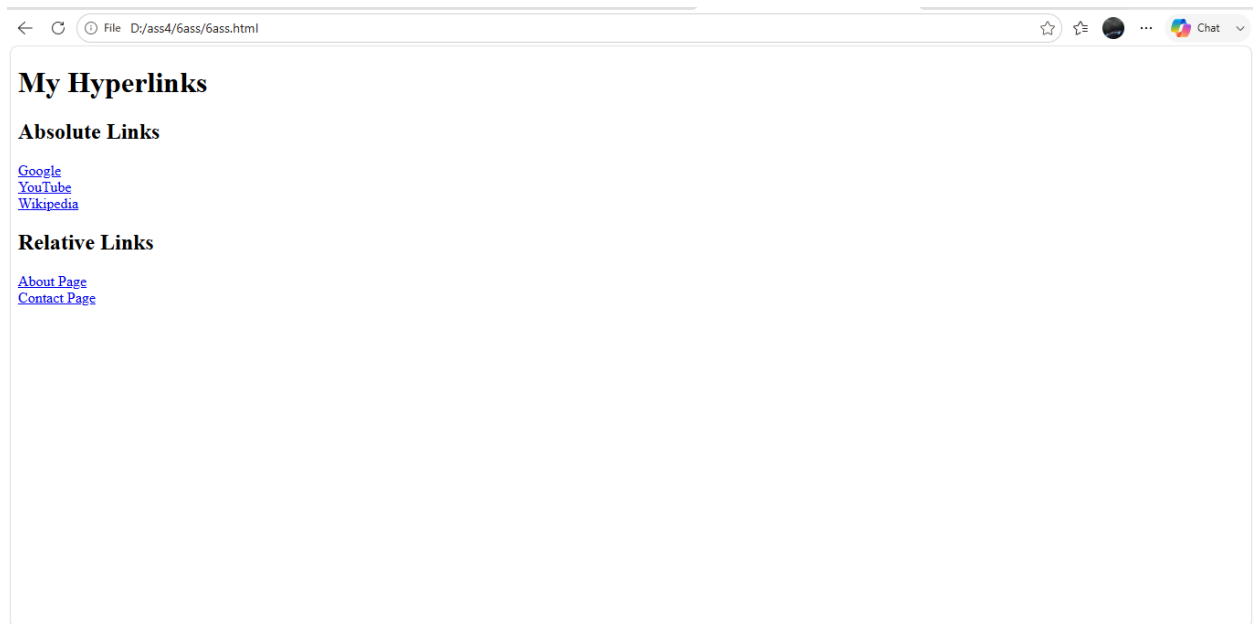

About.html


```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>About us</title>
</head>


<body>

  <h1>About Us</h1>
  <p>This is the About page.</p>

  <a href="index.html">Back to Home</a>

</body>
</html>
```

Output;

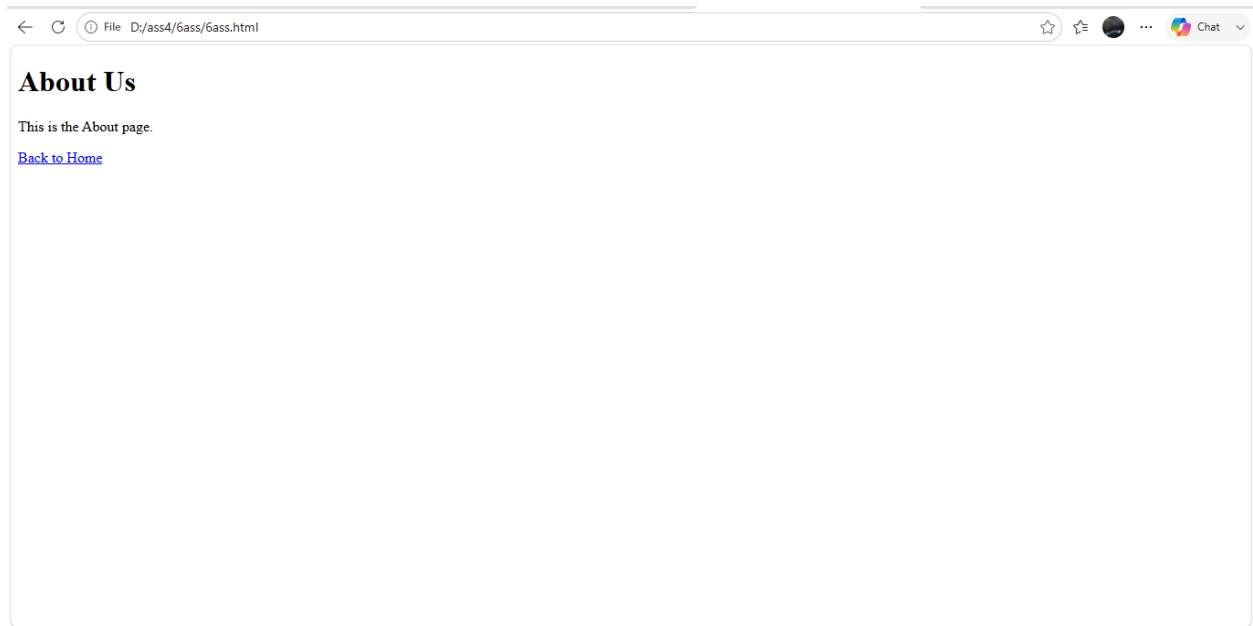

Contact.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>contact</title>
</head>


<body>

  <h1>Contact Us</h1>
  <p>Email: k.aravindhsamy@gmail.com</p>

  <a href="index.html">Back to Home</a>

</body>
</html>
```

Output;

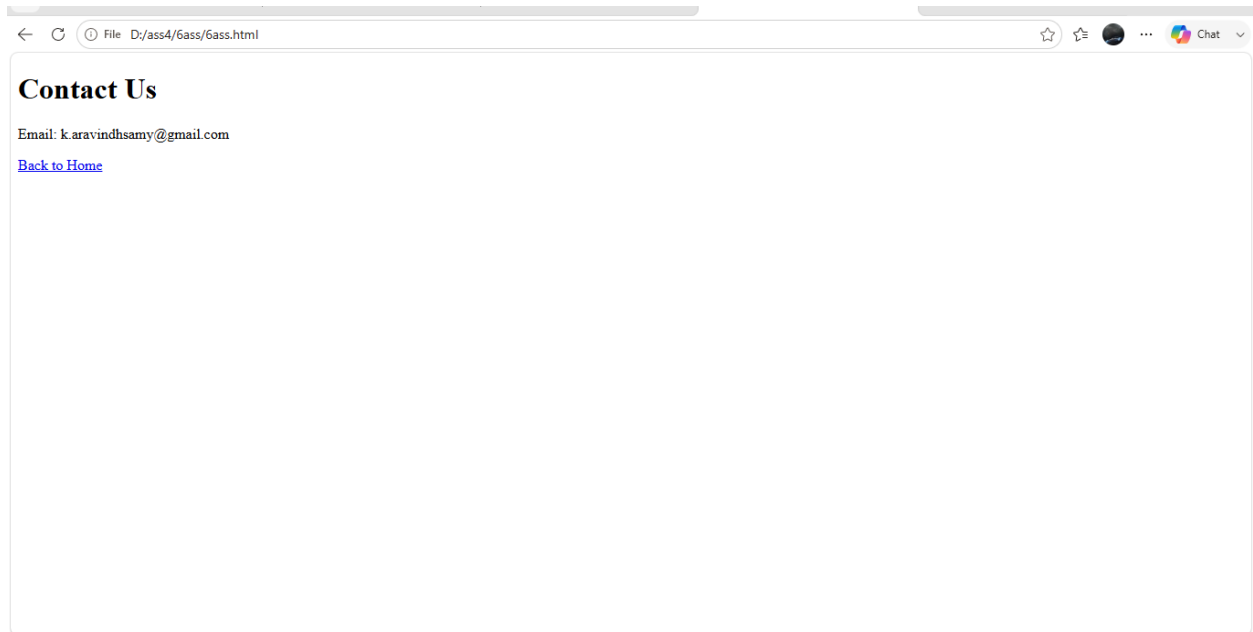

Key Difference

Type	Example	Used for
Absolute	https://www.google.com	External websites
Relative	about.html	Local pages/files

Add attributes like target="_blank", download, mailto:. Create navigation between pages.

HTML Links with Different Attributes

You can make hyperlinks more useful by using attributes such as target="_blank" and download, and by using special mailto: links.

1. target="_blank"

new browser tab

```
<a href="https://www.google.com" target="_blank"> Open Google </a>
```

You can also use it with your own pages:

```
<a href="about.html" target="_blank"> Open About Page </a>
```

2. download

download the linked file

```
<a href="notes.pdf" download> Download Notes </a>
```

filename:

```
<a href="notes.pdf" download="HTML-Notes.pdf">  
    Download HTML Notes  
</a>
```

3. mailto:

The mailto: scheme opens the user's default email application with the email address filled in

```
<a href="mailto:k.aravindhsamy@gmail.com"> Send Email </a>
```

4. Navigation Between Pages

website/

|

├─ index.html

├─ about.html

├─ services.html

├─ contact.html

└─ files/

└─ notes.pdf

In index.html, create a navigation menu:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>in</title>
</head>

<body>

  <header>
    <h1>My Website</h1>

    <nav>
      <a href="index.html">Home</a> |
      <a href="about.html">About</a> |
      <a href="services.html">Services</a> |
      <a href="contact.html">Contact</a>
    </nav>
  </header>

  <main>
    <h2>Welcome to My Website</h2>
    <p>This is the home page.</p>

    <a href="https://www.google.com" target="_blank">
      Visit Google
    </a>
    <br><br>


    <a href="files/notes.pdf" download>
      Download Notes
    </a>
    <br><br>

    <a href="mailto:k.aravindhsamy@gmail.com">
      Send Email
    </a>
  </main>
```



```
</body>  
</html>
```

Output;

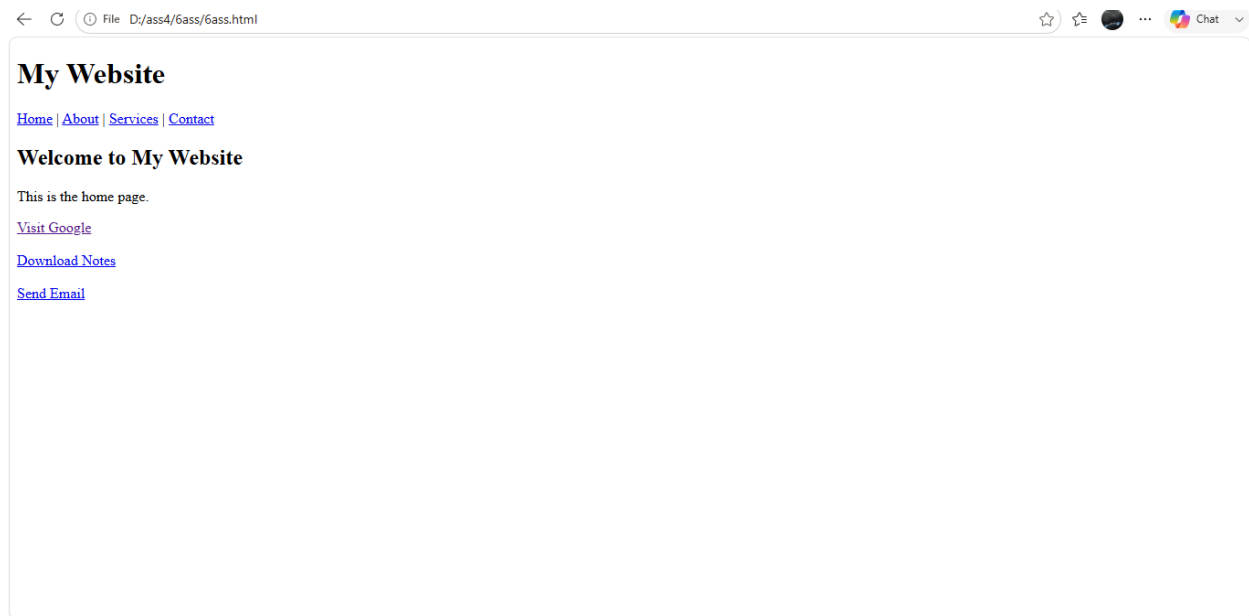

5. Add Navigation to Other Pages

For example, about.html:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>about us</title>
</head>


<body>

  <nav>
    <a href="index.html">Home</a> |
    <a href="about.html">About</a> |
    <a href="services.html">Services</a> |
    <a href="contact.html">Contact</a>
  </nav>

  <h1>About Us</h1>
  <p>This is our About page.</p>

</body>
</html>
```

Output;

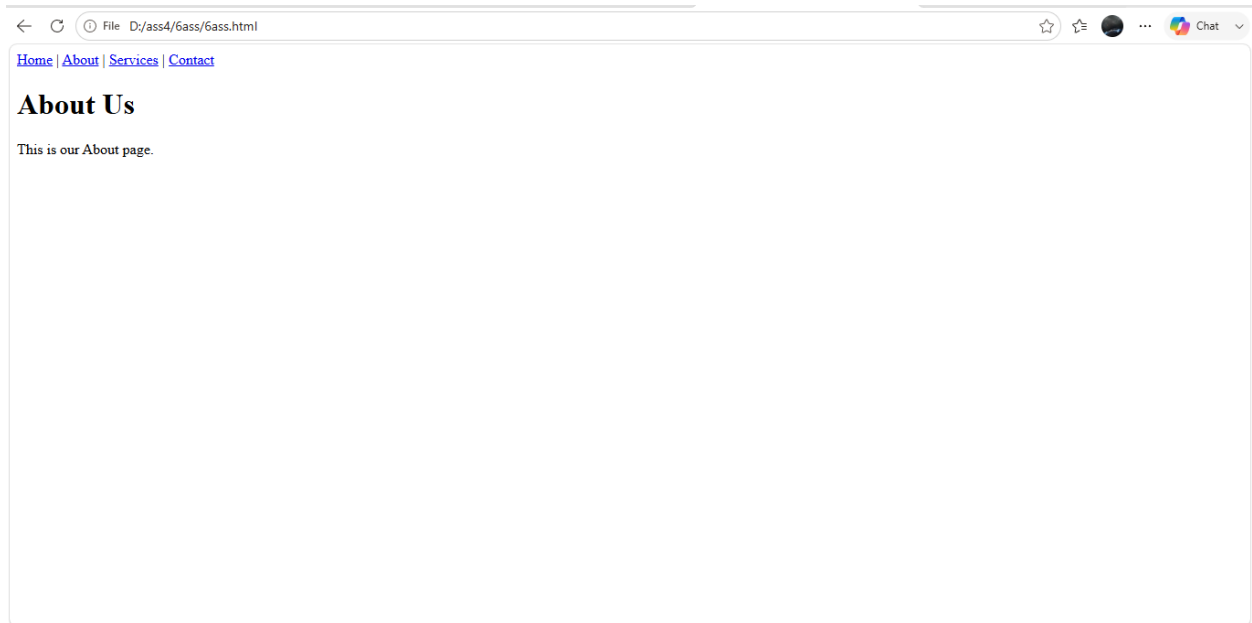

Code

```
href="about.html"
```

Purpose

Link to a local page

<code>href="https://example.com"</code>	Link to an external website
<code>target="_blank"</code>	Open link in a new tab
<code>download</code>	Download a file
<code>href="mailto:..."</code>	Open email application
<code><nav></code>	Contains website navigation links

Learn src and alt attributes. Insert images into a webpage.

HTML src and alt Attributes

The `<img>` element is used to **insert images into an HTML webpage**.

The two important attributes are:

- **src** → specifies the location of the image.
- **alt** → provides alternative text if the image cannot be displayed and helps accessibility.

1. Basic Image

```

```

Here:

- `src="flower.jpg"` → tells the browser which image to display.
- `alt="A beautiful flower"` → describes the image.

2. Using an Image from a Folder

Suppose your project looks like this:

```
my-website/  
|  
├─ index.html  
├─ images/  
│   └─ nature.jpg
```

```

```

3. Image from an External Website

You can also use an image URL:

```

```

4. Setting Image Size

You can use width and height attributes:

```

```

Complete Example

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>images</title>
</head>
<body>

  <h1>My Favorite Images</h1>

  <h2>Nature</h2>


  

    <h2>Flower</h2>

</body>
</html>
```

Output;

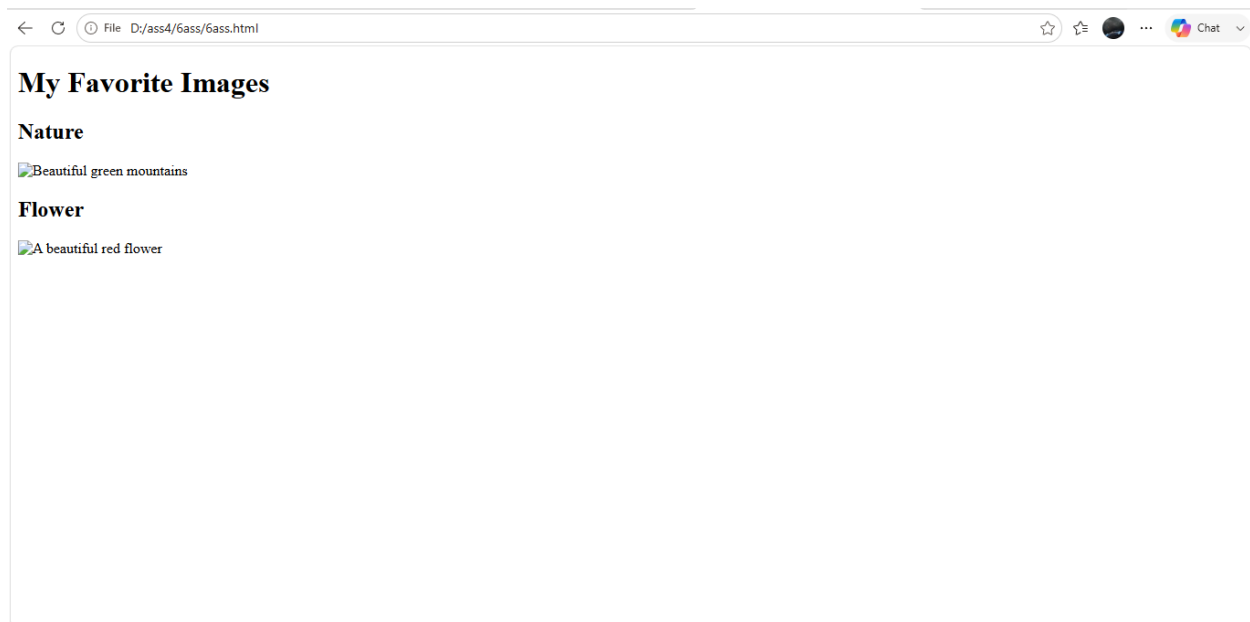

Why is alt Important?

If the image doesn't load:

```

```

Practice adding image dimensions (width, height), responsive images, and clickable images (image inside <a>).

1. Adding width and height

The width and height attributes control the image dimensions.

```

```

→ width="400" → image width is 400 pixels.

→ height="300" → image height is 300 pixels

2. Responsive Images

A responsive image automatically adjusts to fit the available screen size.

A common method is:

```

```


You can also use CSS:


```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title> Responsive images</title>
  <style>
    img {
      max-width: 100%;
      height: auto;
    }
  </style>
</head>
<body>

  <h1>Responsive Image</h1>

</body>
</html>
```

Output;

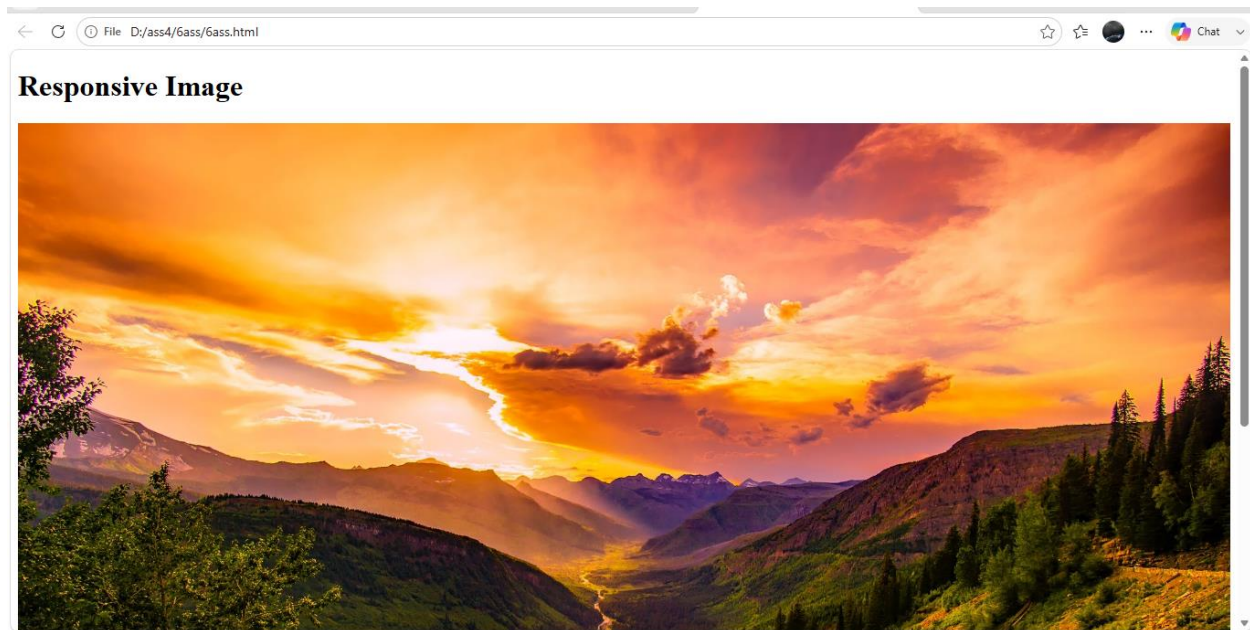

What does this do?

```
max-width: 100%;  
height: auto;
```

3. Clickable Image

You can place an `<img>` element inside an `<a>` element to make the image clickable.

```
<a href="https://www.google.com">  
    
</a>
```

4. Clickable Image Opening in a New Tab

Use `target="_blank"`:

```
<a href="https://www.google.com" target="_blank">  
  
```

```
        width="200"
        height="100">
</a>
```

Example

```
<body>
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>html responsive image</title>
  <style>
    img {
      max-width: 100%;
      height: auto;
    }
  </style>

</head>
<body>
```

```
<h1>My Image Gallery</h1>

<h2>Image with Dimensions</h2>



<h2>Responsive Image</h2>




<h2>Clickable Image</h2>


<a href="https://www.google.com" target="_blank">
```

```
<a href="#">
    
</a>

</body>
</html>
```

Output;

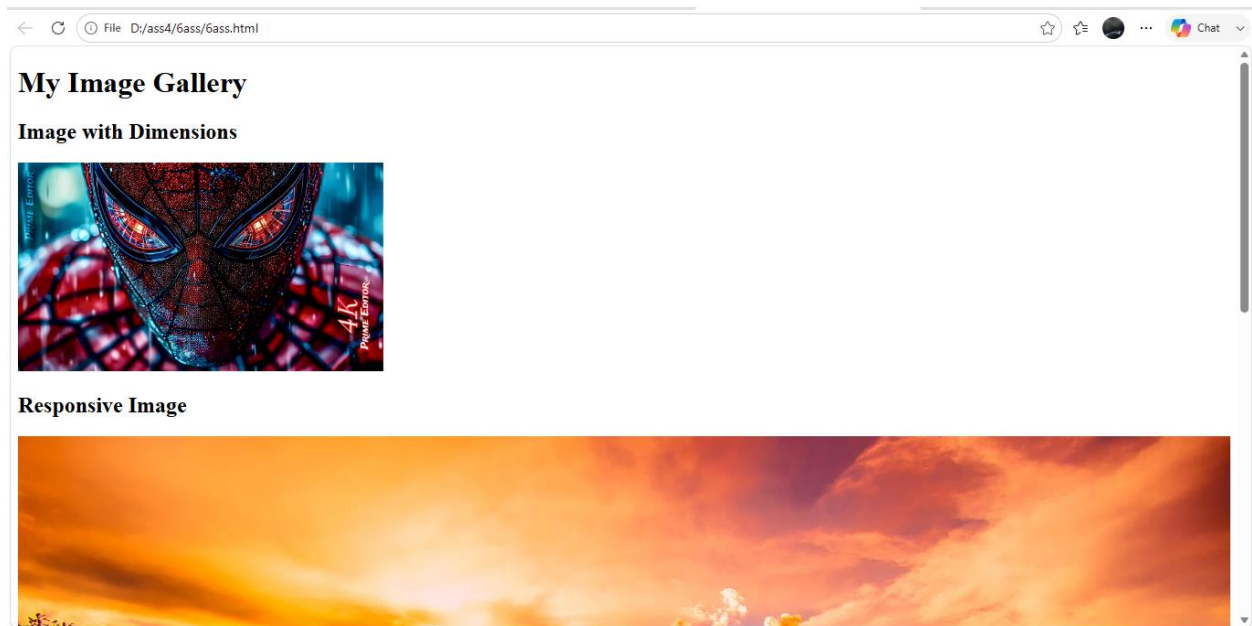

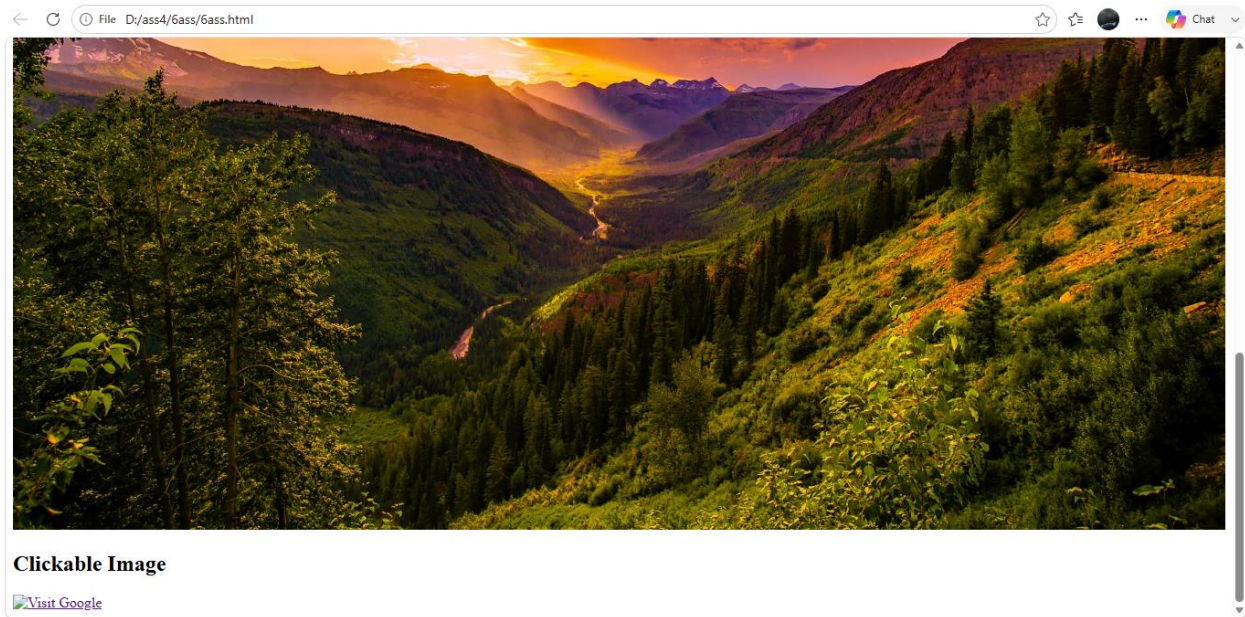

Practice Task

Create a webpage containing:

1. One image with width and height.
2. One responsive image.
3. One clickable image linking to another webpage.
4. Use a meaningful alt description for **every image**.

Create a webpage with navigation links, multiple sections using IDs, and images with proper alt text and titles

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>my website</title>
  <style>
    body {
      font-family: Arial, sans-serif;
      margin: 20px;
    }

    nav {
      background-color: lightblue;
      padding: 15px;
    }

    nav a {
      margin-right: 20px;
    }

    section {
      padding: 30px 0;
    }

    img {
      max-width: 100%;
      height: auto;
    }
  </style>
</head>

<body>
```

```
<!-- Header and Navigation -->
<header>
  <h1>My Personal Website</h1>

  <nav>
    <a href="#home">Home</a>
    <a href="#about">About</a>
    <a href="#gallery">Gallery</a>
    <a href="#contact">Contact</a>
  </nav>
</header>

<!-- Home Section -->
<section id="home">
  <h2>Home</h2>

  <p>Welcome to my personal website.</p>
</section>

<!-- About Section -->
<section id="about">
  <h2>About Me</h2>

  <p>
    I am a student learning HTML and web development.
  </p>
</section>

<!-- Gallery Section -->
<section id="gallery">
  <h2>Gallery</h2>
```

```



</section>

<!-- Contact Section -->
<section id="contact">
  <h2>Contact</h2>

  <p>Email: k.aravindhsamy@example.com</p>

  <a href="mailto:k.aravindhsamy@example.com">
    Send me an Email
  </a>
</section>

<!-- Footer -->
<footer>
  <p>&copy; 2026 My Personal Website</p>
</footer>

</body>
</html>
```

Output;



Navigation using IDs:

```
<a href="#about">About</a>
```

This jumps to:

```
<section id="about">
```

Image with alt and title:

```

```

- `src` → specifies the image location.
- `alt` → describes the image for accessibility and when the image cannot load.
- `title` → provides additional information, commonly shown as a tooltip.
- `id` → gives each section a unique name that navigation links can target.

Learn the purpose of <form> in HTML.

Create a basic form structure with action and method.

HTML <form> Element

The HTML <form> element is used to **collect information from users** and send that information to a server for processing.

For example, forms are used for:

- Login pages
- Registration
- Contact forms
- Job applications
- Course registration
- Search boxes

1. Basic Form Structure

A simple form looks like this:

```
<form action="submit.php" method="post">
```

```
    <label>Name:</label>
```

```
    <input type="text" name="name">
```

```
    <br><br>
```

```
    <label>Email:</label>
```

```
    <input type="email" name="email">
```

```
    <br><br>
```

```
<button type="submit">Submit</button>
```

```
</form>
```

Understanding action

The action attribute specifies **where the form data should be sent**.

```
<form action="submit.php">
```

When the user submits the form, the data is sent to `submit.php`.

For example:

```
<form action="/register" method="post">
```

Here, `/register` is the destination that processes the submitted data.

2. Understanding method

The method attribute specifies **how the form data is sent**.

There are two commonly used methods:

GET

```
<form action="/search" method="get">
```

GET sends form data as part of the URL. It is commonly used for searches and other requests where the submitted values don't need to be kept out of the URL.

Example:

```
/search?name=Aravindh
```

POST

```
<form action="/register" method="post">
```

POST sends the form data in the request body. It is commonly used when submitting or creating data, such as registration forms.

3. Complete Basic Form

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>basic html form</title>
</head>
<body>

  <h1>Registration Form</h1>

  <form action="/register" method="post">

    <label for="name">Full Name:</label>
    <input type="text" id="name" name="name">

    <br><br>

    <label for="email">Email:</label>
    <input type="email" id="email" name="email">

    <br><br>

    <label for="password">Password:</label>
    <input type="password" id="password" name="password">


    <br><br>

    <button type="submit">Register</button>

  </form>

</body>
```

```
</html>
```

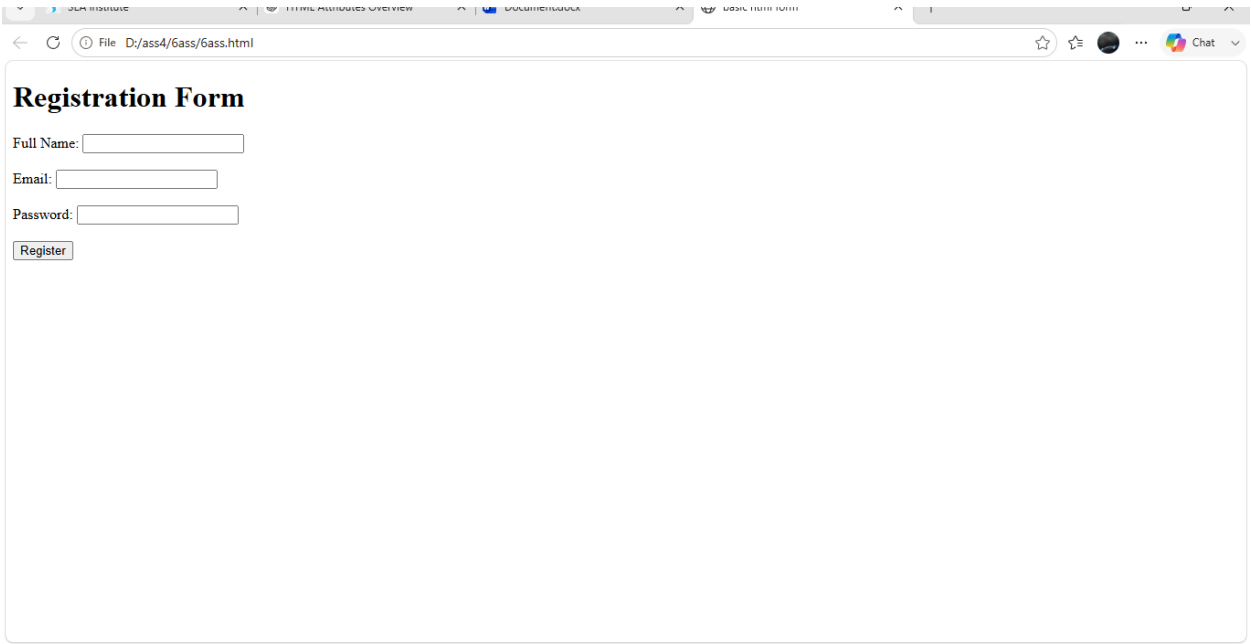

Attribute	Purpose
action	Specifies where the form data is sent
method	Specifies how the data is sent (GET or POST)
name	Identifies the submitted field
id	Identifies an element in the page
type	Specifies the type of input

Key idea: <form> creates the container for user input, action specifies **where the data goes**, and method specifies **how the data is submitted**