


01 Scenario, description and occurrence


SemRisk 0.2.0-rc.3 | OntoUML-based view with explicit scope boundaries

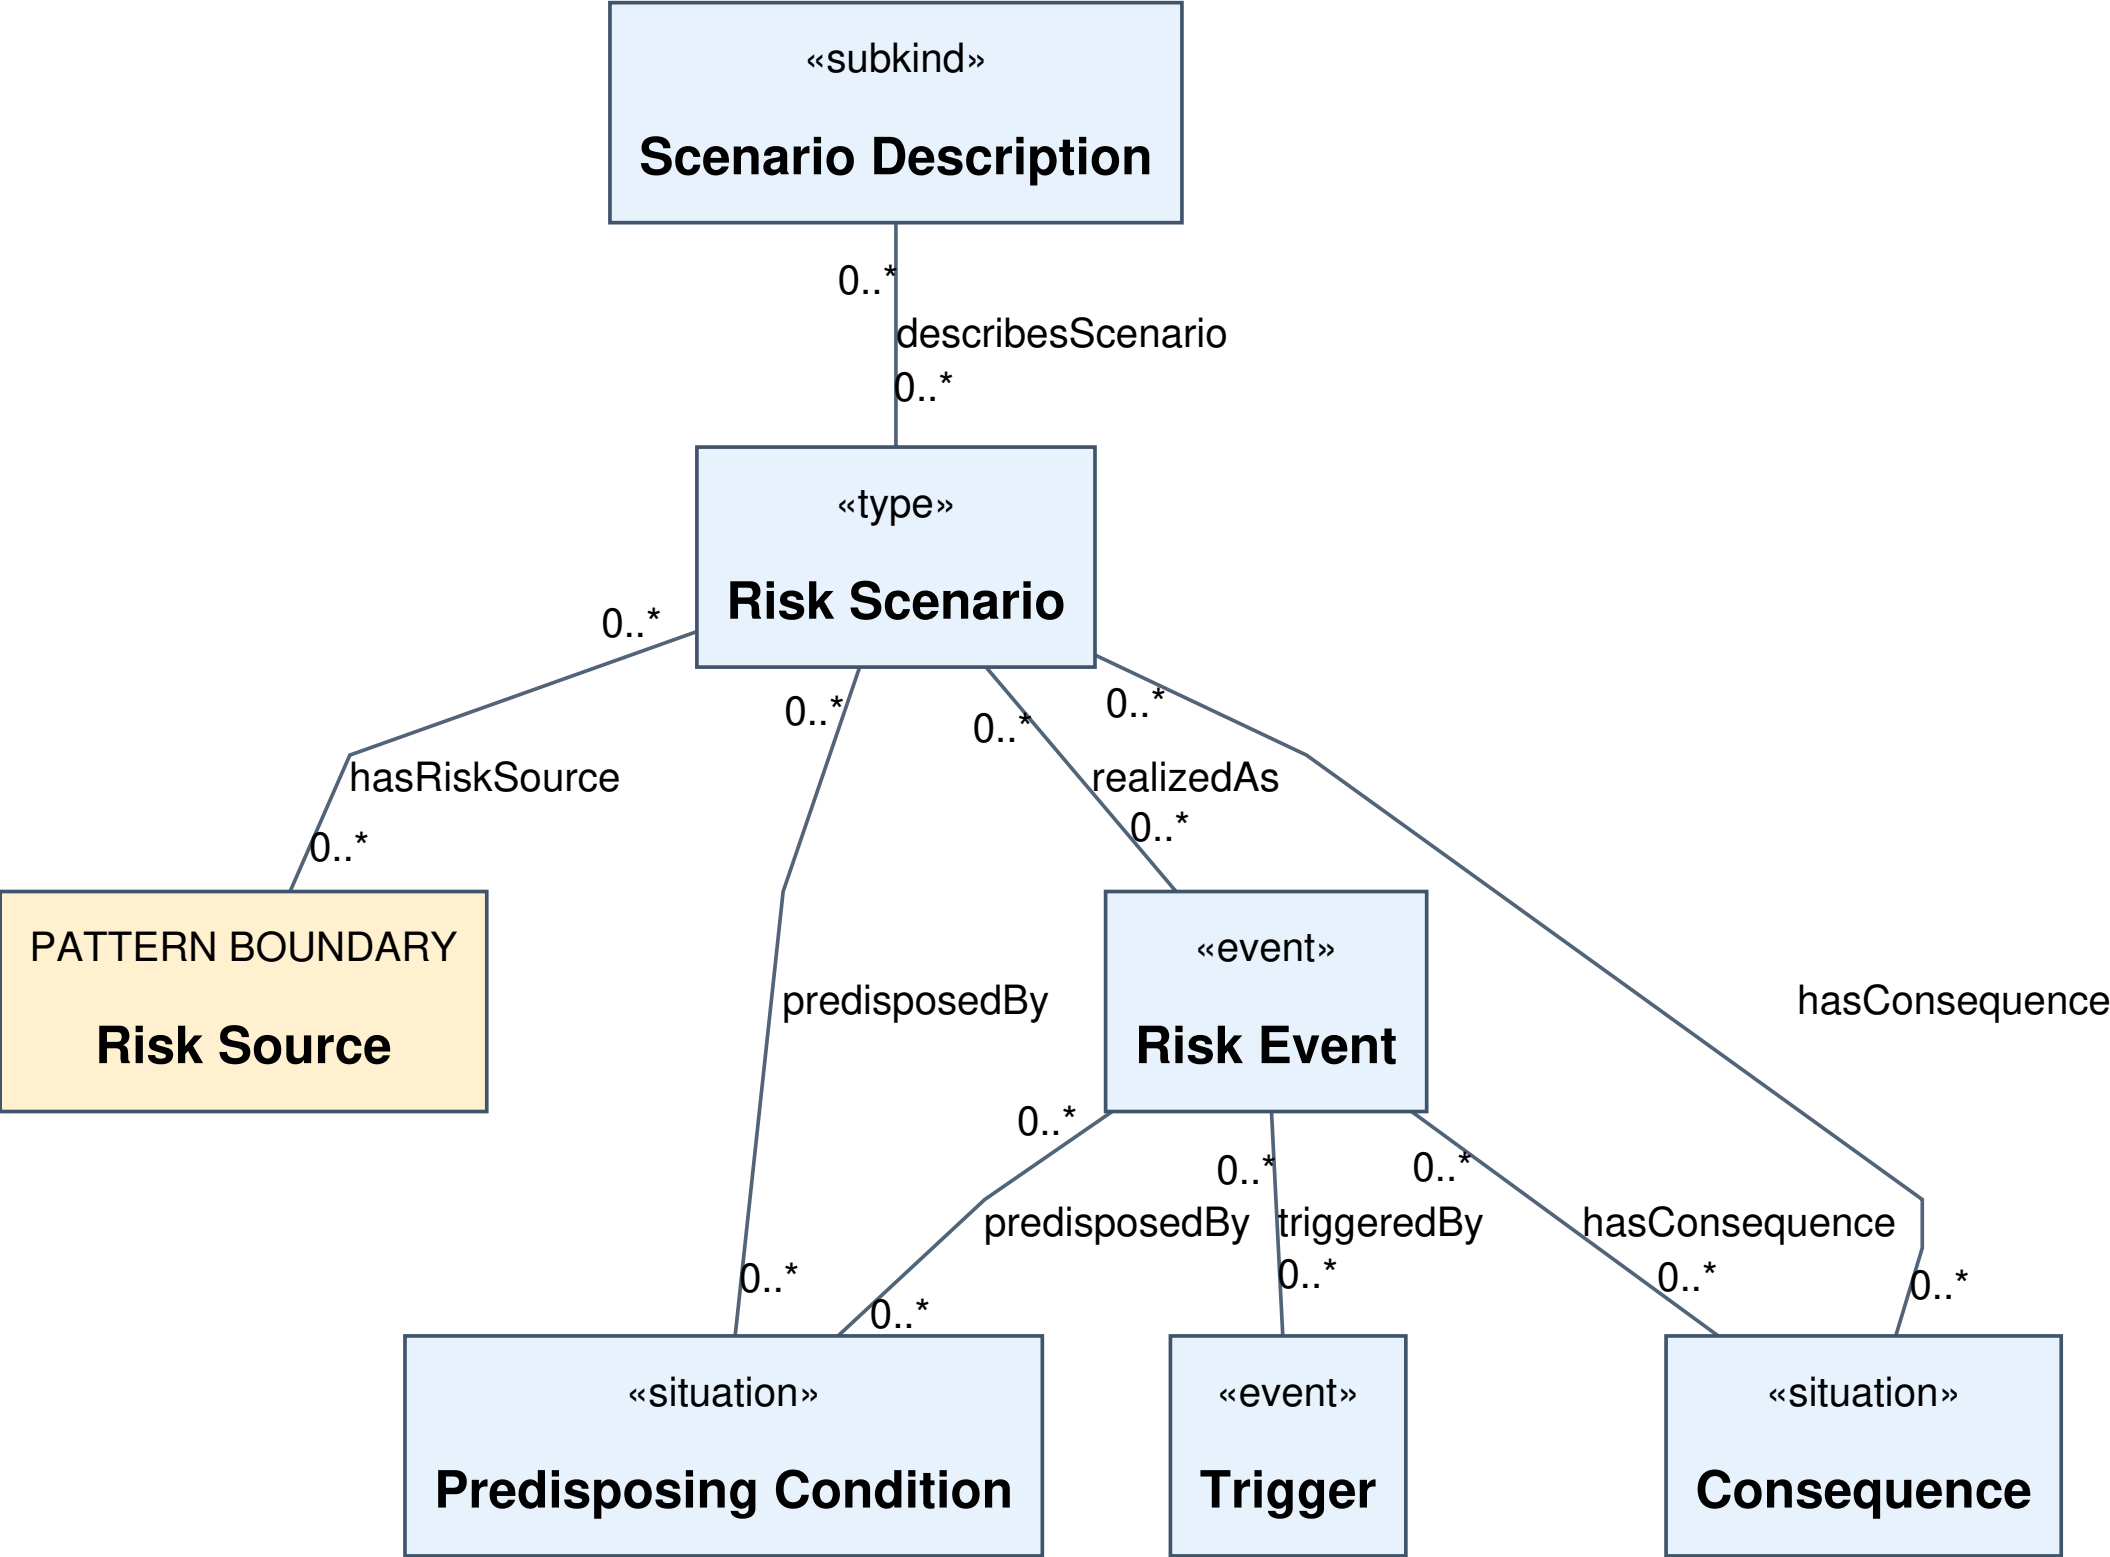

Scenario is a second-order type; realization does not follow merely from its existence.

02 Risk patterns and situational context

SemRisk 0.2.0-rc.3 | OntoUML-based view with explicit scope boundaries

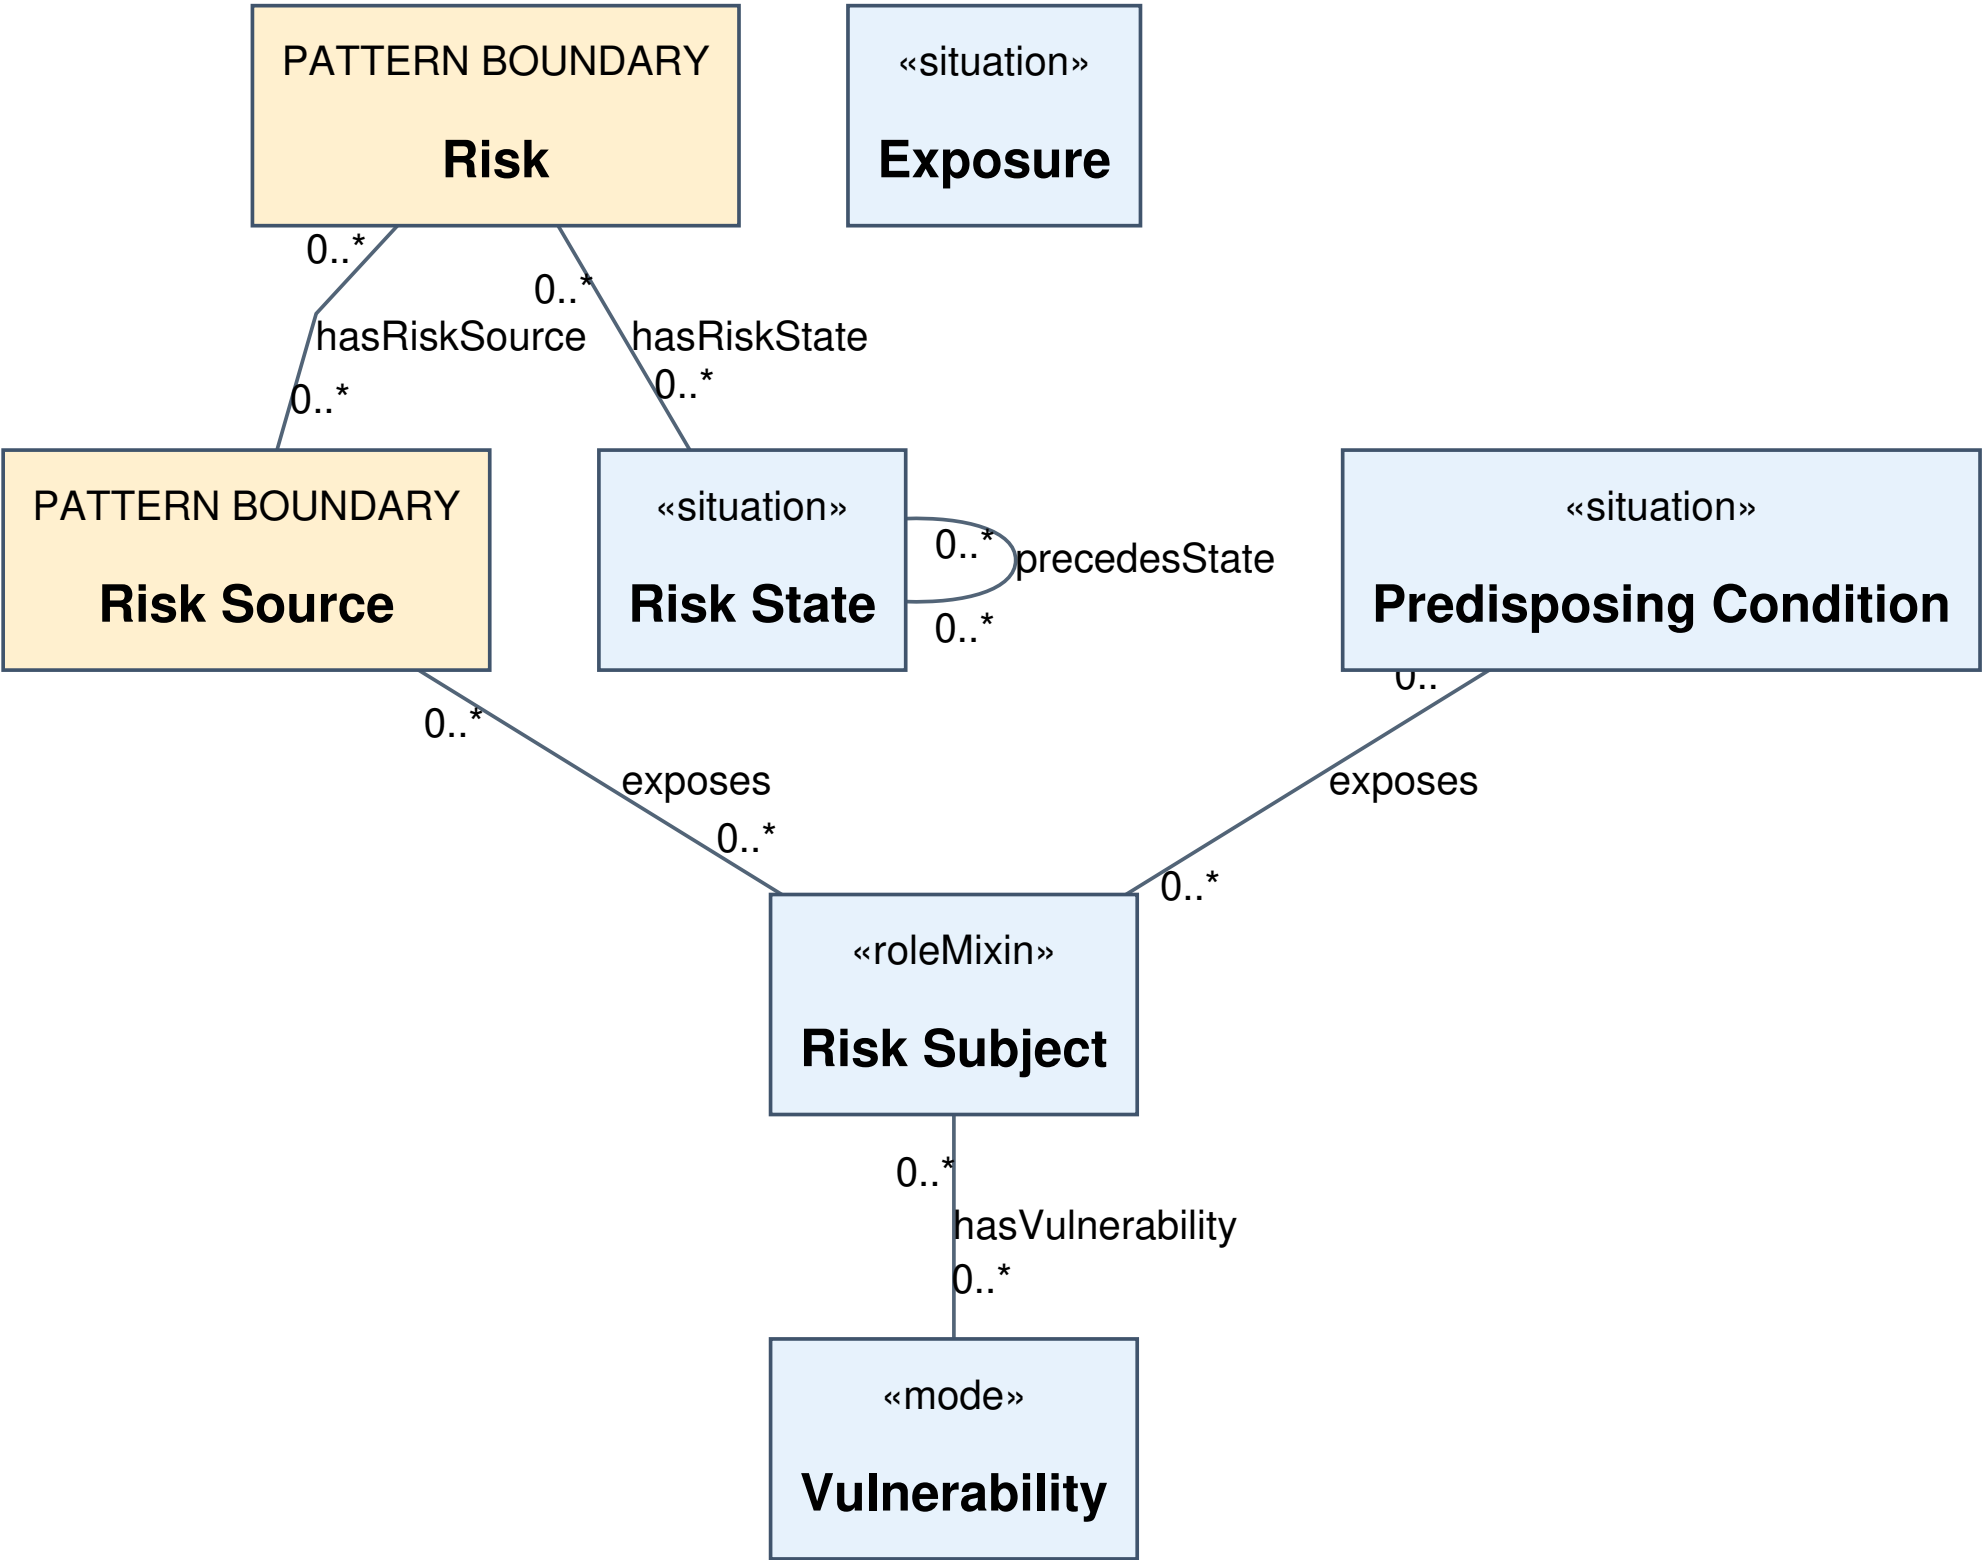


Orange nodes are broad patterns. Exposure has no dedicated registered relation in this release; its isolation is visible.

Blue: implemented | Green: profile helper | Amber: pattern/unclassified | Violet: external/planned

03 Assessment activity and result distinctions


SemRisk 0.2.0-rc.3 | OntoUML-based view with explicit scope boundaries

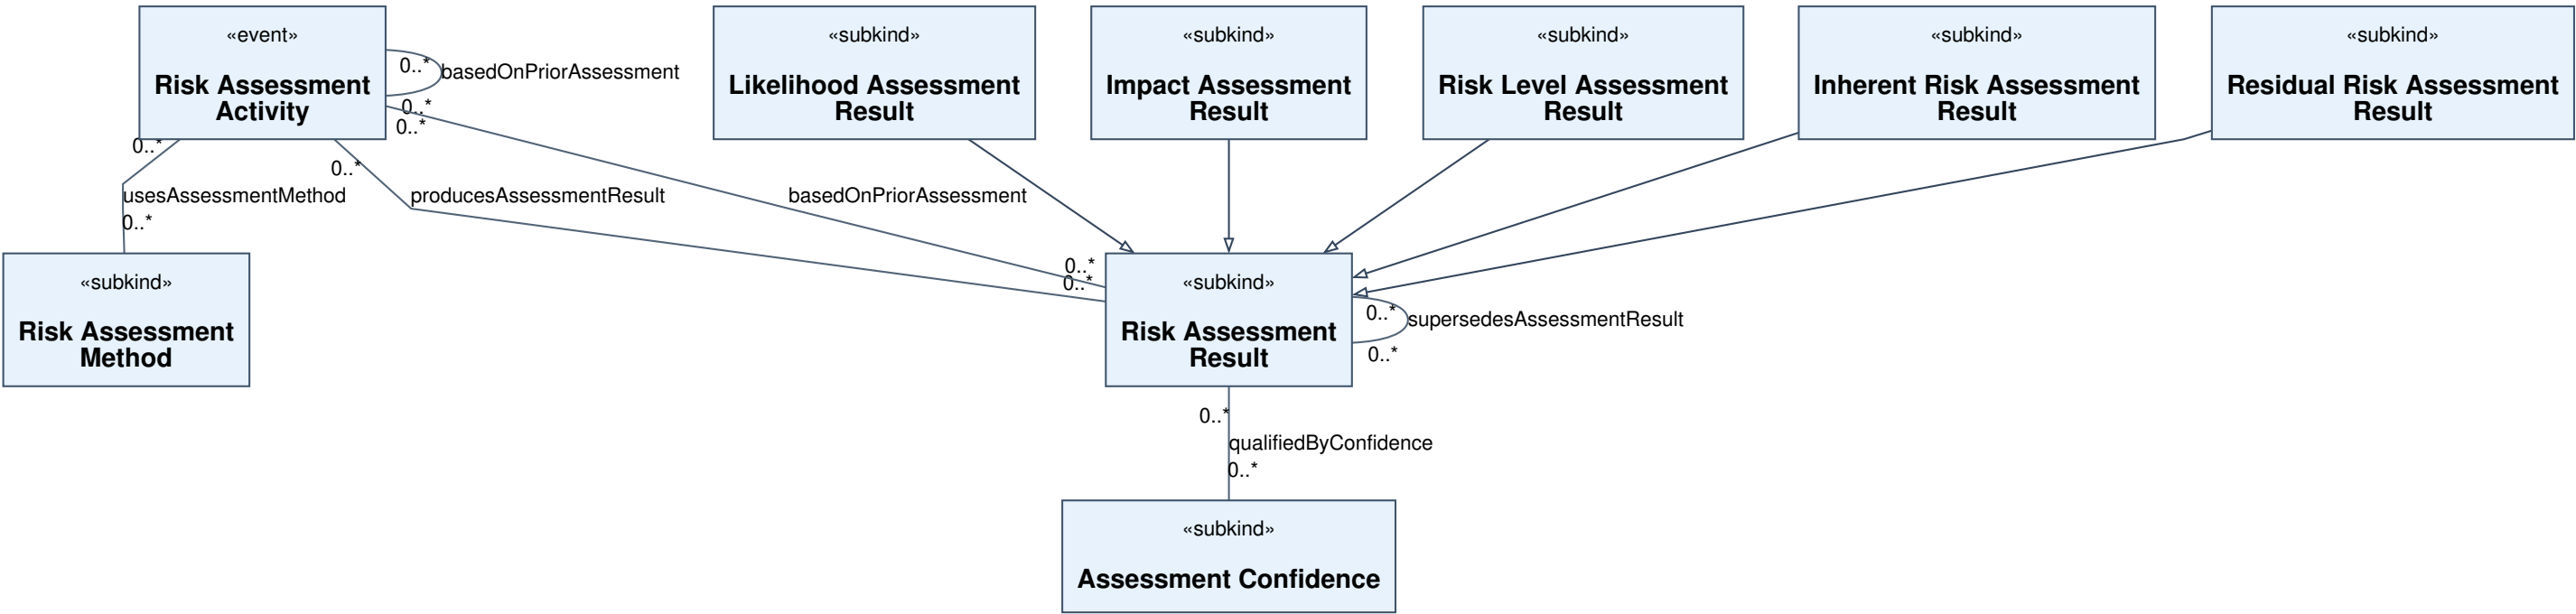

Dimension and control-baseline subkinds may overlap. The ontology does not impose a universal score formula.

04 Observation, evidence and monitoring


SemRisk 0.2.0-rc.3 | OntoUML-based view with explicit scope boundaries

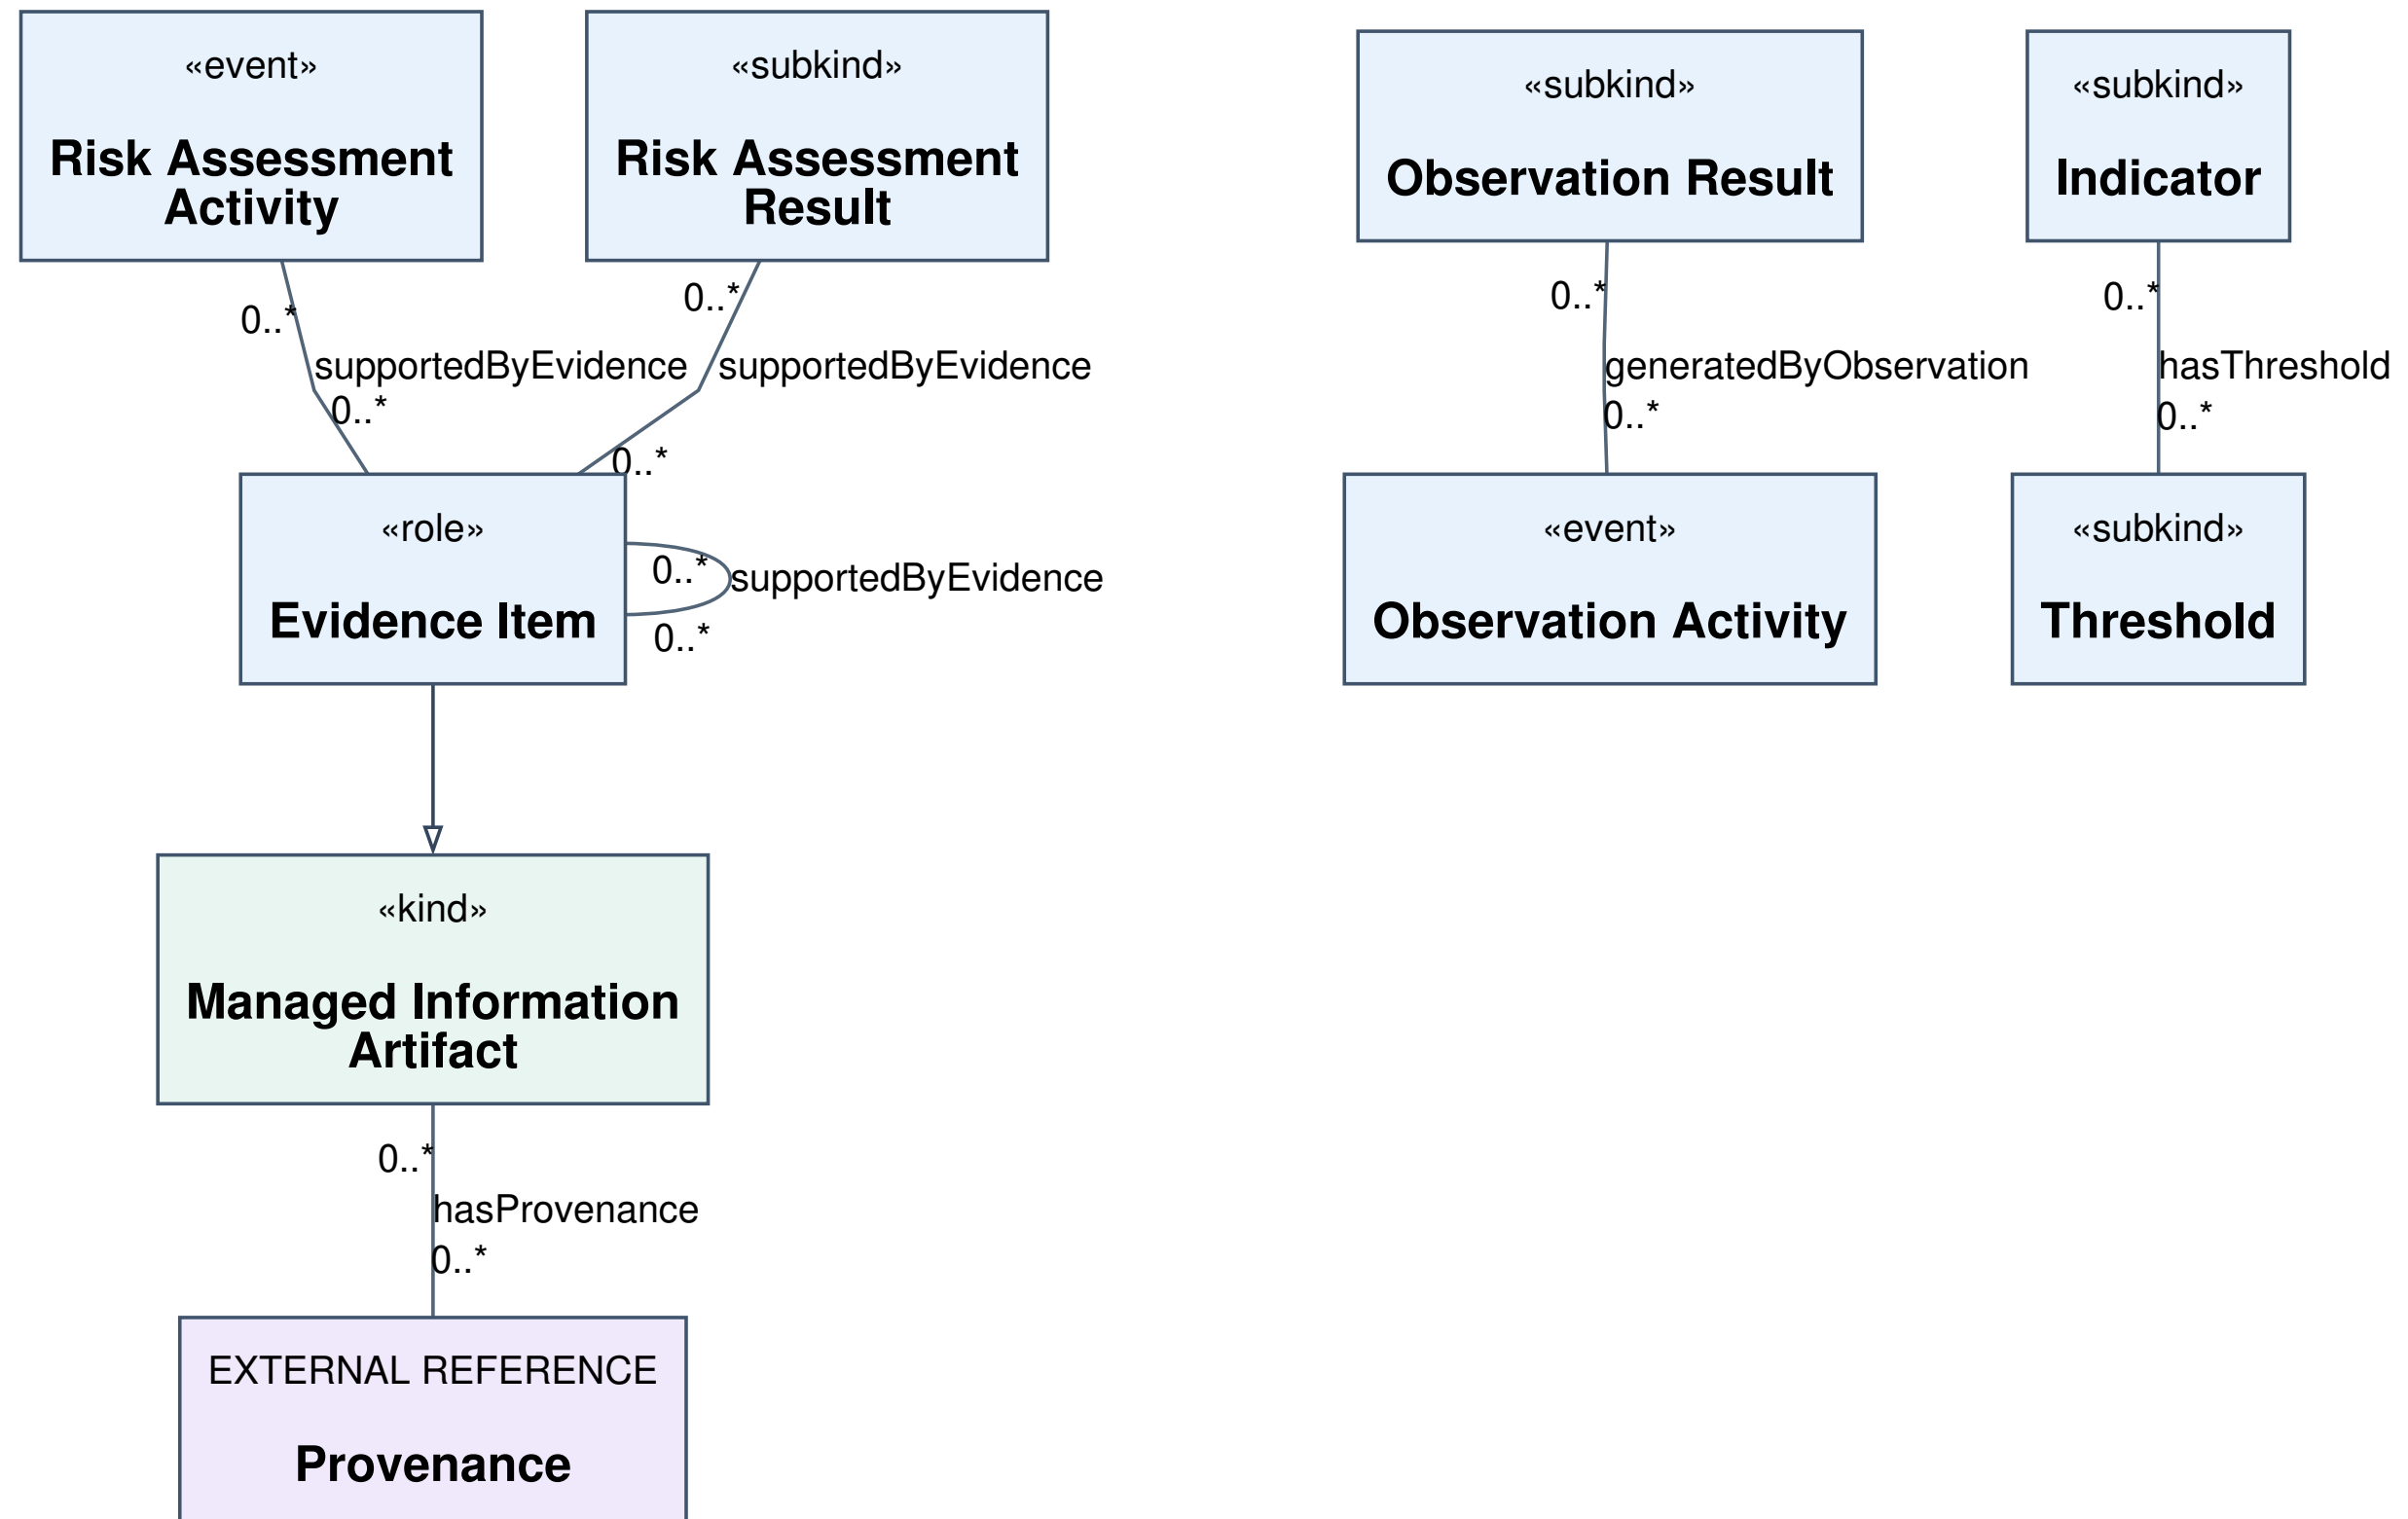

Evidence is a contextual role. Provenance is an external pattern reference; supporting evidence does not establish truth.

05 Treatment specification and execution


SemRisk 0.2.0-rc.3 | OntoUML-based view with explicit scope boundaries

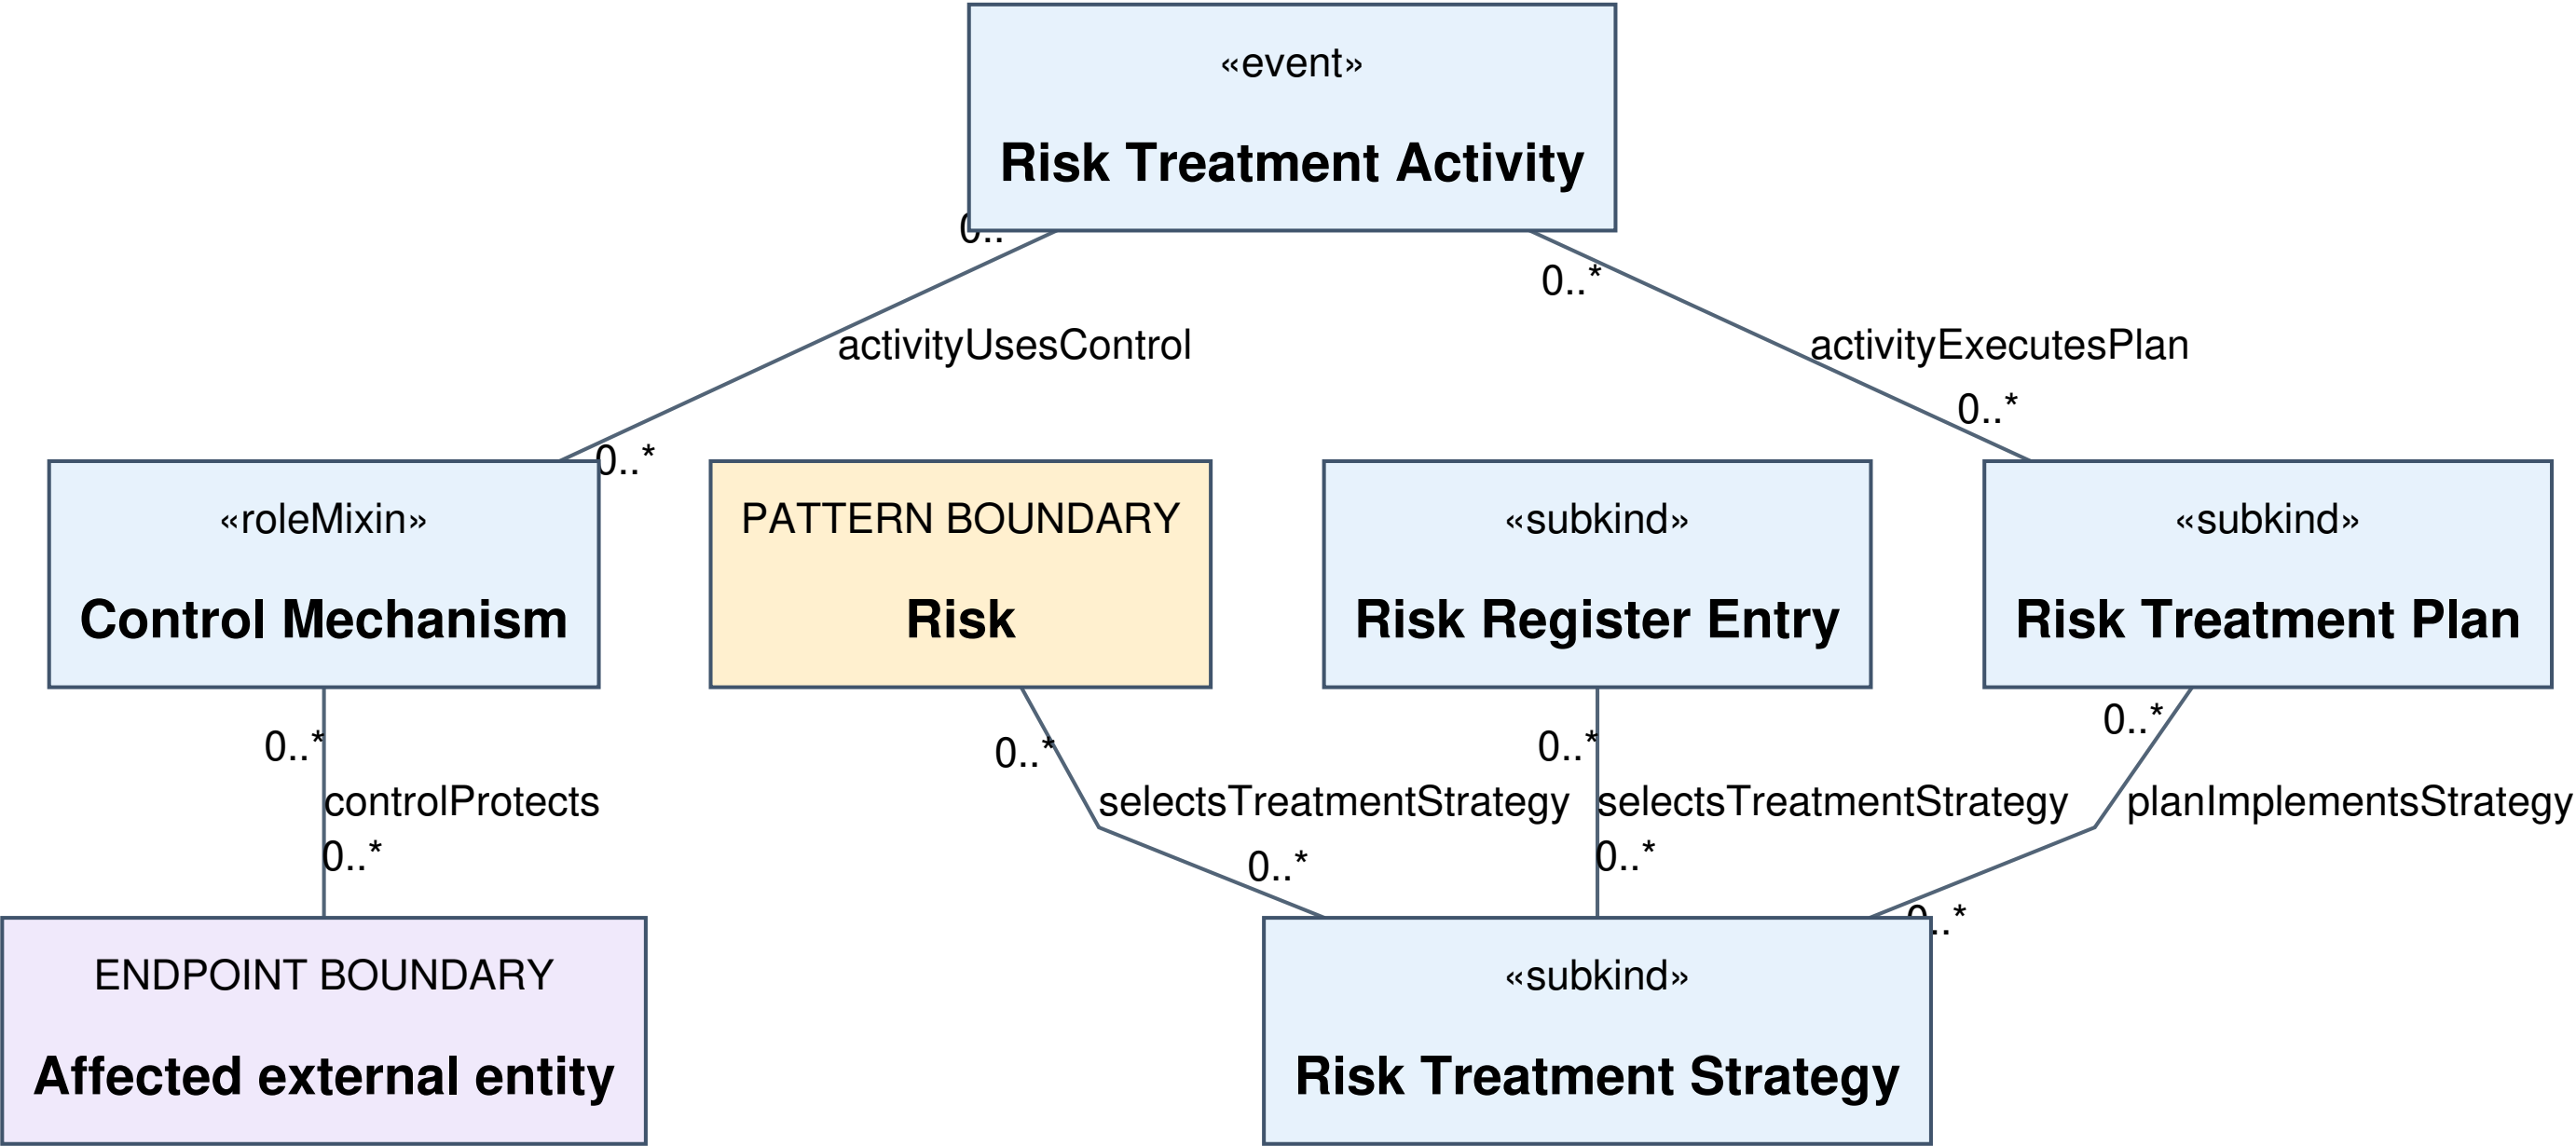

Plan, strategy, activity and control remain distinct. A control association does not prove effectiveness.

06 Responsibility and explicit grounding


SemRisk 0.2.0-rc.3 | OntoUML-based view with explicit scope boundaries

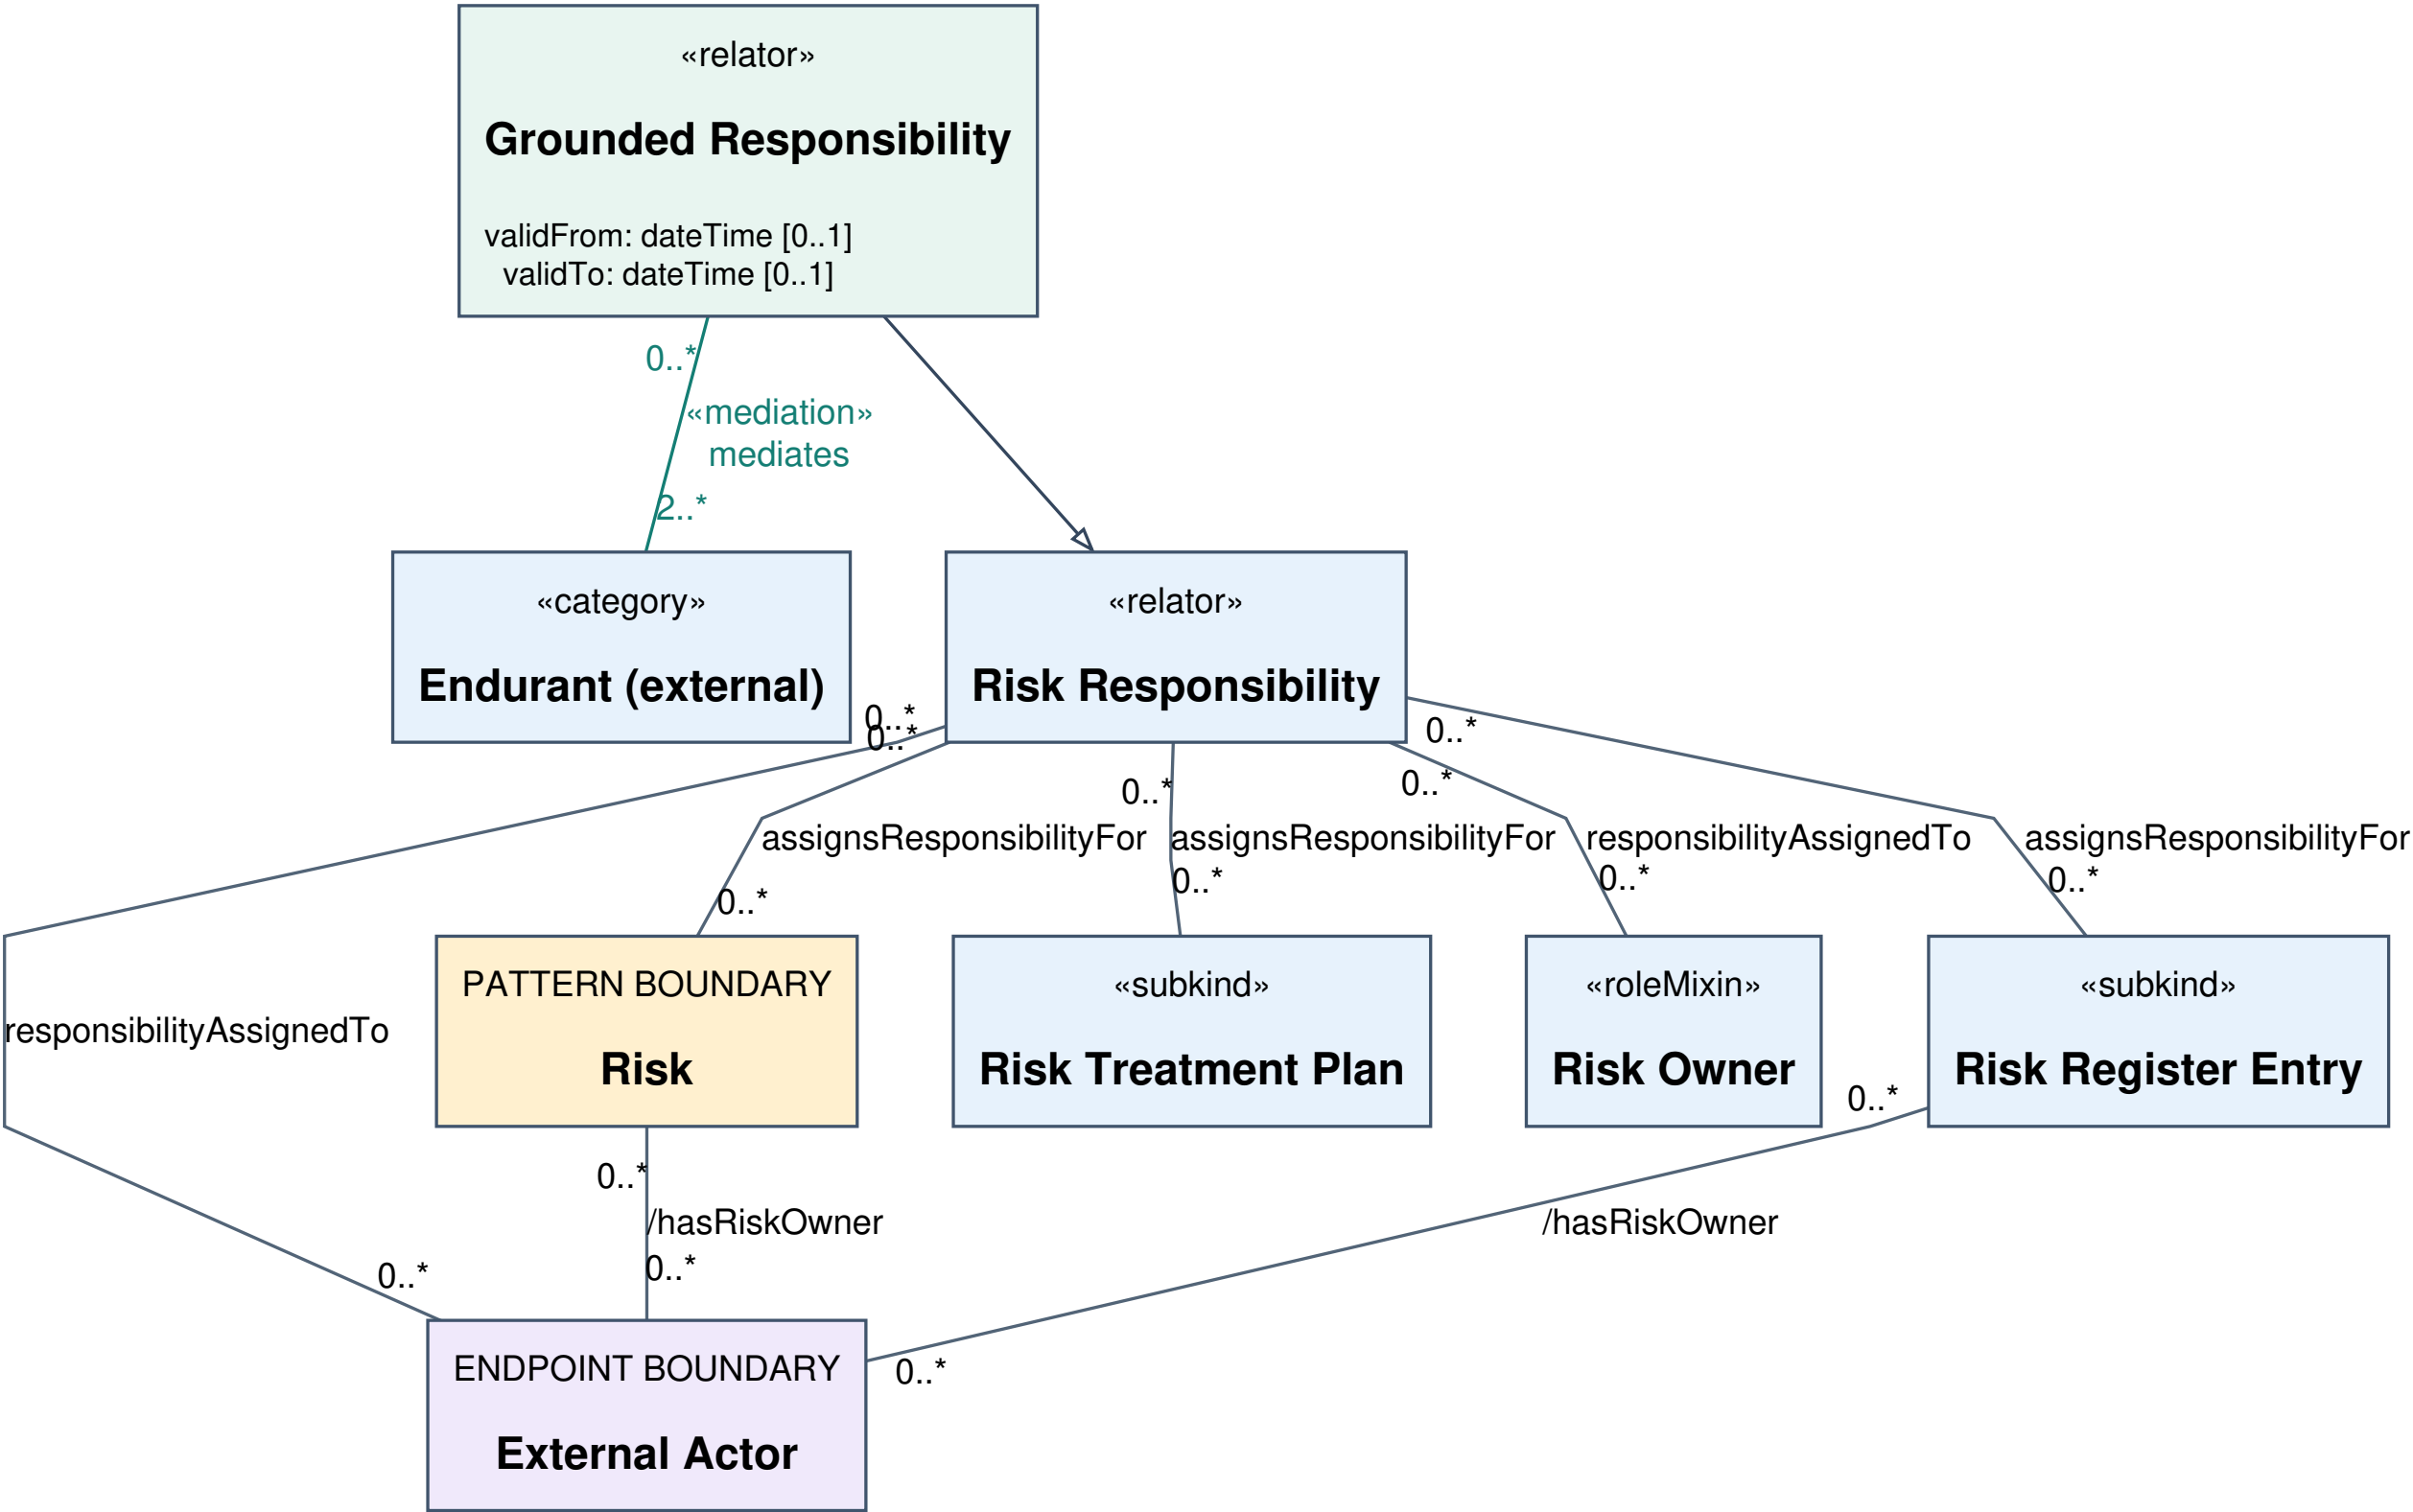

Green profile mediation needs distinct Endurants. External Actor identity is not supplied locally; Risk Owner has no new sortal identity.

07 Register, description and workflow snapshot


SemRisk 0.2.0-rc.3 | OntoUML-based view with explicit scope boundaries

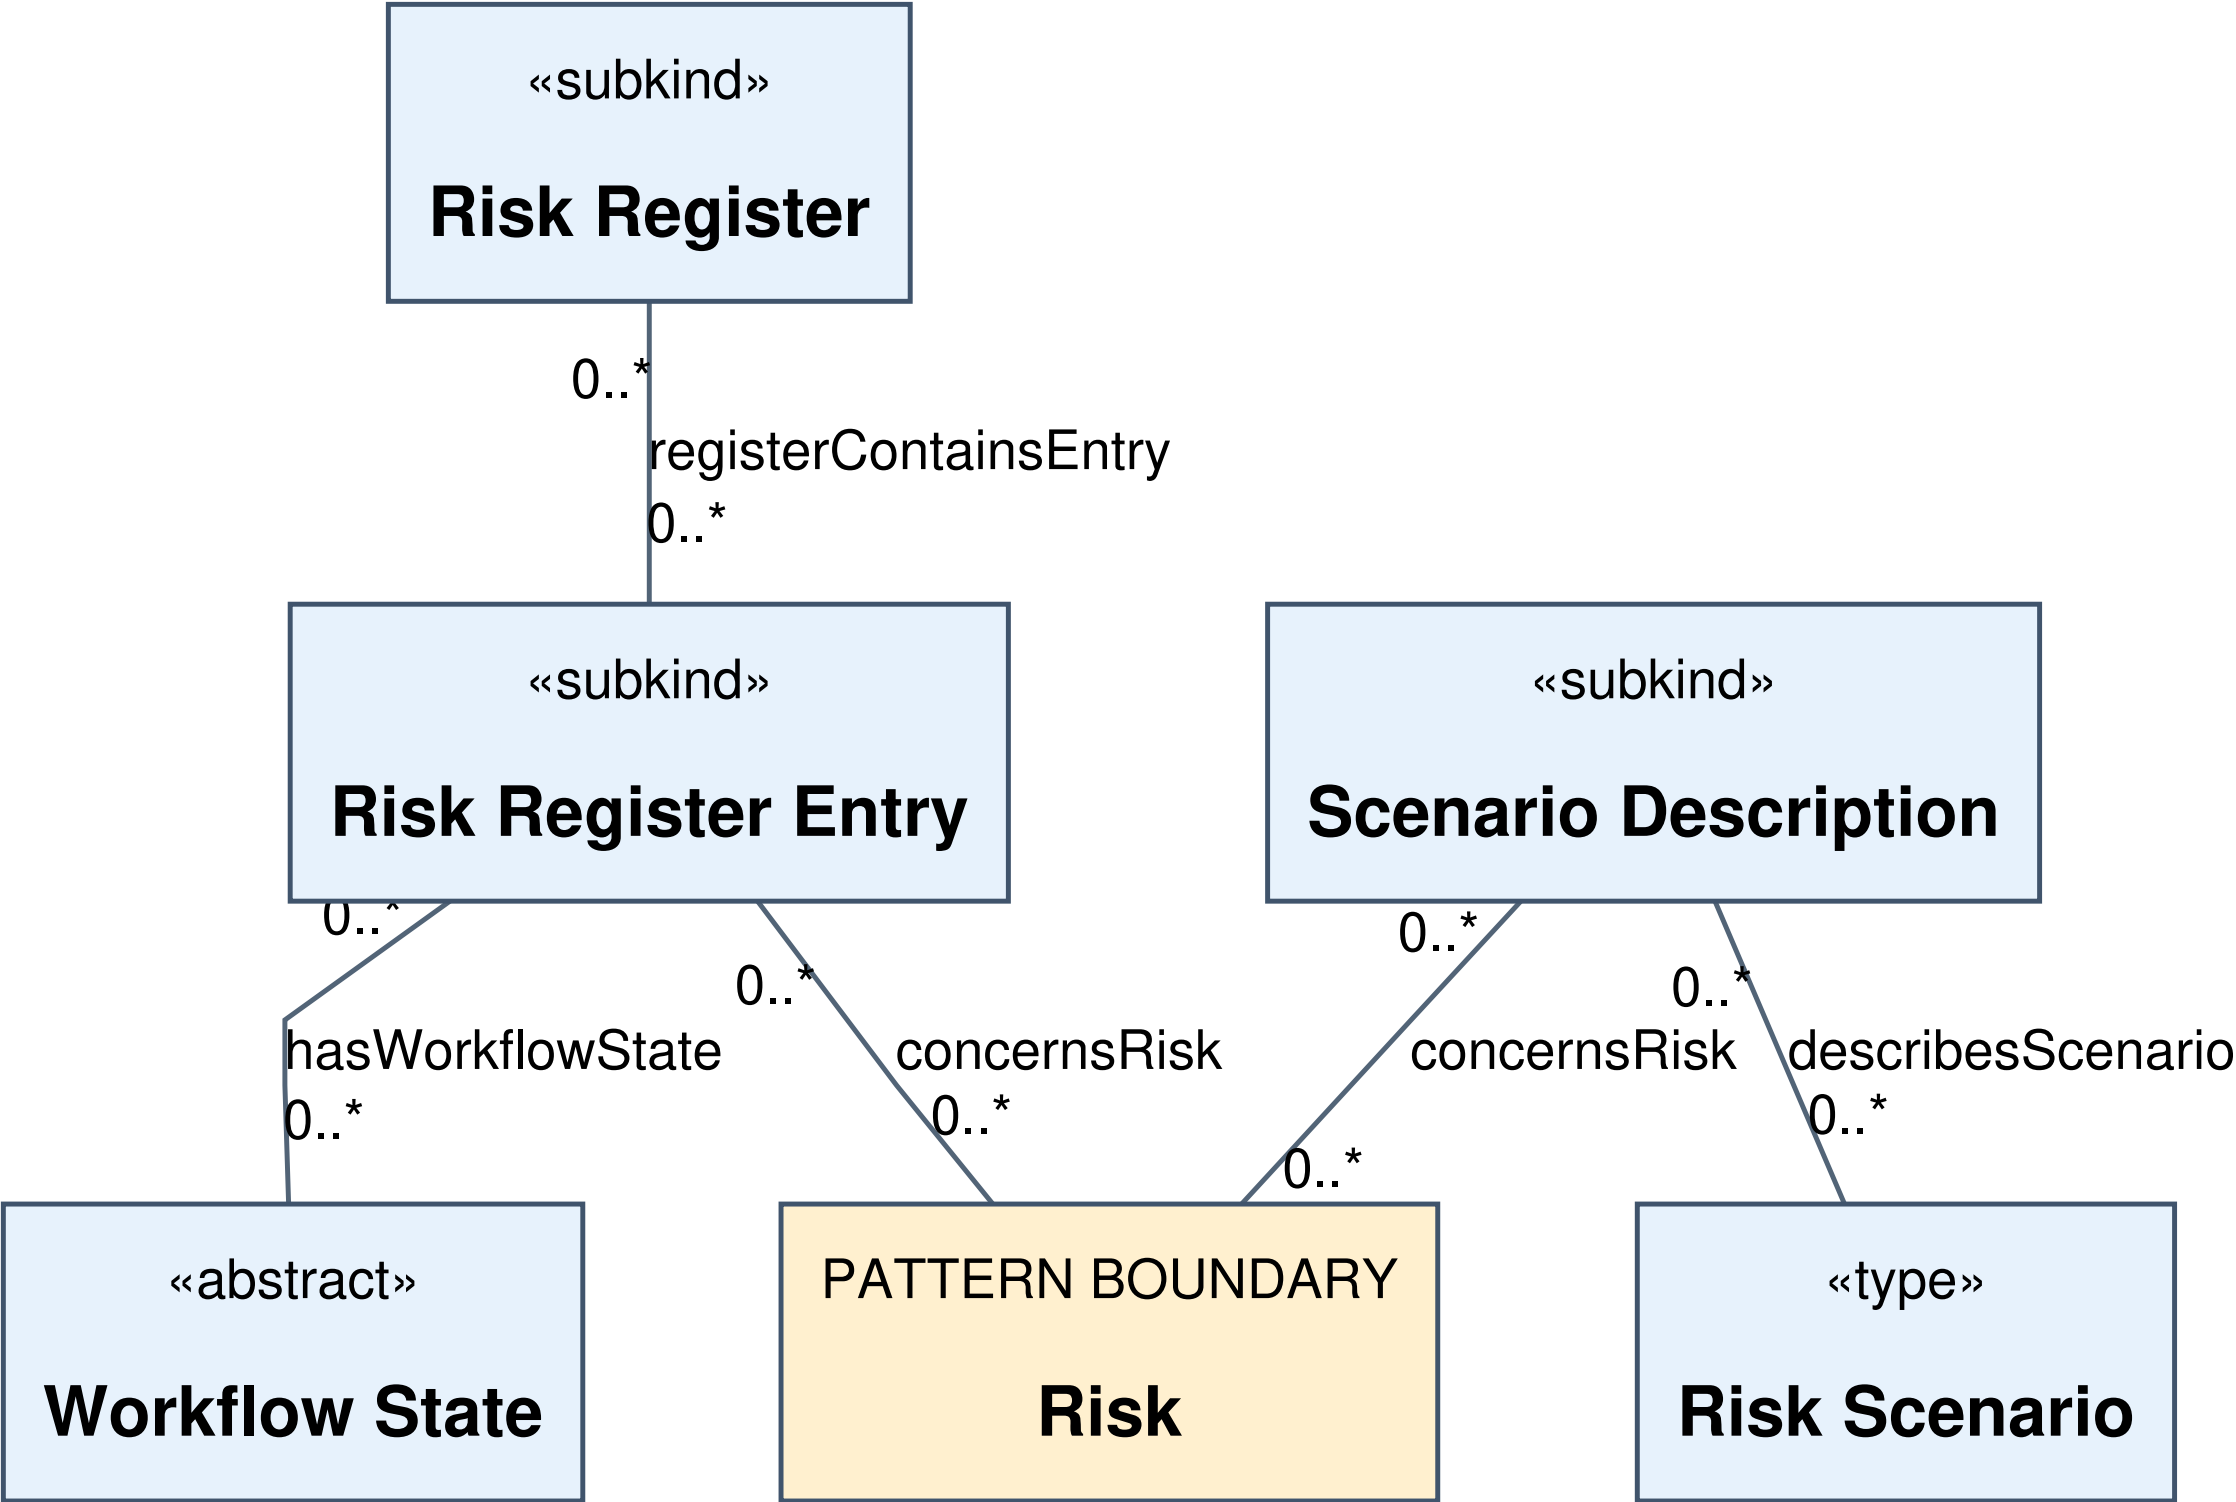

Unqualified hasWorkflowState is a snapshot; use the separate qualified workflow view for historical answers.

08 Managed artifacts, versions and content


SemRisk 0.2.0-rc.3 | OntoUML-based view with explicit scope boundaries

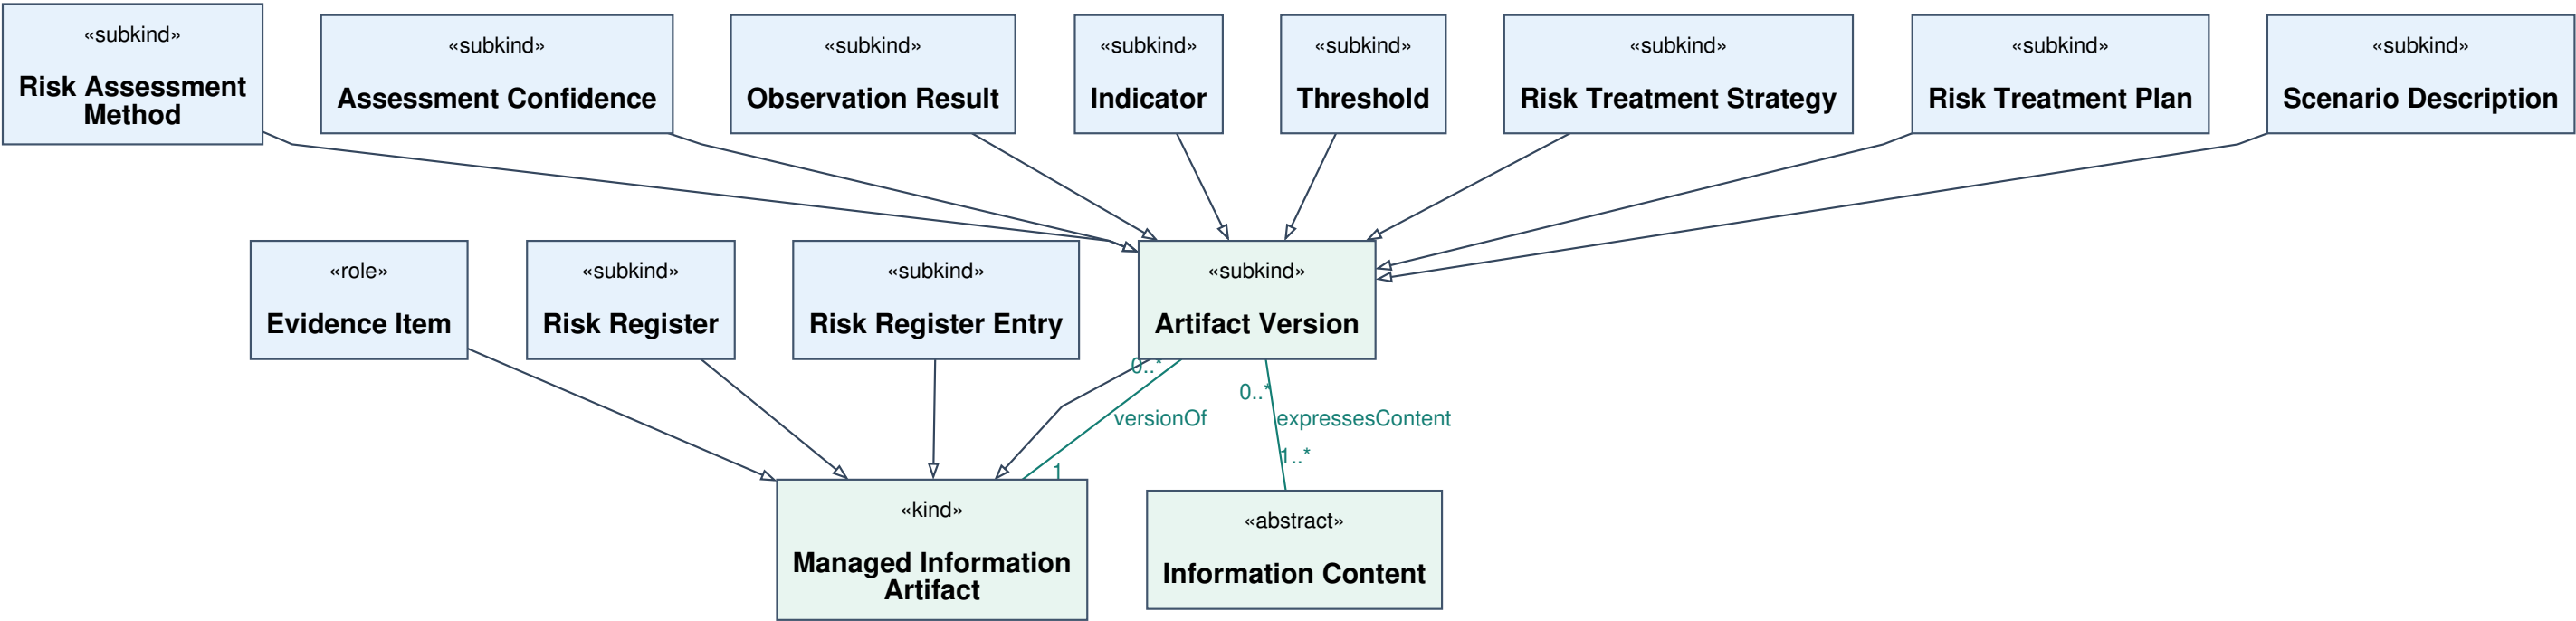

Version/content multiplicities are strict data-profile requirements. Shared content does not merge artifact identity.

09 Result inheritance and qualified profile


SemRisk 0.2.0-rc.3 | OntoUML-based view with explicit scope boundaries

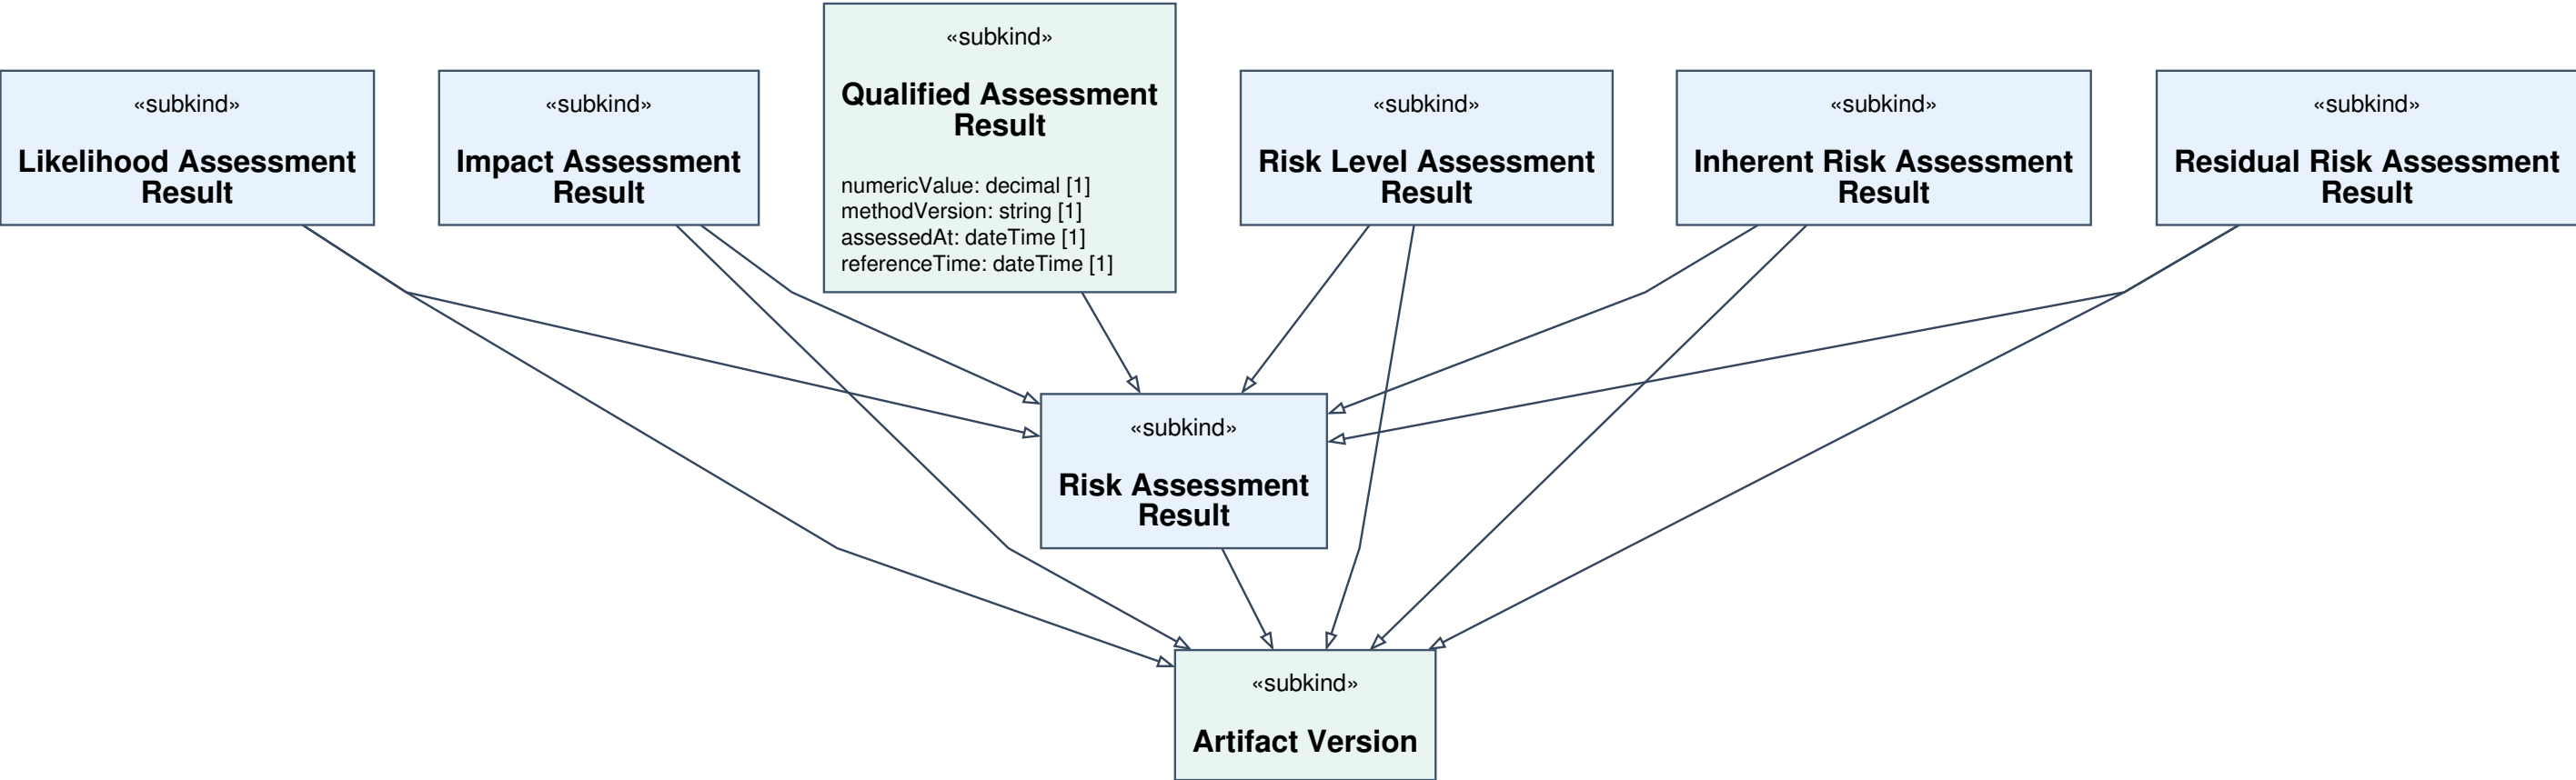

All shown named subclass axioms are asserted in rc.3; no new disjointness between independent result dimensions.

10 Qualified numeric assessment profile


SemRisk 0.2.0-rc.3 | OntoUML-based view with explicit scope boundaries

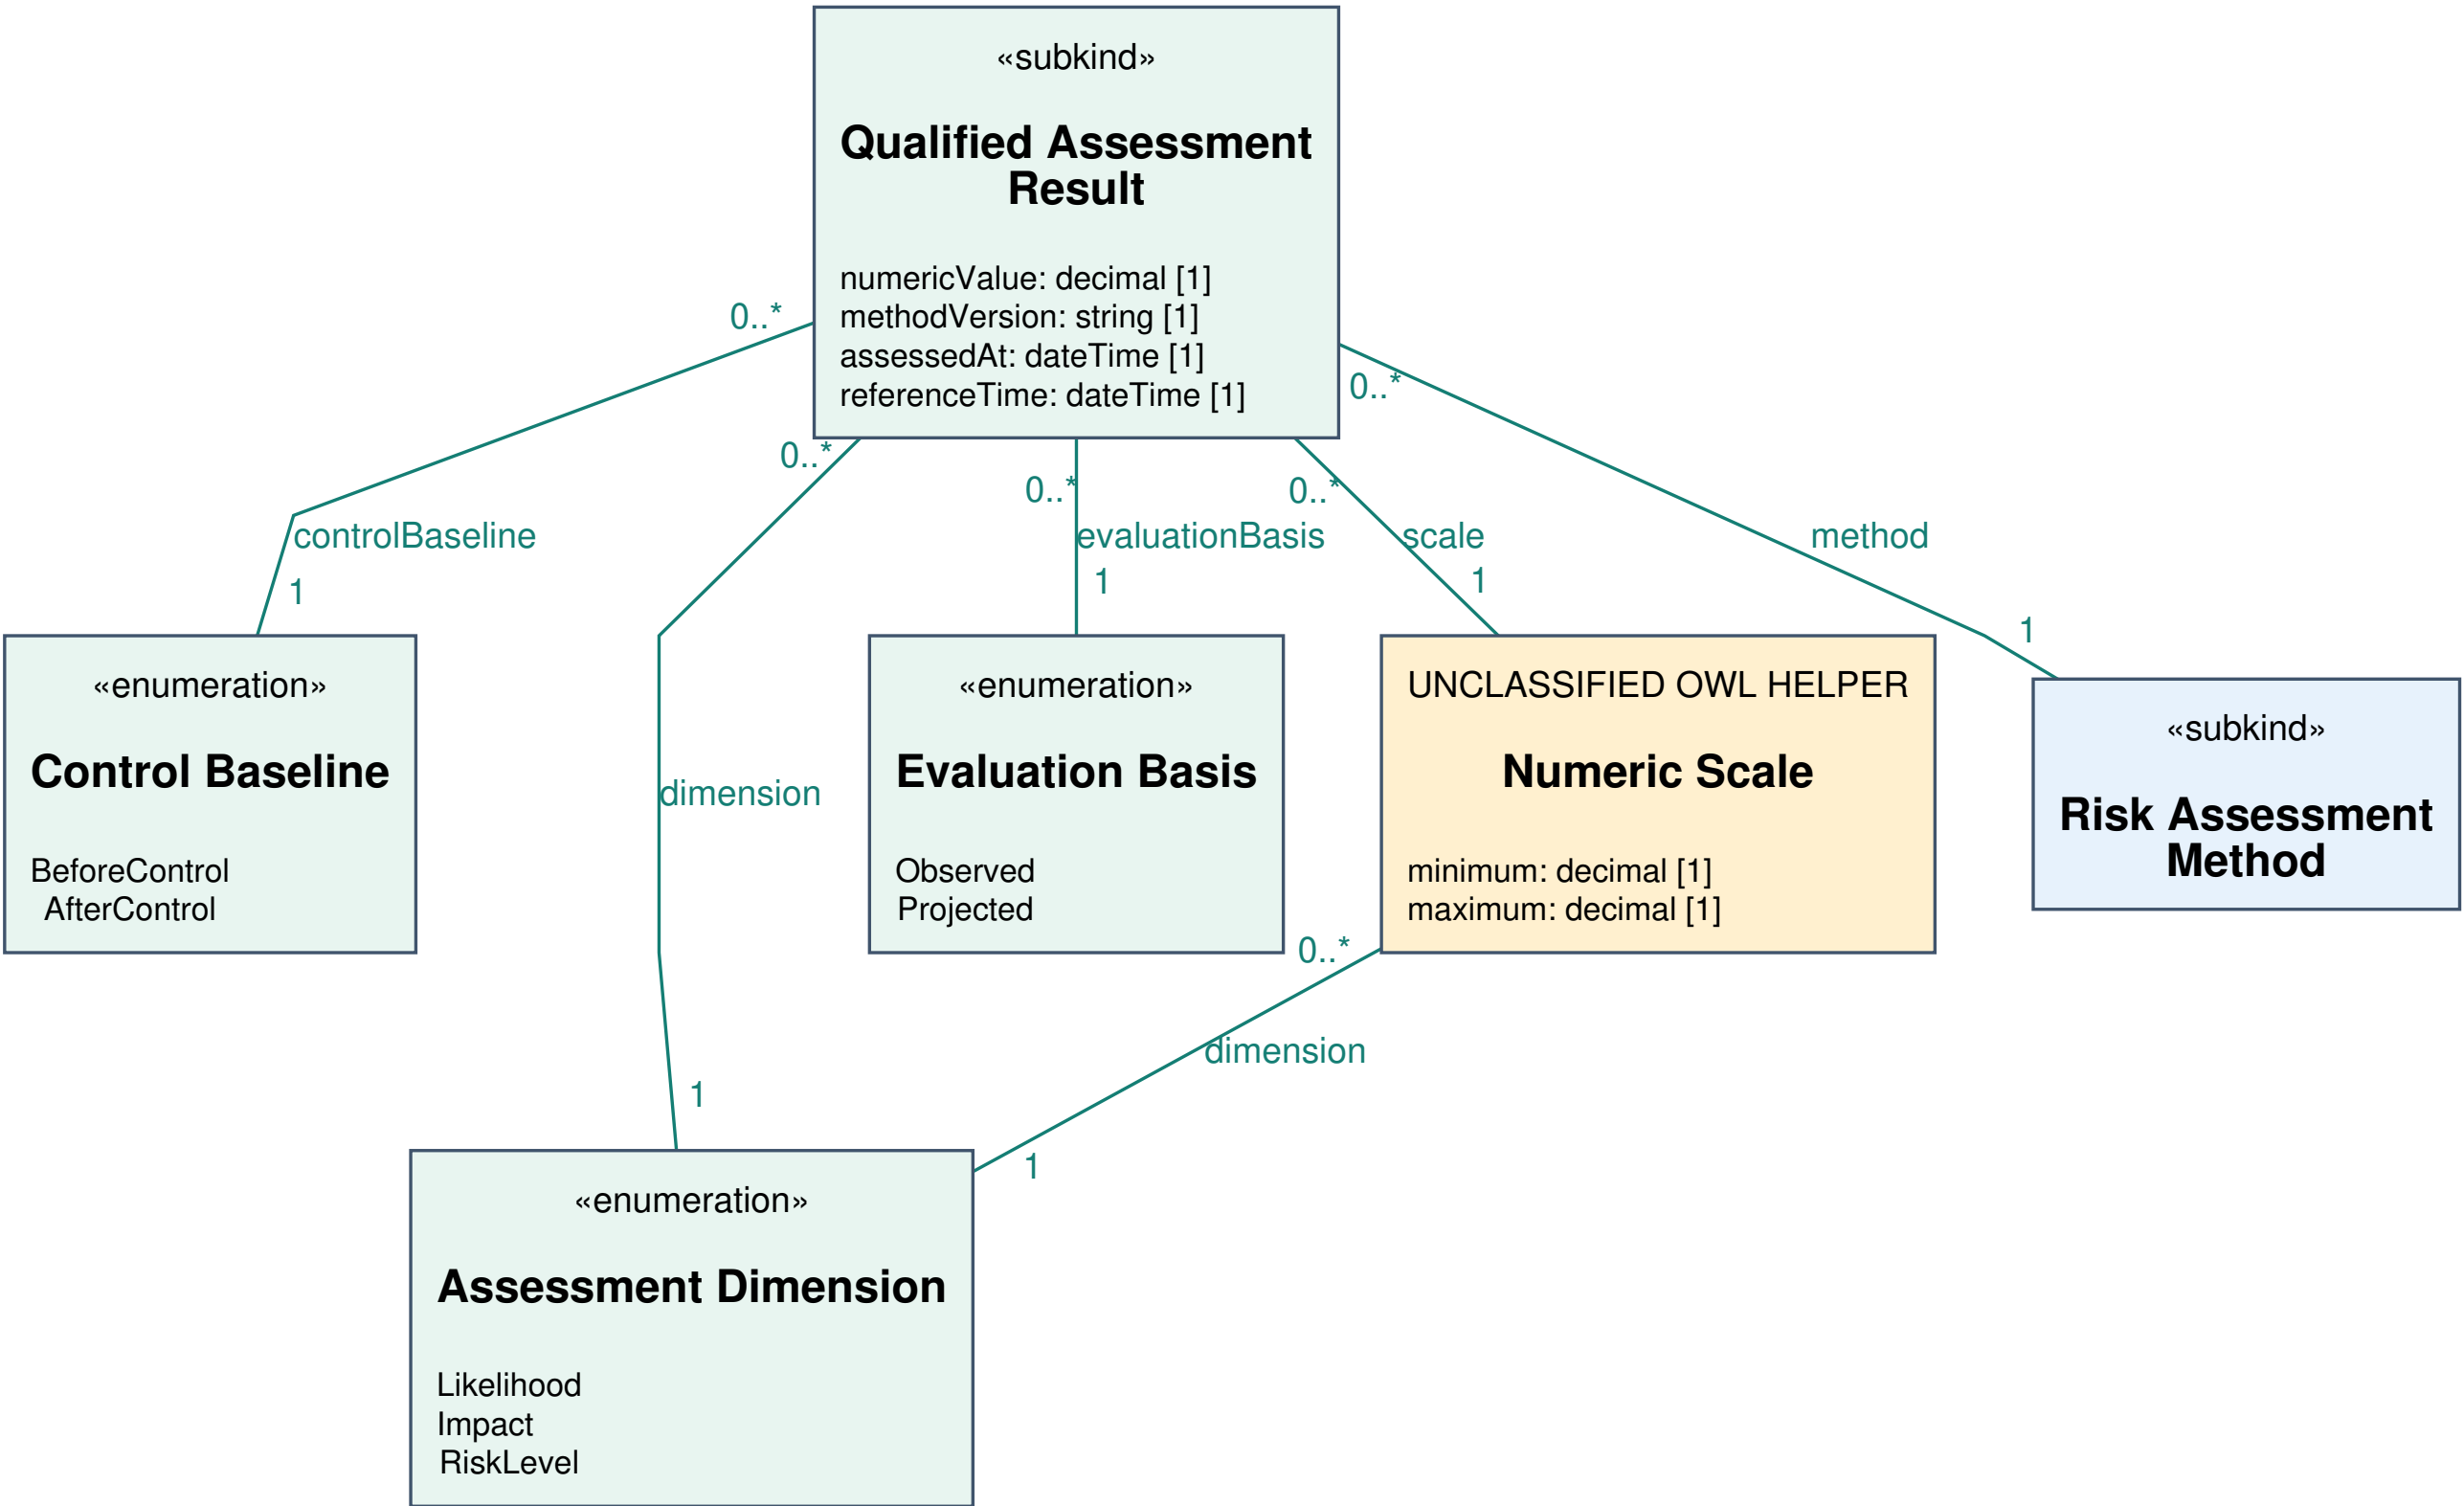

Opt-in SHACL profile. Numeric Scale remains an unclassified OWL helper; no invented foundational stereotype.

11 Scheme-qualified temporal workflow


SemRisk 0.2.0-rc.3 | OntoUML-based view with explicit scope boundaries

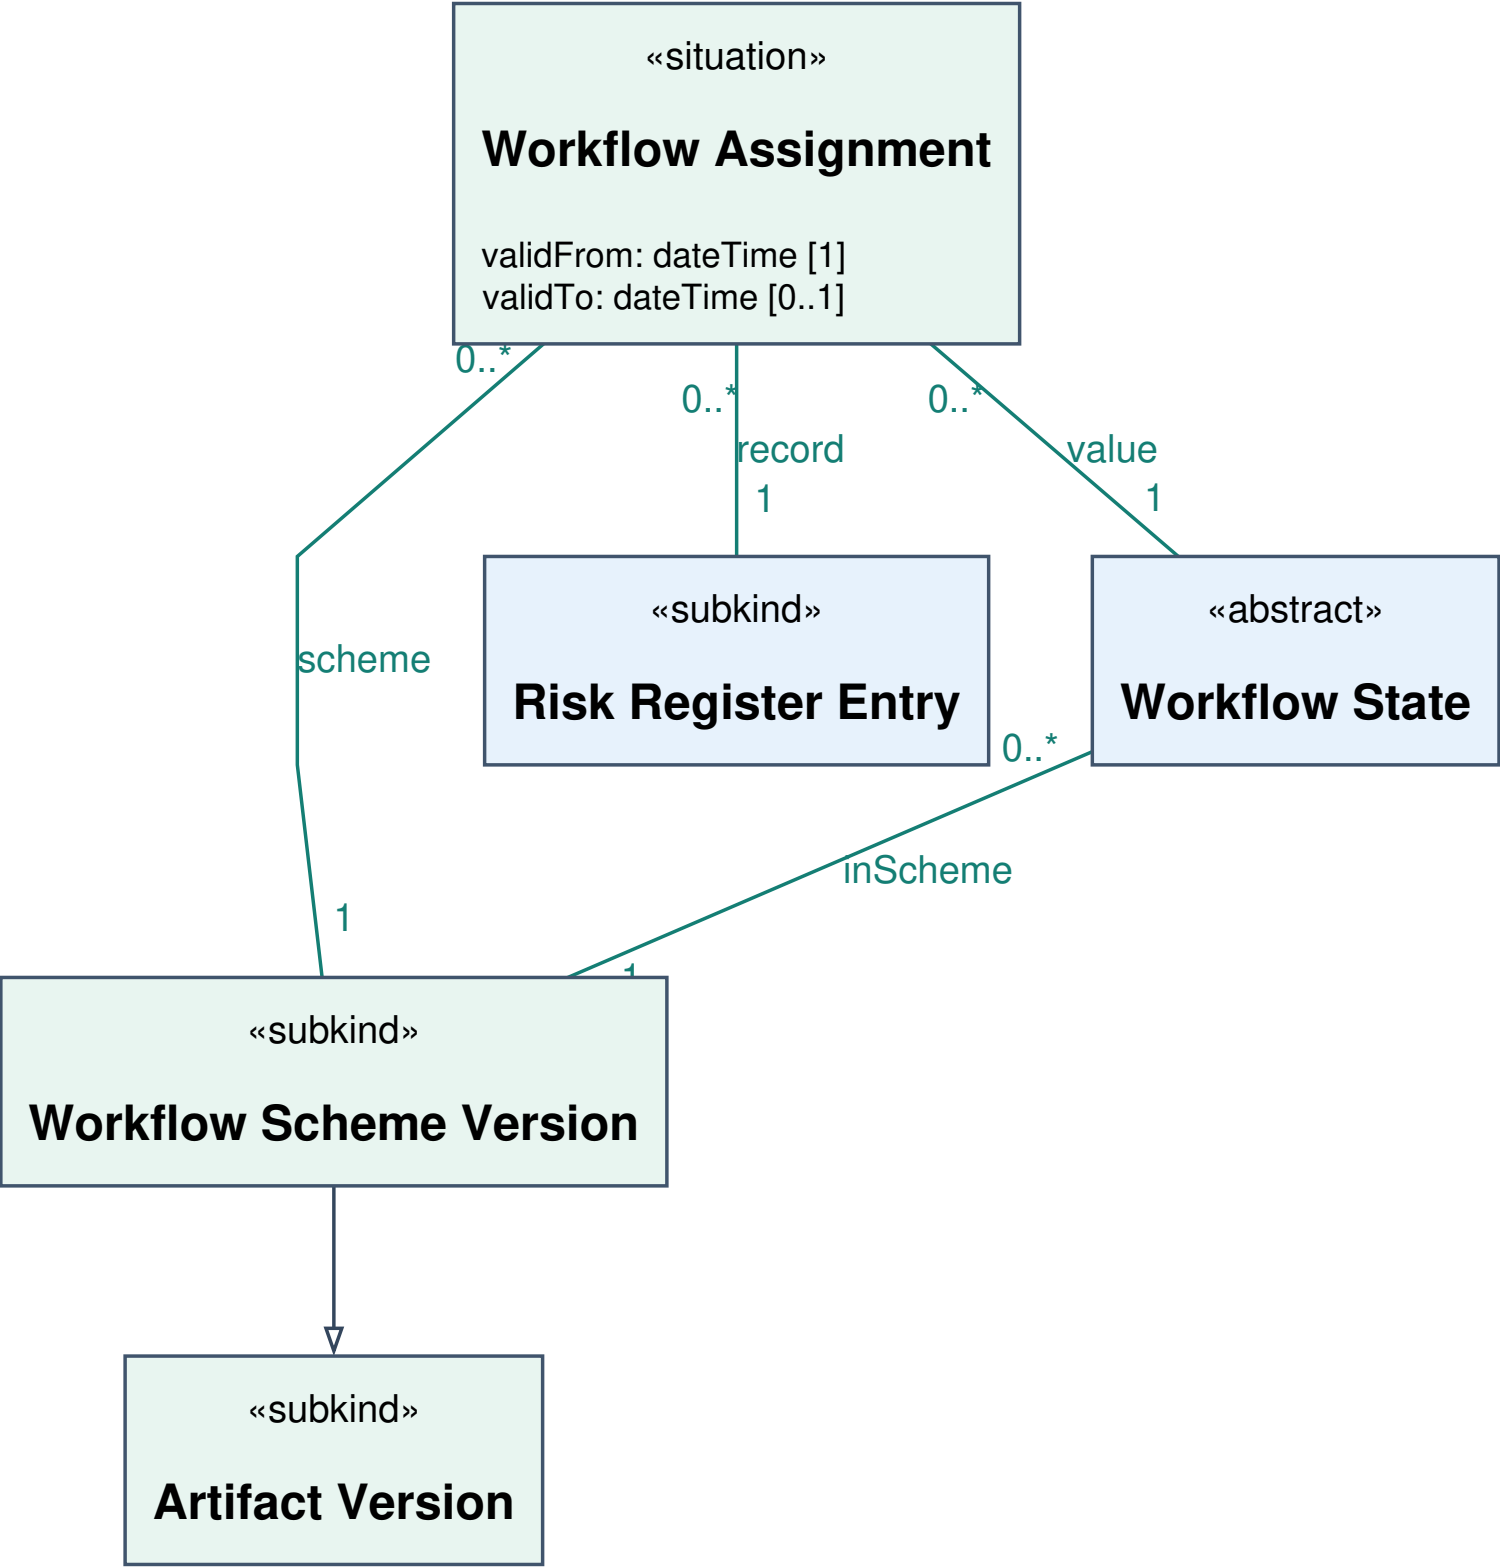

Exactly one record/value/scheme per assignment. Half-open intervals; no overlap for the same record and scheme.

12 Enterprise and pharmaceutical references


SemRisk 0.2.0-rc.3 | OntoUML-based view with explicit scope boundaries

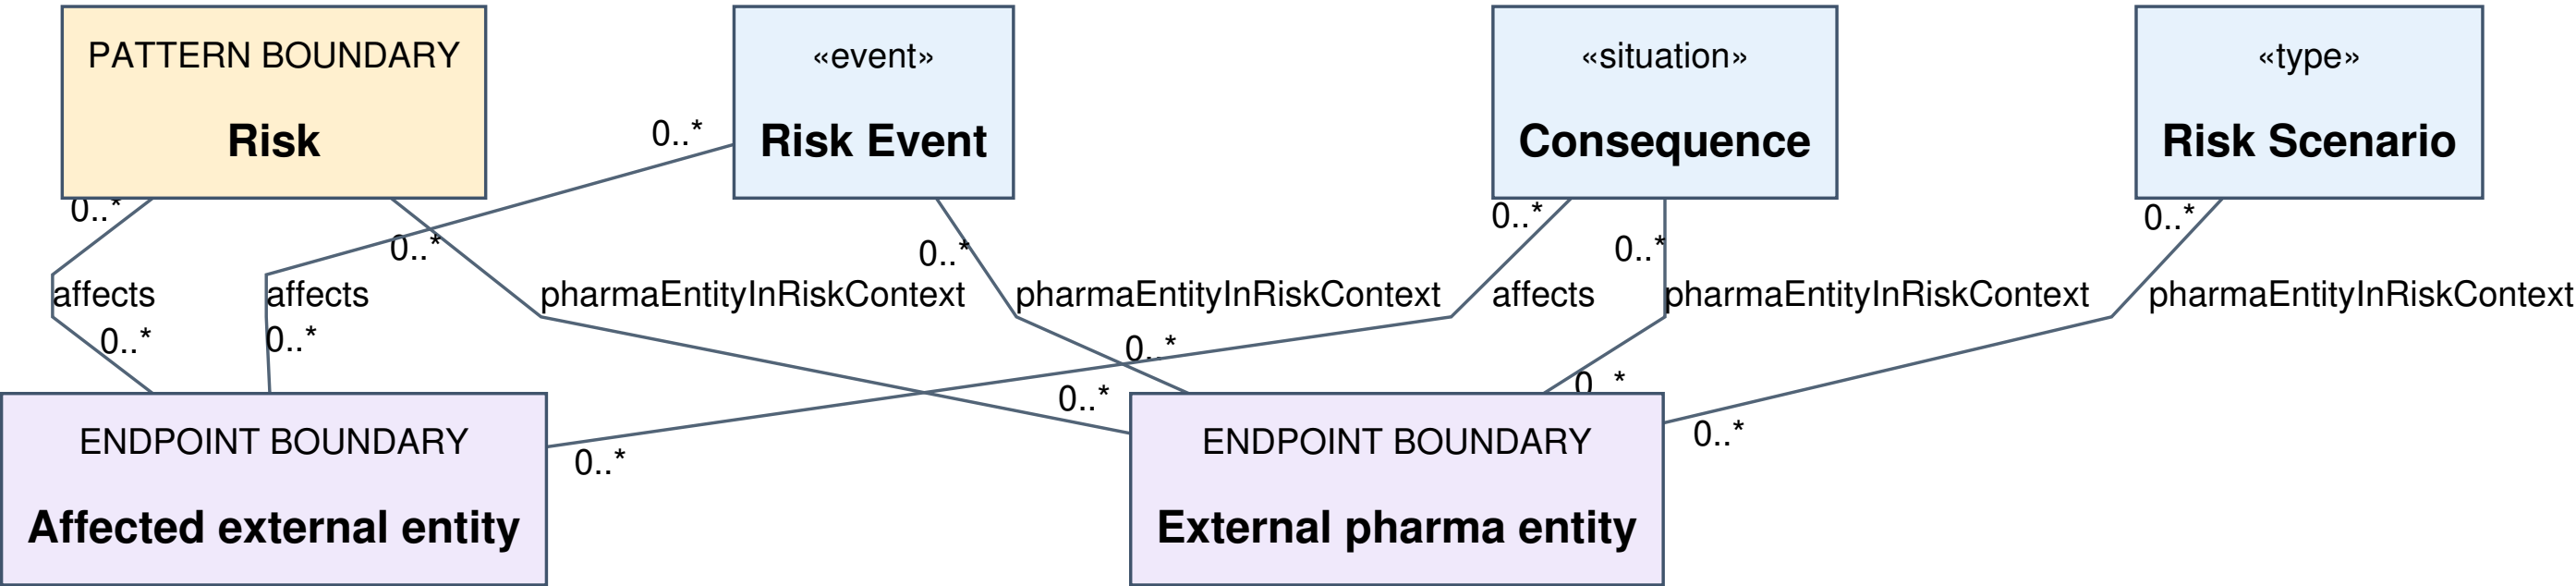

External endpoint references preserve their own identity. No invented CM-PharmE equivalence or asserted global domain.

13 Generic relations and extension metadata


SemRisk 0.2.0-rc.3 | OntoUML-based view with explicit scope boundaries

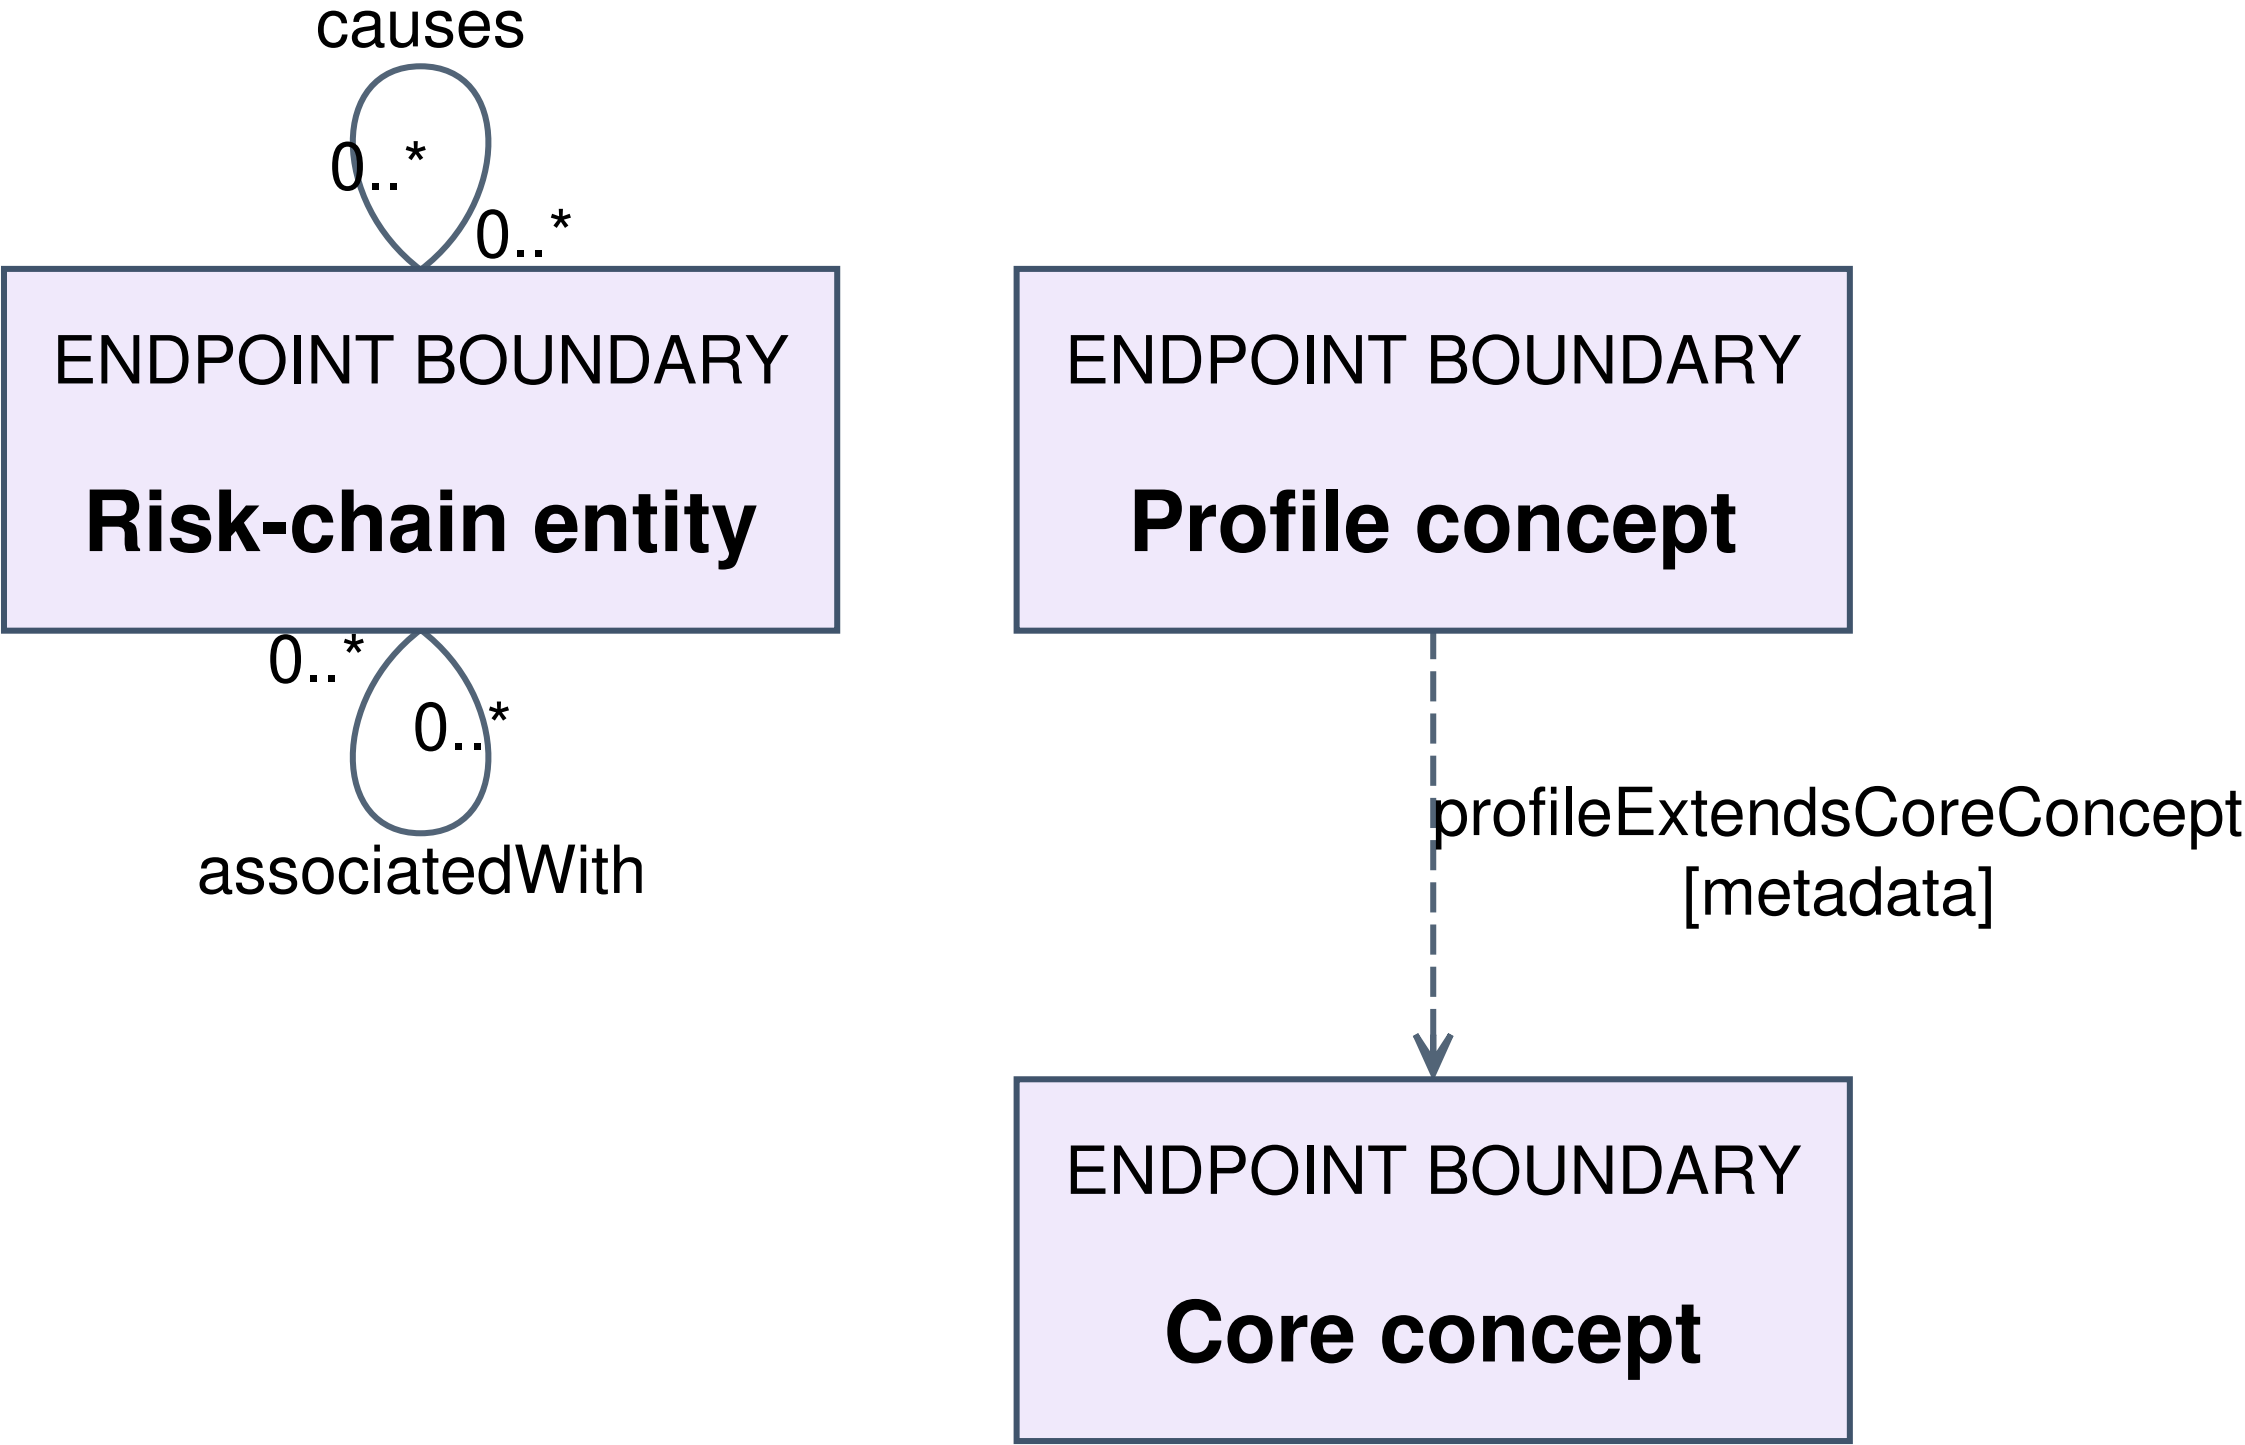

A generic association is not causality. Dashed extension is registry metadata, not an OWL property.

14 Assessment context and indicator links


SemRisk 0.2.0-rc.3 | OntoUML-based view with explicit scope boundaries

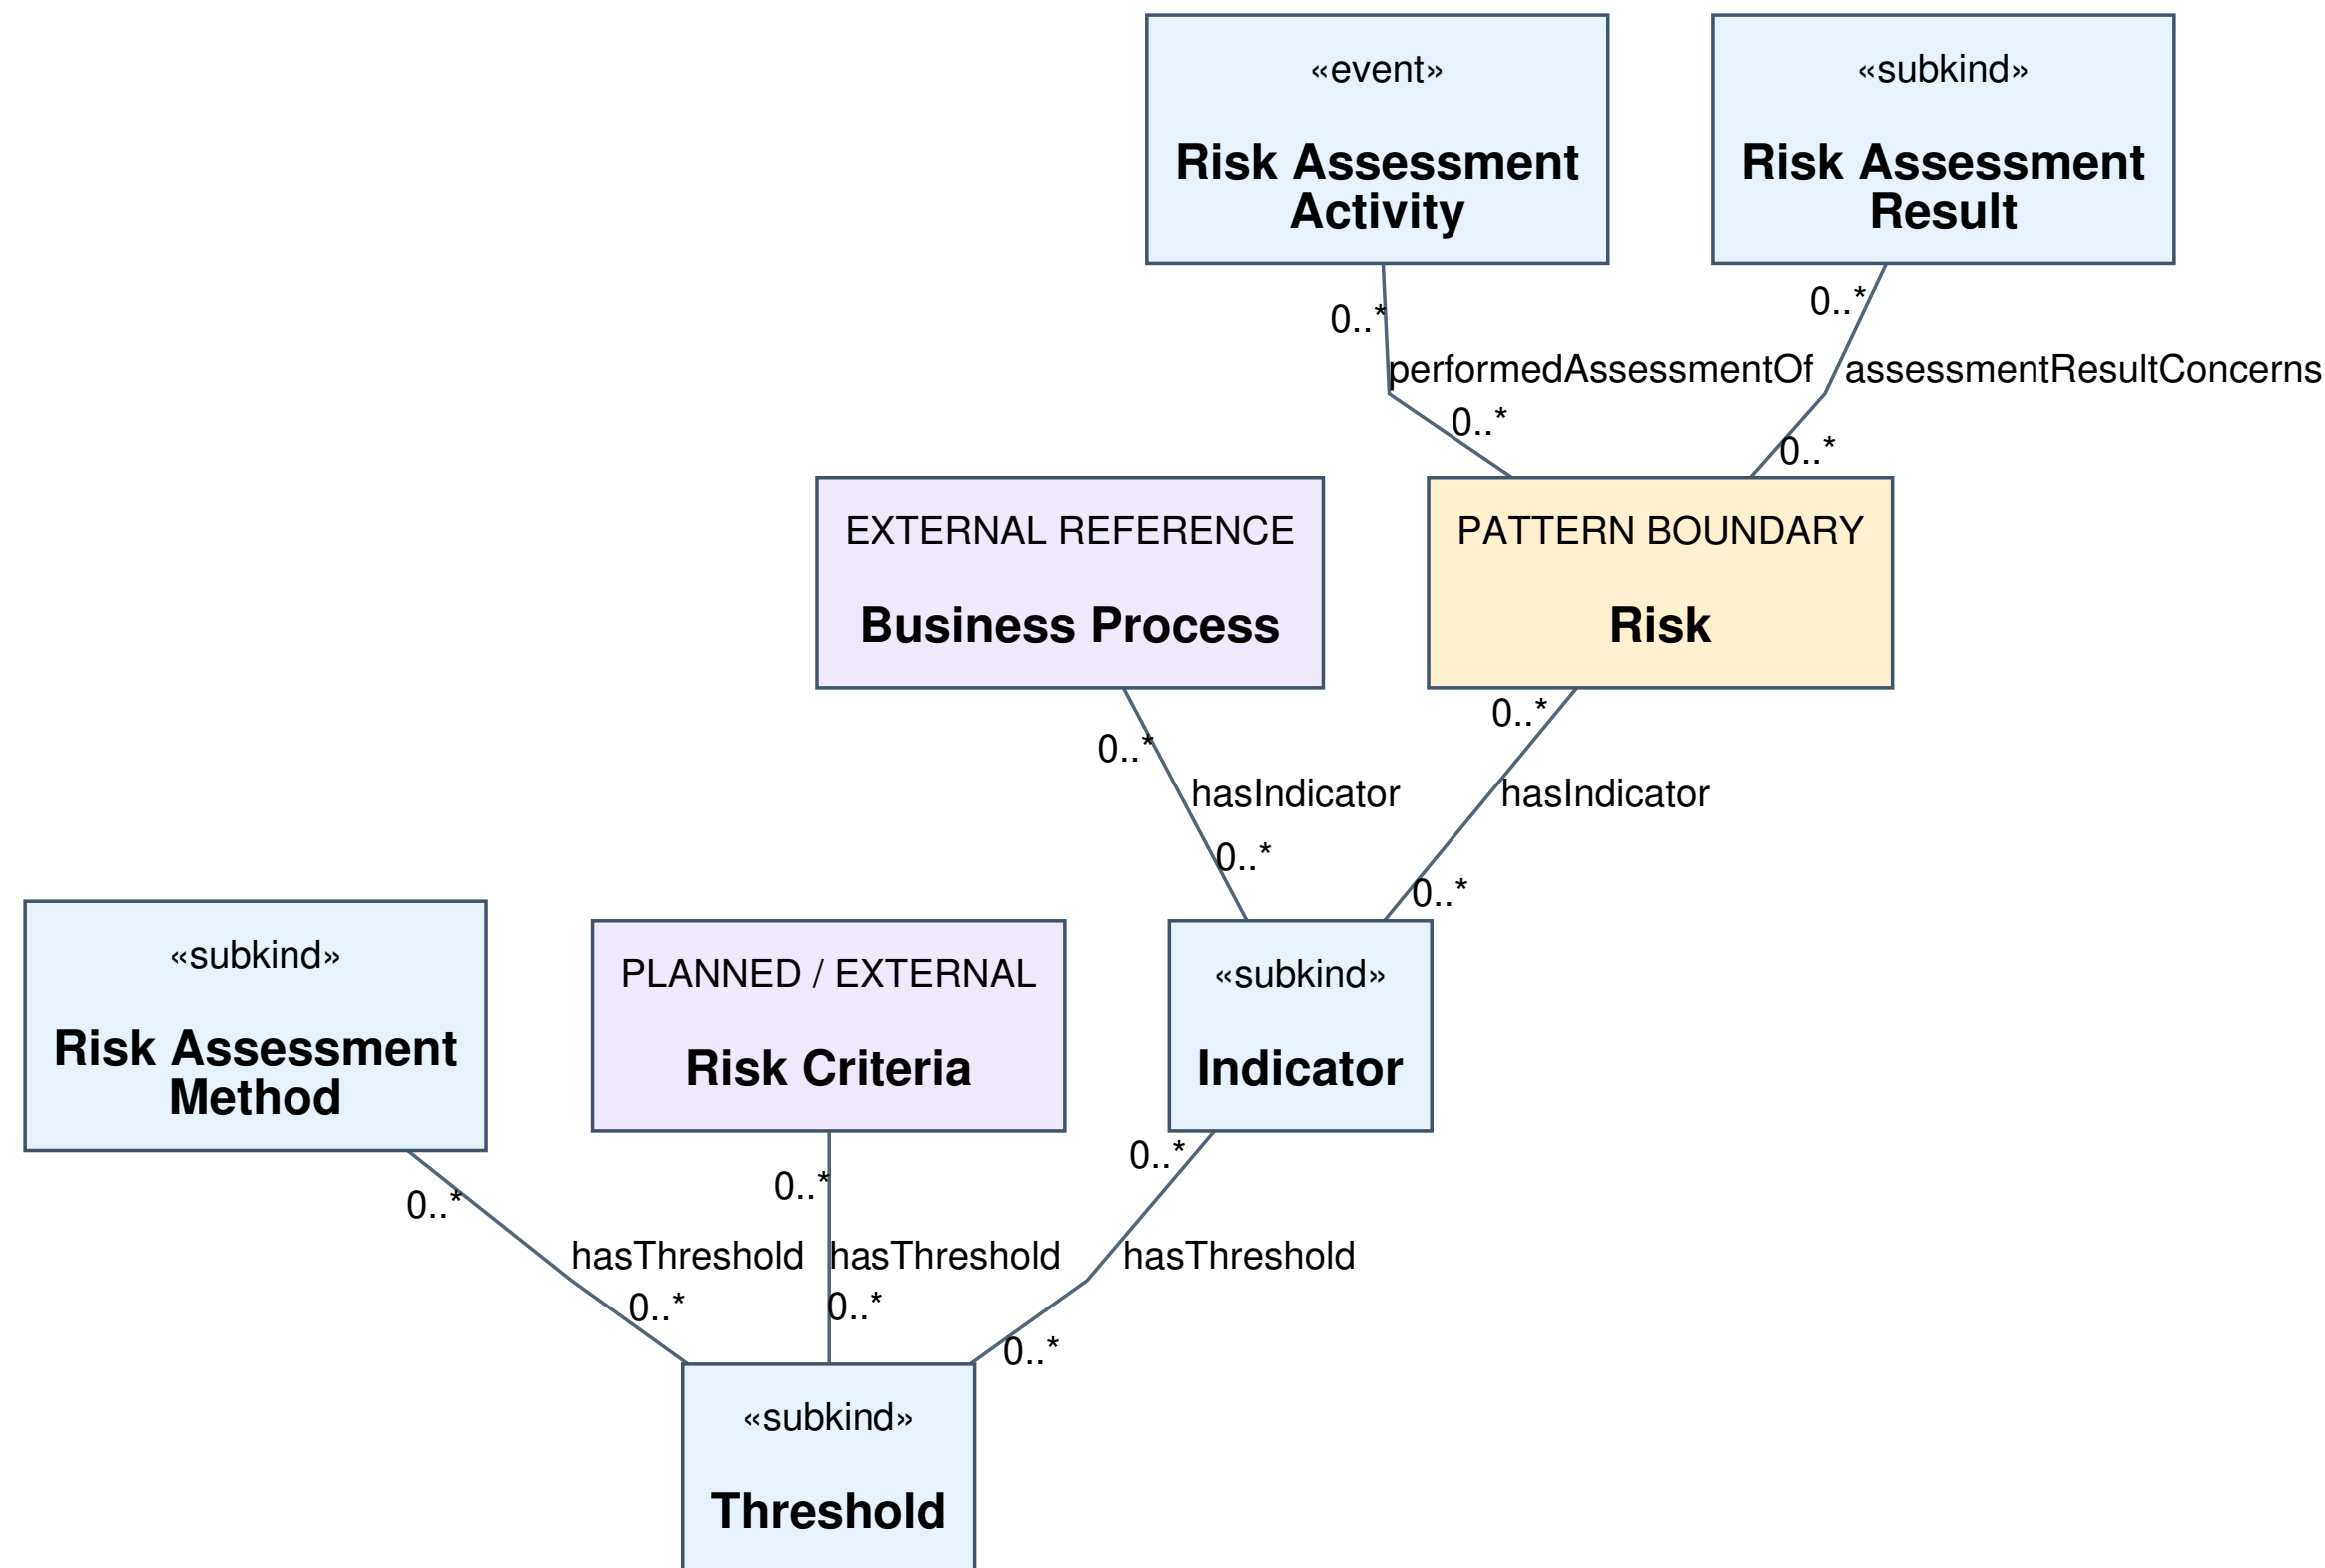

These typed endpoint projections do not narrow globally open property domains. External and planned concepts stay distinct.

15 External references and planned concepts

SemRisk 0.2.0-rc.3 | OntoUML-based view with explicit scope boundaries

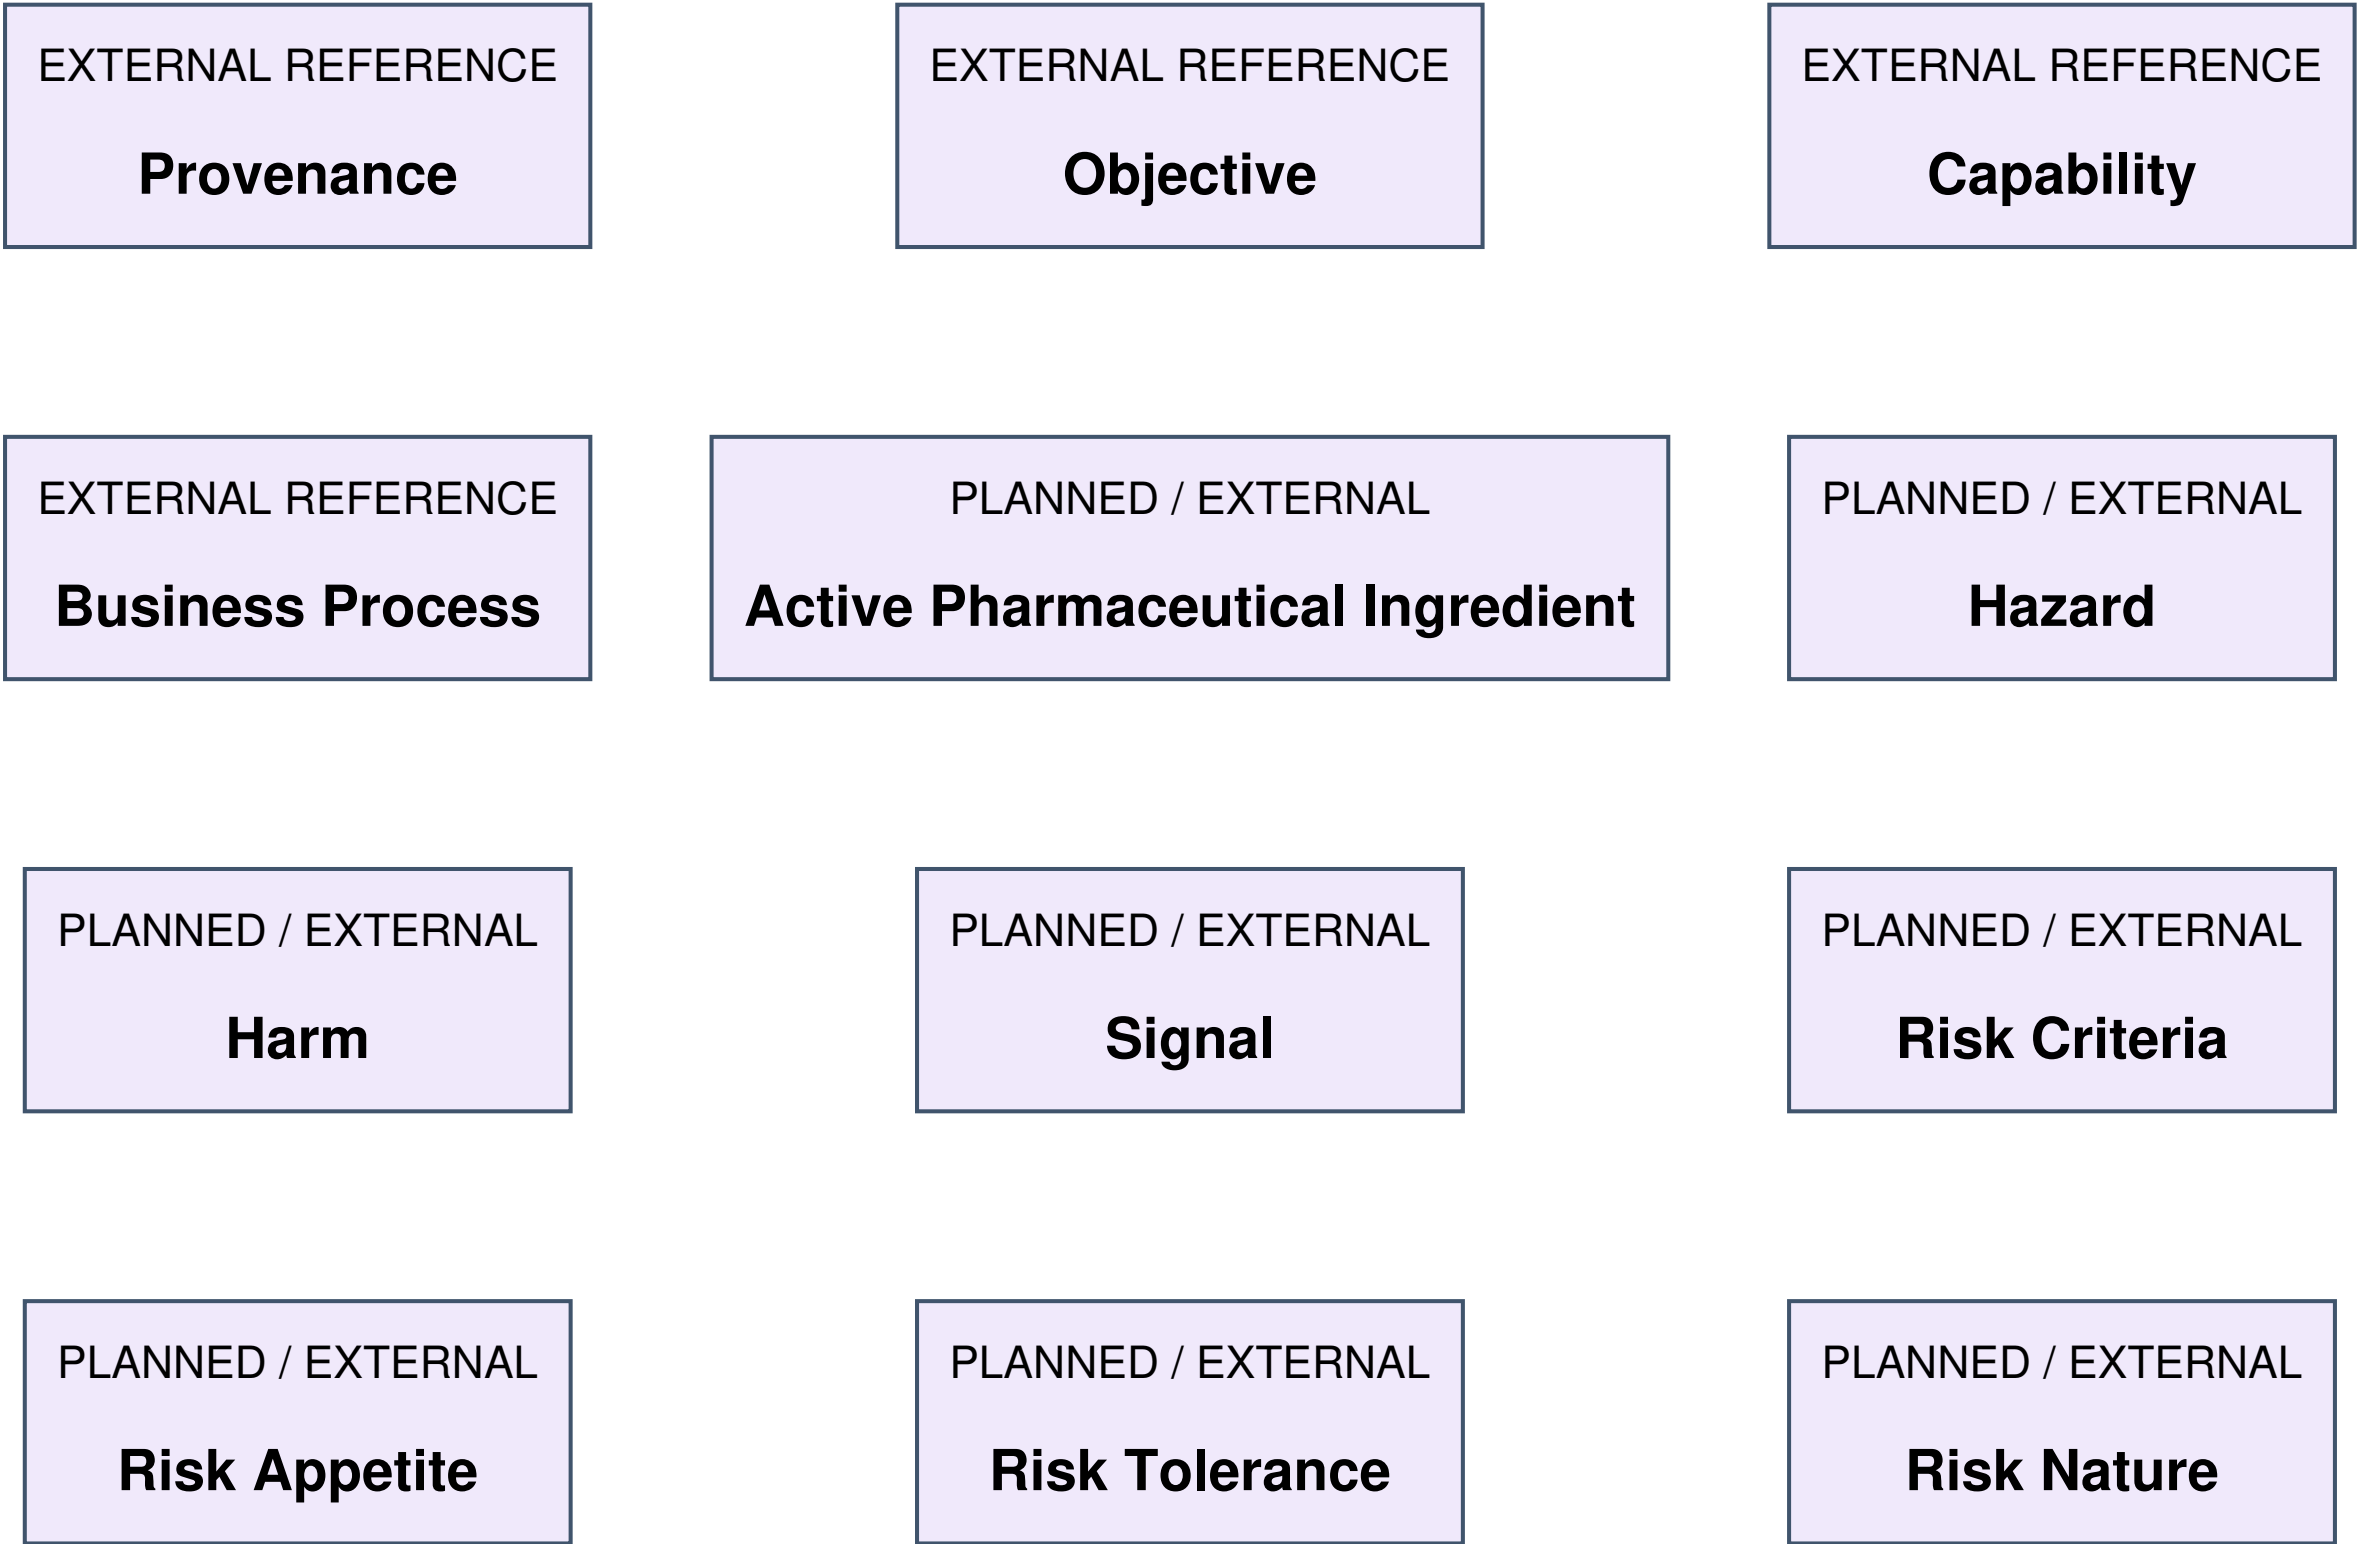

Twelve reference slots: four registry markers and eight undeclared candidates. No implied implementation or equivalence.