



Vidyavardhini's College of Engineering & Technology

Department of Computer Engineering

---

Experiment No.3
To implement the concept of Merkle root
Date of Performance:24-08-23
Date of Submission:24-08-23



**AIM:** To implement the concept of Merkle root

**Objective:** To develop a program to create a cryptographic hash using the concept of merkle tree

**Theory:**

A Merkle tree stores all the transactions in a block by producing a digital fingerprint of the entire set of transactions. It allows the user to verify whether a transaction can be included in a block or not.

Merkle trees are created by repeatedly calculating hashing pairs of nodes until there is only one hash left. This hash is called the Merkle Root, or the Root Hash. The Merkle Trees are constructed in a bottom-up approach

Every leaf node is a hash of transactional data, and the non-leaf node is a hash of its previous hashes. Merkle trees are in a binary tree, so it requires an even number of leaf nodes. If there is an odd number of transactions, the last hash will be duplicated once to create an even number of leaf nodes.

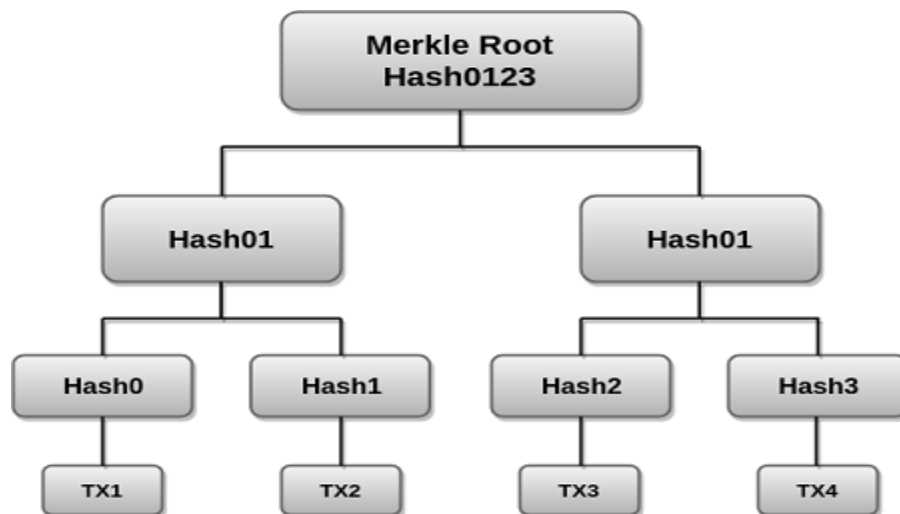


Fig.3.1 Merkle Root Tree Structure



The above example is the most common and simple form of a Merkle tree, i.e., Binary Merkle Tree. There are four transactions in a block: TX1, TX2, TX3, and TX4. Here you can see, there is a top hash which is the hash of the entire tree, known as the Root Hash, or the Merkle Root. Each of these is repeatedly hashed, and stored in each leaf node, resulting in Hash 0, 1, 2, and 3. Consecutive pairs of leaf nodes are then summarized in a parent node by hashing Hash0 and Hash1, resulting in Hash01, and separately hashing Hash2 and Hash3, resulting in Hash23. The two hashes (Hash01 and Hash23) are then hashed again to produce the Root Hash or the Merkle Root.

Merkle Root is stored in the block header. The block header is the part of the bitcoin block which gets hash in the process of mining. It contains the hash of the last block, a Nonce, and the Root Hash of all the transactions in the current block in a Merkle Tree. So having the Merkle root in block header makes the transaction tamper-proof. As this Root Hash includes the hashes of all the transactions within the block, these transactions may result in saving the disk space.

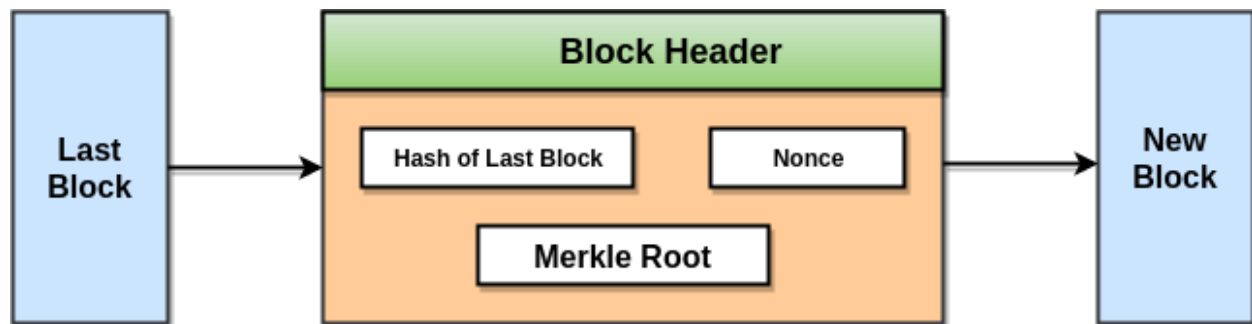


Fig.3.2 Merkle Root in Block

The Merkle Tree maintains the **integrity** of the data. If any single detail of transactions or order of the transaction's changes, then these changes reflected in the hash of that transaction. This change would cascade up the Merkle Tree to the Merkle Root, changing the value of the Merkle root and thus invalidating the block. So everyone can see that Merkle tree allows for a quick and simple test of whether a specific transaction is included in the set or not.

### Process:

Step 1. The transaction represents the original data blocks which are hashed to produce transaction hashes (transaction id) which form the leaf nodes.



# Vidyavardhini's College of Engineering & Technology

## Department of Computer Engineering

Step 2. The leaf nodes have to be even in number for a binary hash tree to work so if the number of leaf nodes is an odd number, then the last leaf node is duplicated to even the count.

Step 3. Each pair of leaf nodes is concatenated and hashed to form the second row of hashes.

Step 4. The process is repeated until a row is obtained with only two hashes

Step 5. These last two hashes are concatenated to form the Merkle root.

### Output:

```
PS C:\Users\student\.vscode> & 'C:\Program Files\Java\jdk-19\bin\java.exe' '-XX:+ShowCodeDetailsInExceptionMessages' '-cp' 'C:\Users\student\AppData\Roaming\Code\User\workspaceStorage\3116023699305b4b35beb4d3d62f0af8\redhat.java\jdt_ws\jdt.ls-java-project\bin' 'App'
Transaction List[a, b, c, d, e]
Left--> a Right--> b
sha2HexValue fb8e28fc2e4c3f248c60c39bd652f3c1347298bb977b8b4d5903b85055620603
Left--> c Right--> d
sha2HexValue 21e721c35a5823fdb452fa2f9f0a612c74fb952e06927489c6b27a43b817bed4
Left--> e sha2HexValue 3f79bb7b435b05321651daefd374cdc681dc06faa65e374e38337b88ca046dea
Left--> fb8e28fc2e4c3f248c60c39bd652f3c1347298bb977b8b4d5903b85055620603 Right--> 21e721c35a5823fdb452fa2f9f0a612c74fb9
52e06927489c6b27a43b817bed4
sha2HexValue 12a40550c10c6339bf6f271445270e49b844d6c9e8abc36b9b642be532befe94
Left--> 3f79bb7b435b05321651daefd374cdc681dc06faa65e374e38337b88ca046dea sha2HexValue ef5960718ca91ca07e63f1d1cf5320ad3c8f9
23d481c1f8c873aa987e1d6e1f6
Left--> 12a40550c10c6339bf6f271445270e49b844d6c9e8abc36b9b642be532befe94 Right--> ef5960718ca91ca07e63f1d1cf5320ad3c8f9
23d481c1f8c873aa987e1d6e1f6
sha2HexValue 3b7e1e6ba3b82975d7802511d8c7fabbe7a5d112d0dd112fbcfbb7e6417a3214
root : 3b7e1e6ba3b82975d7802511d8c7fabbe7a5d112d0dd112fbcfbb7e6417a3214
PS C:\Users\student\.vscode>
```

### Conclusion:

The Merkle root serves as a robust foundation for verifying the authenticity and security of transactions. It operates through the utilization of a clever concept known as a Merkle tree, which groups numerous transactions together and generates a unique code called a hash. This hash acts as a distinct identifier for that group of transactions. If anyone attempts to alter even a minor detail within any transaction, the hash promptly changes, signaling that something is amiss. Placed at the top of the transaction list, the Merkle root safeguards transactions, ensuring their integrity and security. It's akin to having an impenetrable lock on a container, assuring that its contents are genuine and untampered. The Merkle root plays a pivotal role in maintaining the integrity of blockchain data, particularly in critical applications like cryptocurrency transactions and other systems where trustworthiness is of utmost importance.