

WRITE-UP TP5

2. Le rond orange sur la connexion signifie que le port connecté est bloqué
Il y a un rond orange car STP, plus précisément PVST+ (Per VLAN Spanning Tree), tourne par défaut sur les switchs Cisco et a bloqué ce port afin d'éviter une boucle sur le LAN.

4.

Configuration des interfaces physiques de SW1

```
interface range gigabitEthernet0/1 - 2
switchport mode trunk
channel-group 1 mode active
no shutdown
```

Configuration de l'interface logique EtherChannel de SW1 (il faut mettre 'switchport mode trunk' dans les interfaces physiques et dans le canal (port-channel))

```
interface port-channel1
switchport mode trunk
no shutdown
```

Configuration des interfaces physiques de SW2

```
interface range gigabitEthernet0/1 - 2
switchport mode trunk
channel-group 1 mode passive
no shutdown
```


Configuration de l'interface logique EtherChannel de SW2 (il faut mettre 'switchport mode trunk' dans les interfaces physiques et dans le canal (port-channel))

```
interface port-channel1
switchport mode trunk
no shutdown
```


CONFIGURATION DES VLANS

```
SW1(config-if)#exit
SW1(config)#vlan 10
SW1(config-vlan)#name "VLAN 10"
SW1(config-vlan)#vlan 20
SW1(config-vlan)#name "VLAN 20"
SW1(config-vlan)#exit
SW1(config)#int fa0/1
SW1(config-if)#switchport mode access
SW1(config-if)#switchport access vlan 10
SW1(config-if)#int fa0/2
SW1(config-if)#switchport mode access
SW1(config-if)#switchport access vlan 20
SW1(config-if)#
```

Vérification des pings

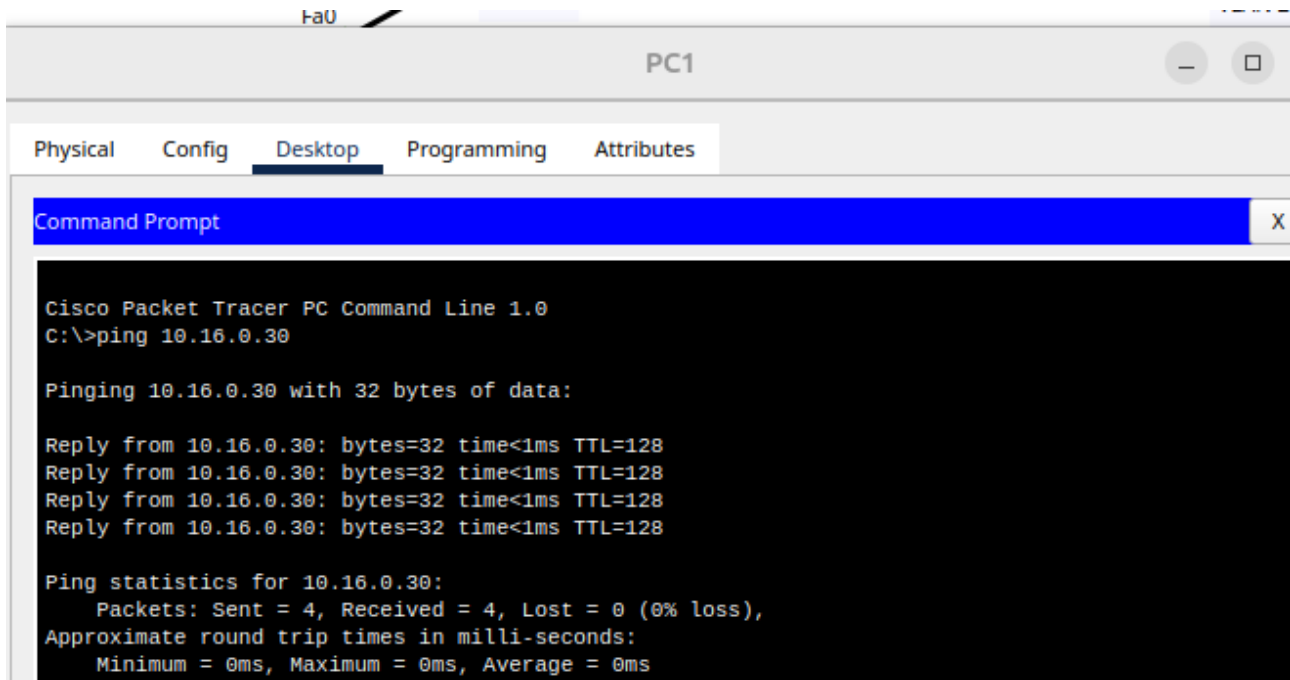

gjjgjjg

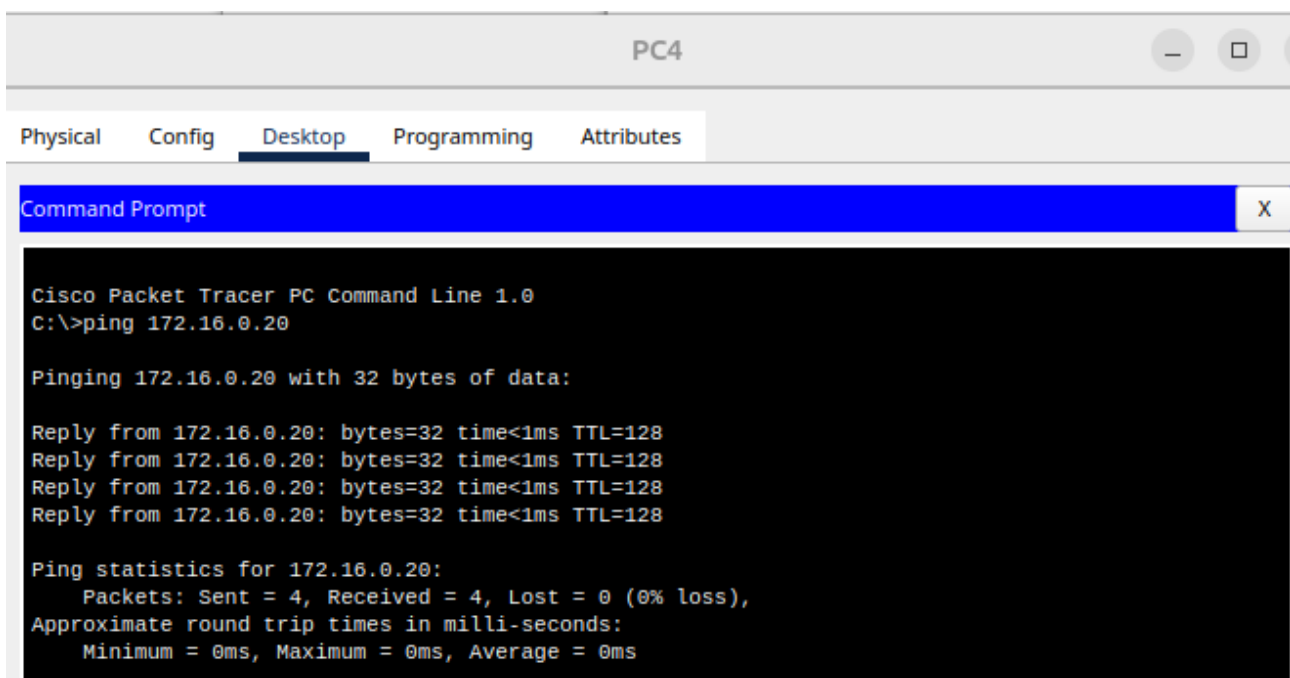

hshhs

Vérifications des configurations

SW1 :

```
SW1#sh etherchannel summary
Flags:  D - down          P - in port-channel
        I - stand-alone  s - suspended
        H - Hot-standby (LACP only)
        R - Layer3       S - Layer2
        U - in use       f - failed to allocate aggregator
        u - unsuitable for bundling
        w - waiting to be aggregated
        d - default port
```

```
Number of channel-groups in use: 1
Number of aggregators:          1
```

Group	Port-channel	Protocol	Ports
1	Po1(SU)	LACP	Gig0/1(P) Gig0/2(P)

SW1#

Po1 1,10,20

```
SW1#show run
Building configuration...

Current configuration : 1332 bytes
!
version 15.0
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname SW1
!
!
!
!
!
spanning-tree mode pvst
spanning-tree extend system-id
!
interface Port-channel1
 switchport mode trunk
!
interface FastEthernet0/1
 switchport access vlan 10
 switchport mode access
!
interface FastEthernet0/2
 switchport access vlan 20
 switchport mode access
!
```

NB : Il y a d'autres lignes qui suivent

```
SW1#show interfaces trunk
Port      Mode      Encapsulation  Status        Native vlan
Po1       on        802.1q         trunking      1

Port      Vlans allowed on trunk
Po1       1-1005

Port      Vlans allowed and active in management domain
Po1       1,10,20

Port      Vlans in spanning tree forwarding state and not pruned
Po1       1,10,20

SW1#
```

SW2 :

```
SW2#sh etherchannel summary
Flags:  D - down          P - in port-channel
        I - stand-alone  S - suspended
        H - Hot-standby (LACP only)
        R - Layer3       S - Layer2
        U - in use       f - failed to allocate aggregator
        u - unsuitable for bundling
        w - waiting to be aggregated
        d - default port
```

```
Number of channel-groups in use: 1
Number of aggregators:          1
```

Group	Port-channel	Protocol	Ports
1	Po1(SU)	LACP	Gig0/1(P) Gig0/2(P)

```
SW2#show run
Building configuration...

Current configuration : 1334 bytes
!
version 15.0
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
```

```
!
hostname SW2
!
!
!
!
!
spanning-tree mode pvst
spanning-tree extend system-id
!
interface Port-channel1
 switchport mode trunk
!
interface FastEthernet0/1
 switchport access vlan 10
 switchport mode access
!
--More--
```

```
SW2#show interfaces trunk
Port      Mode      Encapsulation  Status        Native vlan
Po1       on        802.1q         trunking      1

Port      Vlans allowed on trunk
Po1       1-1005

Port      Vlans allowed and active in management domain
Po1       1,10,20

Port      Vlans in spanning tree forwarding state and not pruned
Po1       1,10,20

SW2#
```