

A Project Report

Flight Delay Prediction for aviation Industry Using Machine Learning

Team ID : NM2023TMID17411

Team Leader : ARCHANA R

Team members : ABISHA A

: ABISHA KUMARI T

: AJITHA N

Flight Delay Prediction for aviation Industry Using Machine Learning

Introduction

1.1 Overview

Flight delay prediction is an important area of research in the aviation industry. Predicting flight delays accurately can help airlines and airports to improve their operations, reduce costs, and enhance customer satisfaction. Delay prediction models use various data sources, such as historical flight data, weather data, and airport congestion data, to estimate the probability of a flight being delayed.

There are two main types of delay prediction models: rule-based models and machine learning models. Rule-based models use a set of predefined rules to predict delays based on factors such as the time of day, the airline, and the airport. Machine learning models, on the other hand, use historical data to train predictive algorithms that can estimate the likelihood of delays based on a wider range of factors.

One of the challenges of building delay prediction models is the large number of variables that can affect flight delays, including weather conditions, air traffic congestion, aircraft maintenance issues, and crew scheduling problems. Another challenge is the need for accurate and timely data, which can be difficult to obtain in real-time.

Despite these challenges, several companies and research institutions have developed and deployed delay prediction models in the aviation industry. Some of the applications of these models include predicting delays for individual flights, optimizing flight schedules, and managing airport congestion.

In conclusion, flight delay prediction is a crucial area of research in the aviation industry, and it has the potential to improve operational efficiency and customer satisfaction. As technology advances and more data becomes available, we can expect to see further developments in this field in the coming years.

1.2 Purpose

The purpose of flight delay prediction in the aviation industry is to improve operational efficiency, reduce costs, and enhance customer satisfaction. Here are some specific purposes of flight delay prediction:

Optimize airline operations: By predicting flight delays in advance, airlines can make changes to their operations, such as re-routing flights, adjusting crew schedules, or providing advance notice to passengers. This can help to minimize the impact of delays on passengers and reduce costs associated with delays, such as compensation for passengers or crew.

Improve passenger experience: Delay prediction models can help airlines and airports to provide more accurate and timely information to passengers about flight delays. This can help to reduce passenger frustration and improve overall customer satisfaction.

Manage airport congestion: Delay prediction models can be used to anticipate periods of high congestion at airports and take steps to manage traffic flow. This can help to minimize delays and improve the efficiency of airport operations.


Reduce environmental impact: By minimizing delays and optimizing flight schedules, delay prediction models can help to reduce fuel consumption and emissions associated with air travel.

Increase safety: Delay prediction models can be used to help airlines and air traffic controllers to anticipate and manage potential safety issues, such as severe weather or runway closures.


Overall, the purpose of flight delay prediction in the aviation industry is to improve the efficiency, safety, and customer experience of air travel. By predicting delays in advance, airlines and airports can take proactive measures to minimize their impact, and provide better service to passengers.

Problem Definition & Design Thinking

2.1 Empathy Map

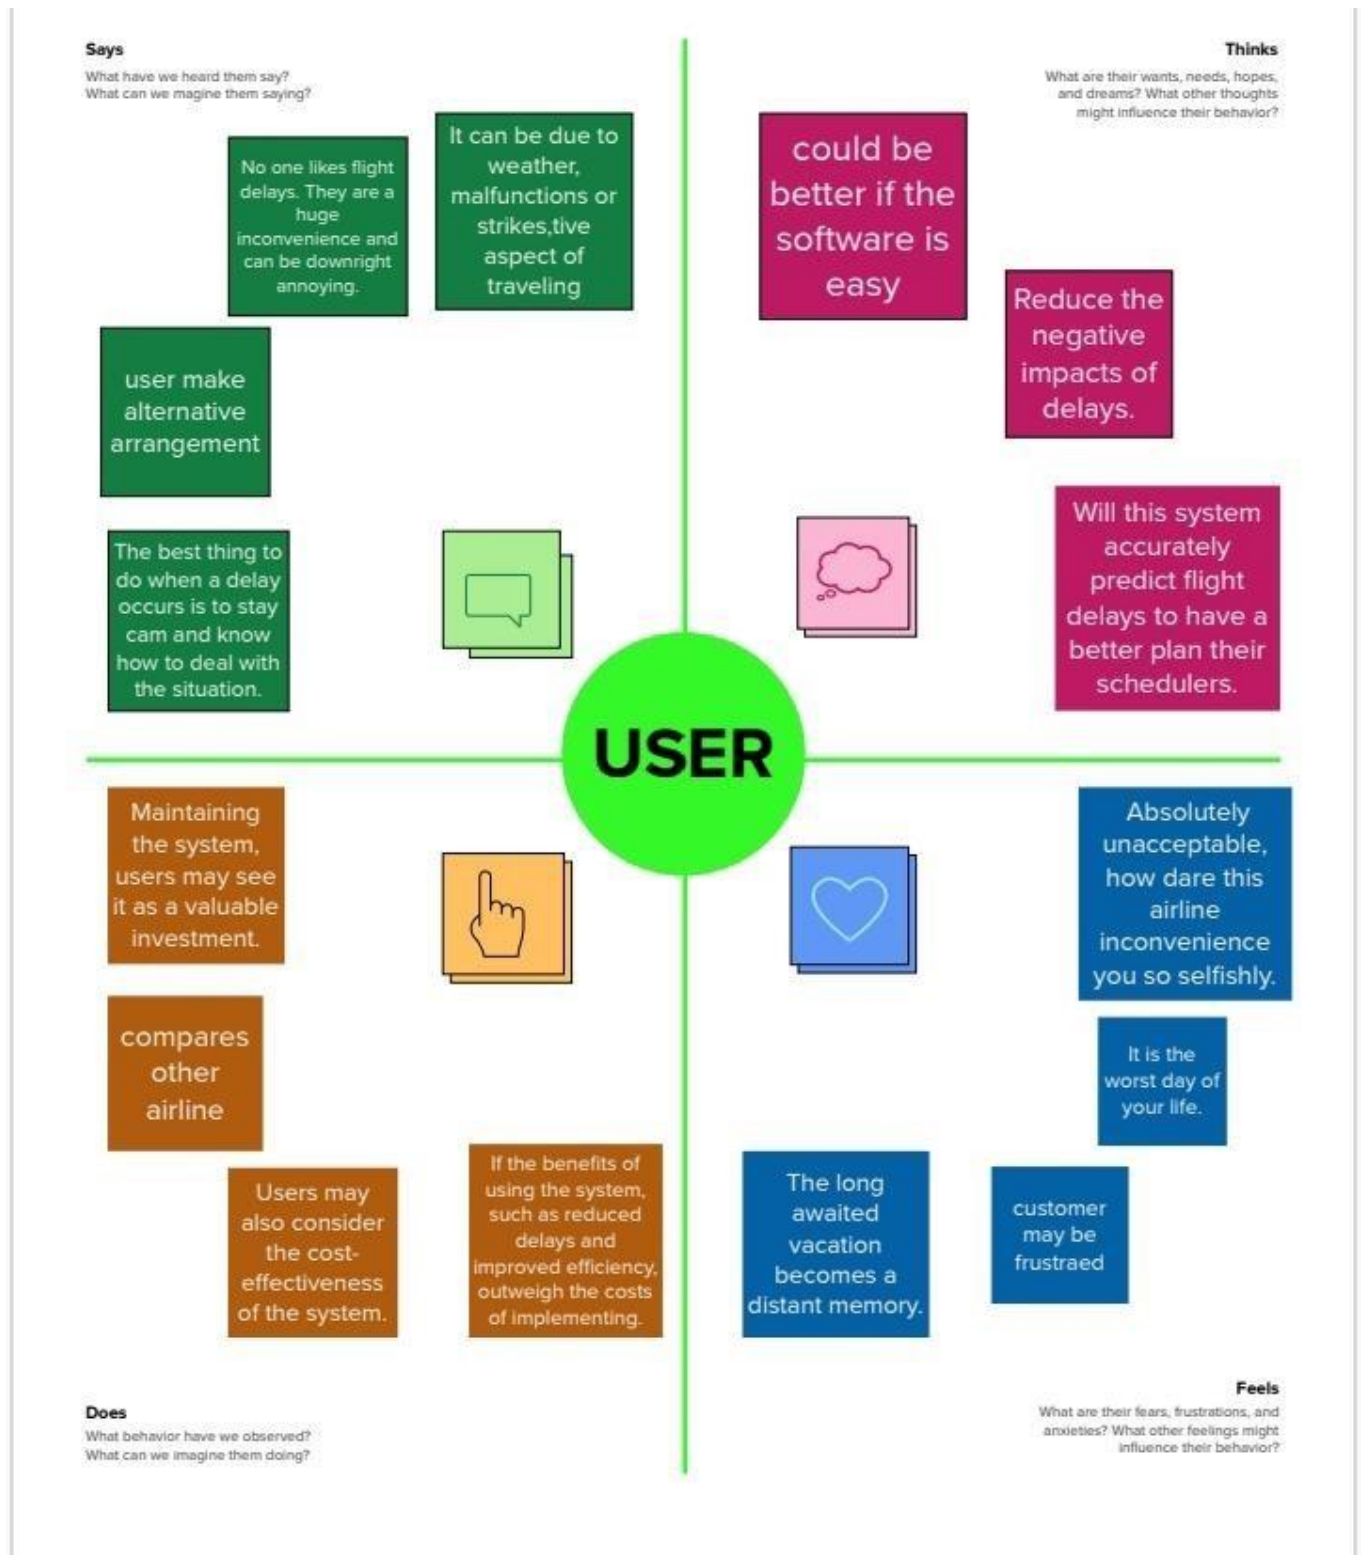

2.1 Problem Definition & Design Thinking



Brainstorm & idea prioritization

Use this template in your own brainstorming sessions so your team can unleash their imagination and start shaping concepts even if you're not sitting in the same room.

🕒 10 minutes to prepare

🕒 1 hour to collaborate

👤 2-8 people recommended



Before you collaborate

A little bit of preparation goes a long way with this session. Here's what you need to do to get going.

🕒 10 minutes



Team gathering

Define who should participate in the session and send an invite. Share relevant information or pre-work ahead.



Set the goal

Think about the problem you'll be focusing on solving in the brainstorming session.



Learn how to use the facilitation tools

Use the Facilitation Superpowers to run a happy and productive session.

[Open article](#)



2

Brainstorm

Write down any ideas that come to mind that address your problem statement.

⌚ 10 minutes

Archana R

Data collection and cleaning: To develop an accurate predictive model, it is essential to have access to high-quality data on past flight delays as well as relevant weather and other factors. This data must be cleaned and pre-processed to remove any errors or inconsistencies.

Feature selection and engineering: Once the data has been collected and cleaned, the next step is to identify which features. (E.G. Weather variables, flight route, airline, etc...) core most relevant for predicting flight delays.

Feature engineering can also be used to create new variables that may improve the accuracy of the model.

Abisha A

Flight delay prediction is an important problem for the aviation and airports the travel experience for passengers.

Machine Learning can be used to develop predictive models that can accurately forecast flight delays, based on a range of factors such as weather conditions, air traffic congestion and mechanical issues.

Abisha Kumari T

Choosing an appropriate algorithm: There are many machine learning algorithms that can be used for predicting flight delay including regression, decision trees, and neural networks.

Choosing the right algorithm for the problem at hand requires careful consideration of factors such as the size and complexity of the dataset, the desired level of accuracy, and the computational resources available.

Developing a flight delay prediction model using machine learning can be a challenging task.

Ajitha N

Over fitting and generalization: A common problem in machine learning is overfitting, where the model performs well on the training data.

To avoid over fitting, techniques such as cross-validation and regularization can be used.

Deployment and maintenance once a predictive model has been developed. It must be deployed and integrated into the airline or airports operations. Ongoing maintenance and monitoring is also required to ensure that the model continues to perform accurately over time.


Overall, developing a flight delay prediction model using machine learning requires careful consideration of a range of factors, including data quality, feature selection, algorithm choice, and deployment and maintenance.

Group ideas

Take turns sharing your ideas while clustering similar or related notes as you go. Once all sticky notes have been grouped, give each cluster a sentence-like label. If a cluster is bigger than six sticky notes, try and see if you can break it up into smaller sub-groups.

🕒 20 minutes

Group Flow Ideas

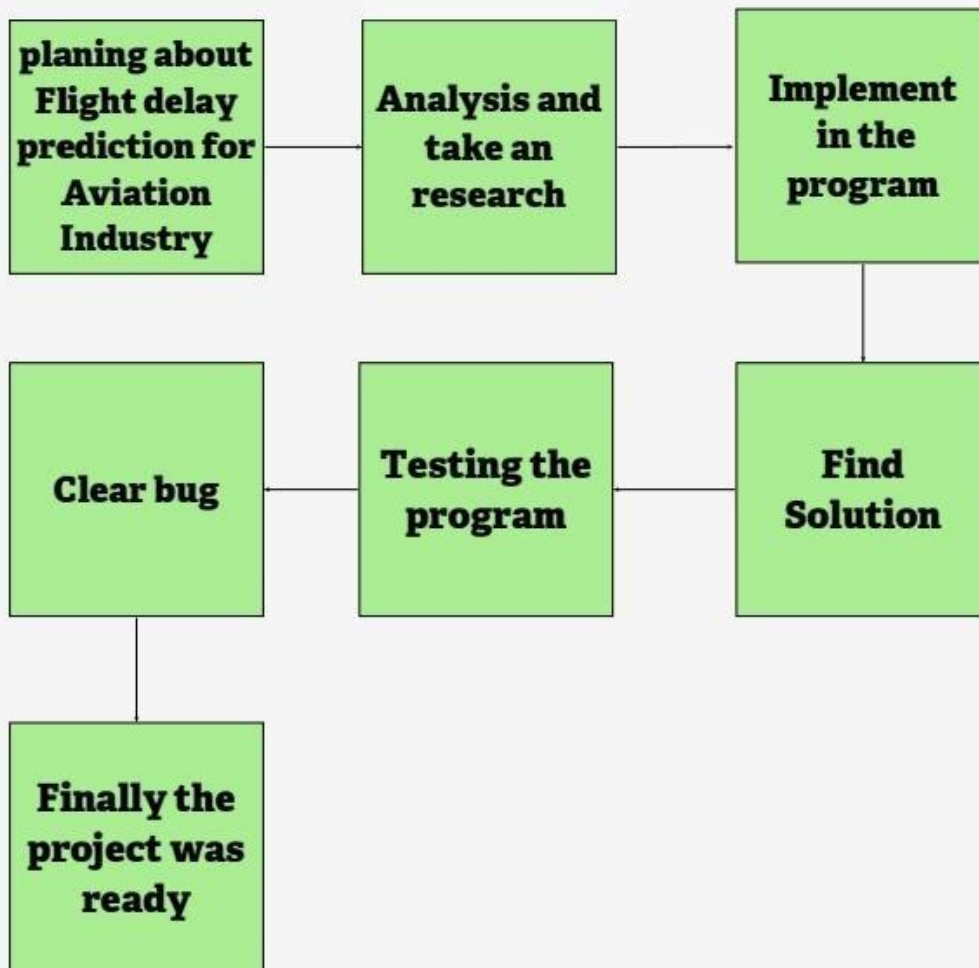


4

Prioritize


Your team should all be on the same page about what's important moving forward. Place your ideas on this grid to determine which ideas are important and which are feasible.

🕒 20 minutes

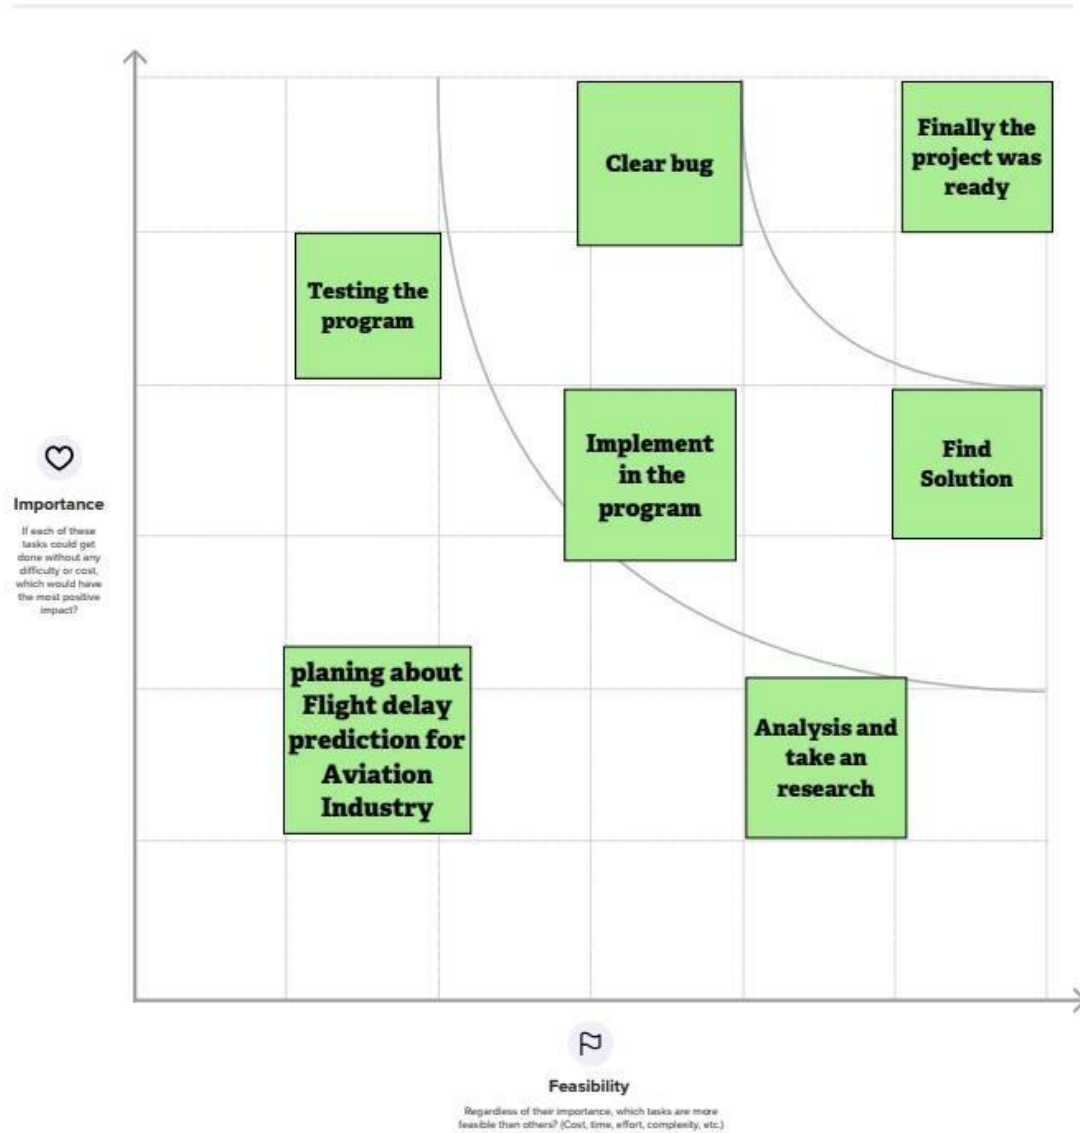

Result

Output:

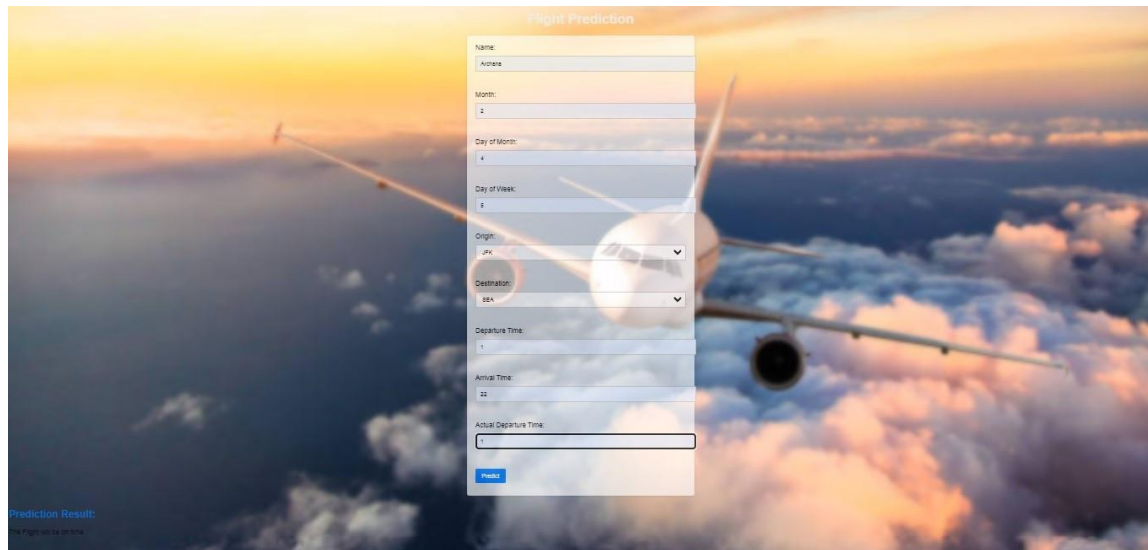

The image shows a web application titled "Flight Prediction" overlaid on a background image of an airplane flying through a sunset sky with clouds. The application features a central form with the following fields and values:

Field	Value
Name	Akshita
Month	2
Day of Month	4
Day of Week	8
Origin	JFK
Destination	SEA
Departure Time	1
Arrival Time	22
Actual Departure Time	1

At the bottom of the form is a blue "Predict" button. In the bottom-left corner, there is a section titled "Prediction Result:" with the text "The flight will be on time."

ADVANTAGES & DISADVANTAGES

Advantages

- Improved operational efficiency: Flight delay prediction can help airlines and airports to optimize their operations by anticipating potential delays and making proactive changes to flight schedules, crew assignments, and other resources. This can help to reduce costs and improve the efficiency of air travel.
- Enhanced customer satisfaction: Flight delays can be a major source of frustration for passengers, and accurate delay predictions can help airlines and airports to provide more accurate and timely information to passengers about their flights. This can help to reduce passenger stress and improve overall customer satisfaction.
- Better management of airport congestion: Delay prediction models can be used to anticipate periods of high congestion at airports and take steps to manage traffic flow. This can help to reduce delays and improve the efficiency of airport operations.
- More accurate planning and scheduling: Delay prediction can help airlines and airports to plan and schedule their operations more accurately by providing insights into potential delays and their causes. This can help to improve the accuracy of flight schedules and crew assignments.
- Improved safety: Delay prediction models can help airlines and air traffic controllers to anticipate and manage potential safety issues, such as severe weather or runway closures. This can help to improve the safety of air travel.

Disadvantages

- Accuracy limitations: While delay prediction models can be very accurate, they are not perfect and can sometimes make errors. These errors can lead to incorrect predictions, which can cause confusion or frustration for passengers and additional costs for airlines.
- Cost of implementation: Developing and implementing delay prediction models can be expensive, especially for smaller airlines or airports. There may be significant costs associated with acquiring and analyzing data, developing models, and integrating the models into existing systems.
- Overreliance on technology: Overreliance on delay prediction models and other technology can sometimes lead to complacency among airline and airport staff. If staff members assume that the models will always be accurate, they may be less likely to make critical decisions or take action when necessary.
- Privacy concerns: Delay prediction models rely on large amounts of data, including passenger and flight data. There may be concerns among passengers and privacy advocates about how this data is collected, used, and protected.
- Overall, while delay prediction models offer many benefits for the aviation industry, there are also potential drawbacks that must be considered. These include accuracy limitations, costs, overreliance on technology, privacy concerns, and ethical considerations.

APPLICATION

Application of Job Prediction

- Airline operations: Airlines can use delay prediction models to optimize their operations by rerouting flights, adjusting crew schedules, or providing advance notice to passengers in the event of a delay. This can help to minimize the impact of delays on passengers and reduce costs associated with delays.
- Air traffic management: Air traffic controllers can use delay prediction models to anticipate potential congestion or safety issues and take steps to manage traffic flow or issue warnings to pilots. This can help to improve the safety and efficiency of air travel.
- Airport operations: Airports can use delay prediction models to anticipate periods of high congestion and take steps to manage traffic flow or allocate resources more effectively. This can help to reduce delays and improve the efficiency of airport operations.
- Flight planning and scheduling: Delay prediction models can be used to help airlines and airports plan and schedule flights more accurately, by providing insights into potential delays and their causes. This can help to improve the accuracy of flight schedules and crew assignments.
- Environmental impact: By minimizing delays and optimizing flight schedules, delay prediction models can help to reduce fuel consumption and emissions associated with air travel, reducing the environmental impact of the aviation industry.

CONCLUSION

Conclusion:

Flight delay prediction has become an increasingly important tool for the aviation industry, offering a range of benefits to airlines, airports, air traffic controllers, and passengers. By using data analytics and machine learning techniques, delay prediction models can accurately forecast flight delays and provide valuable insights into the causes of delays. This can help airlines and airports to optimize their operations, reduce costs, and improve the overall passenger experience. However, there are also potential drawbacks to consider, including accuracy limitations, implementation costs, and ethical concerns. Despite these challenges, the benefits of flight delay prediction make it an essential tool for the aviation industry, helping to improve safety, efficiency, and customer satisfaction, while reducing costs and minimizing the environmental impact of air travel. As technology continues to advance, it is likely that flight delay prediction will become even more sophisticated, providing even greater value to the aviation industry and its customers.

FUTURE SCOPE

Future Scope:

The future scope of flight delay prediction for the aviation industry is vast and promising. As technology continues to advance, new opportunities and challenges will emerge, leading to new applications and innovations. Here are some potential future developments in the field of flight delay prediction:

- **Integration with other technologies:** Delay prediction models could be integrated with other technologies, such as drones, to improve the accuracy and efficiency of flight operations.
- **Real-time updates:** Real-time updates could be provided to passengers, allowing them to adjust their travel plans or make alternative arrangements in the event of a delay.
- **Personalized predictions:** Delay prediction models could be personalized to individual passengers, taking into account factors such as past travel behavior, preferences, and booking history.

Overall, the future scope of flight delay prediction for the aviation industry is promising, with many potential applications and innovations on the horizon. As technology continues to advance, it is likely that delay prediction models will become even more accurate, efficient, and personalized, helping to improve safety, reduce costs, and enhance the overall passenger experience.

APPENDIX

Source Code

1. Home.html

```
<!DOCTYPE html>
<html>
<head>
<title>Flight Prediction</title>
<style>
    body {        font-family:
Arial, sans-serif;
background-color: blue;
        background: url('flight_bg.jpg') center center/cover no-repeat;
backdrop-filter: blur(5px);        opacity: 0.8;
    }
    h1 {        text-
align: center;
color: #eee;
    }

    form {        max-width: 500px;
margin: 0 auto;        padding: 20px;
background-color: rgba(255, 255, 255, 0.8);
```

```
border-radius: 5px;          box-shadow: 0 2px 6px
                                rgba(0, 0, 0, 0.1);
    }
```

```
    label, input, select {
display: block;          margin-
bottom: 10px;
    }
```

```
    input[type="text"], select {
width: 100%;          padding:
10px;          border: 1px solid
#ccc;          border-radius:
3px;
    }
```

```
    input[type="submit"] {
background-color: #007bff;
        color: #fff;
padding: 10px 15px;
border: none;
border-radius: 3px;
cursor: pointer;
    }
```

```
    input[type="submit"]:hover {
background-color: #0056b3;
```

```
    }

    h2 {
        margin-top: 30px;
color: #007bff;
    }

    p {
        margin-top: 10px;
    }
</style> </head>

<body>

<h1>Flight Prediction</h1>
<form action="/prediction" method="post">
<label for="name">Name:</label>
<input type="text" id="name" name="name"><br><br>
<label for="month">Month:</label>
<input type="text" id="month" name="month"><br><br>
<label for="dayofmonth">Day of Month:</label>
<input type="text" id="dayofmonth" name="dayofmonth"><br><br>
<label for="dayofweek">Day of Week:</label>
<input type="text" id="dayofweek" name="dayofweek"><br><br>
<label for="origin">Origin:</label>
<select id="origin" name="origin">
<option value="msp">MSP</option>
<option value="dtw">DTW</option>
<option value="jfk">JFK</option>
```



```

<option value="sea">SEA</option>
<option value="alt">ALT</option>
</select><br><br>
<label for="destination">Destination:</label>
<select id="destination" name="destination">
<option value="msp">MSP</option>
<option value="dtw">DTW</option>
<option value="jfk">JFK</option>
<option value="sea">SEA</option>
<option value="alt">ALT</option>
</select><br><br>
<label for="dept">Departure Time:</label>
<input type="text" id="dept" name="dept"><br><br>
<label for="arrtime">Arrival Time:</label>
<input type="text" id="arrtime" name="arrtime"><br><br> <label
for="actdept">Actual Departure Time:</label>
<input type="text" id="actdept" name="actdept"><br><br>
<input type="submit" value="Predict">
</form>

<h2>Prediction Result:</h2>
<p>{{ showcase }}</p>
</body>
</html>

```

2. app.py

```
from flask import Flask, request, render_template import
joblib

# Load trained machine learning model clf =
joblib.load('flight_delay_prediction_model.joblib')

# Initialize Flask app app
= Flask(__name__)

# Define app routes
@app.route('/') def
home():
    return render_template('index.html')

@app.route('/predict', methods=['POST']) def
predict():

    # Get user input from web form
    departure_time = request.form.get('departure_time')
    arrival_time = request.form.get('arrival_time')
    carrier = request.form.get('carrier')    distance =
    request.form.get('distance')

    # Make prediction using machine learning model    prediction
    = clf.predict([[departure_time, arrival_time, carrier, distance]])

    # Render prediction result in HTML template
```

```
    return render_template('prediction.html', prediction=prediction[0])

# Run app in debug mode if
__name__ == '__main__':
    app.run(debug=True)
```

3.flight.ipynb

```

import pandas as pd
import numpy as np
import pickle
import matplotlib.pyplot as plt
%matplotlib inline
import seaborn as sns
import sklearn
from sklearn.tree import DecisionTreeClassifier
from sklearn.ensemble import GradientBoostingClassifier, RandomForestClassifier
from sklearn.neighbors import KNeighborsClassifier
from sklearn.model_selection import RandomizedSearchCV
import imblearn
from sklearn.model_selection import train_test_split
from sklearn.preprocessing import StandardScaler
from sklearn.metrics import accuracy_score, classification_report, confusion_matrix, f1_score
dataset= pd.read_csv("Flightdata.csv")

```

```
dataset.head()
```

```

YEAR  QUARTER  MONTH  DAY_OF_MONTH  DAY_OF_WEEK  UNIQUE_CARRIER  TAIL_NUM  FL_NUM
0  2016        1      1           1           5             DL      N836DN     139
1  2016        1      1           1           5             DL      N964DN     147
2  2016        1      1           1           5             DL      N813DN     159
3  2016        1      1           1           5             DL      N587NW     176
4  2016        1      1           1           5             DL      N836DN     182

```

5 rows × 26 columns

```
dataset.info()
```

```

<class 'pandas.core.frame.DataFrame'>
RangeIndex: 11231 entries, 0 to 11230
Data columns (total 26 columns):
#   Column                Non-Null Count  Dtype
---  -
0   YEAR                  11231 non-null  int64
1   QUARTER               11231 non-null  int64
2   MONTH                 11231 non-null  int64
3   DAY_OF_MONTH          11231 non-null  int64
4   DAY_OF_WEEK           11231 non-null  int64
5   UNIQUE_CARRIER       11231 non-null  object
6   TAIL_NUM              11231 non-null  object
7   FL_NUM               11231 non-null  int64
8   ORIGIN_AIRPORT_ID     11231 non-null  int64
9   ORIGIN                11231 non-null  object
10  DEST_AIRPORT_ID       11231 non-null  int64
11  DEST                  11231 non-null  object
12  CRS_DEP_TIME          11231 non-null  int64
13  DEP_TIME              11124 non-null  float64
14  DEP_DELAY             11124 non-null  float64
15  DEP_DEL15             11124 non-null  float64
16  CRS_ARR_TIME          11231 non-null  int64
17  ARR_TIME              11116 non-null  float64
18  ARR_DELAY             11043 non-null  float64
19  ARR_DEL15             11043 non-null  float64
20  CANCELLED             11231 non-null  float64
21  DIVERTED              11231 non-null  float64
22  CRS_ELAPSED_TIME      11231 non-null  float64
23  ACTUAL_ELAPSED_TIME   11043 non-null  float64
24  DISTANCE              11231 non-null  float64
25  Unnamed: 25           0 non-null      float64
dtypes: float64(12), int64(10), object(4)
memory usage: 2.2+ MB

```

```

dataset = dataset.drop('Unnamed: 25', axis=1)
dataset.isnull().sum()

```

```

YEAR                0
QUARTER             0
MONTH               0
DAY_OF_MONTH        0
DAY_OF_WEEK         0

```

```

UNIQUE_CARRIER      0
TAIL_NUM              0
FL_NUM               0
ORIGIN_AIRPORT_ID    0
ORIGIN               0
DEST_AIRPORT_ID      0
DEST                 0
CRS_DEP_TIME         0
DEP_TIME             107
DEP_DELAY            107
DEP_DEL15            107
CRS_ARR_TIME         0
ARR_TIME             115
ARR_DELAY            188
ARR_DEL15            188
CANCELLED            0
DIVERTED             0
CRS_ELAPSED_TIME     0
ACTUAL_ELAPSED_TIME  188
DISTANCE             0
dtype: int64

```

```

dataset = dataset[[ "MONTH", "DAY_OF_MONTH", "DAY_OF_WEEK", "ORIGIN", "DEST", "CRS_ARR_TIME", "ARR_DEL15"]]
dataset.isnull().sum()

```

```

MONTH                0
DAY_OF_MONTH         0
DAY_OF_WEEK          0
ORIGIN               0
DEST                 0
CRS_ARR_TIME         0
ARR_DEL15            188
dtype: int64

```

```

dataset[dataset.isnull().values.any(axis=1)].head()

```

	MONTH	DAY_OF_MONTH	DAY_OF_WEEK	ORIGIN	DEST	CRS_ARR_TIME	ARR_DEL15
177	1	9	6	MSP	SEA	852	NaN
179	1	10	7	MSP	DTW	1632	NaN
184	1	10	7	MSP	DTW	912	NaN
210	1	10	7	DTW	MSP	1303	NaN
478	1	22	5	SEA	JFK	723	NaN

```

dataset = dataset.fillna({'ARR_DEL15': 1})
dataset.iloc[177:185]

```

	MONTH	DAY_OF_MONTH	DAY_OF_WEEK	ORIGIN	DEST	CRS_ARR_TIME	ARR_DEL15
177	1	9	6	MSP	SEA	852	1.0
178	1	9	6	DTW	JFK	1724	0.0
179	1	10	7	MSP	DTW	1632	1.0
180	1	10	7	DTW	MSP	1649	0.0
181	1	10	7	JFK	ATL	1600	0.0
182	1	10	7	JFK	ATL	849	0.0
183	1	10	7	JFK	SEA	1945	0.0
184	1	10	7	MSP	DTW	912	1.0

```

dataset.head()

```

```
import math

0      1      1      5      ATL      SEA      2143      0.0

for index, row in dataset.iterrows():
    dataset.loc[index, 'CRS_ARR_TIME'] = math.floor(row['CRS_ARR_TIME']/100)

dataset.head()
```

	MONTH	DAY_OF_MONTH	DAY_OF_WEEK	ORIGIN	DEST	CRS_ARR_TIME	ARR_DEL15
0	1	1	5	ATL	SEA	21	0.0
1	1	1	5	DTW	MSP	14	0.0
2	1	1	5	ATL	SEA	12	0.0
3	1	1	5	SEA	MSP	13	0.0
4	1	1	5	SEA	DTW	6	0.0

```
dataset = pd.get_dummies(dataset, columns=['ORIGIN', 'DEST'])
dataset.head()
```

	MONTH	DAY_OF_MONTH	DAY_OF_WEEK	CRS_ARR_TIME	ARR_DEL15	ORIGIN_ATL	ORIGIN_D
0	1	1	5	21	0.0	1	
1	1	1	5	14	0.0	0	
2	1	1	5	12	0.0	1	
3	1	1	5	13	0.0	0	
4	1	1	5	6	0.0	0	

```
from sklearn.model_selection import train_test_split
```

```
x_train, x_test, y_train, y_test = train_test_split(dataset.drop('ARR_DEL15', axis=1), dataset['ARR_DEL15'], test_size=0.2, random_state=42)
```

```
x_train.shape
```

```
(8984, 14)
```

```
x_test.shape
```

```
(2247, 14)
```

```
from sklearn.ensemble import RandomForestClassifier
```

```
model = RandomForestClassifier(random_state=13)
model.fit(x_train, y_train)
```

```
RandomForestClassifier
RandomForestClassifier(random_state=13)
```

```
predicted = model.predict(x_test)
model.score(x_test, y_test)
```

```
0.8633733867378727
```

```
from sklearn.metrics import roc_auc_score
```

```
probabilities = model.predict_proba(x_test)
```

```
roc_auc_score(y_test, probabilities[:, 1])
```

```
0.6847853166272488
```

```

from sklearn.metrics import confusion_matrix

confusion_matrix(y_test, predicted)

array([[1906,  30],
       [ 277,  34]])

from sklearn.metrics import precision_score

train_predictions = model.predict(x_train)
precision_score(y_train, train_predictions)

1.0

from sklearn.metrics import recall_score

recall_score(y_train, train_predictions)

0.9984025559105432

import pickle

pickle.dump(model, open('flight.pkl', 'wb'))

model_loaded = pickle.load(open('flight.pkl', 'rb'))

model_loaded.predict(x_test)

array([0., 0., 0., ..., 0., 0., 0.])

import joblib

joblib.dump(model, 'flight2')

['flight2']

```