

## ▼ 1. Download the dataset: Dataset

Dataset successfully downloaded

## ▼ 2. Load the dataset.

```
import pandas as pd
import numpy as np
```

```
file=pd.read_csv("Churn_Modelling.csv")
df=pd.DataFrame(file)
df.head()
```

	RowNumber	CustomerId	Surname	CreditScore	Geography	Gender	Age	Tenure	Balance
0	1	15634602	Hargrave	619	France	Female	42	2	
1	2	15647311	Hill	608	Spain	Female	41	1	838
2	3	15619304	Onio	502	France	Female	42	8	1596
3	4	15701354	Boni	699	France	Female	39	1	
4	5	15737888	Mitchell	850	Spain	Female	43	2	1255

```
df['HasCrCard'] = df['HasCrCard'].astype('category')
```

```
df['IsActiveMember'] = df['IsActiveMember'].astype('category')
df['Exited'] = df['Exited'].astype('category')
```

```
df = df.drop(columns=['RowNumber', 'CustomerId', 'Surname'])
```


```
df.head()
```

	CreditScore	Geography	Gender	Age	Tenure	Balance	NumOfProducts	HasCrCard
0	619	France	Female	42	2	0.00	1	1
1	608	Spain	Female	41	1	83807.86	1	0
2	502	France	Female	42	8	159660.80	3	1
3	699	France	Female	39	1	0.00	2	0
4	850	Spain	Female	43	2	125510.82	1	1

### ▼ 3. Perform Below Visualizations.

- Univariate Analysis
- Bi - Variate Analysis
- Multi - Variate Analysis

```
import seaborn as sns
density = df['Exited'].value_counts(normalize=True).reset_index()
sns.barplot(data=density, x='index', y='Exited', );
density
```

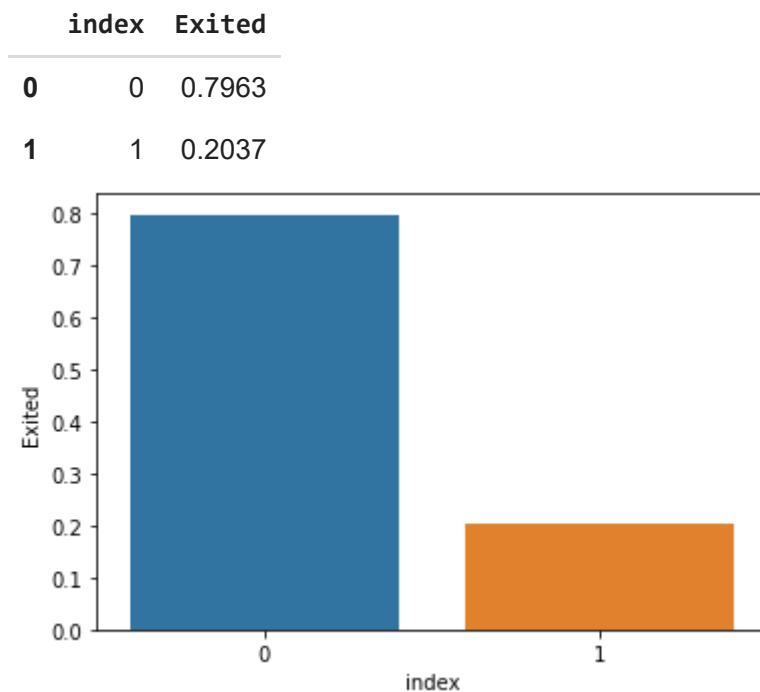

### ▼ the data is significantly imbalanced

```
import matplotlib.pyplot as plt

categorical = df.drop(columns=['CreditScore', 'Age', 'Tenure', 'Balance', 'EstimatedSalary'])
rows = int(np.ceil(categorical.shape[1] / 2)) - 1

# create sub-plots and title them
fig, axes = plt.subplots(nrows=rows, ncols=2, figsize=(10,6))
axes = axes.flatten()
```


```

for row in range(rows):
    cols = min(2, categorical.shape[1] - row*2)
    for col in range(cols):
        col_name = categorical.columns[2 * row + col]
        ax = axes[row*2 + col]

        sns.countplot(data=categorical, x=col_name, hue="Exited", ax=ax);

plt.tight_layout()

```

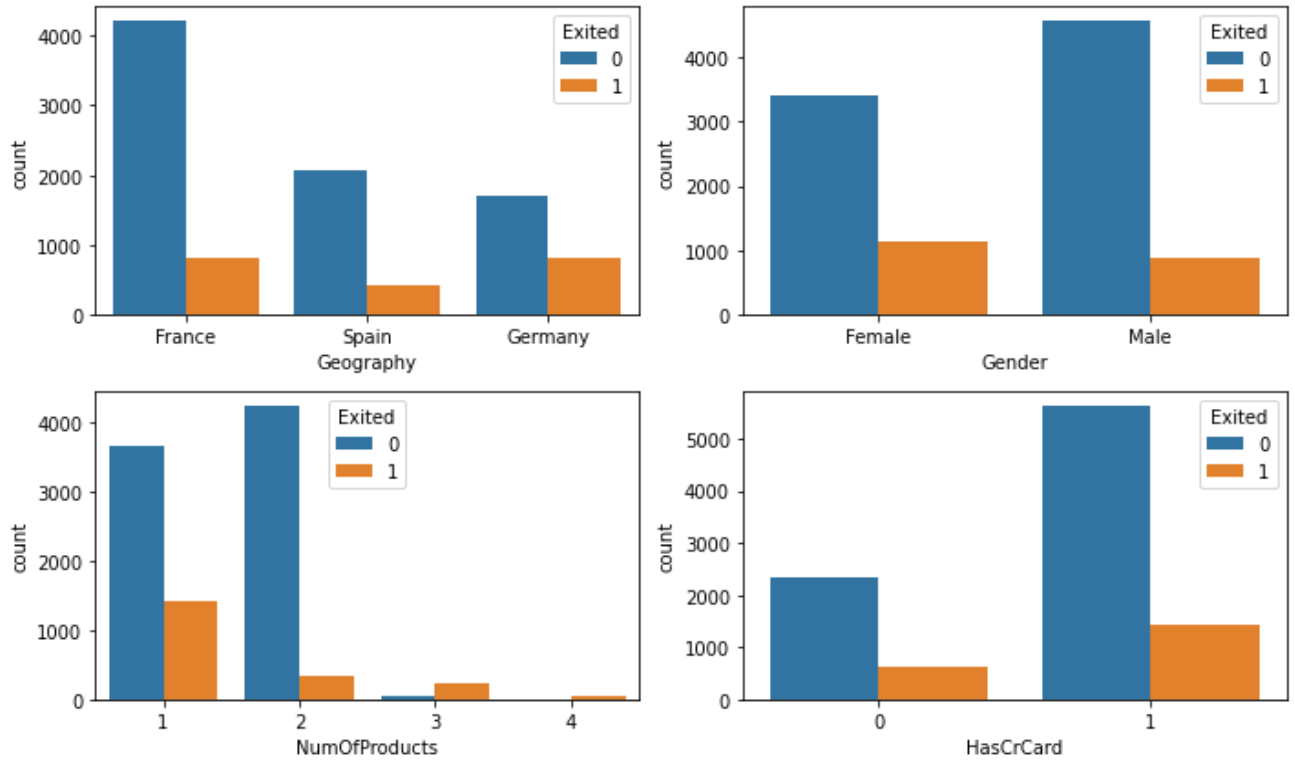

## ▼ 4. Perform descriptive statistics on the dataset.

```
df.info()
```

```

<class 'pandas.core.frame.DataFrame'>
RangeIndex: 10000 entries, 0 to 9999
Data columns (total 11 columns):
#   Column                Non-Null Count  Dtype  
---  -
0   CreditScore            10000 non-null  int64  
1   Geography              10000 non-null  object  
2   Gender                 10000 non-null  object  
3   Age                   10000 non-null  int64  
4   Tenure                 10000 non-null  int64  
5   Balance                10000 non-null  float64 
6   NumOfProducts          10000 non-null  int64  
7   HasCrCard              10000 non-null  category
8   IsActiveMember         10000 non-null  category
9   EstimatedSalary        10000 non-null  float64 

```

```

10 Exited      10000 non-null category
dtypes: category(3), float64(2), int64(4), object(2)
memory usage: 654.8+ KB

```

```
df.describe()
```

	CreditScore	Age	Tenure	Balance	NumOfProducts	EstimatedSalary
<b>count</b>	10000.000000	10000.000000	10000.000000	10000.000000	10000.000000	10000.000000
<b>mean</b>	650.528800	38.921800	5.012800	76485.889288	1.530200	1000.000000
<b>std</b>	96.653299	10.487806	2.892174	62397.405202	0.581654	575.000000
<b>min</b>	350.000000	18.000000	0.000000	0.000000	1.000000	0.000000
<b>25%</b>	584.000000	32.000000	3.000000	0.000000	1.000000	510.000000
<b>50%</b>	652.000000	37.000000	5.000000	97198.540000	1.000000	1001.000000
<b>75%</b>	718.000000	44.000000	7.000000	127644.240000	2.000000	1493.000000
<b>max</b>	850.000000	92.000000	10.000000	250898.090000	4.000000	1999.000000

## ▼ 5. Handle the Missing values.

```
df.isna().sum()
```

```

CreditScore      0
Geography        0
Gender           0
Age             0
Tenure          0
Balance          0
NumOfProducts    0
HasCrCard        0
IsActiveMember   0
EstimatedSalary  0
Exited           0
dtype: int64

```

## ▼ there is no missing values in dataset

```

for i in df:
    if df[i].dtype=='object' or df[i].dtype=='category':

        print("unique of "+i+" is "+str(len(set(df[i])))+" they are "+str(set(df[i])))

unique of Geography is 3 they are {'Spain', 'Germany', 'France'}
unique of Gender is 2 they are {'Female', 'Male'}
unique of HasCrCard is 2 they are {0, 1}

```

unique of IsActiveMember is 2 they are {0, 1}  
 unique of Exited is 2 they are {0, 1}


## 6. Find the outliers and replace the outliers

### ▼ Checking for outliers

```
def box_scatter(data, x, y):
    fig, (ax1, ax2) = plt.subplots(nrows=2, ncols=1, figsize=(16,6))
    sns.boxplot(data=data, x=x, ax=ax1)
    sns.scatterplot(data=data, x=x,y=y,ax=ax2)


box_scatter(df, 'CreditScore', 'Exited');
plt.tight_layout()
print(f"# of Bivariate Outliers: {len(df.loc[df['CreditScore'] < 400])}")
```

# of Bivariate Outliers: 19

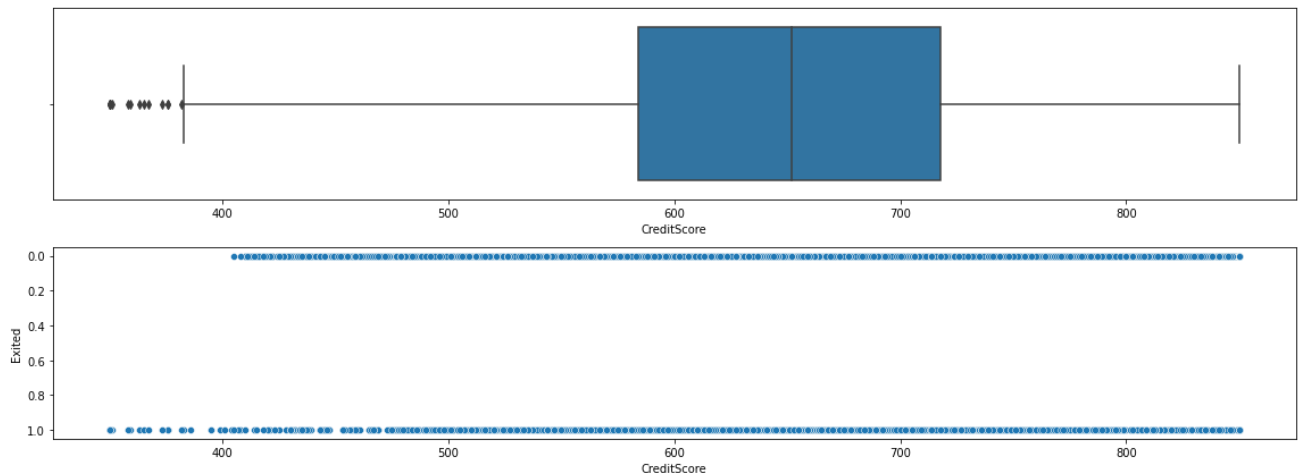


```
box_scatter(df, 'Age', 'Exited');
plt.tight_layout()
print(f"# of Bivariate Outliers: {len(df.loc[df['Age'] > 87])}")
```

# of Bivariate Outliers: 3

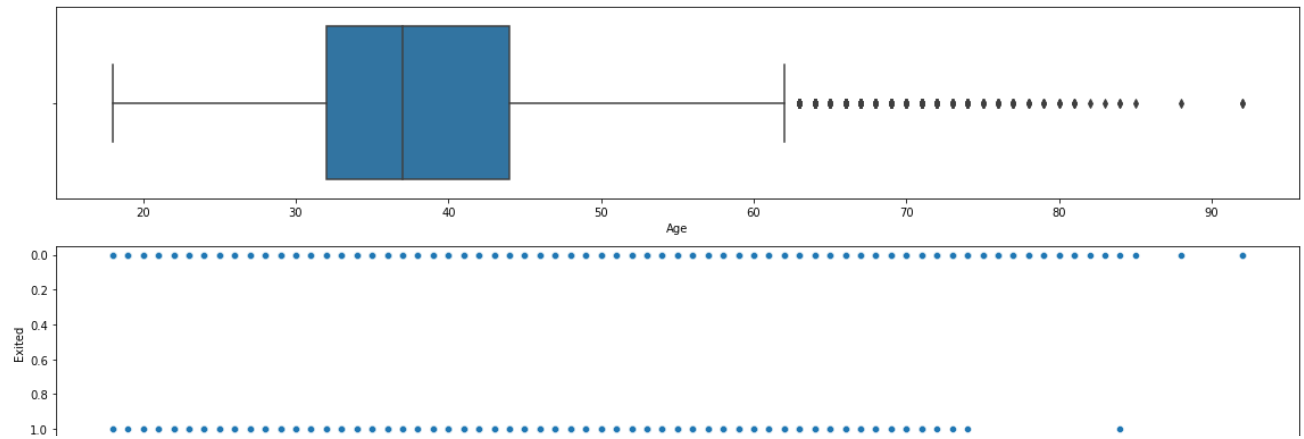


```
box_scatter(df, 'Balance', 'Exited');
plt.tight_layout()
print(f"# of Bivariate Outliers: {len(df.loc[df['Balance'] > 220000])}")
```


# of Bivariate Outliers: 4

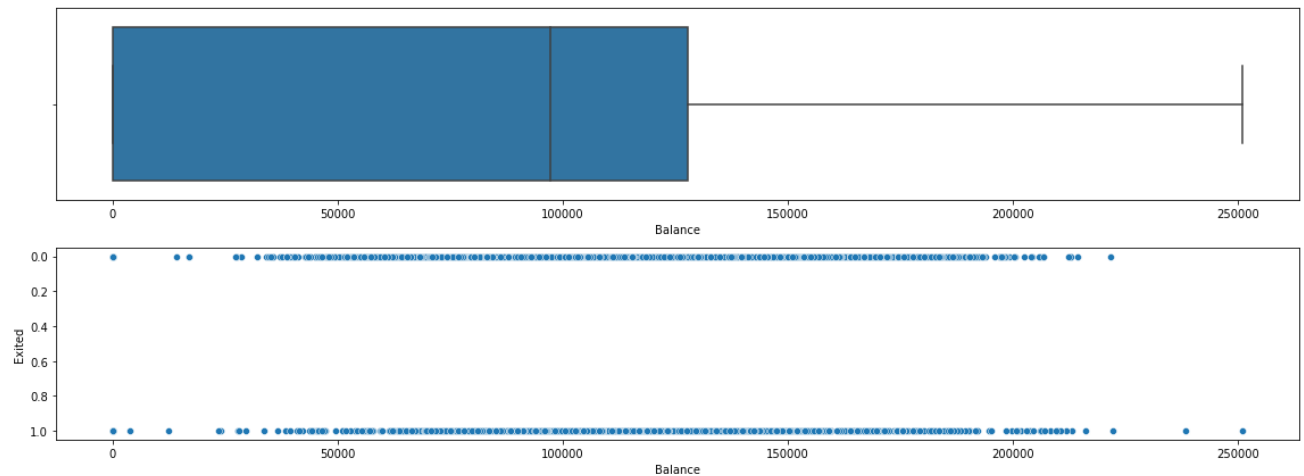

```
box_scatter(df, 'EstimatedSalary', 'Exited');
plt.tight_layout()
```

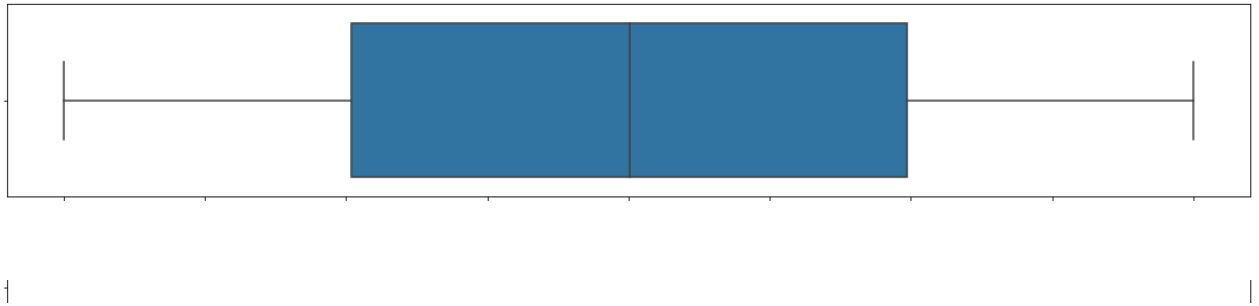

## ▼ Removing outliers



```
for i in df:
    if df[i].dtype=='int64' or df[i].dtypes=='float64':
        q1=df[i].quantile(0.25)
        q3=df[i].quantile(0.75)
        iqr=q3-q1
        upper=q3+1.5*iqr
        lower=q1-1.5*iqr
        df[i]=np.where(df[i] >upper, upper, df[i])
        df[i]=np.where(df[i] <lower, lower, df[i])
```


## ▼ After removing outliers, boxplot will be like

```
box_scatter(df, 'CreditScore', 'Exited');
plt.tight_layout()
print(f"# of Bivariate Outliers: {len(df.loc[df['CreditScore'] < 400])}")
```

```
box_scatter(df, 'Age', 'Exited');
plt.tight_layout()
```

```
print(f"# of Bivariate Outliers: {len(df.loc[df['Age'] > 87])}")
```

# of Bivariate Outliers: 0

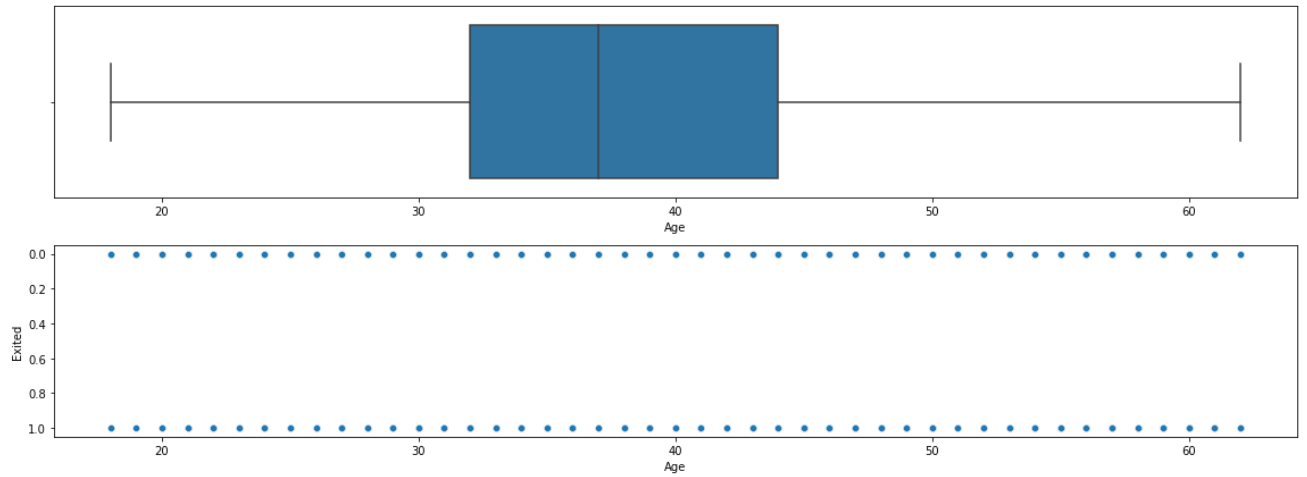


```
box_scatter(df, 'Balance', 'Exited');
```

```
plt.tight_layout()
```

```
print(f"# of Bivariate Outliers: {len(df.loc[df['Balance'] > 220000])}")
```

# of Bivariate Outliers: 4

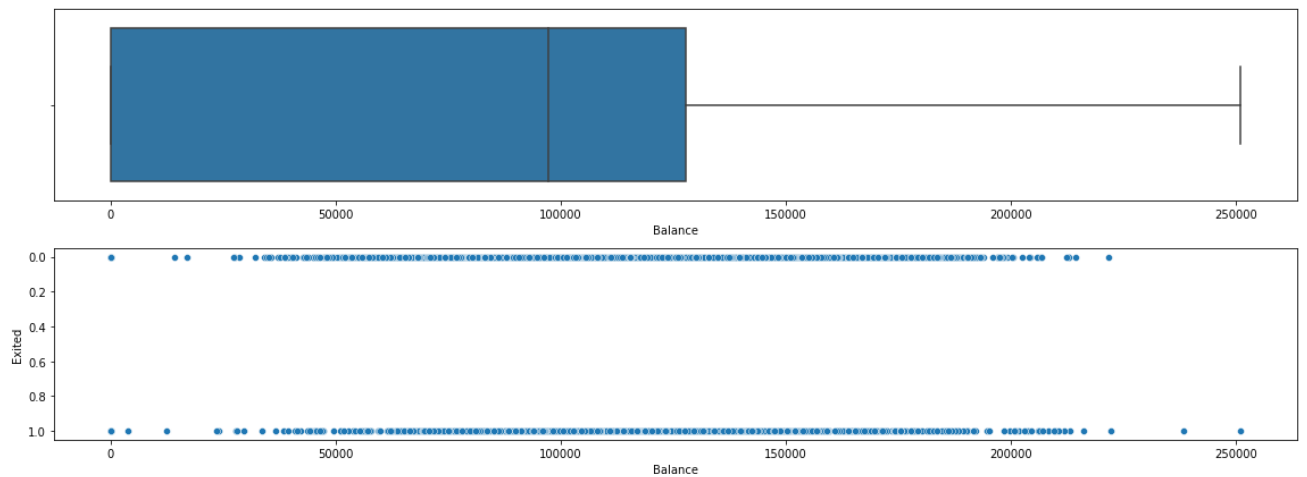

## ➤ 7. Check for Categorical columns and perform encoding.



```

from sklearn.preprocessing import LabelEncoder
encoder=LabelEncoder()
for i in df:
    if df[i].dtype=='object' or df[i].dtype=='category':
        df[i]=encoder.fit_transform(df[i])

```

## ▼ 8. Split the data into dependent and independent variables.

```

x=df.iloc[:, :-1]
x.head()

```

	CreditScore	Geography	Gender	Age	Tenure	Balance	NumOfProducts	HasCrCard
0	619.0	0	0	42.0	2.0	0.00	1.0	1
1	608.0	2	0	41.0	1.0	83807.86	1.0	0
2	502.0	0	0	42.0	8.0	159660.80	3.0	1
3	699.0	0	0	39.0	1.0	0.00	2.0	0
4	850.0	2	0	43.0	2.0	125510.82	1.0	1

```

y=df.iloc[:, -1]
y.head()

```

```

0    1
1    0
2    1
3    0
4    0
Name: Exited, dtype: int64

```

## ▼ 9. Scale the independent variables

```

from sklearn.preprocessing import StandardScaler
scaler=StandardScaler()
x=scaler.fit_transform(x)

```

x

```

array([[ -0.32687761, -0.90188624, -1.09598752, ...,  0.64609167,
         0.97024255,  0.02188649],
       [ -0.44080365,  1.51506738, -1.09598752, ..., -1.54776799,
         0.97024255,  0.21653375],
       [ -1.53863634, -0.90188624, -1.09598752, ...,  0.64609167,
        -1.03067011,  0.2406869 ],
       ...,
       [  0.60524449, -0.90188624, -1.09598752, ..., -1.54776799,
         0.97024255, -1.00864308],

```

```
[ 1.25772996,  0.30659057,  0.91241915, ...,  0.64609167,  
-1.03067011, -0.12523071],  
[ 1.4648682 , -0.90188624, -1.09598752, ...,  0.64609167,  
-1.03067011, -1.07636976]])
```

## ▼ 10. Split the data into training and testing

```
from sklearn.model_selection import train_test_split  
x_train,x_test,y_train,y_test=train_test_split(x,y,test_size=0.33)
```

```
x_train.shape
```

```
(6700, 10)
```

```
x_test.shape
```

```
(3300, 10)
```

```
y_train.shape
```

```
(6700,)
```

```
y_test.shape
```

```
(3300,)
```

