Lab 10: Markov

CSE/IT 107

NMT Computer Science

"Today, most software exists not to solve a problem, but to interface with other software."

— Ian O. Angell

"Computer Science is no more about computers than astronomy is about telescopes."

— Edsger W. Dijkstra

"If people never did silly things, nothing intelligent would ever get done."

— Ludwig Wittgenstein

1 Introduction

2 Markov Chains

A Markov chain is a method of randomly generating a sequence based on a set of input data. In this lab, we will be using Markov chains to generate sentences based on an input text file. In order to do this, we must understand how Markov chains work.



Figure 1: Garkov: A Garfield comic generated using Markov chains.

The basic steps of creating Markov chains are:

- 1. Select a random starting word to start our new sentence.
- 2. From all the words that ever follow that word in the input sequence, choose one. Add that word to the end of our new sentence.
- Continue selecting randomly from the words that can possibly follow the current last word of our sentence until either there are no possible choices or we have made a sentence as long as desired.

As an example, let's use the input phrase "There is a fifth dimension, beyond that which is known to man. It is a dimension as vast as space and as timeless as infinity.". If we were to convert this sentence into graph representing the possible choices to make at each step, it would look something like Figure 2.

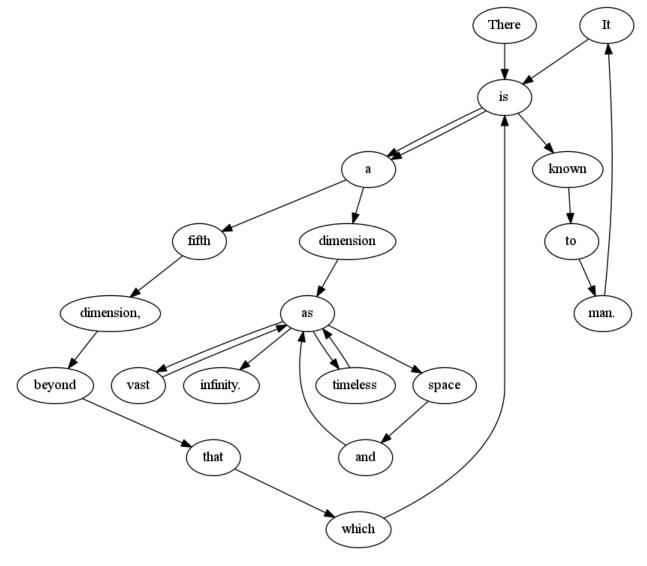


Figure 2: A graphical representation of the Markov possibilities for *The Twilight Zone*'s introduction.

In this graph, each arrow represents a choice we can take based on the last word we added to our sentence. For example, if we start with "There", our only option is "is". "is" is followed by "a" twice, so it has two arrows to "a" and one to "known". This means that, when we randomly choose a next step, we should have a $\frac{2}{3}$ chance to choose "a" and a $\frac{1}{3}$ chance to choose "known". If we (randomly) choose to continue to "a", we have the choice of either "fifth" or "dimension" to continue our sentence with. A few possible new sentences we could generate from this input are:

- There is a dimension as infinity.
- There is a fifth dimension, beyond that which is a fifth dimension, beyond that which is a dimension as vast as space and as infinity.
- There is known to man. It is known to man. It is a dimension as space and as infinity.

As you can see, Markov chains have a tendency to make sentences which almost make sense. This is because every individual pairing of two words will make sense, but the combinations of the pairings might not. For example, "as vast" and "vast as" can both make sense given the right context, but "vast as vast as vast as vast" is nonsense. We can help alleviate this problem by taking into account the last 2 (or 3, or 4...) words when choosing the next word instead of just the last one, but this requires a far larger input or it will result in the output being the same as the input.

3 Amnesty

4 Exercises

Boilerplate

Remember that this lab *must* use the boilerplate syntax introduced in Lab 5.

markov.py Write a program that takes in a filename, reads each line of the file, converts the lines into a format convenient for making Markov chains, and then prints out a new sentence randomly generated from the data, based on the Markov algorithm. When loading the file, treat the lines as separate statements. That is, if "Hello, how are you?" and "Where are my keys?" are lines in a file, then "you?" should not be followed by "Where" when generating a chain. However, "are" should be allowed to be followed by either "you?" or "my", as seen in Figure 3.




Figure 3: A graphical representation of the Markov possibilities for "Hello, how are you?" and "Where are my keys?"

When creating a new chain, the first element should always be a randomly selected first word of a line in the file. The chain should end when either:

- There are no valid choices to continue the sentence with.
- The sentence has reached a length of 100 words.

You may use any file you wish for test input, though reviews.txt is provided for you. This is a collection of 12500 reviews from IMDB and is a subset of the data provided at http://ai.stanford.edu/~amaas/data/sentiment/index.html. When parsing the input file, you should skip any blank lines.

5 Submitting

Files to submit:

• markov.py (Section 4)

You may submit your code as either a tarball (instructions below) or as a .zip file. Either one should contain all files used in the exercises for this lab. The submitted file should be named either cse107_firstname_lastname_lab9.zip or cse107_firstname_lastname_lab9.tar.gz depending on which method you used.

For Windows, use a tool you like to create a .zip file. The TCC computers should have 7z installed. For Linux, look at lab 1 for instructions on how to create a tarball or use the "Archive Manager" graphical tool.

Upload your tarball or .zip file to Canvas.