



Network User Guide

Training Booklet

Contents

Adding Devices to the Network.....	2
Adding a Device with a Static IP Address.....	2
Adding a Device Using Dynamic IP (DHCP).....	3
Connecting a Device Using a Cable.....	4
Connecting a Device Wirelessly.....	5
IoT Devices.....	6
Adding IoT Devices.....	6
Using the IoT Management App.....	7
Common IoT App Features.....	7

Adding Devices to the Network

Adding a Device with a Static IP Address

A static IP address is *manually typed in* and never changes.

Used for important devices such as:


- Printers
- IoT Server
- Critical PCs

Steps:

1. Turn on the device and open the **Network Settings** menu.
2. Select **Manual / Static** IP configuration.
3. Enter the details provided by your IT team, for example:
 - **IP Address:** 192.168.25.xxx
 - **Subnet Mask:** 255.255.255.0
 - **Gateway:** 192.168.25.254
 - **DNS Server:** 192.168.25.1
4. Click **Save** or **Apply**.
5. Restart the device if required.

How do you know it worked?

It should appear like this.

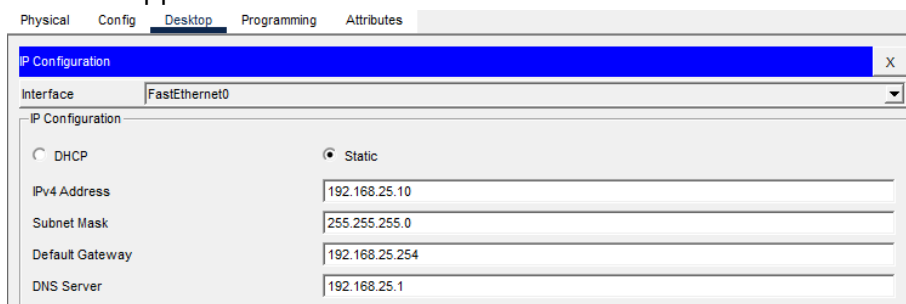

The screenshot shows a window titled 'IP Configuration' with a blue header bar. Below the header, there's a tabbed interface with 'Physical', 'Config', 'Desktop', 'Programming', and 'Attributes'. The 'Config' tab is active. Under 'Config', there's a sub-tab 'IP Configuration'. The 'Interface' dropdown is set to 'FastEthernet0'. The 'IP Configuration' section has two radio buttons: 'DHCP' (unselected) and 'Static' (selected). Below these, there are four input fields: 'IPv4 Address' (192.168.25.10), 'Subnet Mask' (255.255.255.0), 'Default Gateway' (192.168.25.254), and 'DNS Server' (192.168.25.1).

Tip:

- To test the connection, Try to open a webpage. For example <https://www.justit.co.uk>

If that doesn't work, Contact IT Support

Adding a Device Using Dynamic IP (DHCP)

A dynamic IP address is automatically given by the wireless router.

Suitable for:


- Laptops
- Smartphones
- Most IoT devices
- Hot-desk computers

Steps:

1. Open **Network Settings**.
2. Choose **Automatic / DHCP**.
3. Connect the device to the network (wired or wireless).
4. It will automatically get an IP address from the router.

How do you know it worked?

It should appear like this

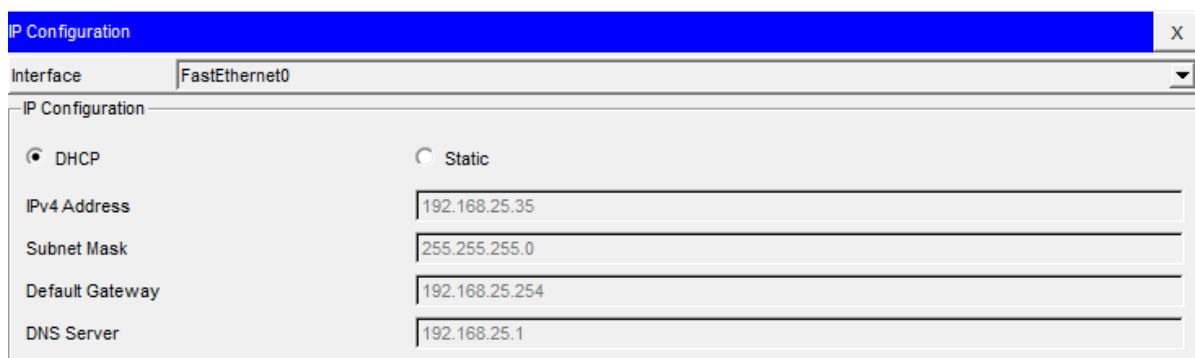

The screenshot shows a window titled "IP Configuration" with a close button (X) in the top right corner. Below the title bar, there is a dropdown menu labeled "Interface" with "FastEthernet0" selected. The main content area is titled "IP Configuration" and contains two radio buttons: "DHCP" (which is selected) and "Static". Below these, there are four text input fields with the following values: "IPv4 Address" (192.168.25.35), "Subnet Mask" (255.255.255.0), "Default Gateway" (192.168.25.254), and "DNS Server" (192.168.25.1).

Tip:


- To test the connection, Try to open a webpage. For example <https://www.justit.co.uk>

If that doesn't work, Contact IT Support

Connecting a Device Using a Cable

What you need:

- A **Ethernet cable** provided by IT
- An available **port**

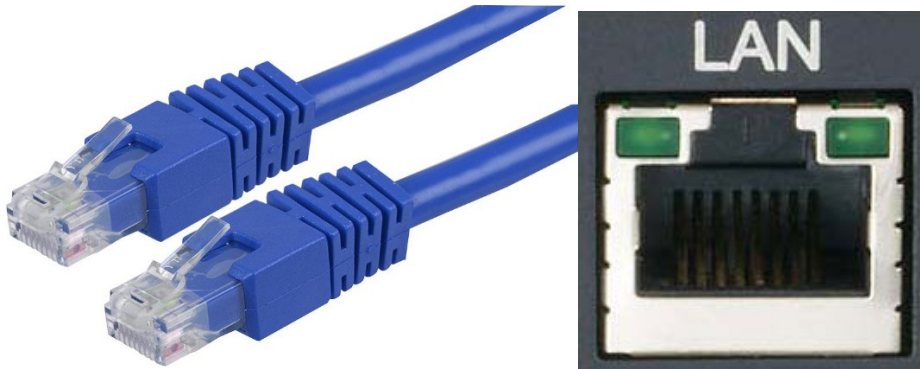

Steps:

1. Plug one end of the cable into your **computer or printer**.
2. Plug the other end into a **network switch** port.
3. The port light will turn **green or amber** to show activity.
4. You will be made aware if you require a static IP or DHCP. Depending on this, follow the instructions previously in the guide

Tip:

- If no lights appear, try a different port or cable.

If that doesn't work, Contact IT Support

Connecting a Device Wirelessly

What you need:

- Wi-Fi name- SmartOffice
- Password- Provided by IT

Steps:

1. Open **Wi-Fi settings** on your laptop/phone.
2. Select **SmartOffice** from the list of networks.
3. Enter the password
4. Wait for the device to show "**Connected**".

How do you know it worked?

It should appear like this.



Tip:

- If the password fails, check for capital letters.
- If Wi-Fi signal is weak, move closer to the router where possible.
- If the device asks for security type, choose WPA2.

If that doesn't work, Contact IT Support

IoT Devices


Adding IoT Devices

Steps:

1. Power on the IoT device.
2. Open its **Network Settings**.
3. Select **SmartOffice** Wi-Fi.
4. Enter the password
5. Leave IP settings on **Automatic (DHCP)**.
6. In the IoT Server field, enter:
192.168.25.1
7. Save settings.
8. Wait until the IoT Server shows the device as **Online**.

How do you know it worked?

It should appear like this

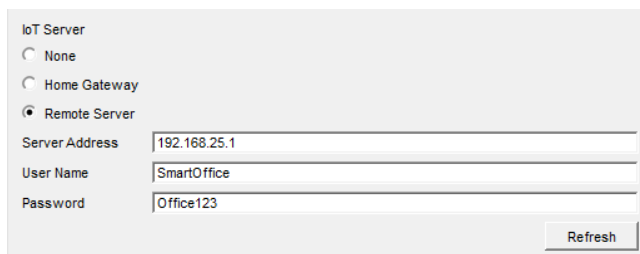

The screenshot shows a configuration window titled "IoT Server". It contains three radio button options: "None", "Home Gateway", and "Remote Server". The "Remote Server" option is selected. Below these options are three text input fields: "Server Address" with the value "192.168.25.1", "User Name" with the value "SmartOffice", and "Password" with the value "Office123". A "Refresh" button is located at the bottom right of the form.

Tip:

- Ensure the IoT Server is powered on.
- Make sure Wi-Fi signal reaches the IoT device.
- Restart the device if it does not appear in the IoT app.

If that doesn't work, Contact IT Support

Using the IoT Management App

1. Open the **IoT Monitor App** on your workphone.
2. Make sure you are connected to **SmartOffice Wi-Fi**.
3. Log in (if login is required).
4. The app will show a list of all IoT devices:
 - Coffee machine
 - Fan
 - Light
 - Motion sensor
5. Select a device to perform actions

Common IoT App Features

Feature	What it does
---------	--------------

Device Status	Shows if a device is online or offline
---------------	--


Control Button	Turns the device on/off
----------------	-------------------------

Sensor Data	Shows temperature, motion, or other readings
-------------	--

Automation	Schedules or triggers behaviours
------------	----------------------------------

How do you know it worked?

It should appear like this

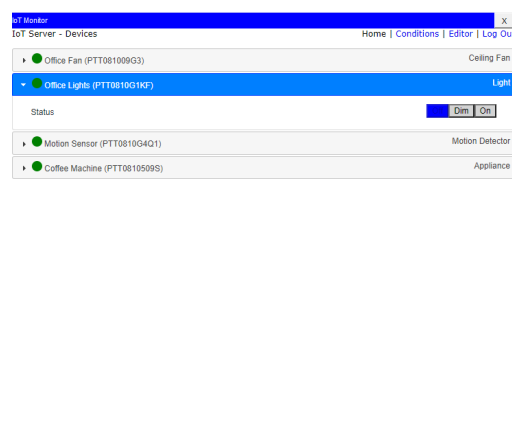

If that doesn't work, Contact IT Support