Replit Proof of Use

SDC Hackathon 2026 · Team Traiblazers · SkillTide · Domain 1, SDG 4 · checked 24 October 2026, 13:02 MYT

Where SkillTide runs on Replit

Live deployment	https://skilltide.replit.app: a public Replit Autoscale deployment (2 vCPU / 4 GiB RAM, region Asia)
Replit account	**ArcueidMP** (display name Arcueid), personal workspace
Replit project	Repl **@ArcueidMP/skilltide**, imported from github.com/ArcueidMP/skilltide; on 24 Oct 2026 its code matched GitHub's `main` at commit `d26b2eb`
Replit plan	Replit Core, activated with the SDC sponsor code
Run configuration	`.replit` in the repository root (reproduced below)

How we use Replit

- **Build and hosting.** Replit runs `npm ci && npm run build:static`, then `npm run start:node`. That starts one Node.js server (`src/server/node.ts`) that serves the site and SkillTide's `/api/v1` API: outlooks, matches, scenario comparison, cohort and the Guide.
- **Secrets.** The OpenAI key for the Guide's optional "AI wording" is stored in Replit Secrets as `OPENAI_API_KEY`. It is never written into the repository.
- **Updates.** We fetch and merge the latest commit from GitHub in the Repl shell, then republish. Replit provisions, runs its security checks, builds, bundles and promotes the new version (Figures 1 and 2).
- **Fallback.** If the deployment cannot be reached, the browser computes the same results with the same engine and data, so a demo never depends on one server.

Replit configuration (`.replit`)

```
# Replit runs SkillTide as one Node server (src/server/node.ts): the static export in out/ plus the
# same API the Cloudflare Worker serves. For AI wording, add OPENAI_API_KEY under Secrets.
modules = ["nodejs-22"]
run = "npm ci && npm run build:static && npm run start:node"

[deployment]
deploymentTarget = "cloudrun"
build = ["sh", "-c", "npm ci && npm run build:static"]
run = ["sh", "-c", "npm run start:node"]

[[ports]]
localPort = 3000
externalPort = 80
```

How to check it yourself

- Open https://skilltide.replit.app. The footer of every page says whether results were computed by the API or, as a fallback, in the browser.
- Run `curl https://skilltide.replit.app/api/v1/health`.

Evidence: the Replit workspace

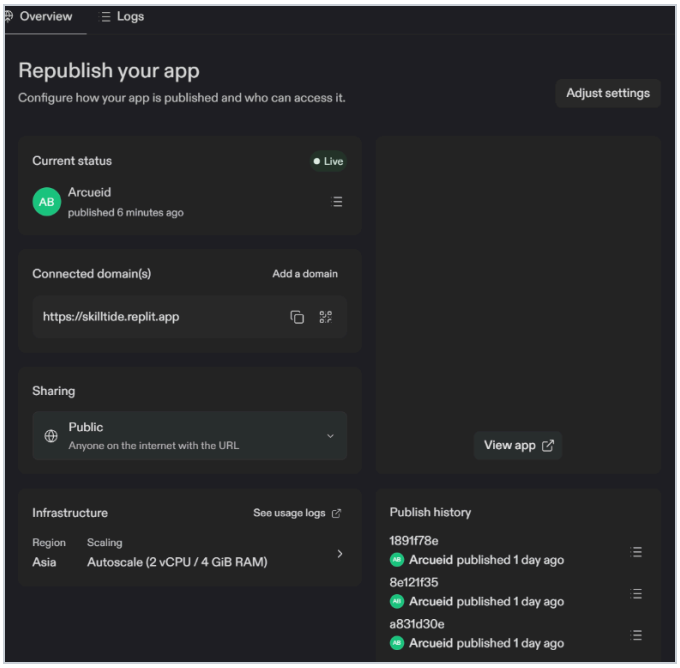


Figure 1. Replit's Publishing page after the 24 Oct 2026 republish: status Live, published by our account six minutes earlier, public at skilltide.replit.app, region Asia, Autoscale. The new publish, `1891f78e`, heads the publish history.

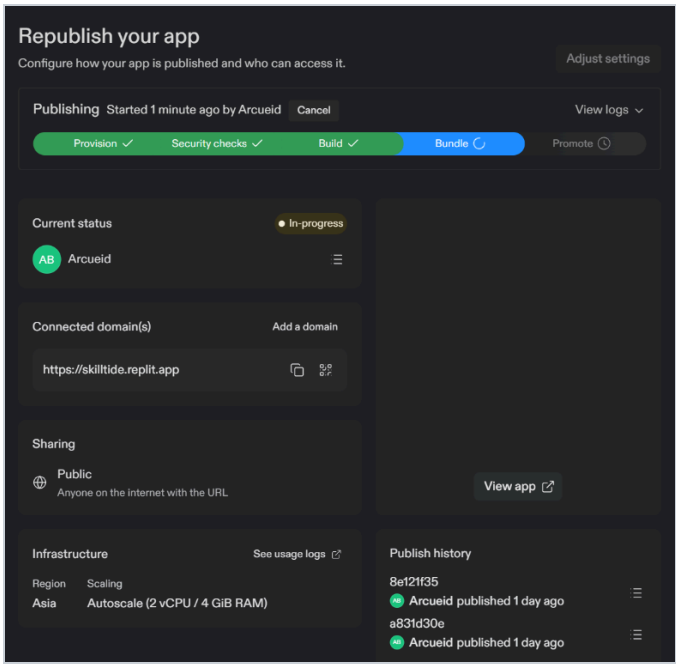


Figure 2. The same republish while it ran: provisioning, security checks and the build had passed, and bundling was under way before promotion.

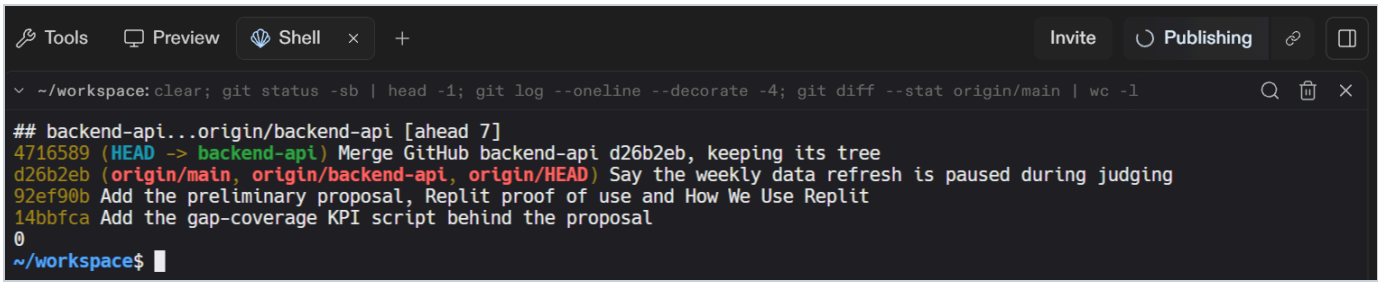


Figure 3. The Repl's shell: its branch carries GitHub's latest commit `d26b2eb` (`origin/main`, `origin/backend-api`), and its diff against `origin/main` has 0 lines, so the deployed code is the code on GitHub.

Evidence: API health check against the deployment

```
$ curl -i https://skilltide.replit.app/api/v1/health        (24 Oct 2026, 13:02 MYT)
HTTP/1.1 200 OK
Cache-Control: no-store
Content-Type: application/json; charset=utf-8
Server: Google Frontend
Via: 1.1 google

{"data":{"ok":true,"dataset":"074cfef3d8d5","ai":{"configured":true,"model":"gpt-6-luna"}},
 "meta":{"dataset":"074cfef3d8d5","generatedAt":"2026-10-21"}}
```

`"configured": true` means the deployment found `OPENAI_API_KEY` in Replit Secrets. The value itself is never returned.

Evidence: the live site

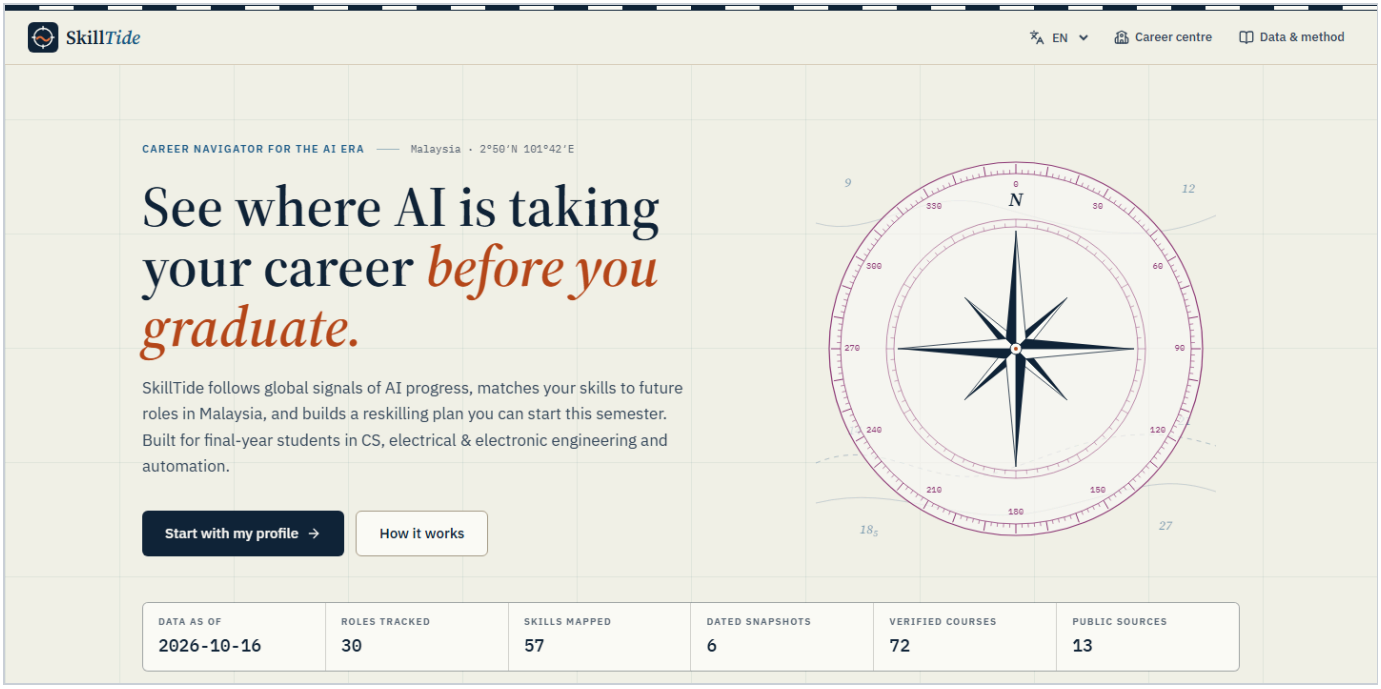


Figure 4. The SkillTide home page served by the Replit deployment (captured 23 Oct 2026).

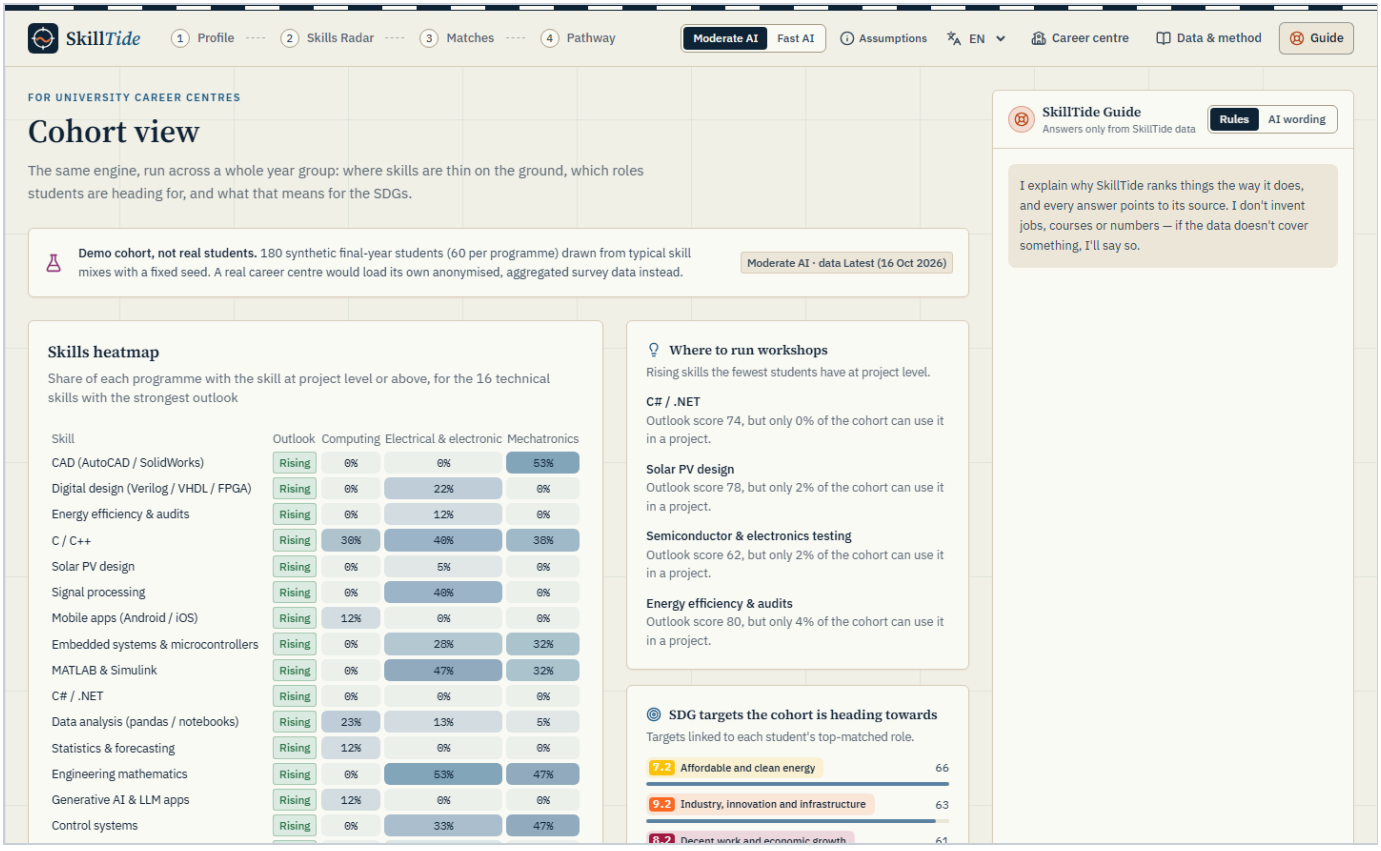


Figure 5. The career-centre view on the deployment. Its cohort data comes from `GET /api/v1/cohort` on Replit, and the page footer read "Results are computed by SkillTide's API." (captured 23 Oct 2026).