

### Starting web service


1. login sebagai root
2. ketik diconsole # service configreloader start      #service configreloader start

### Stopping web service


1. login sebagai root
2. ketik diconsole # service configreloader stop      #service configreloader stop

### Login web application

1. Buka broser
2. ketik alamat url <http://ipserver:9000/>
3. Masukkan valid username , password
4. Default username, password : admin, admin1234ok
5. Jika login sukses maka akan tampil halaman setting, jika login gagal maka tetap kembali ke halaman login dengan pesan “wrong username or password”

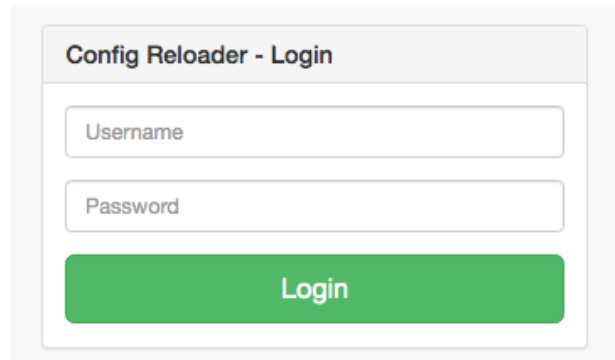

The screenshot shows a web form titled "Config Reloader - Login". It contains two input fields: "Username" and "Password". Below these fields is a green button labeled "Login".

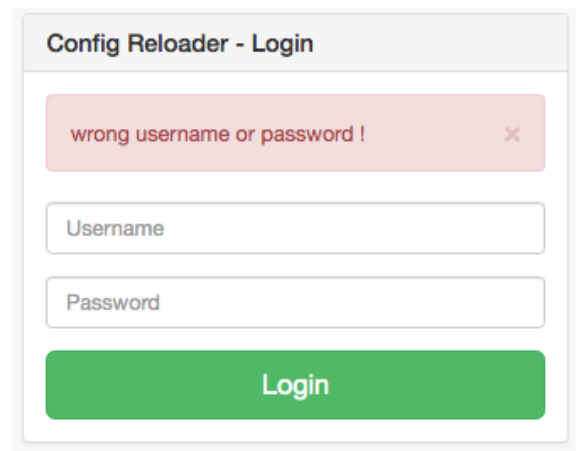


The screenshot shows the same "Config Reloader - Login" form, but with an error message displayed at the top: "wrong username or password !". The message is in a red box with a close button (X) on the right. The "Username" and "Password" fields are still present, along with the green "Login" button.

## MANUAL GUIDE – CONFIG RELOADER Version 1.0

### View utama (halaman setting)

Menu utama setelah login sukses menampilkan 4 tab panel yang menampilkan data konfigurasi diantaranya adalah :

1. Asterisk Manager
2. JDBC Connection
3. Http Service
4. FTP Service

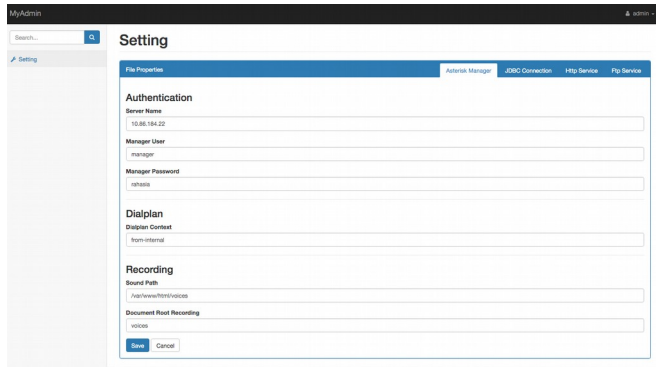


The screenshot shows the 'Setting' page with the 'Asterisk Manager' tab selected. The page contains three sections: 'Authentication' with fields for 'Server Name' (10.88.184.22), 'Manager User' (manager), and 'Manager Password' (rahasia); 'Dialplan' with a 'Dialplan Context' (from-internal); and 'Recording' with fields for 'Sound Path' (/var/www/html/voices) and 'Document Root Recording' (voices). 'Save' and 'Cancel' buttons are at the bottom.

### Edit Asterisk Manager

Data yang diisi adalah sebagai berikut :

1. Server name → IP Address PBX Server
2. Manager username → manager
3. Manager password → rahasia
4. Dialplan asterisk → from-internal
5. Recording sound path → `var/www/html/voices`
6. Document root recording → voices

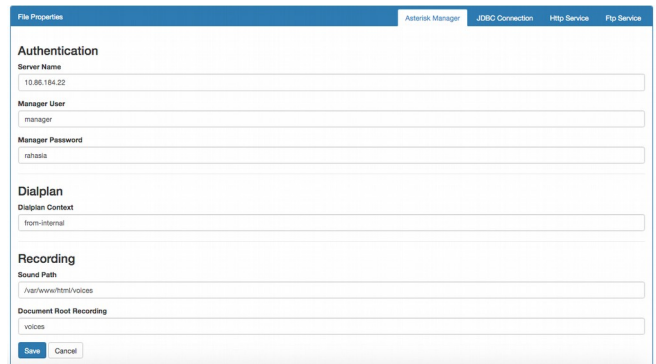


This is an identical screenshot of the Asterisk Manager configuration page, showing the same fields and values as the previous image.

### Edit JDBC Connection

Data yang diisi adalah sebagai berikut :

1. Database url → `jdbc://sqlserver://ipaddress...`
2. Database driver → `com.microsoft.sqlserver...`
3. Database username → wcrm
4. Database password → \*\*\*\*

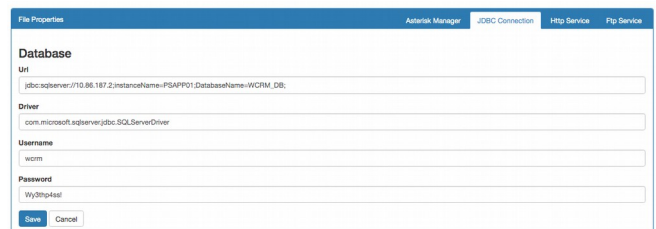


The screenshot shows the 'JDBC Connection' tab selected. The 'Database' section contains fields for 'Url' (jdbc:sqlserver://10.88.187.2;instanceName=PSAPPO1;DatabaseName=WCRM\_DB), 'Driver' (com.microsoft.sqlserver.jdbc.SQLServerDriver), 'Username' (wcrm), and 'Password' (Wv3hnp4sl). 'Save' and 'Cancel' buttons are at the bottom.

## MANUAL GUIDE – CONFIG RELOADER Version 1.0

### Edit Http Service

Data yang diisi adalah sebagai berikut :


1. Http Port Service → 8085 (default)
2. Debugging → toggle checker (on/off)

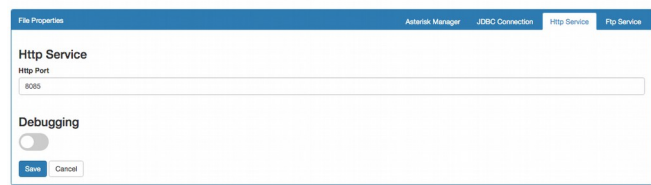

### Edit Ftp Service


Data yang diisi adalah sebagai berikut :

1. Ftp server → trialhost.hopto.org
2. Ftp username → tf
3. Ftp password → \*\*\*\*

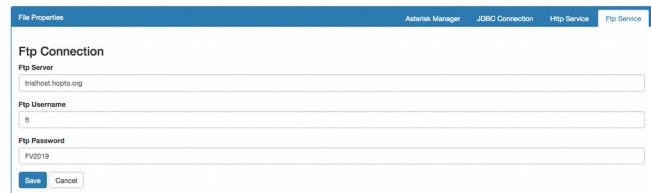

### Starting crondialer service

1. Klik header menu > admin
2. Klik menu Start Service
3. Klik tombol “Start Now” pada modal confirmation



### **Stopping crondialer service**

1. Klik header menu > admin
2. Klik menu Stop Service
3. Klik tombol “Stop Now” pada modal confirmation

