
Week 6: Cisco Device Management

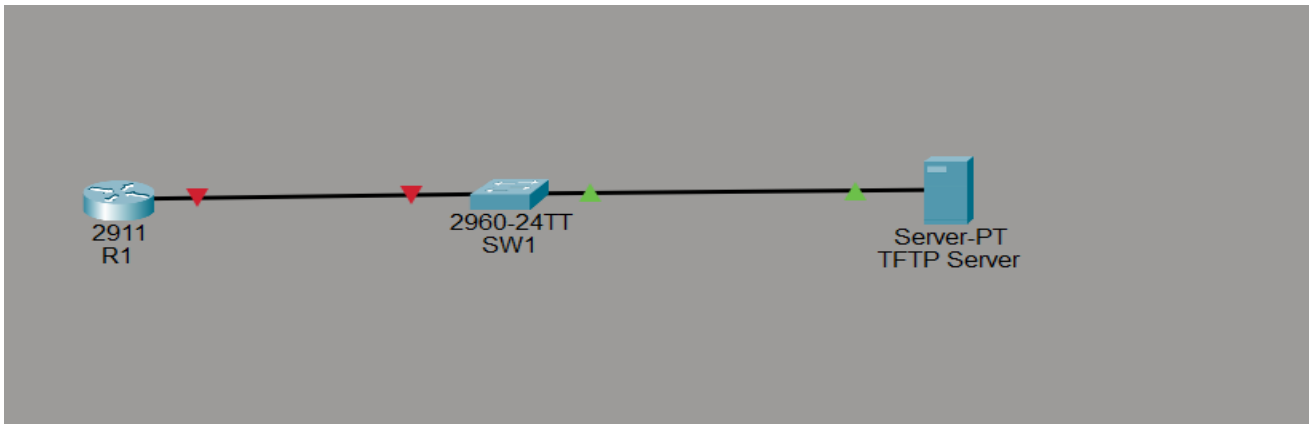

Factory Reset

1. Perform a factory reset on the assigned device and confirm it boots with no saved configuration.

Task 1: Factory Reset
On a Router (R1)

```
R1#write erase
Erasing the nvram filesystem will remove all configuration files!
Continue? [confirm]
[OK]
Erase of nvram: complete
%SYS-7-NV_BLOCK_INIT: Initialized the geometry of nvram
R1#
```

```
Router>enable
Router#show startup-config
startup-config is not present
Router#
```

Task 2: Password Recovery
boot

```
Cisco CISCO2911/K9 (revision 1.0) with 491520K/32768K bytes of memory.
Processor board ID FTX152400KS
3 Gigabit Ethernet interfaces
DRAM configuration is 64 bits wide with parity disabled.
255K bytes of non-volatile configuration memory.
249856K bytes of ATA System CompactFlash 0 (Read/Write)


         --- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]:
```

Change Passwords

```
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#enable secret Cisco123
Router(config)#line console 0
Router(config-line)#password Cisco123
Router(config-line)#login
Router(config-line)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#
```

Copy

Restore Configuration Register

```
Router#configure terminal
Enter configuration commands, one per line.  End with CNTL/Z.
Router(config)#config-register 0x2102
Router(config)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#
```

Confirmation

You can now access the router using the new passwords.

```
Press RETURN to get started!


User Access Verification

Password:
```

Copy Paste

Task 3: Configuration Backup and Restore

Back Up Running Configuration to TFTP

Verify connectivity first:

```
Router>enable
Password:
Router#ping 10.10.10.10

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.10.10.10, timeout is 2 seconds:
.....
Success rate is 0 percent (0/5)

Router#
```

Copy Paste

Backup

```
Router#copy running-config tftp
Address or name of remote host []? 10.10.10.10
Destination filename [Router-confg]? R1-running-config

Writing running-config........
```

Restore Configuration

```
%Error opening tftp://10.10.10.10/R1-running-config (Timed out)
Router#copy tftp running-config
Address or name of remote host []? 10.10.10.10
Source filename []? R1-running-config
```

Verification

```
Router#show running-config
Building configuration...

Current configuration : 771 bytes
!
version 15.1
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Router
!
!
!
enable secret 5 $1$mERr$R1dxcCZEZsTFTETUyRaA50
!
!
!
!
!
!
no ip cef
no ipv6 cef
 --More-- |
```

Task 4: IOS System Image Backup and Recovery

Verify IOS Image

View the IOS image stored in Flash:

```
Router#show flash

System flash directory:
File  Length    Name/status
  3   33591768  c2900-universalk9-mz.SPA.151-4.M4.bin
  2   28282     sigdef-category.xml
  1   227537    sigdef-default.xml
[33847587 bytes used, 221896413 available, 255744000 total]
249856K bytes of processor board System flash (Read/Write)


Router#
```

Backup IOS to TFTP

```
Router#ping 10.10.10.10

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.10.10.10, timeout is 2 seconds:
.....
Success rate is 0 percent (0/5)

Router#copy running-config tftp:
Address or name of remote host []? 10.10.10.10
Destination filename [Router-confg]? R1-backup

Writing running-config......
```

Copy Paste