



# Python - String Methods

[◀ Previous](#)

Next >


# String Methods

Python has a set of built-in methods that you can use on strings.

**Note:** All string methods return new values. They do not change the original string.

| Method              | Description                                                      |
|---------------------|------------------------------------------------------------------|
| <u>capitalize()</u> | Converts the first character to upper case                       |
| <u>casefold()</u>   | Converts string into lower case                                  |
| <u>center()</u>     | Returns a centered string                                        |
| <u>count()</u>      | Returns the number of times a specified value occurs in a string |
| <u>encode()</u>     | Returns an encoded version of the string                         |

|                       |                                                                                          |
|-----------------------|------------------------------------------------------------------------------------------|
| <u>endswith()</u>     | Returns true if the string ends with the specified value                                 |
| <u>expandtabs()</u>   | Sets the tab size of the string                                                          |
| <u>find()</u>         | Searches the string for a specified value and returns the position of where it was found |
| <u>format()</u>       | Formats specified values in a string                                                     |
| <u>format_map()</u>   | Formats specified values in a string                                                     |
| <u>index()</u>        | Searches the string for a specified value and returns the position of where it was found |
| <u>isalnum()</u>      | Returns True if all characters in the string are alphanumeric                            |
| <u>isalpha()</u>      | Returns True if all characters in the string are in the alphabet                         |
| <u>isascii()</u>      | Returns True if all characters in the string are ascii characters                        |
| <u>isdecimal()</u>    | Returns True if all characters in the string are decimals                                |
| <u>isdigit()</u>      | Returns True if all characters in the string are digits                                  |
| <u>isidentifier()</u> | Returns True if the string is an identifier                                              |
| <u>islower()</u>      | Returns True if all characters in the string are lower case                              |
| <u>isnumeric()</u>    | Returns True if all characters in the string are numeric                                 |
| <u>isprintable()</u>  | Returns True if all characters in the string are printable                               |
| <u>isspace()</u>      | Returns True if all characters in the string are whitespaces                             |
|                       |                                                                                          |

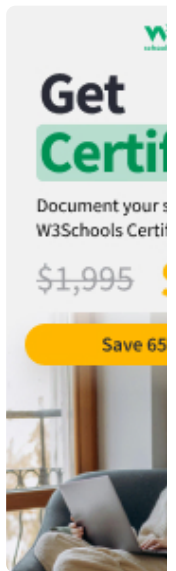

COLOR  
PICKER



ADVERTISEMENT

|                     |                                                                                               |
|---------------------|-----------------------------------------------------------------------------------------------|
| <u>istitle()</u>    | Returns True if the string follows the rules of a title                                       |
| <u>isupper()</u>    | Returns True if all characters in the string are upper case                                   |
| <u>join()</u>       | Joins the elements of an iterable to the end of the string                                    |
| <u>ljust()</u>      | Returns a left justified version of the string                                                |
| <u>lower()</u>      | Converts a string into lower case                                                             |
| <u>lstrip()</u>     | Returns a left trim version of the string                                                     |
| <u>maketrans()</u>  | Returns a translation table to be used in translations                                        |
| <u>partition()</u>  | Returns a tuple where the string is parted into three parts                                   |
| <u>replace()</u>    | Returns a string where a specified value is replaced with a specified value                   |
| <u>rfind()</u>      | Searches the string for a specified value and returns the last position of where it was found |
| <u>rindex()</u>     | Searches the string for a specified value and returns the last position of where it was found |
| <u>rjust()</u>      | Returns a right justified version of the string                                               |
| <u>rpartition()</u> | Returns a tuple where the string is parted into three parts                                   |
| <u>rsplit()</u>     | Splits the string at the specified separator, and returns a list                              |
| <u>rstrip()</u>     | Returns a right trim version of the string                                                    |

---

REMOVE  
ADS

|                       |                                                                       |
|-----------------------|-----------------------------------------------------------------------|
| <u>split()</u> .      | Splits the string at the specified separator, and returns a list      |
| <u>splitlines()</u> . | Splits the string at line breaks and returns a list                   |
| <u>startswith()</u> . | Returns true if the string starts with the specified value            |
| <u>strip()</u> .      | Returns a trimmed version of the string                               |
| <u>swapcase()</u> .   | Swaps cases, lower case becomes upper case and vice versa             |
| <u>title()</u> .      | Converts the first character of each word to upper case               |
| <u>translate()</u> .  | Returns a translated string                                           |
| <u>upper()</u> .      | Converts a string into upper case                                     |
| <u>zfill()</u> .      | Fills the string with a specified number of 0 values at the beginning |

[< Previous](#)[Sign in to track progress](#)[Next >](#)

ADVERTISEMENT