

ADVERTISEMENT

Python - Set Methods

[< Previous](#)[Next >](#)

Set Methods

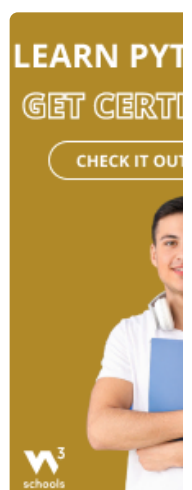
Python has a set of built-in methods that you can use on sets.

Method	Shortcut	Description
<u>add()</u>		Adds an element to the set

[Tutorials](#) ▼ [References](#) ▼ [Exercises](#) ▼ [Certificates](#) ▼[Sign In](#)[HTML](#) [CSS](#) [JAVASCRIPT](#) [SQL](#) [PYTHON](#) [JAVA](#) [PHP](#) [HOW TO](#) [W3.CSS](#) [C](#) [C++](#) [C#](#) [BOO](#) >

- Python Data Types
- Python Numbers
- Python Casting
- Python Strings
- Python Booleans
- Python Operators
- Python Lists
- Python Tuples
- Python Sets
 - Python Sets
 - Access Set Items
 - Add Set Items
 - Remove Set Items
 - Loop Sets
 - Join Sets
 - Frozenset
 - Set Methods
 - Set Exercises
- Python Dictionaries
- Python If...Else
- Python Match

<u>copy()</u>		Returns a copy of the set
<u>difference()</u>	-	Returns a set containing the difference between two or more sets
<u>difference_update()</u>	-=	Removes the items in this set that are also included in another, specified set
<u>discard()</u>		Remove the specified item
<u>intersection()</u>	&	Returns a set, that is the intersection of two other sets
<u>intersection_update()</u>	&=	Removes the items in this set that are

[COLOR PICKER](#)

[Python While Loops](#)
[Python For Loops](#)
[Python Functions](#)
[Python Decorators](#)
[Python Range](#)
[Python Lambda](#)
[Python Arrays](#)
[Python OOP](#)
[Python Classes/Objects](#)
[Python Inheritance](#)
[Python Iterators](#)
[Python Polymorphism](#)

		not present in other, specified set(s)
<u>isdisjoint()</u>		Returns whether two sets have a intersection or not
<u>issubset()</u>	$\leq$	Returns True if all items of this set is present in another set
	$<$	Returns True if all items of this set is present in another, <i>larger</i> set
<u>issuperset()</u>	$\geq$	Returns True if all items of another set is present in this set
	$>$	Returns True if all items of another, <i>smaller</i> set is present in this set
<u>pop()</u>		Removes an element from the set
<u>remove()</u>		Removes the specified element
<u>symmetric_difference()</u>	$\wedge$	Returns a set with the symmetric differences of two sets
<u>symmetric_difference_update()</u>	$\wedge=$	Inserts the symmetric differences from this set and another
<u>union()</u>	$ $	Return a set containing the union of sets
<u>update()</u>	$ =$	Update the set with the union of this set and others



R

[< Previous](#)
[Sign in to track progress](#)
[Next >](#)