

GENIE for FASER

A native build without the ATLAS container,
and what changes from 3.04 to 3.06

André Rubbia

October 2026

ETH Zürich, IPA

1. Why the old recipe needed the ATLAS container
2. The new build: one repository, two scripts
3. Pitfalls solved along the way (macOS / modern ROOT)
4. GENIE 3.04 (FASER fork) → 3.06.02: what changed
5. Validation: 3.06 vs 3.04 on the FASERCal V10 sample
6. Next steps

The old recipe

How 3.04 was built

- `setupATLAS -c centos7`: Apptainer container with CentOS 7
- `asetup Athena,22.0.49`: only to get compilers and libraries from CVMFS (gcc 11, ROOT 6.24, Pythia6, LHAPDF, GSL, ...)
- TPythia6 built as an *Athena/Calypso* CMake project
- GENIE itself: plain `./configure && make`

Problems

- CentOS 7 is end-of-life: the container exists only to run old binaries
- mixed gcc8 and gcc11 libraries on one `LD_LIBRARY_PATH`
- broken Pythia6 link line in `Make.include`
- not usable on a Mac
- no easy path to move to Pythia8

Key point

GENIE contains no ATLAS code. Athena was only a convenient way to get a software stack.


What GENIE actually needs

Dependency	Role	Source in the new build
ROOT (with Geom)	I/O, geometry (TGeo), maths	conda-forge / LCG view
Pythia 6.4.28	hadronization, decays	built from alisw/pythia6
TPythia6 (libEGPythia6)	ROOT interface to Pythia6	built here (plain CMake)
LHAPDF 6	PDFs	conda-forge / LCG
GSL, libxml2, log4cpp	numerics, config, logging	conda-forge / LCG
<i>optional</i> : APFEL 3.0.6	HEDIS structure functions	WITH_APFEL=1
<i>optional</i> : Pythia 8	Pythia8 hadronization	WITH_PYTHIA8=1

TPythia6 was removed from ROOT in 6.32, so it is compiled from the old ROOT sources.

APFEL is off by default: the FASER splines and tunes do not use HEDIS.

The new build

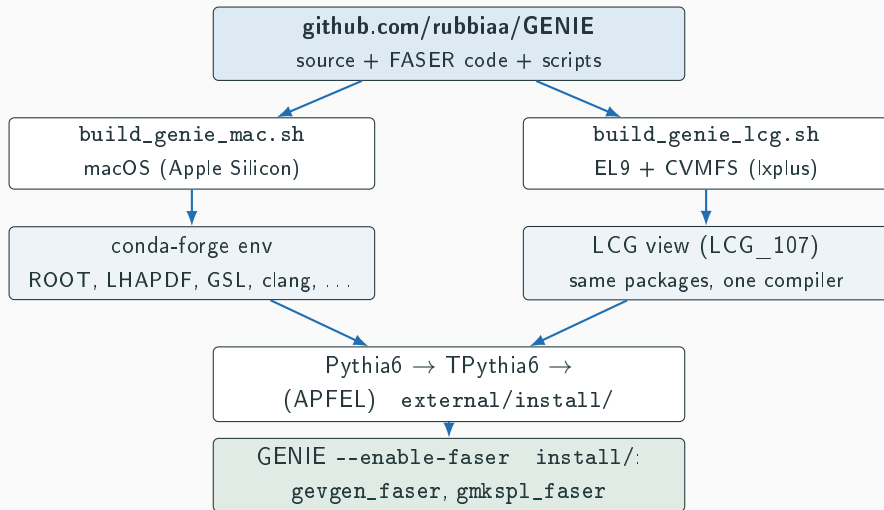

No container, no Athena, no asetup. The same scripts work on both platforms.

Repository = work directory

```
GENIE3.06/                <- git repository
|-- README.md
|-- GENIE_3.04_vs_3.06.md
|-- setup_mac.sh    build_genie_mac.sh
|-- setup_lcg.sh    build_genie_lcg.sh
|-- GenieGenerator/    <- GENIE 3.06.02 + FASER
|  |-- src/    config/    data/
|  |-- faser/    (geometries, fluxes, scripts)
|  |  |-- TPythia6_standalone/
|  |  `-- build/external/    (patch, Pythia6 CMake)
|-- install/          \
|-- external/         |    created by the
|-- build/            |    build, ignored by git
|-- faser_xsec/        |
`-- run/              /
```

- Full GENIE history kept (7 962 commits), FASER work on top
- Build products, downloads, splines and event files are *git-ignored*
- Large Kling 2023 flux ntuples (≤ 575 MB) not in git: regenerated with `getRawFluxes.sh` + `convertAllFluxes.sh`
- Scripts find the source tree and work directory automatically

Building on a Mac

```
git clone https://github.com/rubbiaa/GENIE.git GENIE3.06
cd GENIE3.06
./build_genie_mac.sh          # first time ~20 min
source setup_mac.sh           # every new terminal (zsh or bash)
```

What the script does:

1. installs a private Miniforge in ~/miniforge3 (does not touch .zshrc or an existing Anaconda)
2. creates the genie env: root lhpdf gsl libxml2 log4cpp cmake make clang gfortran
3. builds Pythia 6.4.28 and TPythia6 into external/install/
4. patches Make.include for Apple Silicon and the conda compilers (idempotent)
5. ./configure --enable-faser ..., make, make install

Options: WITH_PYTHIA8=1, WITH_APFEL=1, NJ=<jobs>.

Building on lxplus (EL9 + CVMFS)

```
git clone https://github.com/rubbiaa/GENIE.git GENIE3.06 && cd GENIE3.06
./build_genie_lcg.sh                # LCG_107, x86_64-el9-gcc13-opt
LCG_VERSION=LCG_105 ./build_genie_lcg.sh # any other release
source setup_lcg.sh
```

- One LCG view provides ROOT, Pythia6, LHAPDF, GSL, log4cpp and libxml2, all built with the same compiler
- `setup_lcg.sh` replaces `ATLAS_container.sh`, `.asetup.save`, `kk` and `setupGenerator.sh`
- Only TPythia6 and GENIE are compiled locally

Pitfalls solved


Problems found and fixed (all automatic in the scripts)

Symptom	Cause → fix
conda solve never finishes expected ')' in <charconv>	old Anaconda classic solver → private Miniforge with mamba clang 18 with libc++ 20 headers (ROOT pin) → match clang to the headers
undeclared identifier NAN	macOS 27 SDK takes NAN from <float.h>; strict -std=c++20 hides it → -std=gnu++20
libc++ “feature unavailable” rootcling fails	conda targets macOS 11 → -D_LIBCPP_DISABLE_AVAILABILITY dictionary step does not see CXXFLAGS → flags also passed via the include options
-lPythia6/-lEGPythia6 not found	make distclean empties install/ → externals in external/install/; library path added
APFEL: arm64-apple unknown Apple Silicon flags	2013 config.sub → use aarch64-apple-darwin generic macosx64 block (Xcode-10 era) → dedicated macosxarm64 block

3.04 → 3.06



Where the versions sit

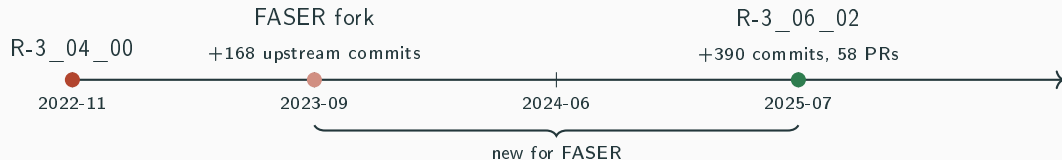

- R-3_06_02 in the FASER GitLab is a plain mirror of the official release: **no FASER code**
- Default tune unchanged: G18_02a_00_000; its model configuration is identical
- About 1 480 files differ upstream (configs, new models, data tables)

FASER code ported to 3.06

Item	Status
gevgen_faser, gmkspl_faser	ported unchanged
FaserGMCJDriver, FaserROOTGeomAnalyzer	ported; base interfaces unchanged
configure --enable-faser, Apps/Makefile	applied cleanly
GVLD-Emax = 7 TeV (official: 1 TeV)	re-applied
NaturalIsotopes::GetIsotopeData()	re-added
weighted-flux POT fix in GSimpleNtpFlux	already upstream
tunes F23_00a, G25_01a	ported
faser/ (geometries, fluxes, scripts)	copied; big fluxes git-ignored

Not ported: the fork's broken Pythia6 lines in `Make.include`, which also removed the Pythia8 link block.

Upstream changes relevant to FASER

Pythia6 / Pythia8

- Pythia6 now optional (`--disable-pythia6`)
- decayer: `PythiaDecayer` → `Pythia6Decayer2023` (and `Pythia8Decayer2023`)
- DIS charm: `AGCharm2019` → `AGCharmPythia6Hadro2023` (same parameters)
- HEDIS hadronization: `LeptoHadPythia6/8`
- HE leptons: separate Pythia6/8 W-decay classes

Other

- memory-leak fixes (long productions)
- G_F , α configurable in `CommonParam.xml`
- build: Apple Silicon support, no ROOTSYS needed

Not used by default


- tunes G24_20i/j/k/l, N24_20i, MK19_00a
- MK single-pion model, Z-expansion and MARun form factors, SuSAv2/CRPA updates

⇒ Expect small event-level differences in decays and charm hadronization: validate before production.

Validation

Event rate and neutrino energy

Same command, flux, geometry and (3.04) splines: `gevgen_faser -l 1000 (1000 fb-1)`, FASERCal V10, Aki 2024 light flux.

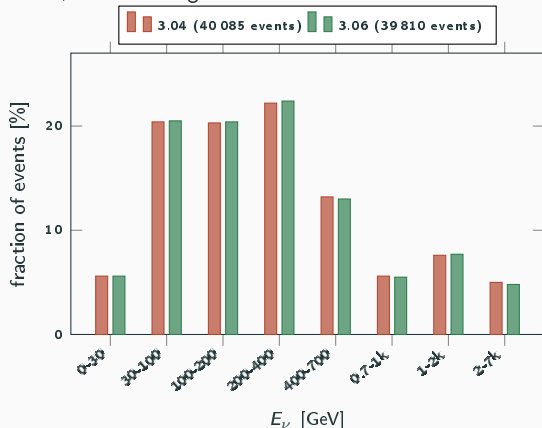

- Rate: $3.06/3.04 = 0.993 \pm 0.007$ (1.0σ)
- Every E_ν bin agrees within 1.3σ (ratios 0.96–1.01)
- $\langle E_\nu \rangle = 478$ vs 474 GeV, median 222 vs 222 GeV
- Speed: 0.045 s/event, constant over the run (30 min in total)

	3.04	3.06
$\nu_\mu / \bar{\nu}_\mu / \nu_e / \bar{\nu}_e$ [%]	64.6 / 27.6 / 5.4 / 2.4	65.2 / 27.2 / 5.3 / 2.4
CC / NC [%]	75.6 / 24.4	75.4 / 24.6
DIS / RES / QEL [%]	97.3 / 1.9 / 0.5	97.3 / 1.9 / 0.5
charm production [%]	6.3	6.2
targets Fe / C / Pb / W / Al [%]	76.2 / 7.8 / 7.2 / 3.3 / 2.2	76.0 / 7.8 / 7.2 / 3.3 / 2.3
vertex z , 5–50–95% [m]	0.88 / 5.43 / 6.73	0.87 / 5.42 / 6.73
CC inelasticity $\langle y \rangle$	0.435	0.432
$\langle n_{\text{charged hadrons}} \rangle$	7.87	7.83
$\langle n_{\pi^0} \rangle$	2.40	2.38

Conclusion

With the same splines, 3.06 reproduces the 3.04 light sample within statistics: rate, spectrum, flavours, processes, targets and final-state multiplicities. The remaining checks are the new 3.06 splines and the charm/ τ samples.

Next steps

1. **Charm sample:** repeat the 3.04 comparison for the Aki 2024 charm flux
2. **Regenerate splines for 3.06** with `faser/Splines/` (free nucleons $\rightarrow$ nuclei, 6 flavours, up to 7 TeV; $\sim 2-3$ days on 16 cores)
3. **Physics validation** of the rewritten decays and charm hadronization (charm and τ samples)
4. **Optional:** Pythia8 hadronization (`WITH_PYTHIA8=1`), then drop Pythia6
5. **Share:** push `faser-R-3_06_02` back to the FASER GitLab

Backup: command cheat sheet

```
# environment
source setup_mac.sh                # or setup_lcg.sh on lxplus

# incremental rebuild after a code change
cd GenieGenerator && make -j && make install && cd ..

# event generation (FASERCal V10, Aki 2024 light flux, 1000 fb-1)
gevgen_faser -l 1000.0 -r 0 -g $GENIE/faser/FASERCAL_V10.gdml \
  -f $GENIE/faser/Fluxes/Aki_2024/events_light_4x4.root --seed 2999833 \
  --cross-sections $GENIE_HOME/faser_xsec/faserSplines.7TeV.xml \
  -o fasercal.Aki2024.v10.light

# splines (run in GENIE3.06/splines_work, one flavour at a time)
source $GENIE/faser/Splines/calcSplinesN.sh; wait
source $GENIE/faser/Splines/mergeSplinesN.sh
source $GENIE/faser/Splines/calcNuMuSplinesA.sh; wait      # ... all 6 flavours
source $GENIE/faser/Splines/mergeSplinesA.sh
```