

DVD MovieFactory™ 3

*User Guide
Ulead Systems, Inc.
November 2003*

English edition for Ulead DVD MovieFactory 3, November 2003.

© 2000-2004 Ulead Systems, Inc.

All rights reserved. No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording or storing in a retrieval system, or translated into any language in any form without the express written permission of Ulead Systems, Inc.

Software license

The software described in this document is furnished under a License Agreement, which is included with the product. This Agreement specifies the permitted and prohibited uses of the product.

Licenses and trademarks

All rights reserved. Ulead, Ulead Systems logo, are registered trademarks and/or trademarks of Ulead Systems, Inc. Intel, Pentium and MMX are registered trademarks and/or trademarks of Intel Corporation. Microsoft, Windows, DirectX and/or other Microsoft products referenced herein are either trademarks or registered trademarks of Microsoft Corporation. Adobe, the Adobe logo, and Acrobat are trademarks of Adobe Systems Incorporated.

All other product names and any registered and unregistered trademarks mentioned in this manual are used for identification purposes only and remain the exclusive property of their respective owners.

Sample files

Files provided as samples on the program CD can be used for personal demonstrations, productions and presentations. No rights are granted for commercial reproduction or redistribution of any sample files.

North & South America

Ulead Systems Inc.

<http://www.ulead.com>

Support: <http://www.ulead.com/tech>

International

Ulead Systems, Inc.

<http://www.ulead.com>

<http://www.asiapac.ulead.com>

<http://www.ulead.com.tw>

Support:

<http://www.ulead.com/tech>

<http://www.asiapac.ulead.com/tech>

<http://www.ulead.com.tw/tech>

Japan

Ulead Systems Inc.

<http://www.ulead.co.jp>

Support: <http://www.ulead.co.jp/tech>

China

Ulead Systems, Inc.

<http://www.ulead.com.cn>

Support: <http://www.ulead.com.cn/tech>

Germany

Ulead Systems GmbH

<http://www.ulead.de>

Support: <http://www.ulead.de/tech>

United Kingdom

<http://www.ulead.co.uk>

Support: <http://www.ulead.co.uk/tech>

France

<http://www.ulead.fr>

Support: <http://www.ulead.fr/tech>

Table of Contents

Welcome To Ulead DVD MovieFactory	5
What's New?	5
System requirements	7
Hardware checkup and configuration	8
Hardware checkup before using DVD MovieFactory	8
IEEE-1394 interface card	8
<i>Windows 98 Second Edition/ Windows 2000</i>	8
<i>Windows Millennium Edition (Me)</i>	9
<i>Windows XP</i>	9
Enabling DMA for IDE disks	9
Analog capture card	9
USB port	10
Configuring DVD MovieFactory	10
DV (IEEE-1394 interface card)	10
Analog capture card	11
USB input device	11
DVD MovieFactory launcher	12
Create Video Disc	12
Create Slideshow Disc	13
Create Music Disc	13
Create Data Disc	13
Direct to Disc	13
Edit Disc	14
Copy Disc	14
DVD Player	14
Erase Disc	14
Burn from Disc Image	15
Print Disc Label	15
Create Video Disc	16
Add Media	16
Capturing video	17
<i>Capturing DV video</i>	18
<i>Capturing analog video</i>	19
<i>Capture Options dialog box</i>	19
<i>Video and Audio Capture Property Settings dialog box</i>	20
<i>Setting the field order</i>	22
<i>Capturing TV footage</i>	23
<i>Split by Scene</i>	24
<i>Capturing still images</i>	24
<i>Capturing video directly to MPEG format</i>	25
Adding video files	26
Creating a slideshow	27
Importing DVD-Video	27

Setup Preferences, Project Settings and other options	28
Settings and options	28
<i>General</i>	28
<i>Capture</i>	30
Project settings	31
Print Disc Label	32
Edit Media	33
Trimming a video	33
Multi-trimming a video	33
Joining/Separating videos	34
Enhancing your video	35
The Effect tab	35
<i>Options for the Effect tab.</i>	36
The Text tab	37
<i>Options for the Text tab.</i>	38
The Audio tab	38
<i>Options for the Audio tab.</i>	39
Adding/Editing chapters	39
Editing a slideshow	40
Setup menus	42
Preview	46
Output	48
Options for output	50
The Output Options dialog box	52
Direct to Disc	54
For DVD, VCD, or SVCD	55
For DVD-VR disc	58
Edit Disc (on-disc editing)	59
Print Disc Label	61
Print Disc Label dialog box	61
Creating custom paper templates	64
Designing a disc label	66
Importing a disc label	67
Saving a disc label	68
Printing a disc label	68
Shortcuts	69
DVD MovieFactory launcher	69
Ulead DVD MovieFactory	70
Ulead DVD MovieFactory DiskRecorder	73
Print Disc Label	75
Glossary	77
Index	79

Welcome To Ulead DVD MovieFactory

Ulead DVD MovieFactory provides you with the answer to your disc-authoring needs. You can instantly create video, slideshow, music, or data discs through a user-friendly, wizard-type process and specific task oriented features. You can also enhance your video by adding transition effects, text, audio, interactive menus, and many others, or print disc label or cover to make your discs more attractive and interesting.

With DVD MovieFactory, creating professional-looking video, music, or data discs has never been easier!

Note: The availability of program modules depends on the DVD MovieFactory version you have.

What's New?

- **Direct to disc and on-disc editing available to standard DVD-Video disc.**

With the [Direct to disc](#) feature, you can capture your videos and burn them directly onto a disc. [On-disc editing](#) allows you to directly edit the content of your DVD-RW/+RW or DVD-RAM without having to capture the content for editing and burn it back onto the disc.

- **Integration with Burn.Now for Data CD/DVD and Audio Disc solution**

DVD MovieFactory now comes integrated with Burn.Now to let you create not only DVD/VCD movies, but also Data CD/DVD and Audio Discs such as Audio CDs, MP3 CDs and DVDs. See the separate manual for details. The manual is BurnNow.pdf in the C:\Program Files\Ulead Systems\Ulead DVD MovieFactory 3 folder by default.

- **Complete DVD-VR format support**

By integrating a DVD-VR authoring module into DVD MovieFactory, you can now easily create DVD-VR discs that you can edit again and again. See the separate manual for details. The manual is DiskRecorder.pdf in the C:\Program Files\Ulead Systems\Ulead DVD MovieFactory 3 folder by default.

- **Disc label and index printing**

Design and print vivid disc labels and case covers with the [Print Disc Label](#) feature.

- **Normalize audio in output process**

Different video clips may have different audio recording levels when created. When these video clips are put together, the volume may vary greatly from one to another. With [Normalize audio](#) function, each audio waveform is evaluated and adjusted so that the highest peak reaches a certain level, correcting the rest accordingly to lessen the volume variation.

- **Ulead DVD Player**

Ulead DVD Player provides fully featured control of DVD/VCD playback on your computer. See the separate manual for details. The manual is DVD_Player.pdf in the C:\Program Files\Ulead Systems\Ulead DVD MovieFactory 3 folder by default.

- **Support for Sony MICROMV**

Use DVD MovieFactory to capture your videos from Sony MICROMV camcorders.

- **UDF 2.01 system drive for Windows**

This version of Ulead UDF file system driver provides recordable and rewritable media support. It allows you to use a CD or DVD disc like a floppy disk or to drag and drop files to write to the disc using Windows Explorer.

System requirements

To be able to run DVD MovieFactory on your computer, make sure the following minimum requirements are met:

- Intel® Pentium III™ 800 MHz CPU or higher (Pentium® IV 2.4 GHz recommended)
- Microsoft® Windows™ 98 SE, 2000, Me, XP
- 128MB of RAM (256MB RAM or higher recommended)
- 200MB of available hard disk space for program installation
- 4GB or more of hard disk space for video capture and editing
- Windows-compatible display with at least 800x600 resolution
- CD-ROM or DVD-ROM drive
- Windows-compatible mouse, display card, and sound card

To utilize the full capabilities of DVD MovieFactory, the following additional components are recommended:

- Separate Audio/Video hard disk for storing captured videos and temporary project files
- CD-R/RW and DVD-R/-RW/+R/+RW drives for creation of DVD/VCD/SVCD
- TV tuner card, USB or video capture card for analog capture
- OHCI compliant IEEE-1394 interface card for use with DV camcorder and capture device

Hardware checkup and configuration

To ensure that DVD MovieFactory works properly, use the following information to configure your hardware and DVD MovieFactory.

Hardware checkup before using DVD MovieFactory

To make sure your video production runs smoothly and trouble-free, click **Control Panel: System - Hardware - Device Manager** and check if your devices are working properly in accordance with your Operating System (O/S).

In general, as long as the image/imaging device can be seen and working properly in the **Device Manager** (this applies to all Windows versions), **DVD MovieFactory** and other Ulead products will be able to detect it and work with it.

IEEE-1394 interface card

The following Windows operating systems support the IEEE-1394 interface card. Always remember to turn on your DV camcorder or VCR connected to the IEEE-1394 interface card so that the camcorder can be detected as an image/imaging device or sound, video and game controller.

Windows 98 Second Edition/ Windows 2000

Check that the following devices are working properly:

- 1394 Bus Controller
- Image Device: Microsoft DV Camera and VCR (For Microsoft DV driver only.)
- Sound, video and game controllers: 1394 camcorder (For Texas Instruments DV driver only.)

Windows Millennium Edition (Me)

Windows Me fully supports the IEEE-1394 interface card. Check that the following devices are working properly:

- 1394 Bus Controller
- 61883 Device Class
- AVC Device Class
- Imaging Device: (Brand name) DV Camcorder: The brand name depends on the DV camcorder connected to the IEEE-1394 interface card.

Windows XP

To run DVD MovieFactory under Windows XP, check that the following devices are working properly:

- 1394 Bus Controller
- Imaging devices: (Brand name) DV Camcorder: The brand name depends on the DV camcorder connected to the IEEE-1394 interface card.

Note: In addition to commonly used Texas Instruments and Microsoft DV drivers, there are other drivers available. Consult your camcorder's manual for suitable drivers.

Enabling DMA for IDE disks

If you use IDE disks in Windows, enable **DMA** (Direct Memory Access) for all the hard disks that will be used for capturing video. DMA avoids possible dropped frame problems when you are capturing video.

Analog capture card

Windows 98SE, 2000, Me, and XP support analog capture cards. Remember to turn on the camcorder or VCR and connect it to your computer. Then check that the following devices are working properly:

- Sound, video and game controllers

USB port

The Universal Serial Bus (USB) connector lets you attach a wide array of devices to your computer quickly and easily. These devices include digital cameras, webcams, and just about every computer peripheral. Since Windows 98SE, 2000, Me, and XP fully support USB, installing the driver for this device is quick and easy too.

Check that the following device is working properly:

- Universal serial bus controller

Configuring DVD MovieFactory

Camcorders, VCRs, and VCD/DVD players are common sources of video footage. To ensure a smooth interaction between these video sources and your computer, make sure that the settings of DVD MovieFactory are configured properly depending on the capture device you are using.

DV (IEEE-1394 interface card)

To check the setup of DVD MovieFactory for DV interface:

1. Connect your camcorder to your IEEE-1394 interface card.
2. Insert your video tape into the camcorder and switch it on. Make sure it is in playback mode (usually named **VTR** or **VCR**). Check your camcorder's manual for specific instructions.
3. Go to the **Add/Edit Media** page and click **Capture Video** to open the **Capture Video** dialog box.
4. Check if your device is displayed under **Source**.

Note: When your camcorder is in **Record** mode (usually named **CAMERA** or **MOVIE**), you can still capture real-time video directly in MovieFactory, even if there's no video tape inserted.

Analog capture card

To check the setup of DVD MovieFactory for analog interface:

1. Connect your camcorder, VCR, or other video source device to your analog capture card.
2. Insert your video tape into the capture device and switch it on. Make sure it is in the playback mode (usually named **VTR** or **VCR**). See your machine's manual for specific instructions.
3. Your **Capture plug-in** will be detected automatically.
4. Go to the **Add/Edit Media** page and click **Capture Video** to open the **Capture Video** dialog box.
5. Check if your device is displayed under **Source**.

Note: If your capture device supports multiple video sources, the **Video and Audio Capture Property Settings** dialog box allows you to select your desired video source such as Composite, Tuner, or S-Video. In the Capture Video dialog box, click **Advanced Settings** and select **Video and Audio Capture Property Settings** from the pop-up menu.

Likewise, if you have multiple audio sources, this dialog box allows you to select your desired audio source.

USB input device

To check the setup of DVD MovieFactory for USB interface:

1. Connect your video source device to your **USB** port using a standard USB cable and switch it on.
2. Your **Capture plug-in** will automatically be detected.
3. Go to **Add/Edit Media** and click **Capture Video** to open the **Capture Video** dialog box.
4. Check if your device is displayed under **Source**.

DVD MovieFactory launcher

The **DVD MovieFactory launcher** serves as a control panel where you can find the tasks you'll need for disc-authoring. Clicking a task icon will launch the program module associated with it.

Note: Opening previously created project files from outside DVD MovieFactory launcher will automatically launch the associated program.



Create Video Disc

Opens the DVD MovieFactory **Start** dialog box where you can create a new video project or open an existing one.

To start a new video project:

1. Select **New Project**.
2. Select the output disc format.
3. Click **OK**.

To open an existing video project:

1. Select **Existing Project**.
2. Select an existing project from the list or click **Browse** to locate one.
3. Click **OK**. See "[Create Video Disc](#)" for more details.

**Create Slideshow Disc**

Opens the DVD MovieFactory **Start** dialog box where you can create a new photo slideshow or open an existing slideshow project.

To start a new slideshow project:

1. Select **New Project**.
2. Select the output disc format.
3. Click **OK**.

To open an existing slideshow project:

1. Select **Existing Project**.
2. Click **Browse** and locate the project file.
3. Click **OK**. See "[Creating a slideshow](#)" for more details.

**Create Music Disc**

Opens a dialog box where you can select the type of music disc to create. Refer to the separate **Burn.Now** manual for details. The manual is BurnNow.pdf in the C:\Program Files\Ulead Systems\Ulead DVD MovieFactory 3 folder by default.

**Create Data Disc**

Opens a dialog box where you can select the type of data disc to create. Refer to the separate **Burn.Now** manual for details. The manual is BurnNow.pdf in the C:\Program Files\Ulead Systems\Ulead DVD MovieFactory 3 folder by default.

**Direct to Disc**

You can capture videos from your source device and burn these videos directly onto a disc.

To start the Direct to Disc process:

1. Select an output disc format.
2. Select the burner drive.
3. Click **OK**. See [“Direct to Disc”](#) for more details.



Edit Disc

You can modify existing videos and menus in a DVD+R/RW, DVD-R/RW, or mini-DVD disc using a compatible disc burner.

To start the Edit Disc process:

1. Select the burner drive where the disc you want to edit is loaded.
2. Select whether to append data or edit video.
3. Click **OK**. See [“Edit Disc \(on-disc editing\)”](#) for more details.



Copy Disc

Makes a copy of a disc or burns a disc from a disc image file. Please refer to the separate **Burn.Now** manual for details. The manual is BurnNow.pdf in the C:\Program Files\Ulead Systems\Ulead DVD MovieFactory 3 folder by default.



DVD Player

Ulead DVD Player provides full-featured control over playback of your DVD videos from your DVD drive or hard drive. Please refer to the separate **DVD Player** manual for details. The manual is DVD_Player.pdf in the C:\Program Files\Ulead Systems\Ulead DVD MovieFactory 3 folder by default.



Erase Disc

Please refer to the separate **Burn.Now** manual for details. The manual is BurnNow.pdf in the C:\Program Files\Ulead Systems\Ulead DVD MovieFactory 3 folder by default.



Burn from Disc Image

Please refer to the separate **Burn.Now** manual for details. The manual is BurnNow.pdf in the C:\Program Files\Ulead Systems\Ulead DVD MovieFactory 3 folder by default.



Print Disc Label

Launches the **Print Disc Label** dialog box where you can create and print disc labels and covers for your discs. See [“Print Disc Label”](#) for more details.

Note: You could also run the EXE files of program modules to open them without using the DVD MovieFactory launcher. For the DVD MovieFactory main program the program file is **DVDMF.exe**, for Ulead Burn.Now it is **BurnStar.exe**, and for the Ulead DVD MovieFactory DiskRecorder the file is **DVDVR.exe**. The default location for these files is **C:\Program Files\Ulead Systems\Ulead DVD MovieFactory 3**.

Create Video Disc

Ulead DVD MovieFactory's step-by-step interface makes creating movies simple and easy.

Add Media

DVD MovieFactory lets you add content to your movie by capturing video, adding video files, and importing DVD videos. You can also create and add photo slideshow to your movie.






Capturing video

Capturing is the process of transferring video from your camcorder or other video sources to your computer. When you have properly setup your equipment for capturing, the video feed from your source device should be visible when you play the source tape in the **Preview Window** of the **Capture Video** dialog box. If your display card supports TV output connection, you will be able to view your video on the TV monitor.

Note: Before capturing videos, make sure that you have done the procedures described in [“Hardware checkup and configuration”](#).

Ulead DVD MovieFactory is capable of capturing video from different video sources such as DV camcorders and VCRs, analog devices, and TV tuners.

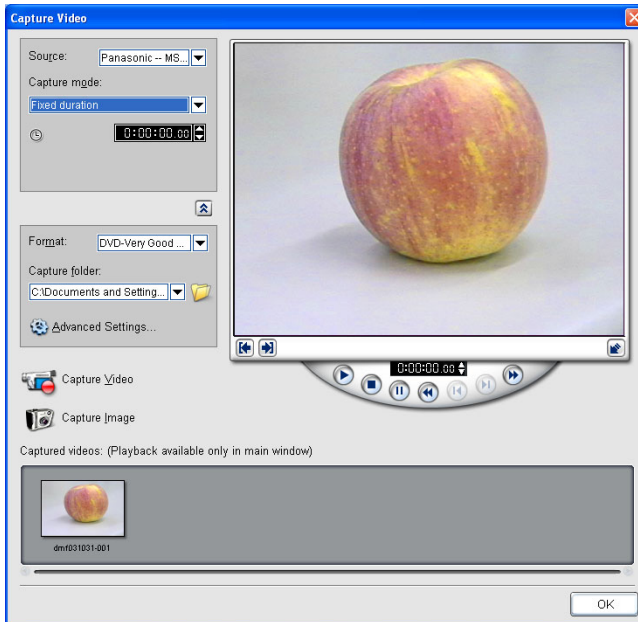

Capturing DV video

DVD MovieFactory allows you to capture digital video with two options: DV Type-1 and DV-Type 2.

DV Type-1 and DV Type-2 captured by FireWire (IEEE-1394 interface card) are automatically stored as AVI files (when your capture plug-in is DirectShow). An AVI file usually contains two streams, one video and one audio. DV is a data stream that itself contains video and audio.

In DV Type-1, the whole DV stream is stored unmodified as one AVI stream. DV Type-2 splits the DV data into separate audio and video streams.

Capturing DV video as Type-2 gives more compatibility with other applications.

To choose which DV Type to use:

1. Select your DV camcorder from the **Source** list.
2. Click **Show / Hide Options** to show the capture options.
3. Click **Advanced Settings** and select **Change Capture Plug-in**. Set the capture plug-in to **Ulead DirectShow Capture Plug-in**. Click **OK**.
4. Click **Advanced Settings** and select **DV Type**.
5. Choose the DV type to capture. Select **DV type-2** to make the captured video more compatible with other video editing programs then click **OK**.

To capture DV video:

1. Connect your camcorder to the IEEE-1394 interface card. Turn it on and set it to **Play** (or VTR /VCR) mode.
2. In the **Add/Edit Media** page, click **Capture Video**. The DV device connected to your computer is displayed in the **Source** list.
3. Select a **Capture mode**:
 - **Fixed duration** sets the total duration to be captured.
 - **Marked duration** will show the mark-in and mark-out timecode control where you can set mark-in and mark-out point for capturing.

- **Full DV Tape** captures the whole DV tape from tape start to end.
4. To adjust the capture options, click **Show / Hide Options**.
 - **Format** allows you to select the file format of the captured video.
 - **Capture folder** shows the path of the folder where captured videos are saved. Click **Browse** to select a different folder.
 - **Advanced Settings** lists additional capture settings.
 5. Click **Play** in the **Navigation Panel**.
 6. When you get to the part of the video you want to record, click **Capture Video**. Click **Stop Capture** or press **[Esc]** to stop capturing. The captured video will be added to the Captured videos list.
 7. Repeat steps 6 and 7 to add more clips.

Capturing analog video

DVD MovieFactory allows you to capture videos not only from digital sources, but also from analog sources. Before capturing analog videos, set the appropriate options in the **Video and Audio Capture Property Settings** dialog box in the **Advanced Settings**.

Note: Make sure that the audio cable is connected to the line-in jack.

Capture Options dialog box

This is where you can set DVD MovieFactory to capture audio, detect scenes, and preview the video while capturing. This is also where you specify the capture frame rate.

- **Capture audio** Select to capture the audio when capturing from an analog device.
- **Split video by Scene detection** Select to capture the different sequences of footage recorded in a DV tape into multiple files or clips based on recording dates and times.