


Connector Configuration

Prerequisite: Need a user ID for RFC connection in **PLUG-IN system (S4HANA/ECC/BW)**. User ID should be SYSTEM or COMMUNICATION type and should be assigned with necessary (RFC) authorizations. Auth Objects starting with S_RFC* would give access to RFC-related authorizations.

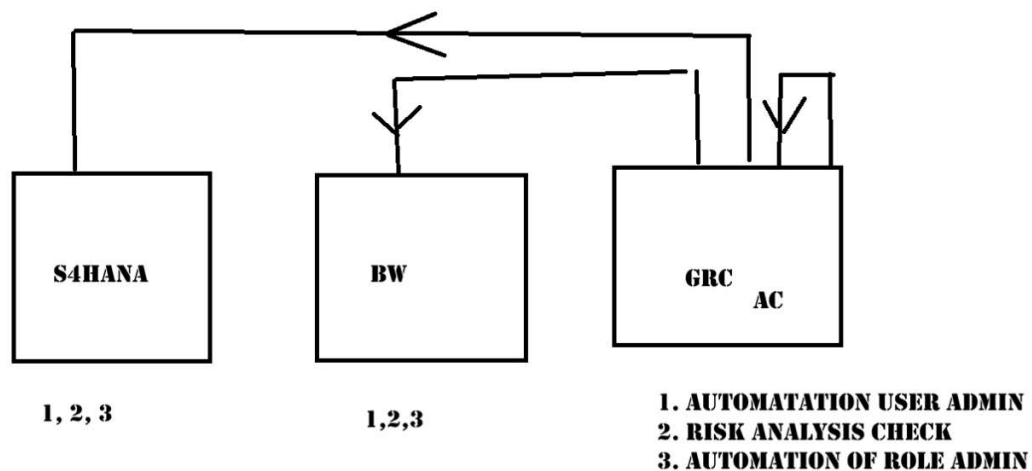


All the config below is done in GRC system:

Path for 1st 3 steps of Connector Configuration:

SPRO ----> GRC -----> Common Component Settings -----> Integration Framework

1) Create Connector (SM59)

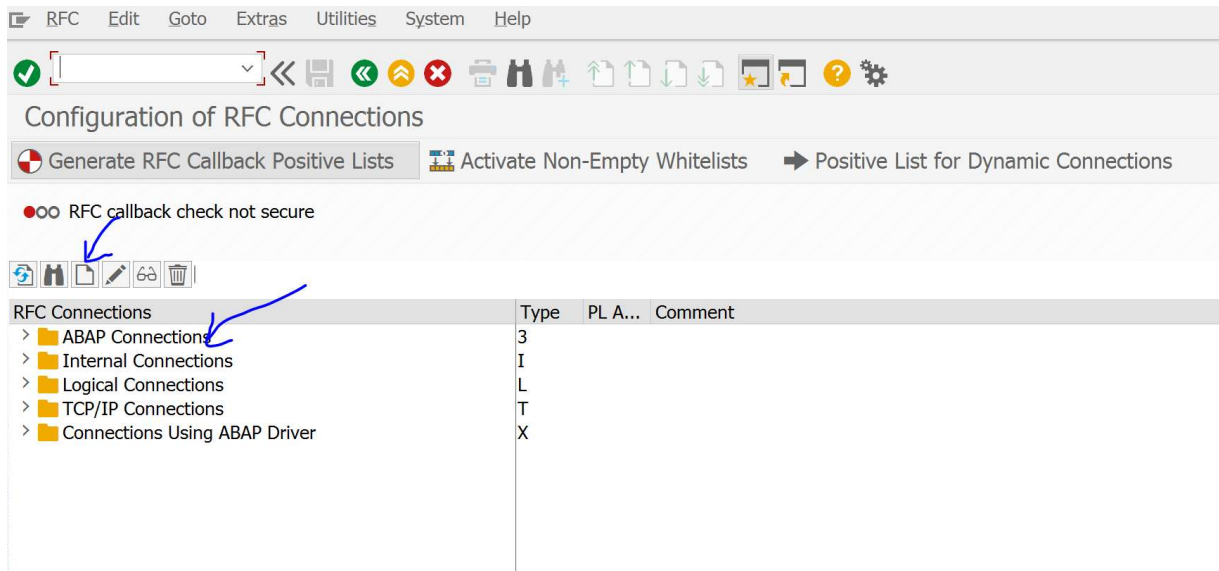

Set up of RFC between **Plug in system** and **GRC** systems

GRC system – GRP 350

ECC1 (Plug in system) – ID7 800 --- > APAC

ECC2(Plug in system) – ID7 700 ---- > AMERICA

ECC3 (Plug in system) – ID7 600 ---- > EURO

RFC Connection: Naming Convention - Examples


GRP 350 (GRC) ----- > ID7 800 (ECC) = ID7CLNT800

GRP 350 (GRC) ----- > ID7 700 (ECC) = ID7CLNT700

GRP 100 (GRC) ----- > ID7 600 (ECC) = ID7CLNT600

GRP 350 (GRC) ----- > GEP 100 (ECC) = GEPCLNT100

GRP 350 (GRC) ----- > ID7 800 (ECC) = ID7CLNT800(TYTCLNT800)

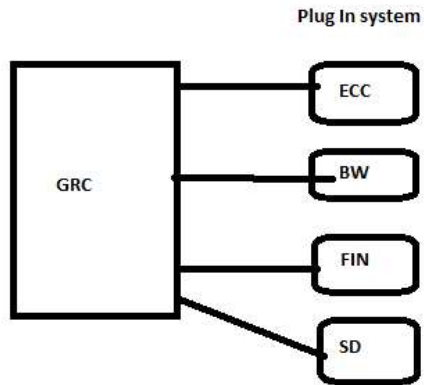

Note: Ensure that **RFC Connection name** is defined in **CAPITAL** Letters.

ECC - ED1, EQ1, EP1

BW - BD1, BQ1, BP1

GRC - GD1, GQ1, GP1

Cannot be transported:

GD1 100---- > ED1 100 Connector: ED1CLNT100

GQ1 100 --- > EQ1 100 Connector: EQ1CLNT100


GP1 100 ---- > EP1 100 Connector: EP1CLNT100

Transportable data:

GD1 100---- > ED1 100 Connector: ECCCLNT100

GQ1 100 -----> EQ1 100 Connector: ECCCLNT100

GP1 100 ---- > EP1 100 Connector: ECCCLNT100

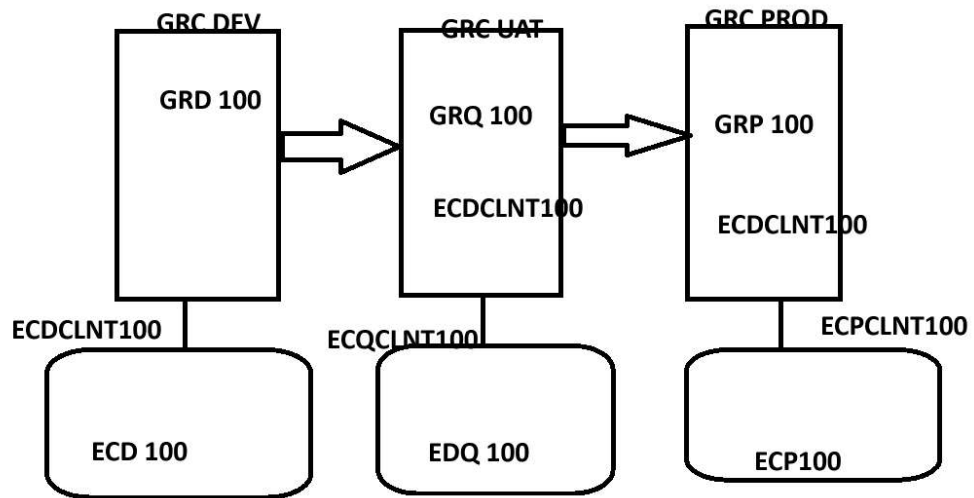

2) Maintain Connectors and Connection Types


- a) **Define Connectors:** Source Connector & Logical Port should be same as Target connector

GRC --- > **ECC:** Connection Type: **SAP**

GRC ---- > **S4HANA On Premise:** Connection Type: **SAP**

GRC ---- > **S4HANA Cloud:** Connection Type: **S4HANA**

GRC ----- > **non-SAP:** Connection Type: **WS (webservice)**

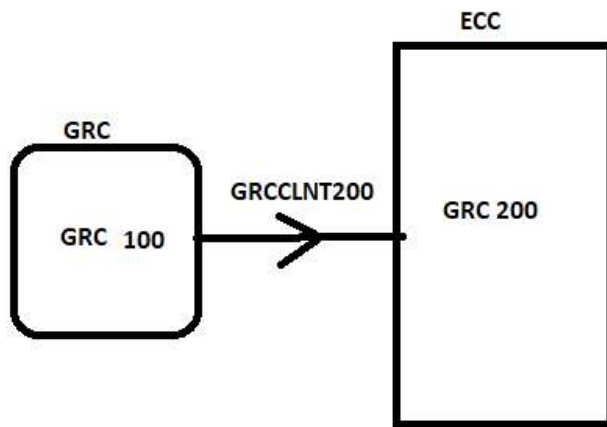

2. **A.1) Define Subsequent Connector** – This is required for **JAVA** systems only. Not required for ABAP system. Subsequent Connector is created by BASIS Team.


SAP ABAP ---- > One Connector ---- > SAP (Connection Type)

SAP JAVA (PI/PO/IDM/CRM/EP/MDG/SOLMAN) ----- > 2 Connectors

SPML1 ----- > Main Connector

SPML2 ----- > Sub Subsequent Connector


b) Define Connector Groups – Create a Group

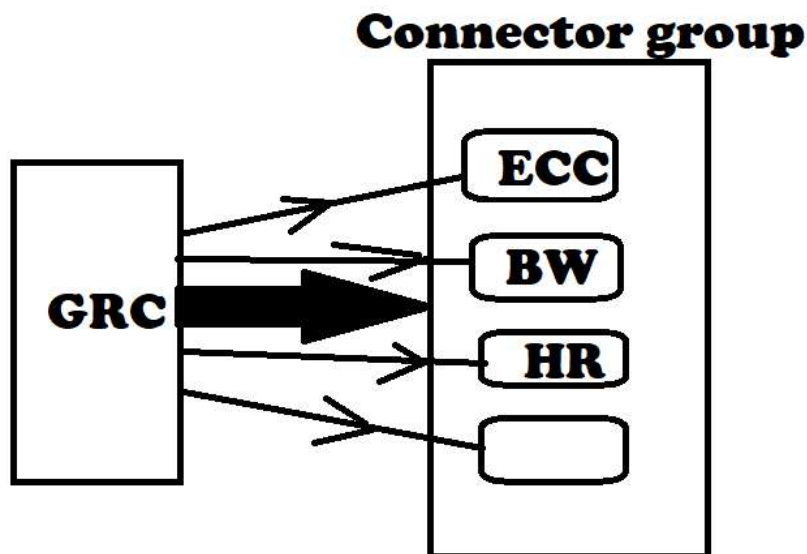

2. B.1) Assign Connector Groups to Group Types: Define your Connector group status as **Logical Group** for AC

2. B.2) Assign Connectors to Connector Groups – Put the connector which you have created in Step 1 under this Connector Group just created.

3) Maintain Connection Settings

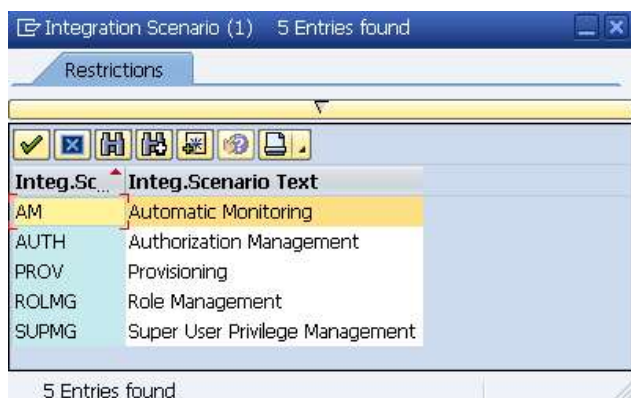

AM: Process Control

Access Control related Integration Scenarios

AUTH: Related to BRM

PROV: Related to ARM

ROLMG: Related to BRM

SUPMG: Related to EAM


Path: **SPR0 ----- > GRC ---- > Access Control**


4) **Maintain Connector Settings ----- > Define Application Type, Environment and PSS.** PSS stands for Password Self Service.

5) **Maintain Mapping for Actions and Connector Groups**

a) **Maintain Connector Group Status ---- > Enter your connector group name and make it active.**

b) **Assign default connector to connector group**

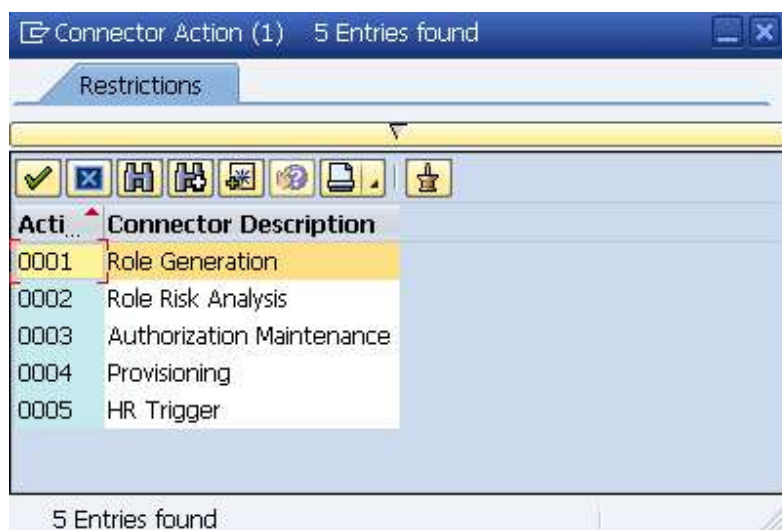

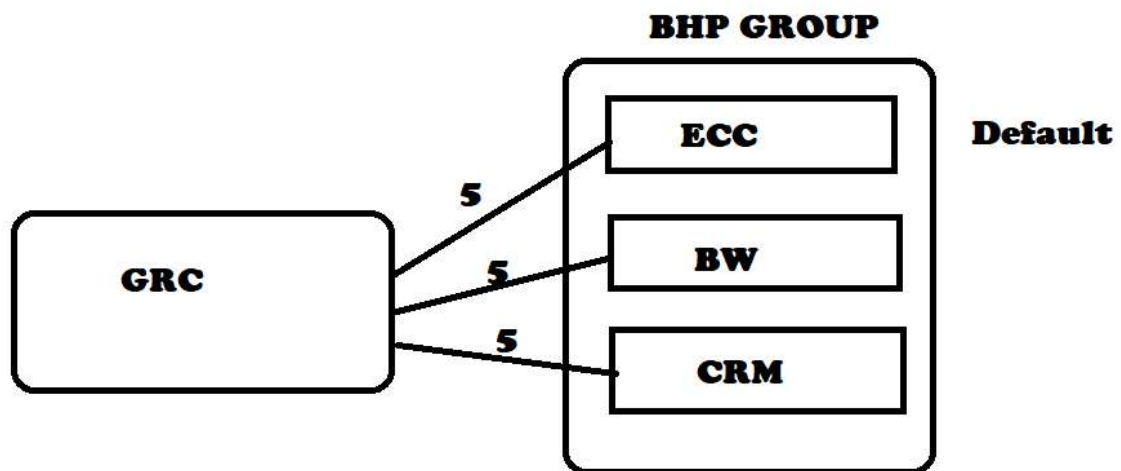

- Under one connector group, only 1 system can act as Default Connector for one Action.
- All systems under connector group, should be mapped with all actions, but only one system can act as Default Connector