

(Remote) IR Blaster

ESP8266-12E

5v@2A

USB hub (Externally Powered)

5V@ 2A

Web Cam + Microphone

Audio Video In

Bluetooth

2.4 Ghz

(Remote)

Trigger Sources

- Hammer type gesture recognition

OR

Trigger Sources

- Wrist band gesture recognition

OR

Trigger Sources

- Mouse pressing
- Mouse movement

2.4Ghz RF Mouse

(Remote) Wi-Fi Alarm

ESP8266-12F

PAM8403

3W 4ohms x 2

Wi-Fi AP/STA

HDMI

USB


USB

DHT11

5V@3A

Raspberry Pi5

LCD Wave share 4.3 Inch LCD

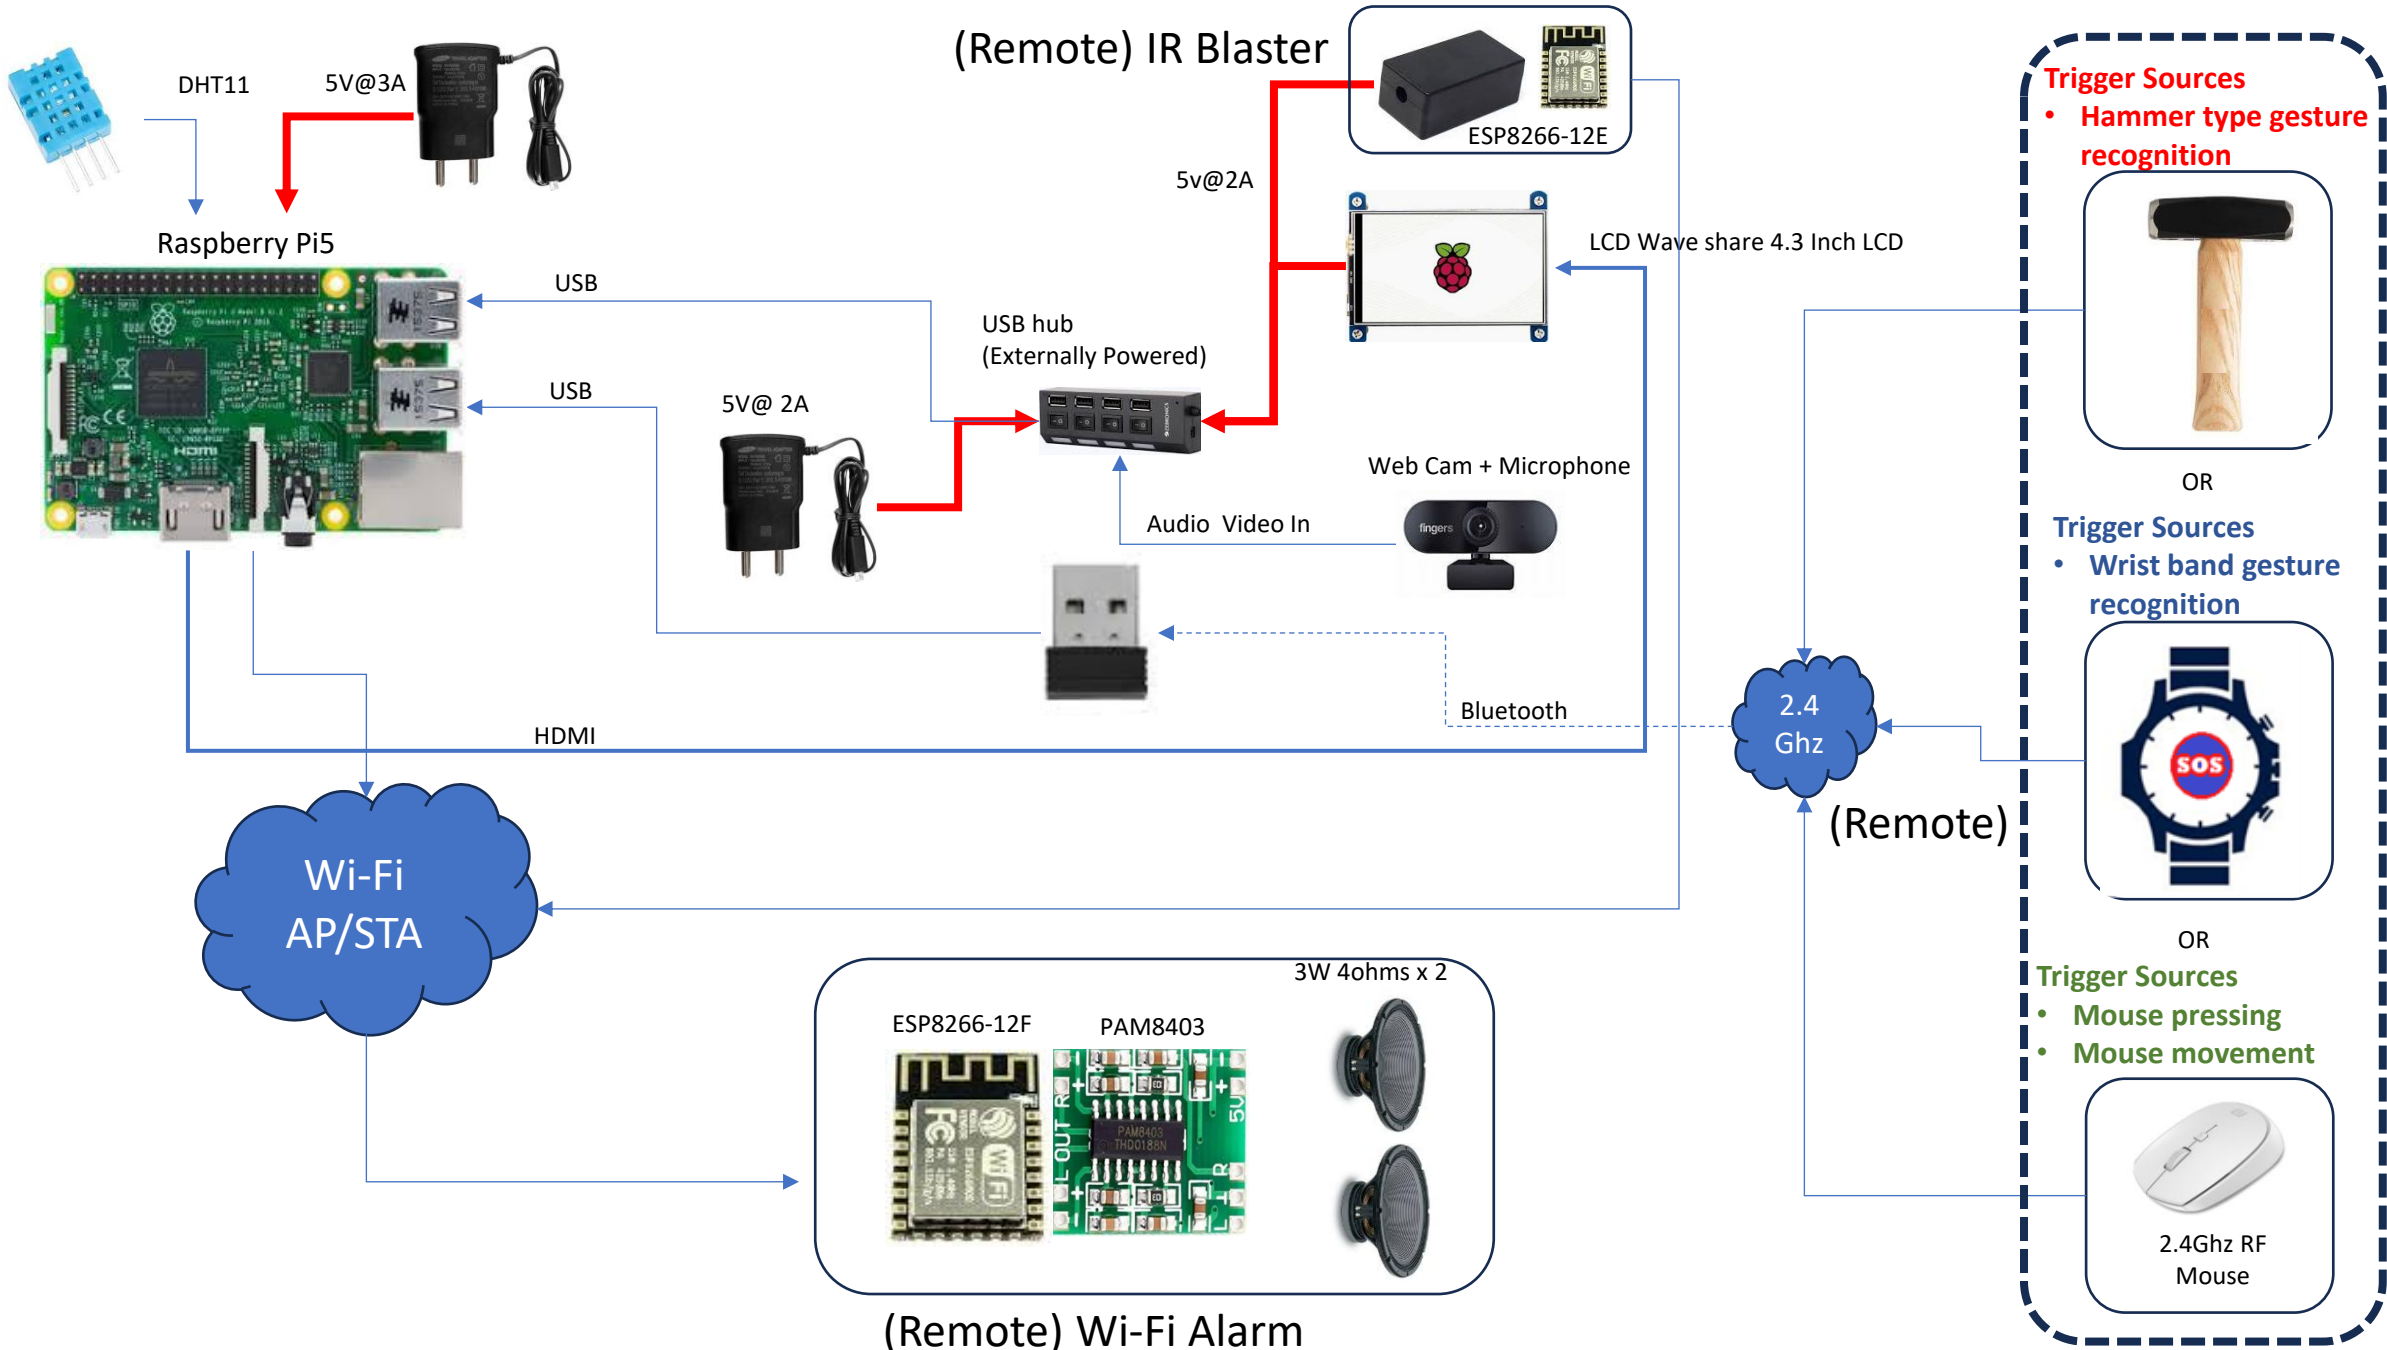



Voice
Activation




Wrist Band
Activation





Motion Detection
Activation

ALARM




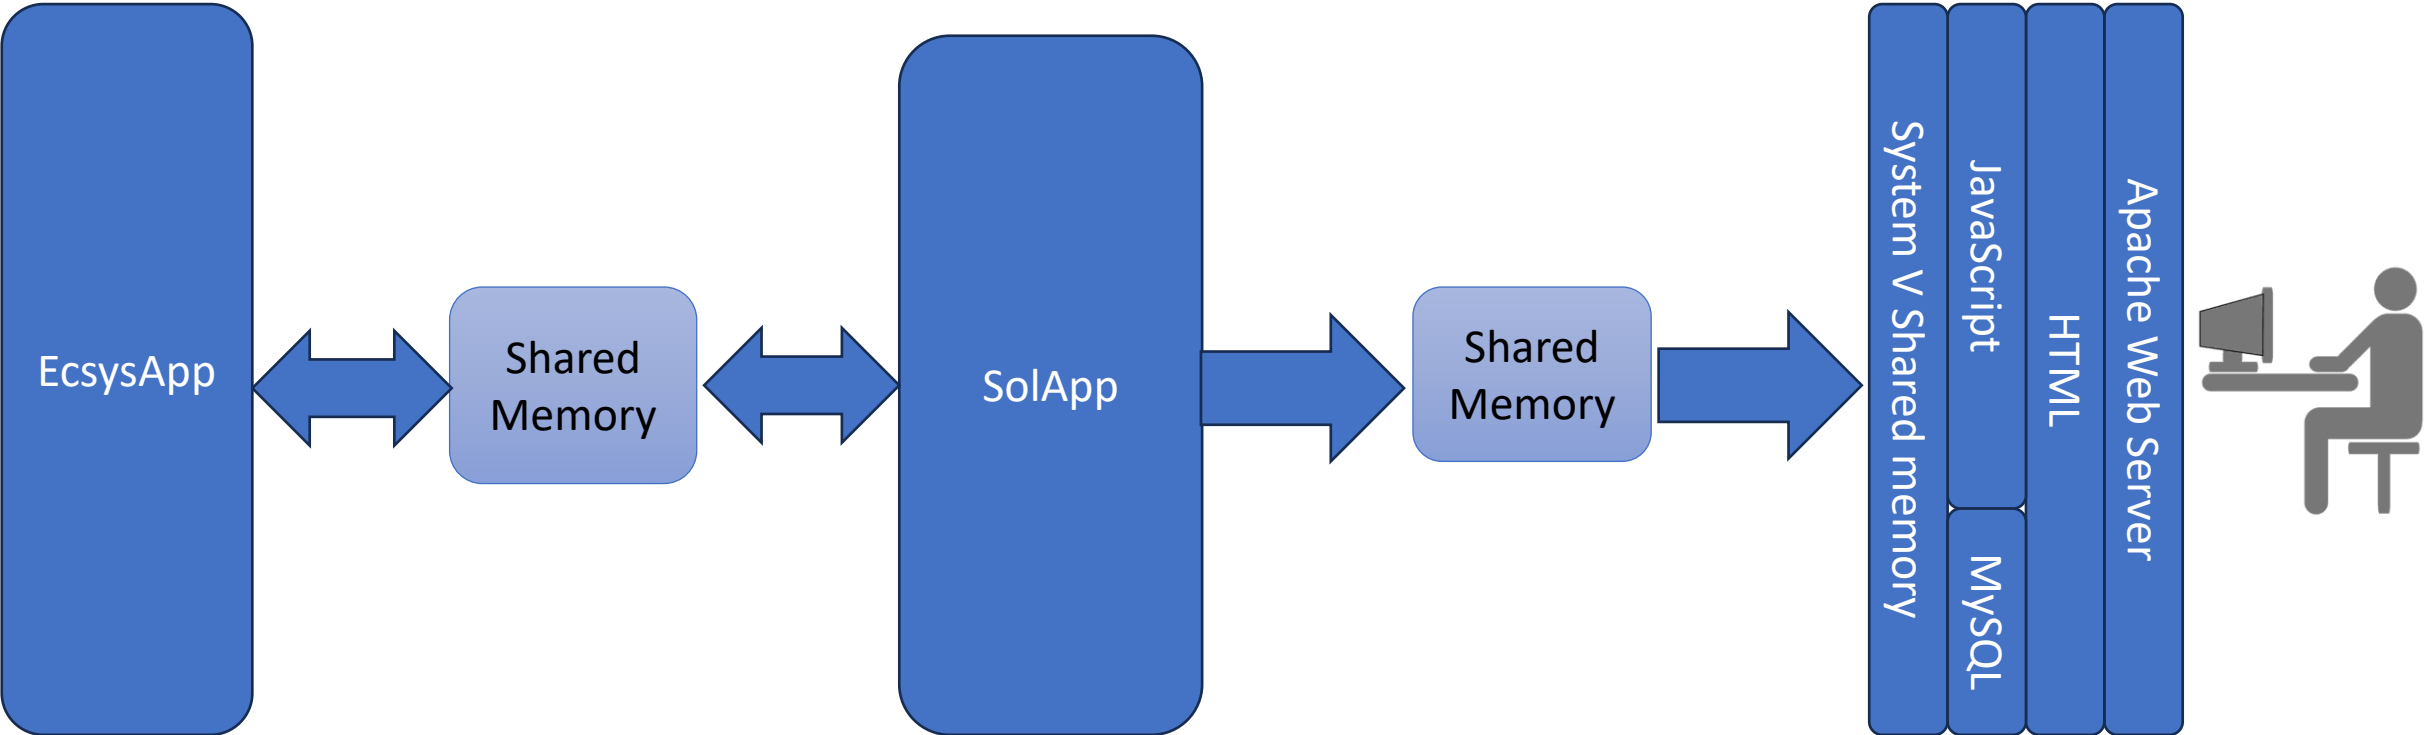


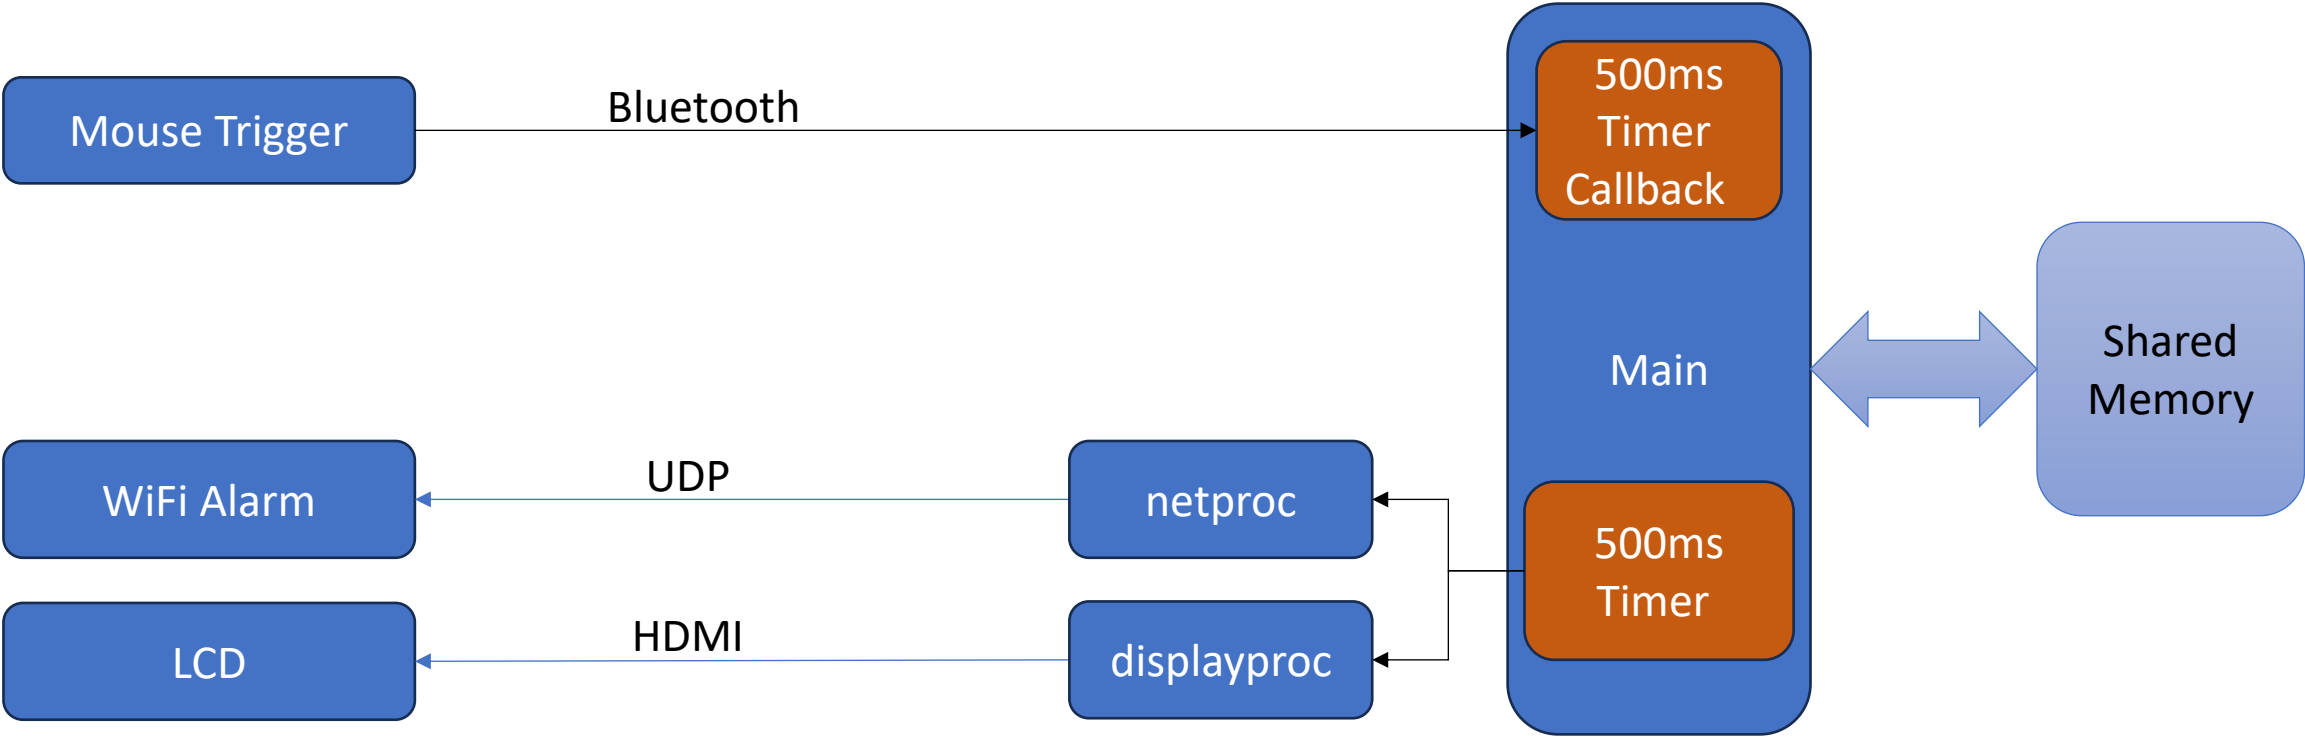

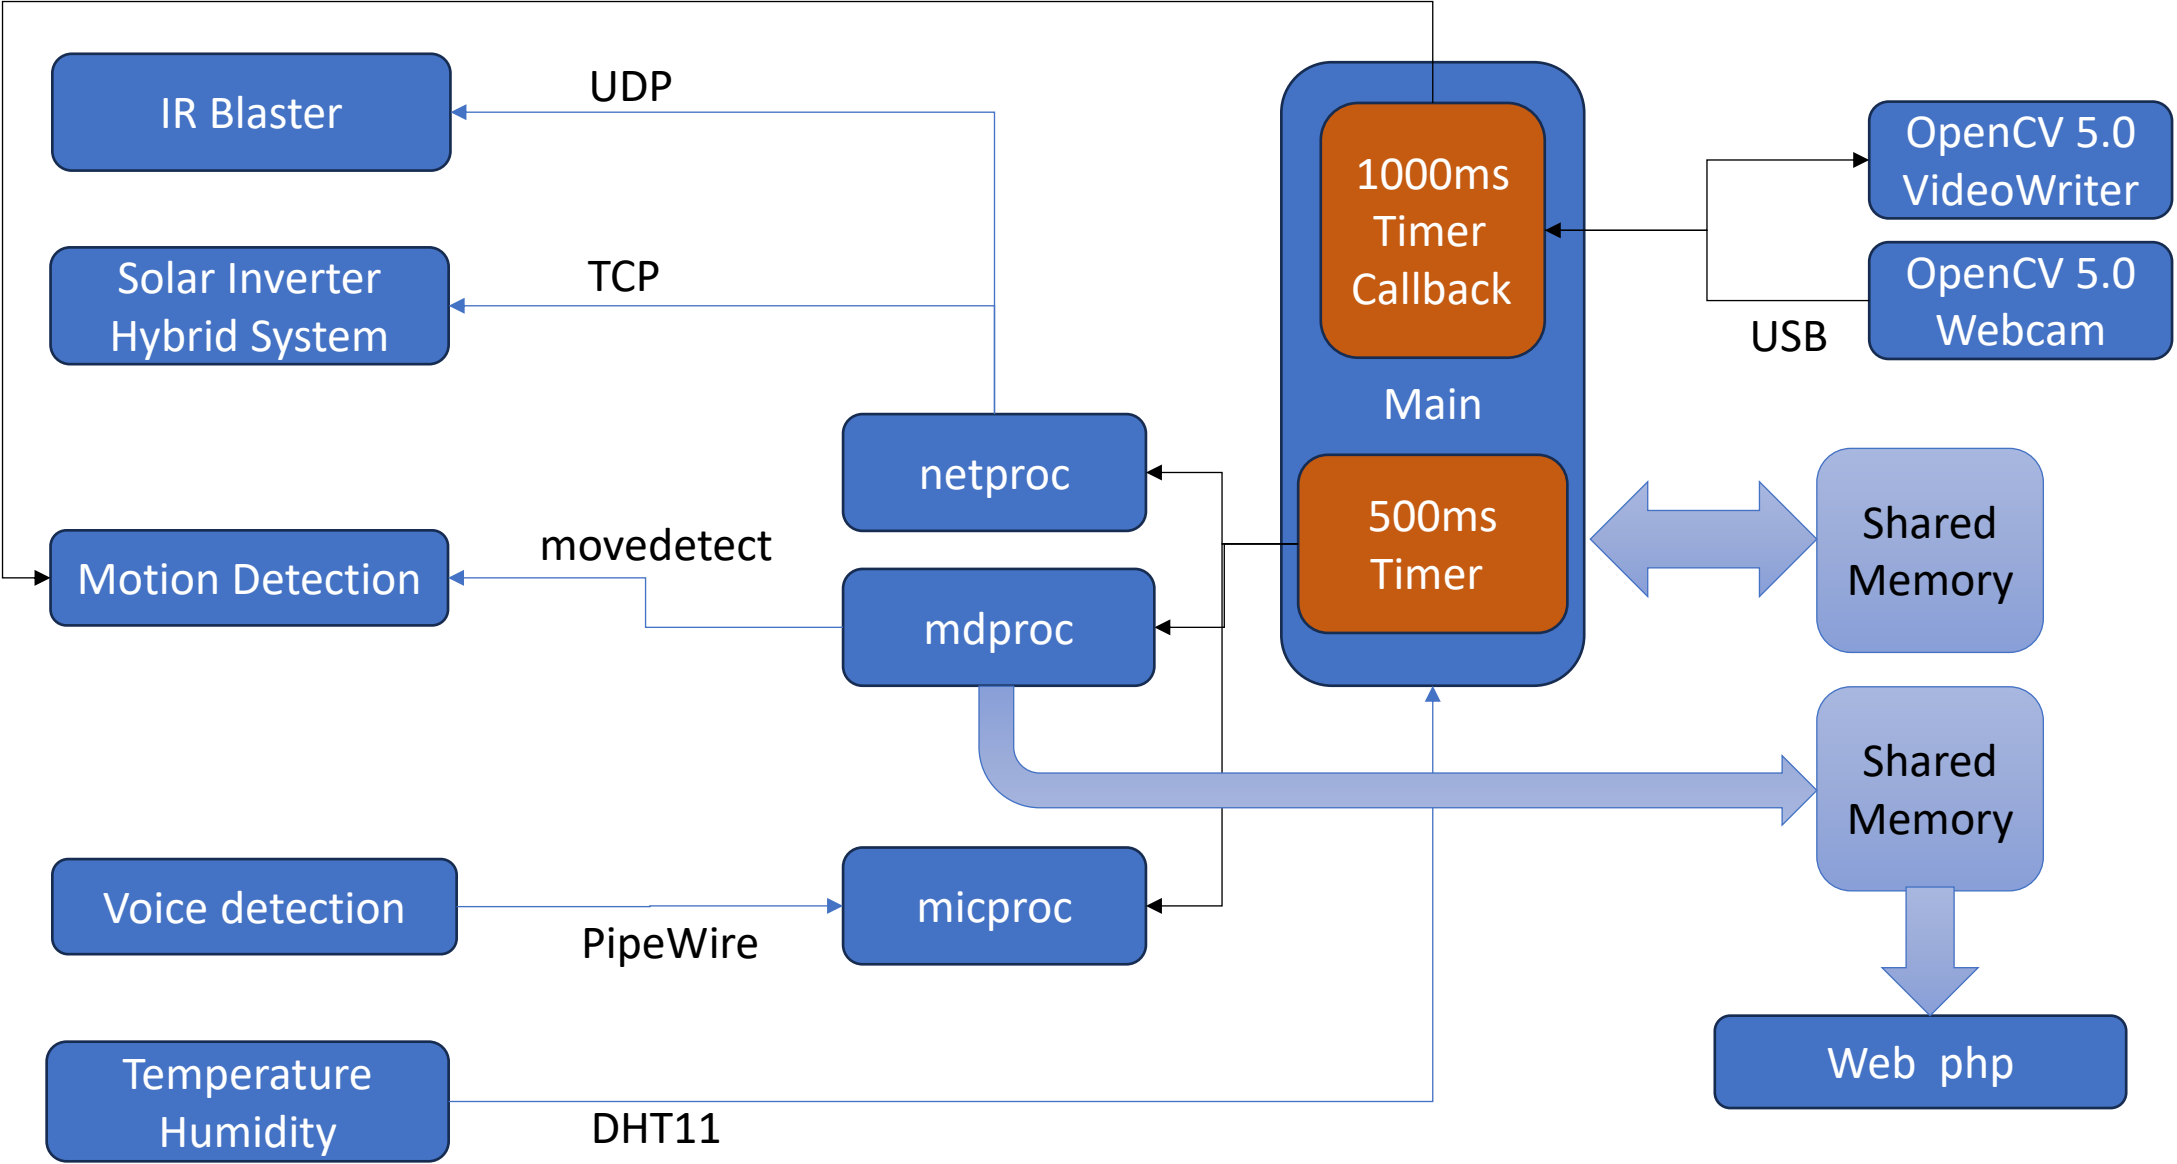

Shared Memory Data

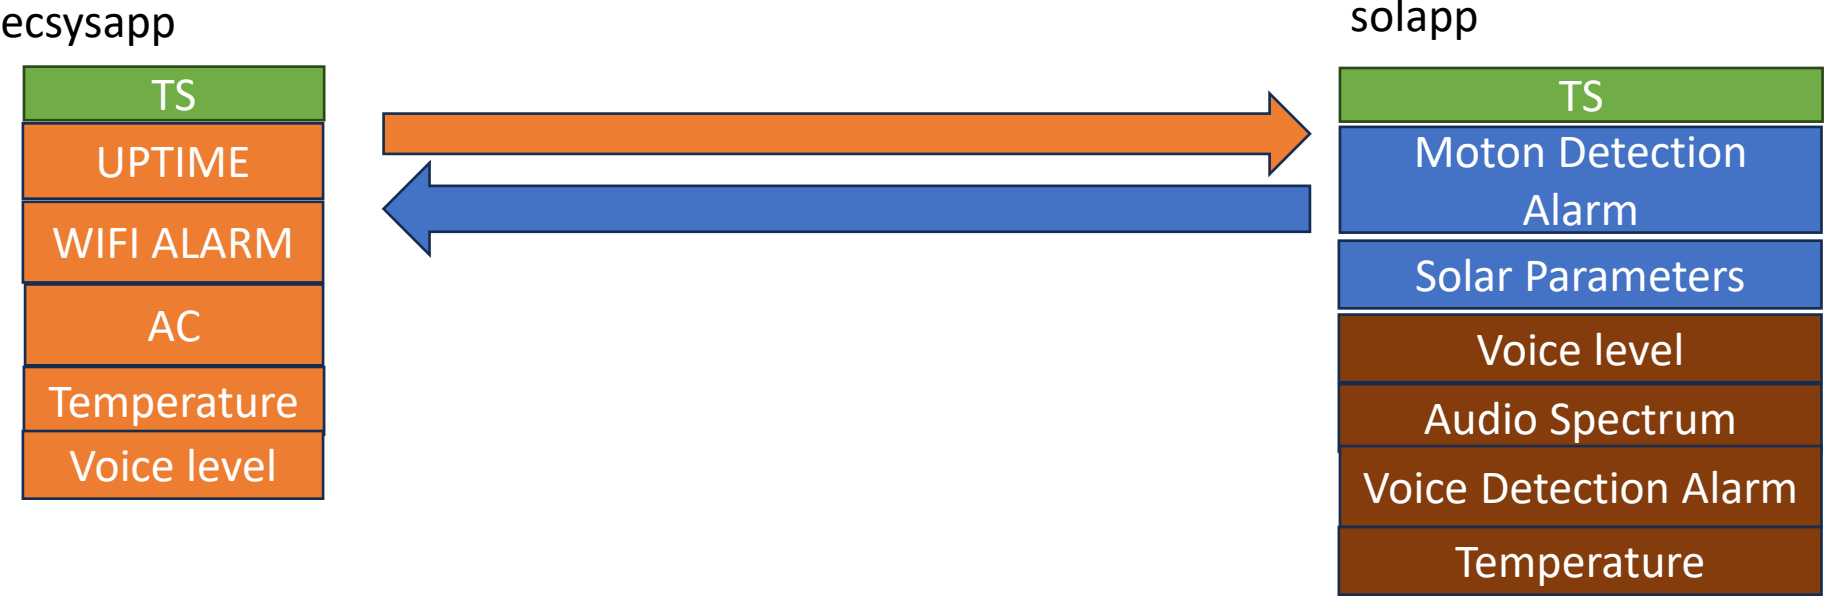

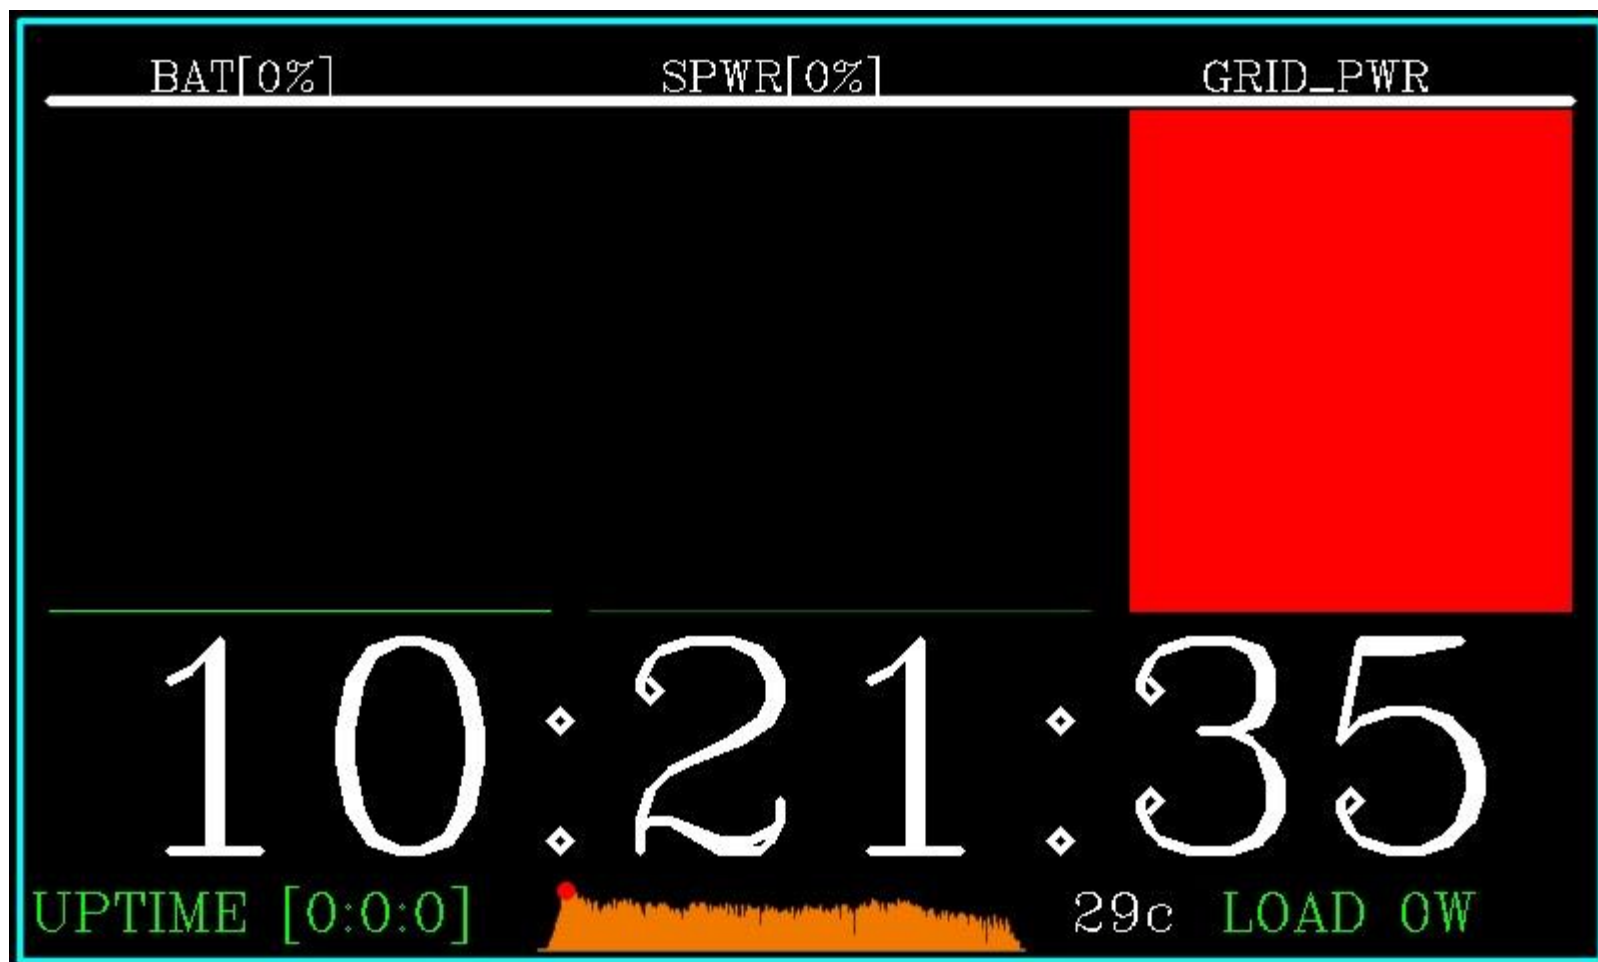

System Configurations

ID	NAME
0	2.4G Mouse
1	2.4G Mouse
2	pwr_button
3	Lenovo FHD Webcam Audio: Lenovo
4	vc4-hdmi-0
5	vc4-hdmi-0 HDMI Jack
6	vc4-hdmi-1
7	vc4-hdmi-1 HDMI Jack

Application Parameters

MOUSE_LEVEL_A[0-5]	0
MOUSE_LEVEL_B[0-5]	0
MOUSE_LEVEL_B_HOURS[0,1,2...23]	DEFAULT
MOUSE_NAME	2.4G Mouse
MOUSE_INDEX	1
BEACON_TIMEOUT[1-255]	15
DIR_MAX[1-255]	2
NIGHT MODE HOURS[0,1,2...23]	20,21,22,23,0,1,2,3,4,5
AC ON HOURS[0,1,2...23]	11,13,20
ALARM KEY	
ALARM IP	192.168.0.105
AC CUT OFF TEMPERATURE	26
VOICE DETECTION HOURS[0,1,2...23]	DEFAULT
MOTION DETECTION HOURS[0,1,2...23]	DEFAULT
SOLAR IP	192.168.0.100
IR BLASTER IP	192.168.0.108
Solar Serial Number	
IR BLASTER KEY	
ACCESS_PASSWORD	

Submit

Select the image area for motion detection

ID22X0Y0W320H480

Mask AddMask Remove

X

Y

W

H

Add

ID

Remove


	160	320	480	640
120				
240				
360				
480				

REBOOT

This is a private web site, any unauthorized attempt to access will be prosecuted to the maximum permitted by the law.[192.168.0.112]




2026-07-13 12:23:14

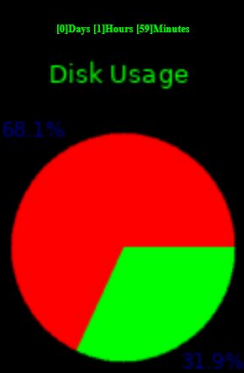


[Show Summary](#)
[Show Configuration](#)
[Show Logs](#)

Statistics

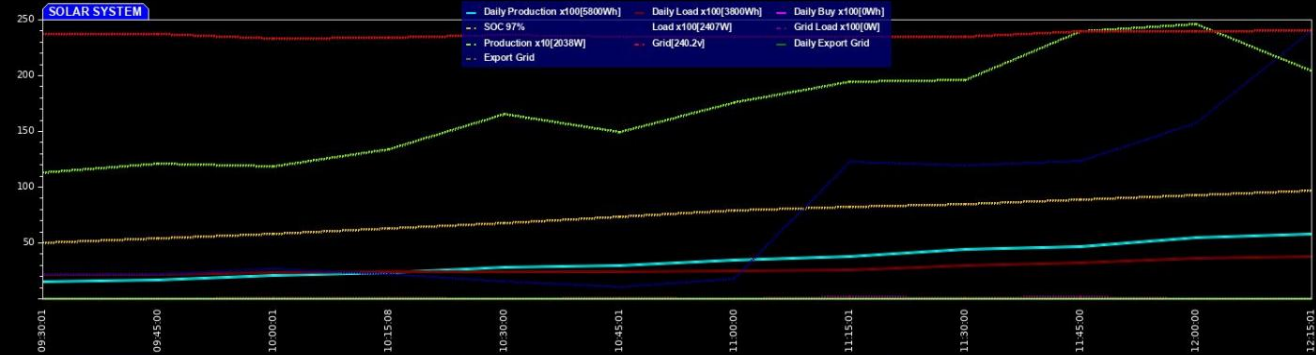

IR Blaster Schematics

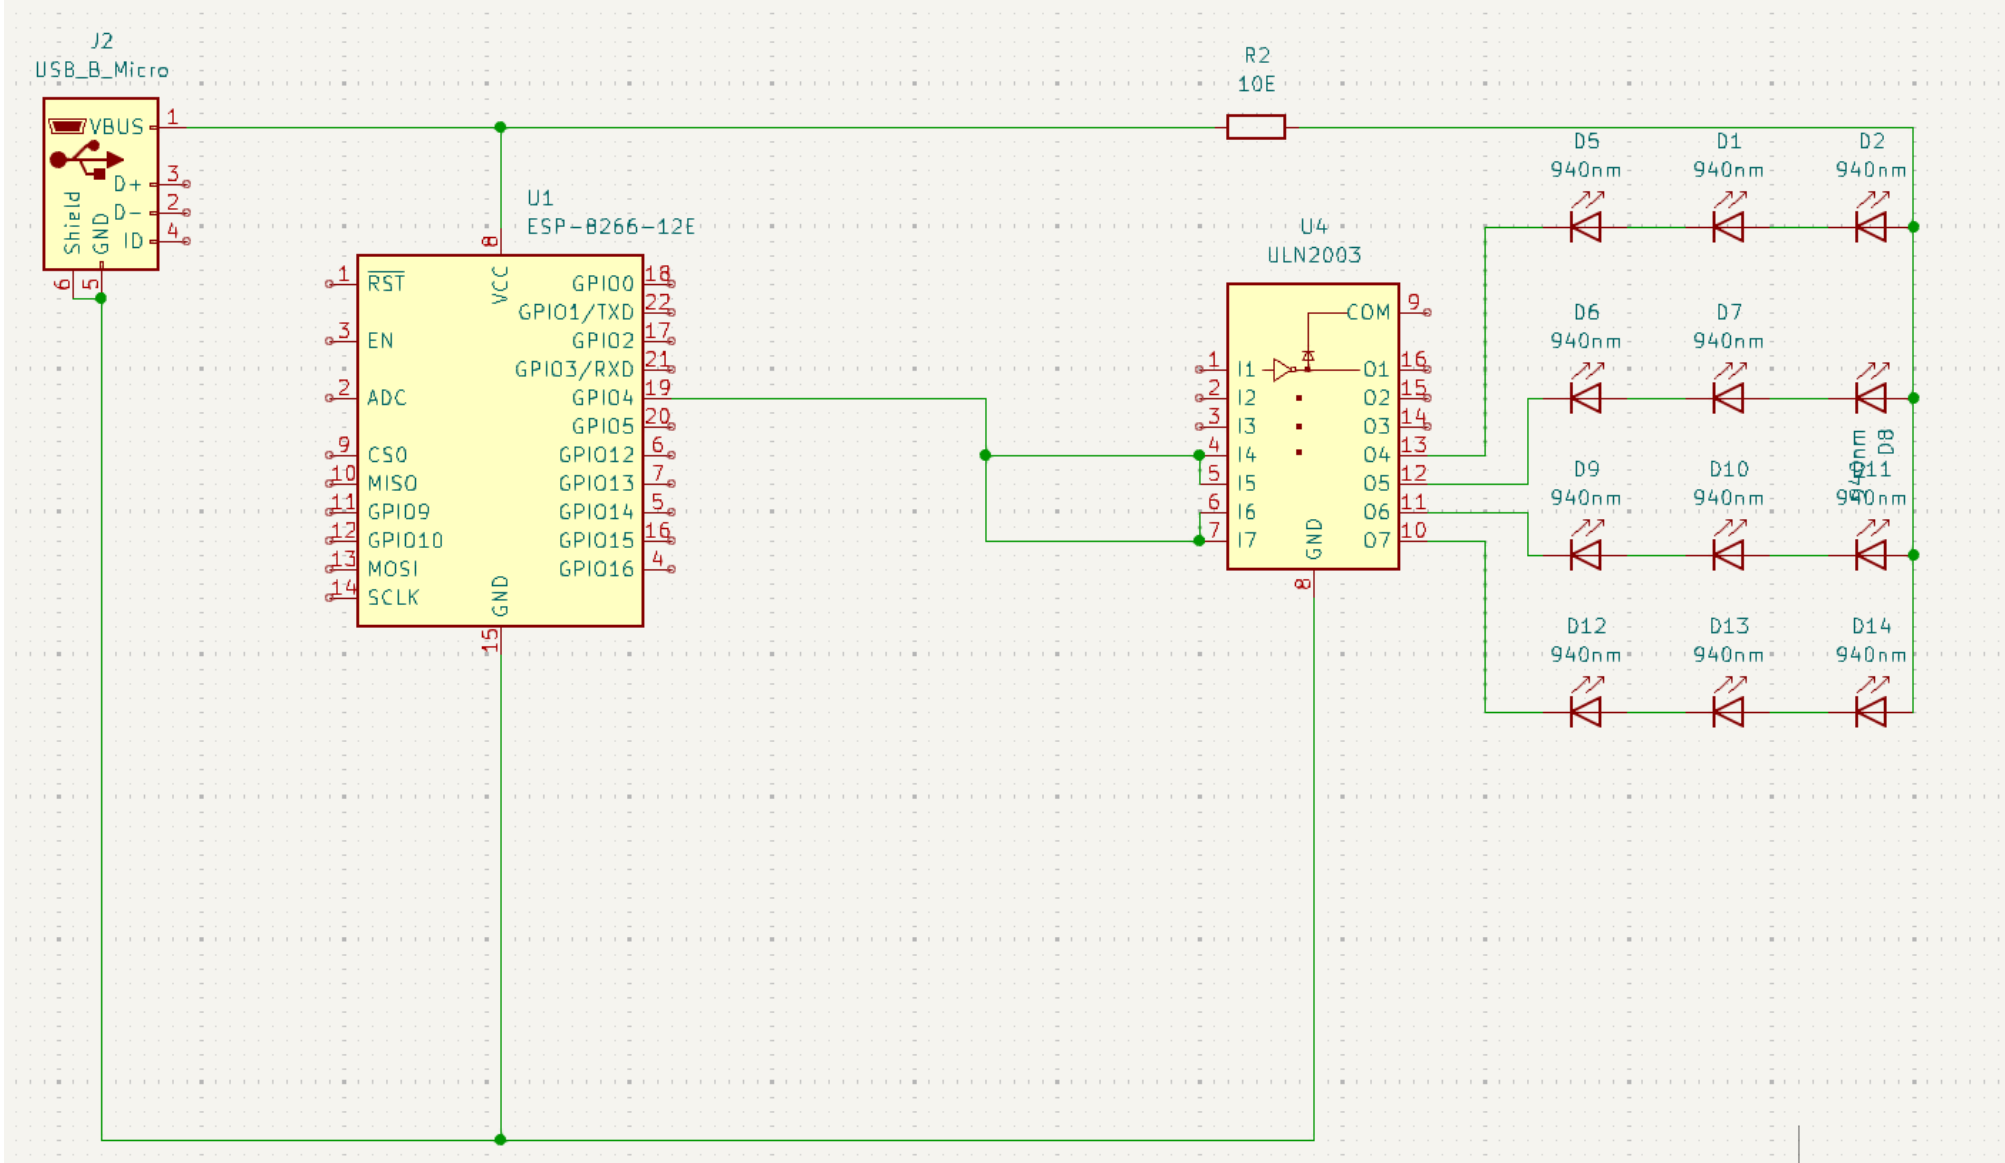

.bashrc

```
cmd=$(pgrep keep_alive.sh)
if [ -z "$cmd" ]; then
    if [ -f /home/ecsys/enable ]; then
        /home/ecsys/ecsysapp/keep_alive.sh &
    fi
fi
```

cmdline.txt

```
console=serial0,115200 console=tty1 root=PARTUUID=b64a6f0e-02
rootfstype=ext4 fsck.repair=yes rootwait ds=nocloud;i=rpi-imager-
1778722754770 cfg80211.ieee80211_regdom=IN logo.nologo
fbcon=rotate:3 vc4.force_hotplug=1 usbcore.autosuspend=-1
```

config.txt

```
[all]
gpio=26=op,dh
dtoverlay=dht11,gpiopin=21
```

- sudo nmcli con add con-name ethernet ifname eth0 type ethernet ip4 10.10.10.1/24 gw4 10.10.10.1
- sudo nmcli con mod ethernet ipv4.dns 10.10.10.1,8.8.8.8
- sudo nmcli con mod ethernet connection.autoconnect true
- sudo nmcli con up ethernet ifname eth0

- sudo nmcli connection add type 802-11-wireless con-name **ssid_name** ssid **ssid_name** 802-11-wireless-security.key-mgmt WPA-PSK 802-11-wireless-security.psk **password**
- sudo nmcli con mod **ssid_name** connection.autoconnect true
- sudo nmcli connection up **ssid_name**

/var/www/html

- sudo chown www-data:www-data -R *
- sudo setfacl -m u:ecsys:rwx storage

```
sudo apt-get install mariadb-server php cmake libmysqlcppconn-dev syslog-ng acl vim universal-ctags apache2 libboost-all-dev libopencv-dev  
https://github.com/stephanecharette/MoveDetect  
sudo apt install php8.4-mysql php8.4-gd libfmt-dev ttf-mscorefonts-installer libdrm-dev libpipewire-0.3-dev libfftw3-dev
```

```
create table syscon(id MEDIUMINT,name CHAR(255) NOT NULL);  
create table mask(id int NOT NULL AUTO_INCREMENT,x MEDIUMINT NULL,y MEDIUMINT NULL,w MEDIUMINT NULL,h MEDIUMINT NULL,PRIMARY KEY  
(id));  
create table cfg(mouse_levela TINYINT NULL,mouse_levelb TINYINT,mouse_bhrs CHAR(64), mouse_name CHAR(255) NOT NULL,mouse_index MEDIUMINT  
NULL,beacon_timeout MEDIUMINT NULL,dir_max MEDIUMINT NULL,night CHAR(64) NULL,ac CHAR(64) NULL,akey CHAR(64) NULL,aip CHAR(32) NULL,aco  
MEDIUMINT NULL,voice CHAR(64) NULL,motion CHAR(64) NULL,sip CHAR(32) NULL,bip CHAR(32),sn CHAR(32) NOT NULL,mkey CHAR(32) NOT NULL,bkey  
CHAR(32),access CHAR(255) NOT NULL, reboot TINYINT NULL);
```

```
create table hour(temp smallint NULL,humd smallint NULL,noise smallint NULL,dprod smallint NULL,dload smallint NULL,dbuy smallint NULL,soc smallint  
NULL,upload smallint NULL,gload smallint NULL,prod smallint NULL,gvolt smallint NULL,gdexp smallint NULL,gexp smallint NULL,ts TIMESTAMP NOT NULL  
DEFAULT CURRENT_TIMESTAMP ON UPDATE CURRENT_TIMESTAMP);
```

```
create user "userecsys"@"localhost"identified by "ecsys123";  
grant all on ecsys.* TO "userecsys"@"localhost";
```

```
sudo nmcli dev wifi rescan  
nmcli dev wifi list  
sudo nmcli device wifi rescan && nmcli device wifi list
```

```
sudo systemctl --no-pager status syslog-ng  
sudo systemctl restart syslog-ng  
sudo systemctl enable syslog-ng
```

```
MariaDB [ecsys]> desc cfg;
```

Field	Type	Null	Key	Default	Extra
mouse_levela	tinyint(4)	YES		NULL	
mouse_levelb	tinyint(4)	YES		NULL	
mouse_bhrs	char(64)	YES		NULL	
mouse_name	char(255)	NO		NULL	
mouse_index	mediumint(9)	YES		NULL	
beacon_timeout	mediumint(9)	YES		NULL	
dir_max	mediumint(9)	YES		NULL	
night	char(64)	YES		NULL	
ac	char(64)	YES		NULL	
akey	char(64)	YES		NULL	
aip	char(32)	YES		NULL	
aco	mediumint(9)	YES		NULL	
voice	char(64)	YES		NULL	
motion	char(64)	YES		NULL	
sip	char(32)	YES		NULL	
bip	char(32)	YES		NULL	
sn	char(32)	NO		NULL	
bkey	char(32)	YES		NULL	
access	char(255)	NO		NULL	
reboot	tinyint(4)	YES		NULL	

```
20 rows in set (0.001 sec)
```

```
MariaDB [ecsys]> desc syscon;
```

Field	Type	Null	Key	Default	Extra
id	mediumint(9)	YES		NULL	
name	char(255)	NO		NULL	

```
2 rows in set (0.003 sec)
```

```
MariaDB [ecsys]> desc mask;
```

Field	Type	Null	Key	Default	Extra
id	int(11)	NO	PRI	NULL	auto_increment
x	mediumint(9)	YES		NULL	
y	mediumint(9)	YES		NULL	
w	mediumint(9)	YES		NULL	
h	mediumint(9)	YES		NULL	

```
5 rows in set (0.001 sec)
```

```
MariaDB [ecsys]> desc hour;
```

Field	Type	Null	Key	Default	Extra
temp	smallint(6)	YES		NULL	
humd	smallint(6)	YES		NULL	
noise	smallint(6)	YES		NULL	
dprod	smallint(6)	YES		NULL	
dload	smallint(6)	YES		NULL	
dbuy	smallint(6)	YES		NULL	
soc	smallint(6)	YES		NULL	
upload	smallint(6)	YES		NULL	
gload	smallint(6)	YES		NULL	
prod	smallint(6)	YES		NULL	
gvolt	smallint(6)	YES		NULL	
gdexp	smallint(6)	YES		NULL	
gexp	smallint(6)	YES		NULL	
ts	timestamp	NO		current_timestamp()	on update current_timestamp()

```
14 rows in set (0.001 sec)
```

```
Database changed
```

```
MariaDB [ecsys]> show tables;
```

Tables_in_ecsys
cfg
hour
mask
out_img
syscon

```
5 rows in set (0.002 sec)
```