
Digital Mohalla — Sequence diagram (b): confirm handover (UC-B7) and return → evidence (UC-B8) — design step A9 (b), Student 1, v1.2 (as built, 14 October 2026)

Precondition: request is ACCEPTED (UC-B6, T13; booking HELD). Event types and T-numbers: State_Machine_Design.md v2.2. Each API request runs in one database transaction (api/deps.py), committed when the request ends; every append runs event_validate / event_apply (schema.sql). Grey messages = planned, not built.

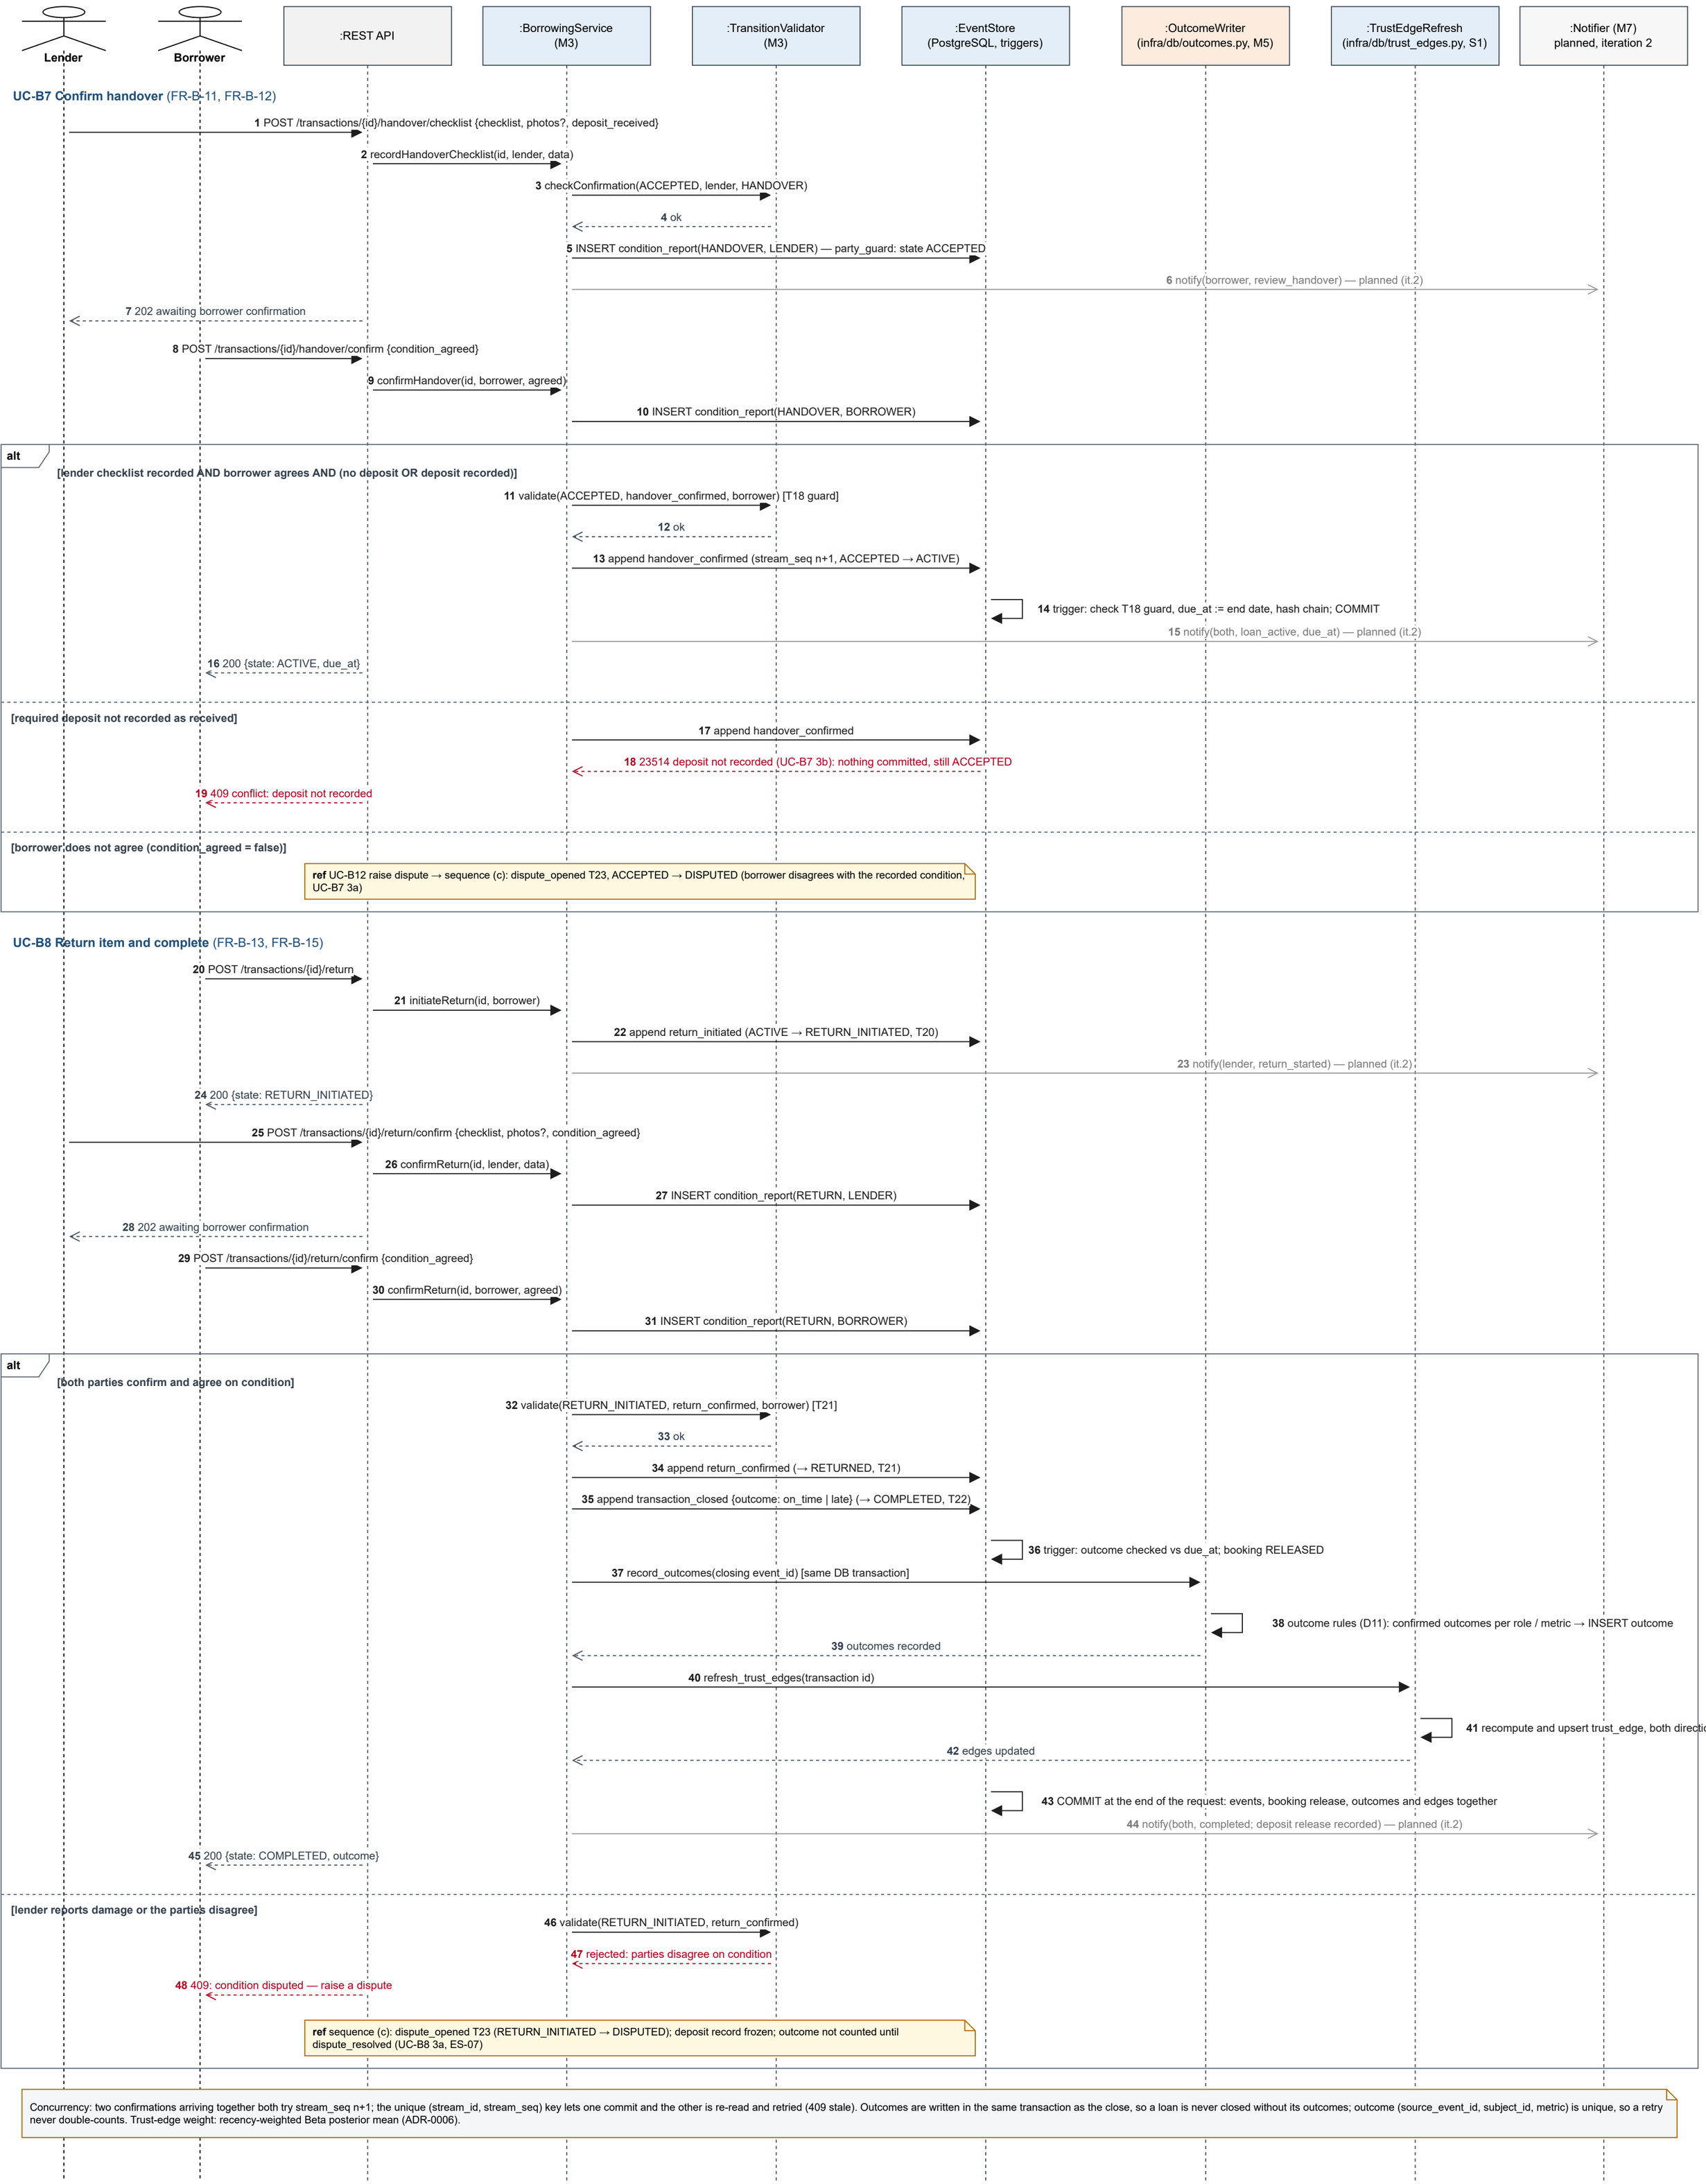

Concurrency: two confirmations arriving together both try stream_seq n+1; the unique (stream_id, stream_seq) key lets one commit and the other is re-read and retried (409 stale). Outcomes are written in the same transaction as the close, so a loan is never closed without its outcomes; outcome (source_event_id, subject_id, metric) is unique, so a retry never double-counts. Trust-edge weight: recency-weighted Beta posterior mean (ADR-0006).