# People-Ops: Langfuse webhooks and grid testing

All backend paths are under /api/v1/agents. Langfuse (cloud) reaches your laptop only through the ngrok URL.

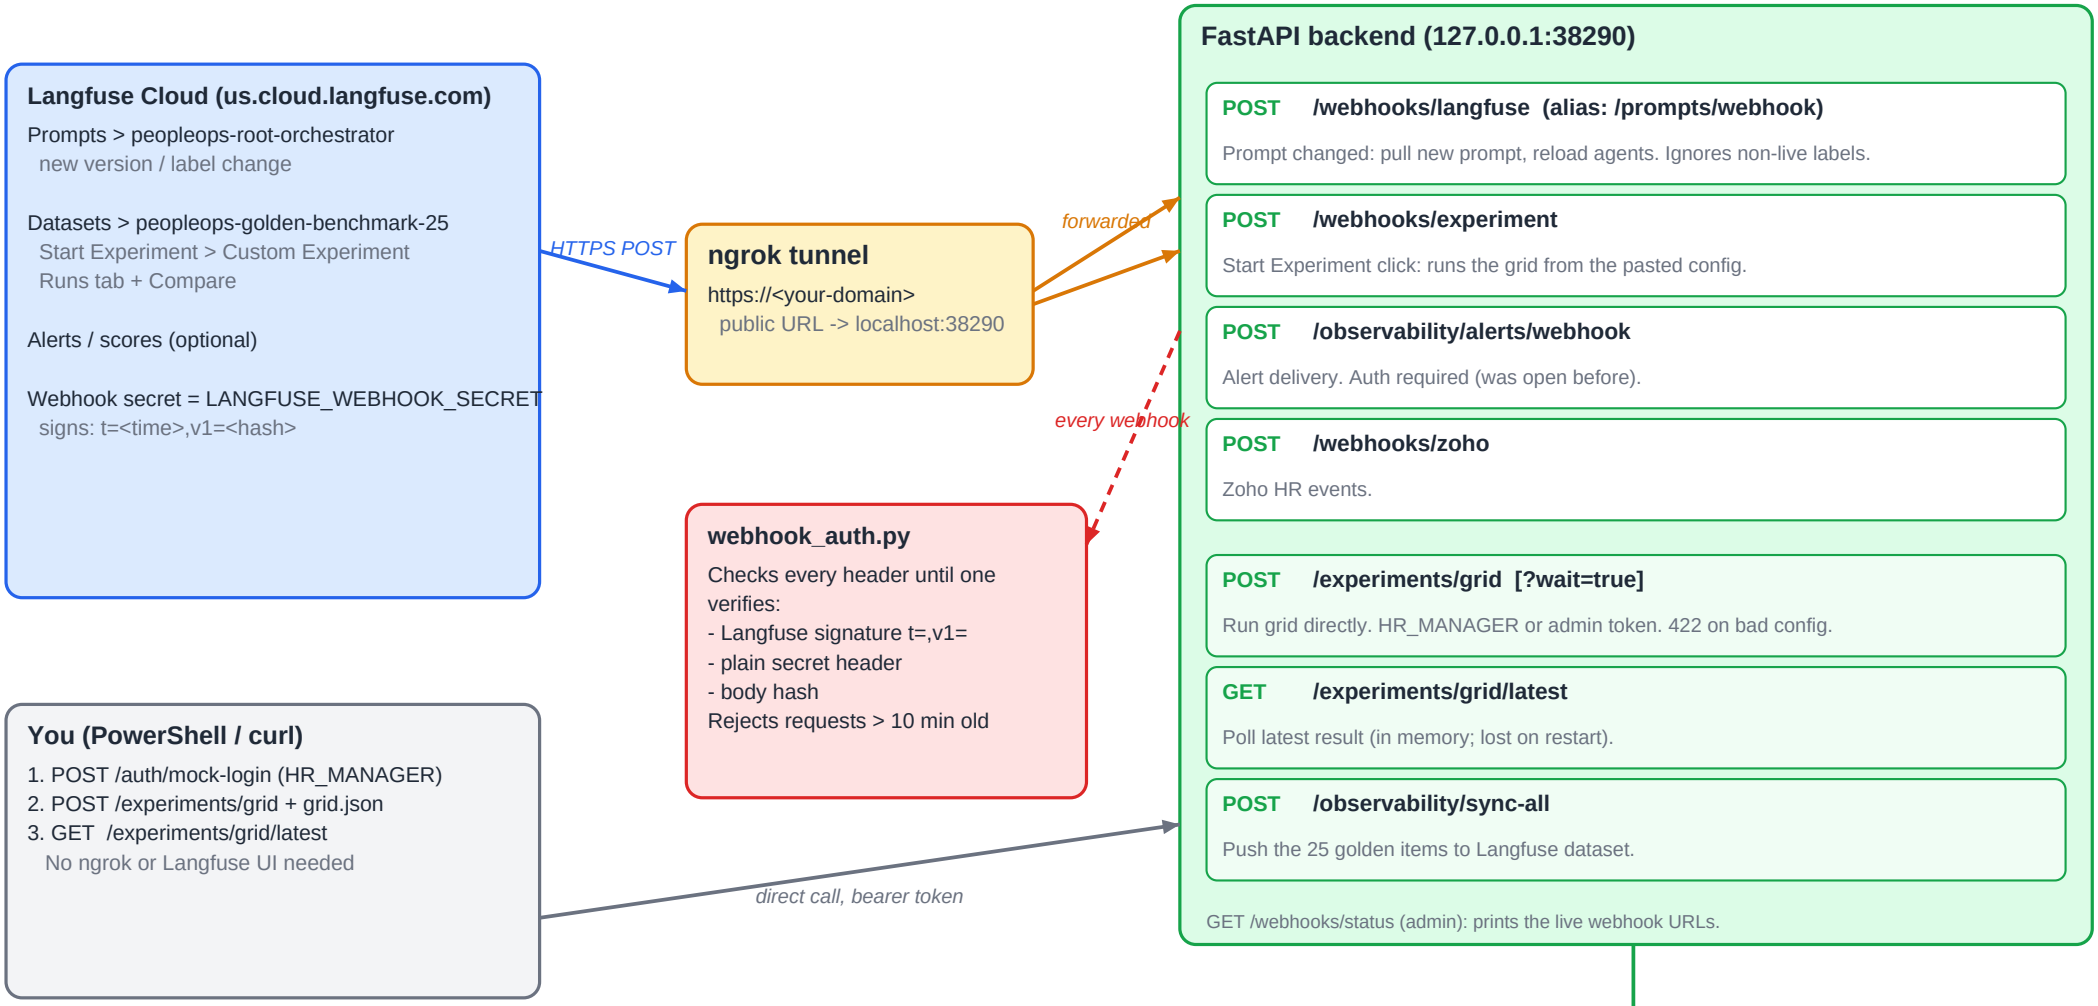


## What happens inside the backend for a grid run

**1. Load config**
prompt versions x models

→

**2. Run each cell**
real LLM calls per item

→

**3. Judge**
LLM score + privacy rule check

→

**4. Langfuse runs**
one run per prompt+model

→

**5. Optimize (opt.)**
rewrite best, saved non-live

Cells with status=error report why (e.g. missing prompt version) without stopping the others. If mock_mode=true, nothing real ran: set MOCK_LLM_ENABLED=false.

# Endpoint reference and Langfuse UI setup

| Endpoint (under /api/v1/agents) | Method | Called by | Auth | Purpose |
|---|---|---|---|---|
| /webhooks/langfuse (+ /prompts/webhook) | POST | Langfuse | Signature / secret | Prompt changed: refetch + reload agents |
| /webhooks/experiment | POST | Langfuse Start Experiment | Signature / secret | Run grid from default config |
| /observability/alerts/webhook | POST | Langfuse / alerting | Signature / secret | Receive alerts |
| /webhooks/zoho | POST | Zoho | Zoho verification | HR system events |
| /experiments/grid | POST | You | HR_MANAGER / admin | Run grid; ?wait=true blocks until done |
| /experiments/grid/latest | GET | You | HR_MANAGER / admin | Latest grid result |
| /experiments/compare | POST | You | Bearer token | Compare experiment runs |
| /observability/sync-all | POST | You | Bearer token | Sync golden dataset to Langfuse |
| /webhooks/status | GET | You | Admin | Show live webhook URLs |

## Setting up Start Experiment in the Langfuse UI

1. Run npm run dev:all (starts backend + ngrok).
2. As admin, GET /api/v1/agents/webhooks/status to read your public experiment URL.
3. Langfuse > Datasets > peopleops-golden-benchmark-25 > Start Experiment > Custom Experiment.
4. URL: https://<your-ngrok-domain>/api/v1/agents/webhooks/experiment
5. Default config: the grid.json body (prompt_versions, models, items, judge, run_prefix).
6. Webhook secret: the value of LANGFUSE_WEBHOOK_SECRET from .env.
7. Click Run, then poll GET /experiments/grid/latest. Compare runs under Datasets > Runs.

Note: the exact body Langfuse sends for Start Experiment is unverified. Test one small cell first.