Data Visualization with R

Your Name

2026-10-04

(PART*) Part I: From data to visualization

- Two y-axes invite false comparisons
- Scale choices can make any trend look correlated
- Use two panels or index both series instead

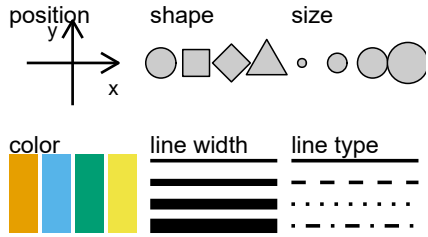

Setup

The ITS model

$$Y_t = \beta_0 + \beta_1 t + \beta_2 \text{post}_t + \beta_3 t_{\text{post}} + \varepsilon_t$$

Fitting it in R

```
its_model <- lm(rate ~ t + post + t_post, data = its_b)
```

Incremental bullets

- Level change

Setup

The ITS model

$$Y_t = \beta_0 + \beta_1 t + \beta_2 \text{post}_t + \beta_3 t_{\text{post}} + \varepsilon_t$$

Fitting it in R

```
its_model <- lm(rate ~ t + post + t_post, data = its_b)
```

Incremental bullets

- Level change
- Slope change