

REPORT LAB 8 :

Configuring RIP Version 2 (RIPv2) on Cisco Packet Tracer

NAME: R.SENABADHY SESAN

REGISTER NO: RA2211003050047

Objective:

To configure RIPv2 on two routers (R1 and R2) to allow communication between devices on different networks using RIPv2. The networks will be divided into two segments, connected via a serial connection between the routers, with RIP facilitating dynamic routing.

Network Topology Setup:

1. **Routers:** Cisco Router 1941 (R1 and R2)
2. **PCs:** Two PCs connected to each router (PC1 and PC2 to R1, PC3 and PC4 to R2)
3. **Connections:**
 - Serial connection between R1 (Serial0/1/0) and R2 (Serial0/1/1) using IP block 10.1.1.0/30
 - GigabitEthernet connections from R1 and R2 to their respective local networks

Step-by-Step Configuration:

Step 1: Configure IP Addresses on Router R1

1. Assign IP address to **GigabitEthernet0/0** (R1):
bash
R1#conf t
2. R1(config)#hostname R1
3. R1(config)#interface gigabitethernet 0/0
4. R1(config-if)#ip address 192.168.5.1 255.255.255.128
5. R1(config-if)#no shutdown
6. R1(config-if)#ip address 10.1.1.1 255.255.255.252
7. R1(config-if)#no shutdown

Step 2: Configure IP Addresses on Router R2

1. Assign IP address to **GigabitEthernet0/1** (R2):
bash
R2#conf t

2. R2(config)#hostname R2
3. R2(config)#interface gigabitethernet 0/1
4. R2(config-if)#ip address 192.168.5.129 255.255.255.128
5. R2(config-if)#no shutdown

6. Assign IP address to **Serial0/1/1** (R2):
bash
R2(config)#interface serial 0/1/1

7. R2(config-if)#ip address 10.1.1.2 255.255.255.252
8. R2(config-if)#no shutdown

Step 3: Test Connectivity Before RIP Configuration

- **Ping between devices on the same LAN:**
Test the connection by pinging from PC1 (connected to R1) to PC2 (also connected to R1). This should succeed.
- **Ping between different LANs:**
Ping from PC1 to the Serial and GigabitEthernet interfaces of R2. This will fail because no routing protocol is yet configured.

Step 4: Activate RIPv2 on Routers

1. Enable RIP and configure networks on **R1**:
bash
R1#conf t

2. R1(config)#router rip
3. R1(config-router)#version 2
4. R1(config-router)#network 10.1.1.0
5. R1(config-router)#network 192.168.5.0
6. R1(config-router)#end

7. Enable RIP and configure networks on **R2**:
bash
R2#conf t

8. R2(config)#router rip
9. R2(config-router)#version 2
10. R2(config-router)#network 10.1.1.0
11. R2(config-router)#network 192.168.5.128

12 . R2(config-router)#end

Step 5: Test Connectivity After RIP Configuration

- **Ping Test Between Different LANs:**

After enabling RIPv2, ping from PC1 (192.168.5.2) to PC3 (192.168.5.130). The ping should succeed, indicating that R1 and R2 are exchanging routing information through RIPv2.

Step 6: Verify RIP Configuration

1. **Check Routing Table:**

Use the show ip route command to view the routing table on both routers. Entries should now appear for the other network.

bash

R1#show ip route

2. **Check Routing Protocol:**

Use the show ip protocols command to verify RIP status on both routers.

bash

R1#show ip protocol

3. **Check RIP Updates:**

Use the debug ip rip command to monitor RIP updates.

bash

Observation Summary:

- **Initial Configuration:**

IP addresses were correctly configured on the GigabitEthernet and Serial interfaces of both routers. Local LAN devices were able to communicate, but inter-LAN communication failed before RIP configuration.

- **RIPv2 Configuration:**


RIPv2 was enabled on both routers, and appropriate network segments (192.168.5.0 and 10.1.1.0) were added to RIP routing tables. The routers exchanged routing information using multicast addresses, which allowed for inter-LAN communication.

- **Post-RIP Connectivity:**

After configuring RIPv2, pings between devices on different networks succeeded. This showed that the routers were dynamically learning and sharing routes.

- **Verification Commands:**

The show ip route, show ip protocols, and debug ip rip commands confirmed the correct functioning of RIP and the routers' ability to share routes via RIPv2.

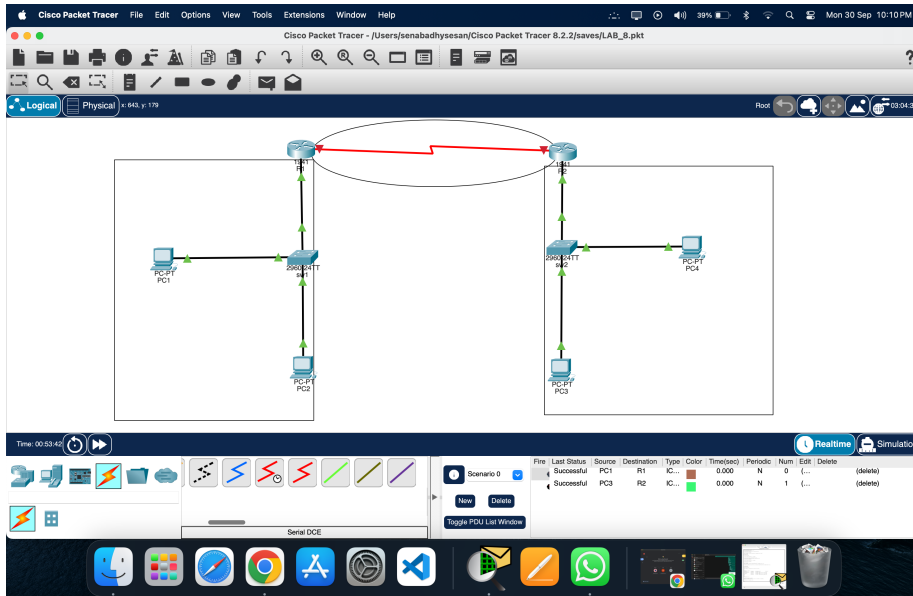

R1

Physical
Config
CLI
Attributes

IOS Command Line Interface

```

Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>
Router#enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface serial 0/1/0
Router(config-if)#ip address 10.1.1.1 255.255.255.252
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial0/1/0, changed state to down
Router(config-if)#
Router(config-if)#
Router(config-if)#exit
% Invalid input detected at '^' marker.

Router(config-if)#interface gigabitEthernet 0/0
Router(config-if)#ip address 192.168.5.1 255.255.255.128
Router(config-if)#no shutdown
% Invalid input detected at '^' marker.

Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up

Router(config-if)#
Router(config-if)#
Router(config-if)#end
R1#
%SYS-5-CONFIG_I: Configured from console by console

R1#
R1#show ip int br
Interface      IP-Address      OK? Method Status      Protocol
GigabitEthernet0/0  192.168.5.1    YES manual up          up
GigabitEthernet0/1  unassigned      YES unset  administratively down down
Serial0/1/0       10.1.1.1        YES manual down        down
Serial0/1/1       unassigned      YES unset  administratively down down
Vlan1           unassigned      YES unset  administratively down down
R1#

```

Copy
Paste

☐ Top