

The model is down. Finished goods are waiting.

PLANT 2 · LINE 4 · QUALITY VISION SERVICE

MODEL ENDPOINT UNAVAILABLE

FINISHED GOODS AT RELEASE GATE: 412 UNITS

CONTINUE


MANUAL

HOLD

Choose now: continue, manual inspection or hold release. Then prove the choice can run.

Illustrative US manufacturing scenario.


Two regions can share one failure path.

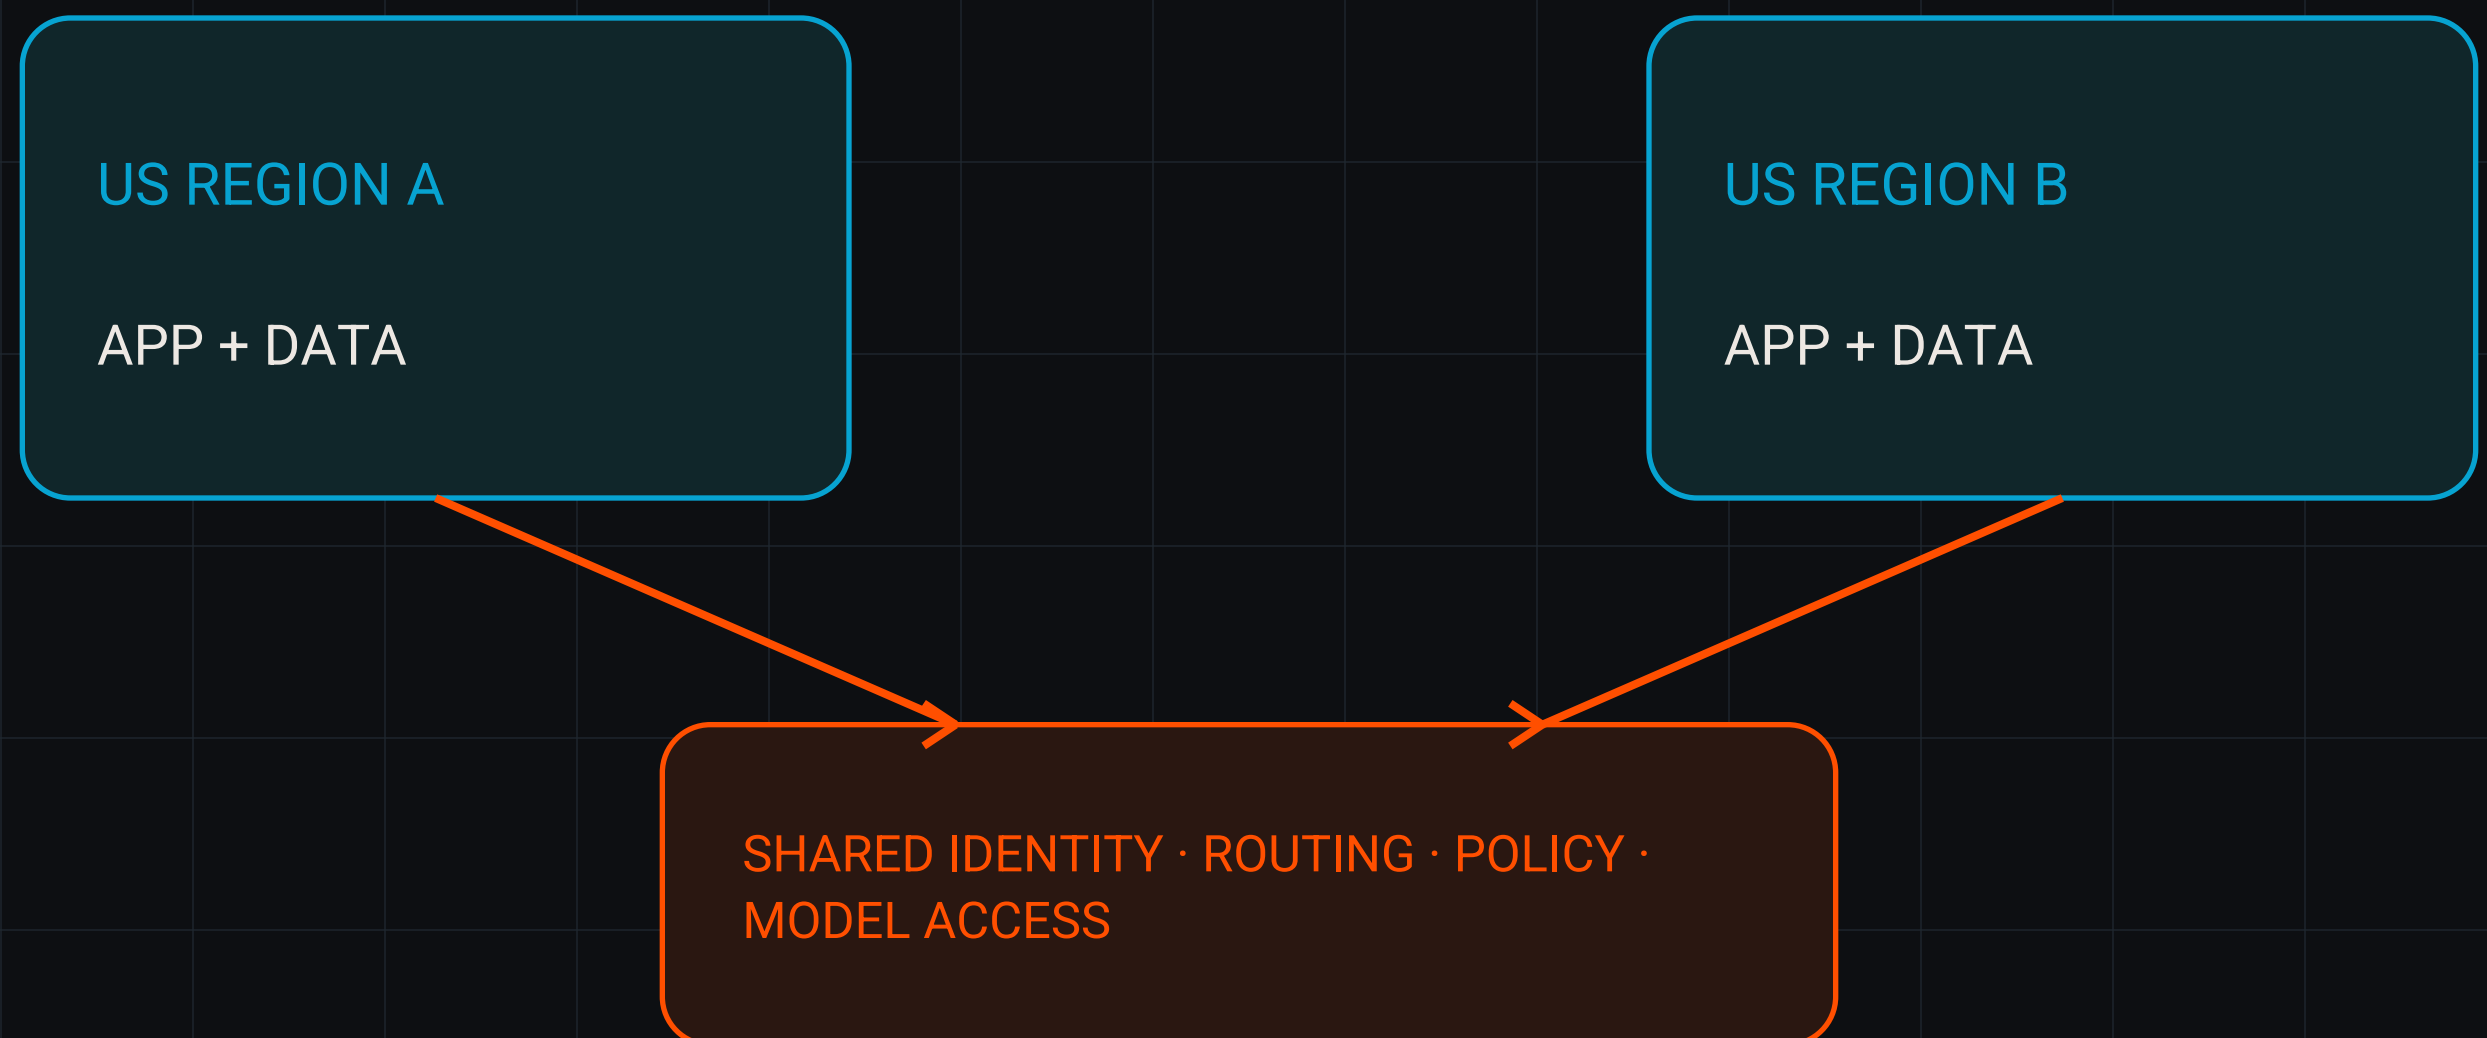

Identity, routing, policy, model access, data and authority can stop both deployments.

Architecture redundancy is not tested recovery.

Recover the business decision, not one endpoint.

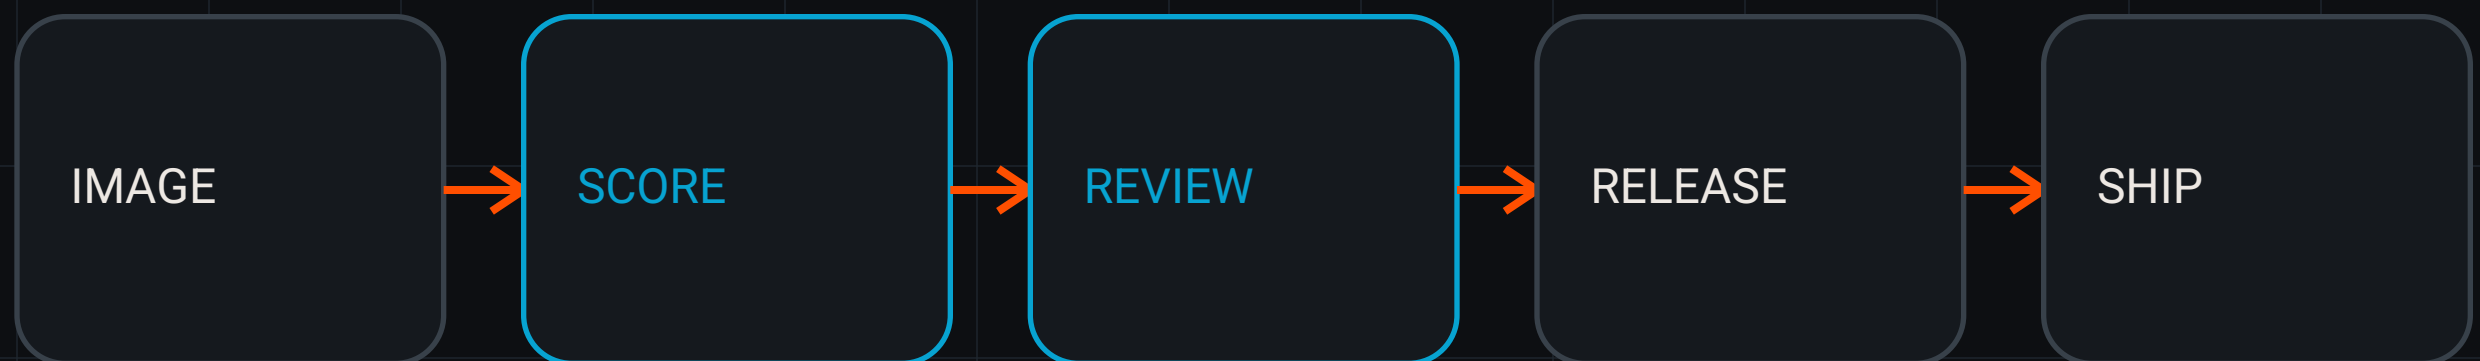

RECOVERY OBJECT: CONTROLLED PRODUCT RELEASE

Image, score, review, release and shipment form the service that must continue.

Start from the business-impact analysis.

Choose the safe degraded mode before the outage.



Manual work needs trained staff and current instructions. A hold needs space, priority and authority.

Stale AI output is not a generic fallback.

Set recovery targets against the full process.

RECOVERY TIME

45 MIN

Manual capacity runs out

RECOVERY POINT


8 MIN

Reviewer state trails images

Technology can recover inside target while people, evidence or inventory capacity fail first.

RTO and RPO need tested business evidence.

Run the 20-minute tabletop.

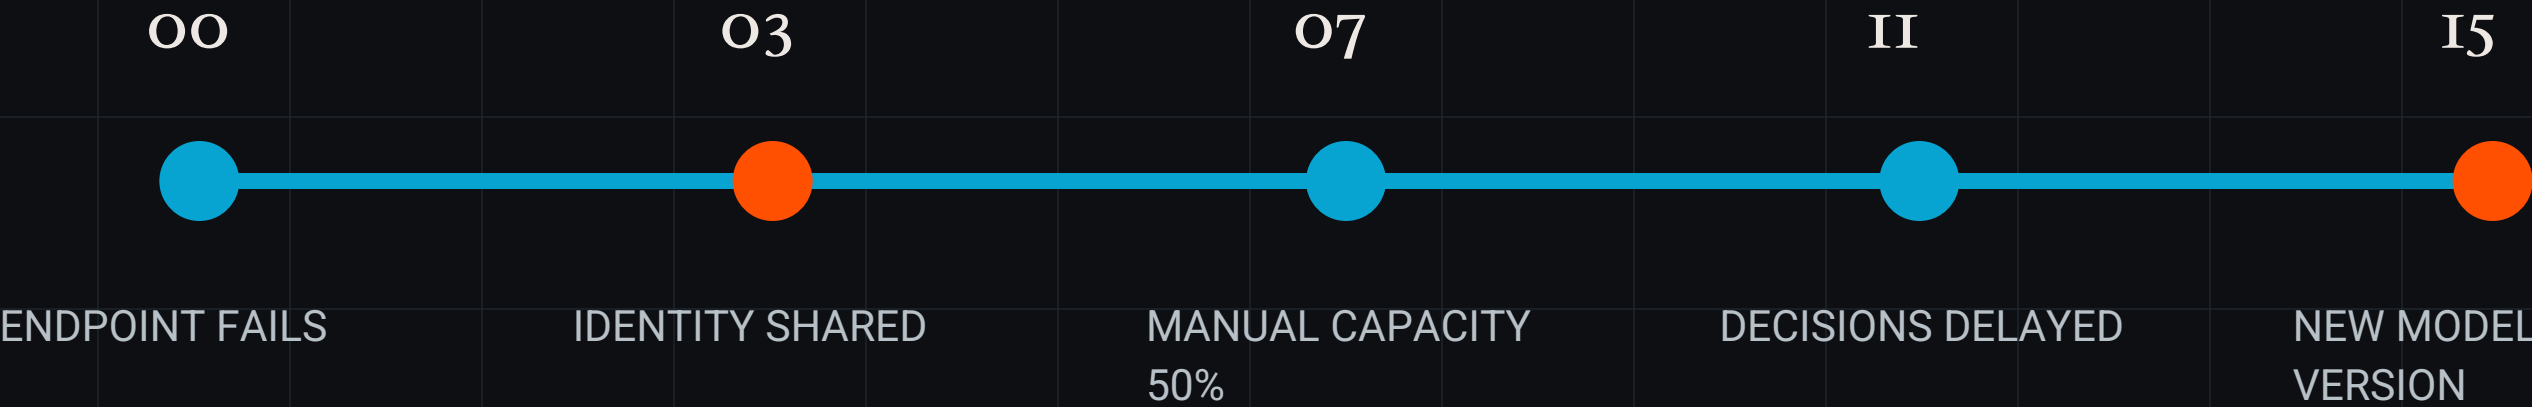

Reveal shared identity, reduced manual capacity, delayed decisions and a changed model version.

Decision tool: AI Service Continuity Tabletop.

What fails first in your AI service?

PAUSE · SAVE · USE

ONE RECORD. ONE OWNER. ONE
NEXT REVIEW.

#AIHASASUPPLYCHAIN

Save the tabletop. Test one dependency, one degraded mode and one named approval path.