




How to analyze single-cell RNA- Seq data in R using Seurat package



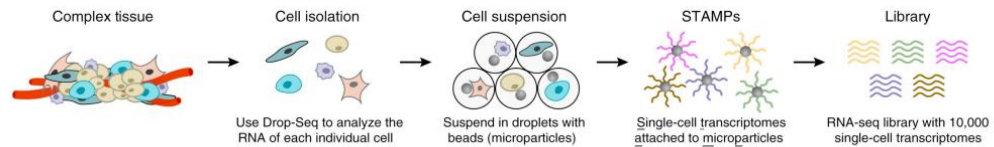


Macosko et al., Cell, 2015


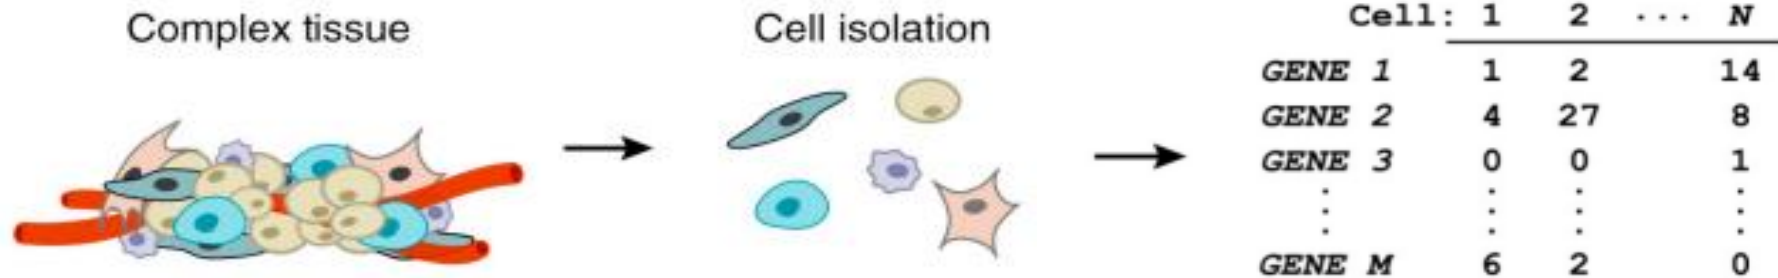


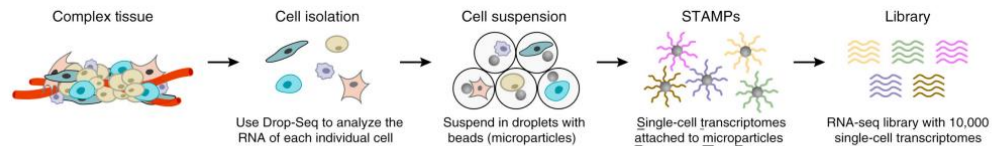


Macosko et al., Cell, 2015

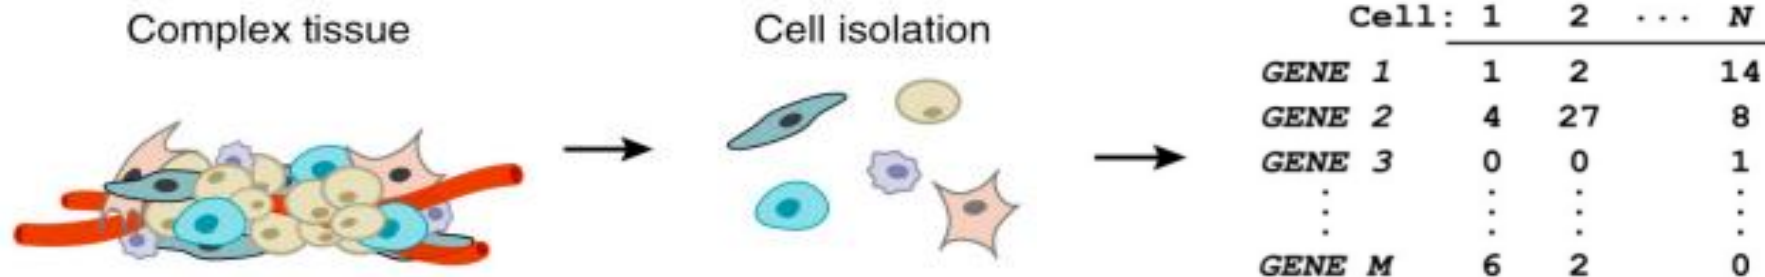

Cells visualization using non-linear dimension reduction

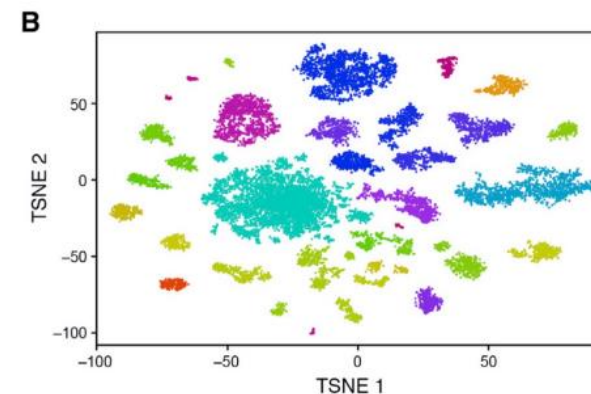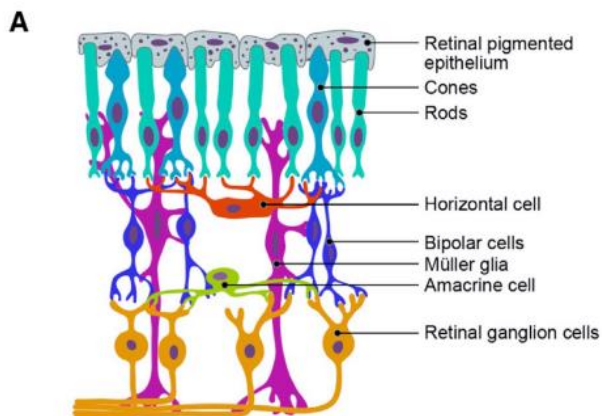

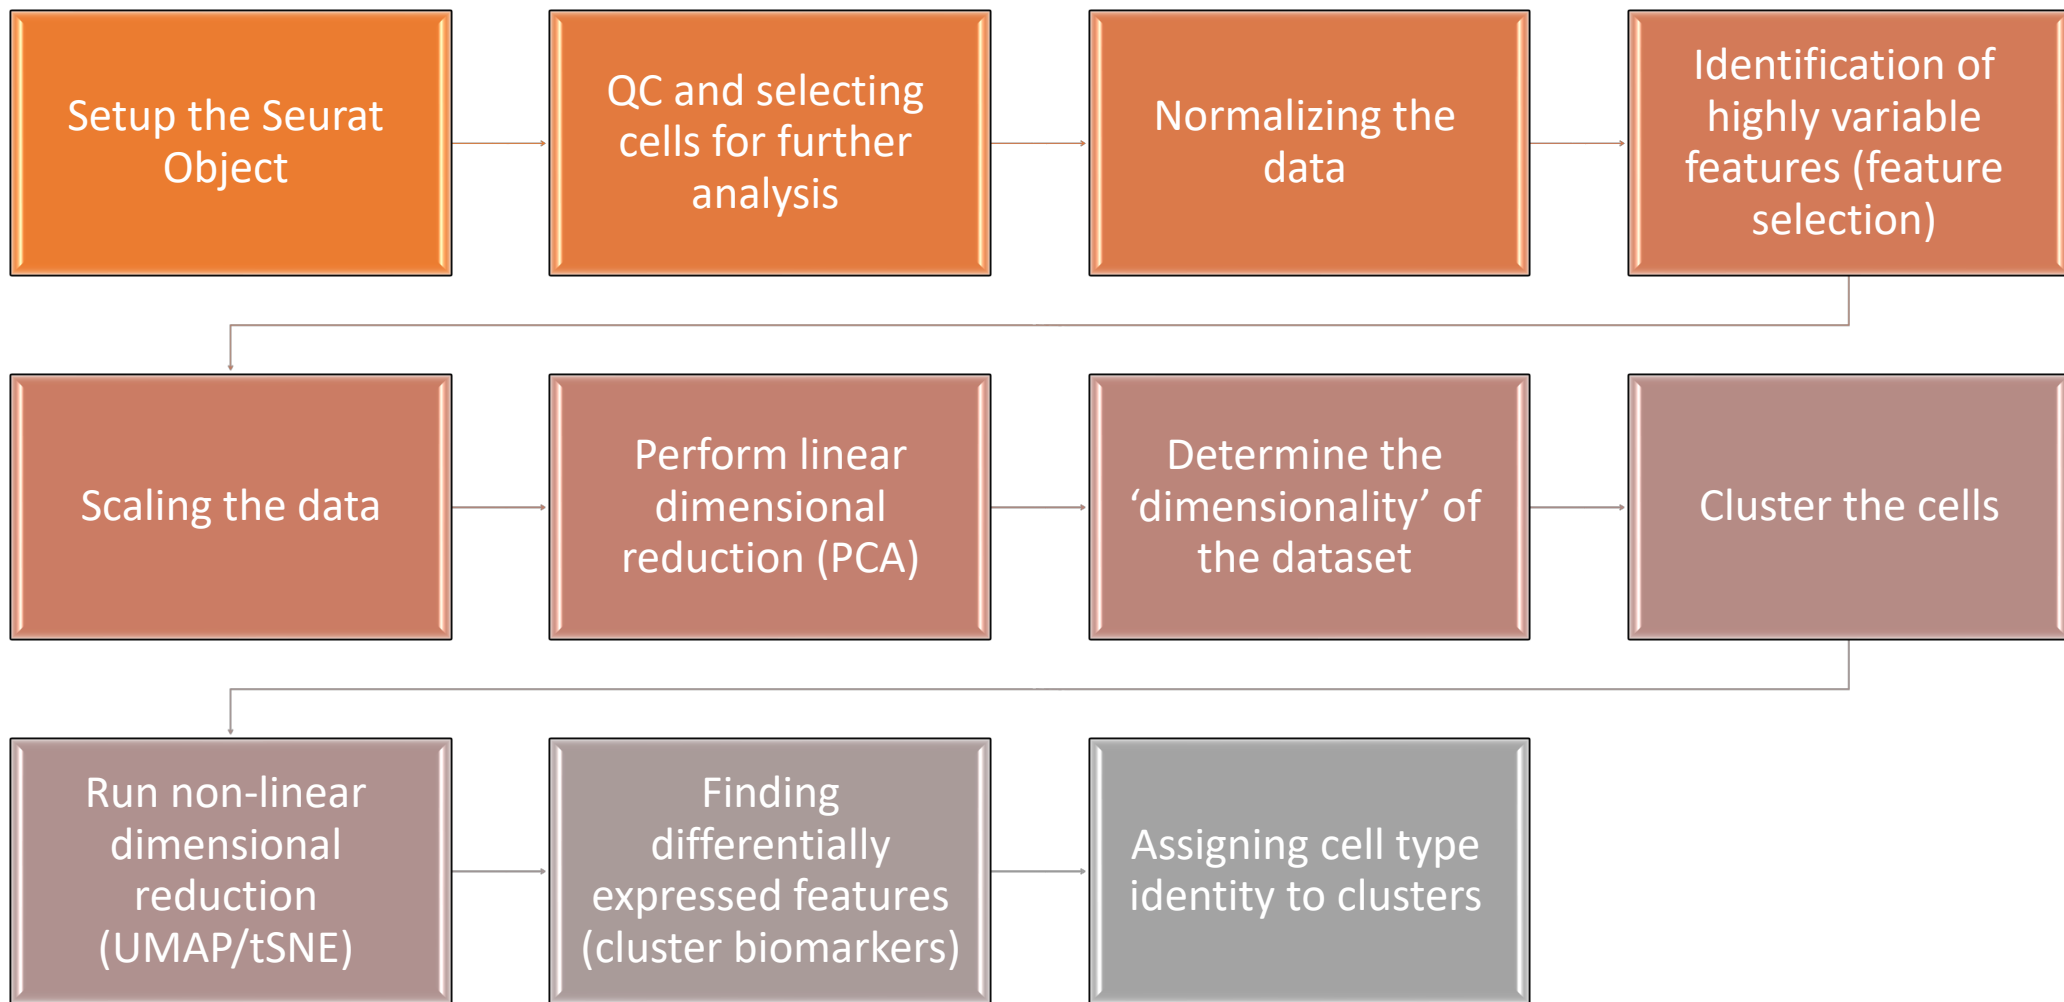

Seurat - Guided Clustering Tutorial

- Dataset of Peripheral Blood Mononuclear Cells (PBMC) freely available from 10X Genomics.
- There are 2,700 single cells and 13714 genes (features).
- Input: count matrix - the values in this matrix represent the number of molecules for each feature (i.e. gene; row) that are detected in each cell (column).
- Output: identify cell types.

