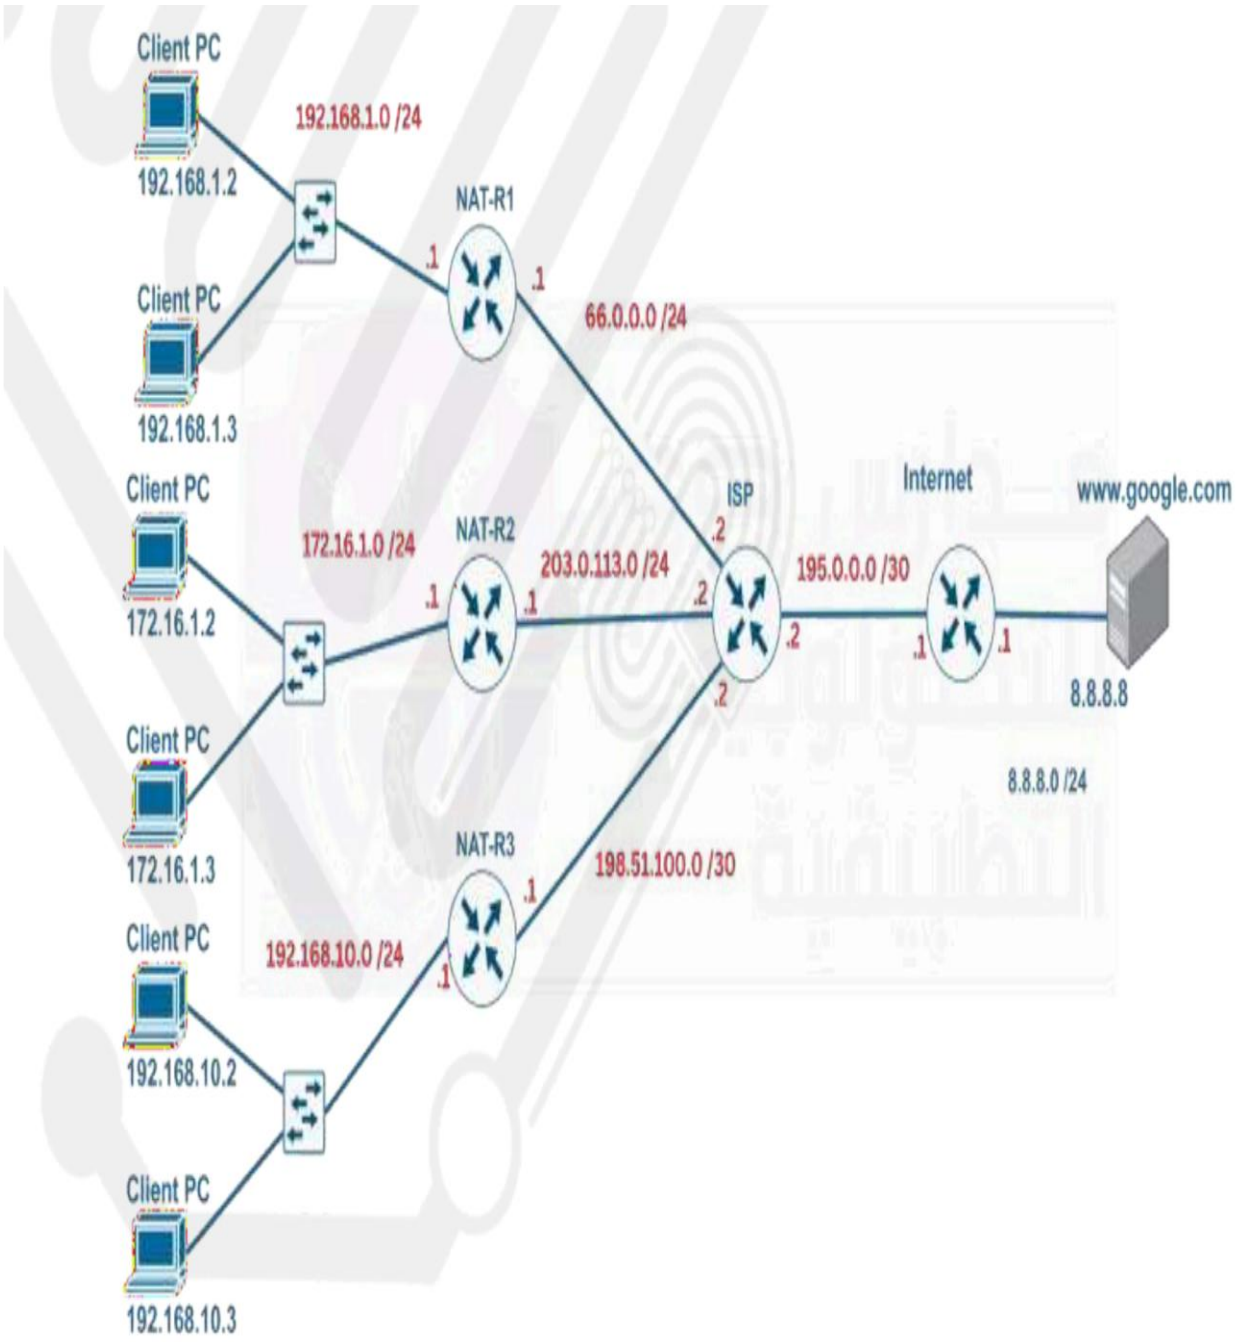

Client PC
192.168.1.2
192.168.1.0 /24
NAT-R1
.1
.1
66.0.0.0 /24
Client PC
192.168.1.3
Client PC
172.16.1.2
172.16.1.0 /24
NAT-R2
.1
.1
203.0.113.0 /24
ISP
.2
.2
195.0.0.0 /30
Internet
www.google.com
.2
.1
.1
8.8.8.8
8.8.8.0 /24
Client PC
172.16.1.3
NAT-R3
198.51.100.0 /30
.1
Client PC
192.168.10.2
192.168.10.0 /24
.1
Client PC
192.168.10.3

You are required to configure different types of NAT (Static NAT, Dynamic NAT, and Port Address Translation [PAT]) on the provided topology.
The goal is to enable the Client PCs in each network to access the internet (represented by the 8.8.8.8 server). Follow the instructions carefully and configure NAT as specified for each router.

- **Task 1: Static NAT on NAT-R1**

Configure Static NAT on NAT-R1 so that:
Internal Client PCs (192.168.1.2 and 192.168.1.3) are mapped to specific public IPs (66.0.0.100 and 66.0.0.101).
Verify that the internal PCs can successfully access the server 8.8.8.8.

- **Task 2: Dynamic NAT on NAT-R2**

Configure Dynamic NAT on NAT-R2 using the 203.0.113.0/24 pool.
Create a NAT pool with at least 5 public IP addresses (203.0.113.10 to 203.0.113.14).
Associate this pool with the internal network 172.16.1.0/24.
Ensure NAT translation occurs dynamically as internal Client PCs access external resources.
Verify connectivity by pinging the server 8.8.8.8 from internal PCs.

- **Task 3: PAT on NAT-R3**

Configure PAT on NAT-R3:
Use the single public IP address 198.51.100.1 from the 198.51.100.0/30 network for NAT Overload.
Enable translation for all Client PCs in the 192.168.10.0/24 network.
Verify that the PCs can access the DNS server 8.8.8.8 simultaneously without issues.