

# **QSTP 2016 WEEK 2 REGULAR ASSIGNMENT** **LOGISTIC REGRESSION & REGULARIZATION**

## **Part A: Regular Assignment (Compulsory)**

**Start Date:** Wednesday, June 1 midnight

**Due Date:** WEDNESDAY June 8 midnight

- 1. ALL THE CODES HAVE TO BE IN VECTORIZATION FORMAT [EXCEPT WHERE NOT POSSIBLE]**
2. This is a compulsory assignment.
3. Follow all the steps very carefully!

### **Introduction**

In this exercise, you will implement logistic regression and apply it to two different datasets. Before starting on the programming exercise, we strongly recommend watching the video lectures and completing the review questions for the associated topics. To get started with the exercise, you will need to download the starter code and unzip its contents to the directory where you wish to complete the exercise. If needed, use the `cd` command in Octave to change to this directory before starting this exercise.

### **Files included in this exercise**

ex2.m - Octave script that will help step you through the exercise  
ex2 reg.m - Octave script for the later parts of the exercise  
ex2data1.txt - Training set for the first half of the exercise  
ex2data2.txt - Training set for the second half of the exercise  
mapFeature.m - Function to generate polynomial features  
plotDecisionBounday.m - Function to plot classifier's decision boundary [?]  
plotData.m - Function to plot 2D classification data [?]  
sigmoid.m - Sigmoid Function [?]  
costFunction.m - Logistic Regression Cost Function [?]  
predict.m - Logistic Regression Prediction Function [?]  
costFunctionReg.m - Regularized Logistic Regression Cost

? Indicates files you will need to complete

Throughout the exercise, you will be using the scripts `ex2.m` and `ex2 reg.m`. These scripts set up the dataset for the problems and make calls to functions that you will write. You do not need to modify either of them. You are only required to modify functions in other files, by following the instructions in this assignment.

## 1. Logistic Regression

In this part of the exercise, you will build a logistic regression model to predict whether a student gets admitted into a university. Suppose that you are the administrator of a university department and you want to determine each applicant's chance of admission based on their results on two exams. You have historical data from previous applicants that you can use as a training set for logistic regression. For each training example, you have the applicant's scores on two exams and the admissions decision. Your task is to build a classification model that estimates an applicant's probability of admission based the scores from those two exams. This outline and the framework code in `ex2.m` will guide you through the exercise.

### 1.1 Visualizing the data

Before starting to implement any learning algorithm, it is always good to visualize the data if possible. In the first part of `ex2.m`, the code will load the data and display it on a 2-dimensional plot by calling the function `plotData`. You will now complete the code in `plotData` so that it displays a figure like Figure 1, where the axes are the two exam scores, and the positive and negative examples are shown with different markers.

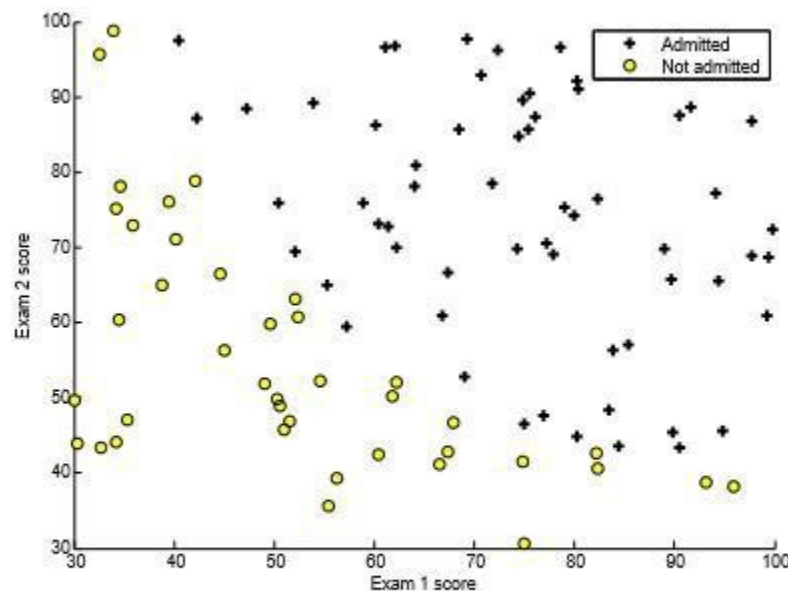


Figure 1: Scatter plot of training data

To help you get more familiar with plotting, we have left `plotData.m` empty so you can try to implement it yourself. I have also provide an implementation below so you can copy it or refer to it.

```

% Find Indices of Positive and Negative Examples
pos = find(y==1); neg = find(y == 0);

% Plot Examples
plot(X(pos, 1), X(pos, 2), 'k+', 'LineWidth', 2, ...
     'MarkerSize', 7);
plot(X(neg, 1), X(neg, 2), 'ko', 'MarkerFaceColor', 'y', ...
     'MarkerSize', 7);

```

## 1.2 Implementation

### 1.2.1 Warmup exercise: sigmoid function

Before you start with the actual cost function, recall that the logistic regression hypothesis is defined as:

$$h_{\theta}(x) = g(\theta^T x),$$

Where function  $g$  is the sigmoid function. The sigmoid function is defined as:

$$g(z) = 1/(1 + e^{-z}).$$

Your first step is to implement this function in `sigmoid.m` so it can be called by the rest of your program. When you are finished, try testing a few values by calling `sigmoid(x)` at the octave command line. For large positive values of  $x$ , the sigmoid should be close to 1, while for large negative values, the sigmoid should be close to 0. Evaluating `sigmoid(0)` should give you exactly 0.5. Your code should also work with vectors and matrices.

For a matrix, your function should perform the sigmoid function on every element. You can submit your solution for grading by typing `submit` at the Octave command line. The submission script will prompt you for your username and password and ask you which files you want to submit. You can obtain a sub-mission password from the website.

### 1.2.2 Cost function and gradient

Now you will implement the cost function and gradient for logistic regression. Complete the code in `costFunction.m` to return the cost and gradient.

Recall that the cost function in logistic regression is

$$J(\theta) = \frac{1}{m} \sum_{i=1}^m [-y^{(i)} \log(h_{\theta}(x^{(i)})) - (1 - y^{(i)}) \log(1 - h_{\theta}(x^{(i)}))],$$

And the gradient of the cost is a vector  $\theta$  where the  $j$ th element (for  $j = 0, 1, \dots, n$ ) is defined as follows:

$$\frac{\partial J(\theta)}{\partial \theta_j} = \frac{1}{m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)}) x_j^{(i)}$$

Note that while this gradient looks identical to the linear regression gradient, the formula is actually different because linear and logistic regression have different definitions of  $h_{\theta}(x)$ . Once you are done, `ex2.m` will call your `costFunction` using the initial parameters of  $\theta$ . You should see that the cost is about 0.693.

### 1.2.3 Learning parameters using `fminunc`

In the previous assignment, you found the optimal parameters of a linear regression model by implementing gradient descent. You wrote a cost function and calculated its gradient, then took a gradient descent step accordingly. This time, instead of taking gradient descent steps, you will use an Octave built-in function called `fminunc`. Octave's `fminunc` is an optimization solver that finds the minimum of an unconstrained2 function. For logistic regression, you want to optimize the cost function  $J(\theta)$  with parameters  $\theta$ . Concretely, you are going to use `fminunc` to find the best parameters  $\theta$  for the logistic regression cost function, given a fixed dataset (of  $X$  and  $y$  values). You will pass to `fminunc` the following inputs:

- The initial values of the parameters we are trying to optimize.
- A function that, when given the training set and a particular  $\theta$ , computes the logistic regression cost and gradient with respect to  $\theta$  for the dataset  $(X, y)$

In `ex2.m`, we already have code written to call `fminunc` with the correct arguments.

```
% Set options for fminunc
options = optimset('GradObj', 'on', 'MaxIter', 400);

% Run fminunc to obtain the optimal theta
% This function will return theta and the cost
[theta, cost] = ...
    fminunc(@(t) (costFunction(t, X, y)), initial_theta, options);
```

In this code snippet, we first defined the options to be used with `fminunc`. Specifically, we set the `GradObj` option to `on`, which tells `fminunc` that our function returns both the cost and the gradient. This allows `fminunc` to use the gradient when minimizing the function. Furthermore, we set the `MaxIter` option to 400, so that `fminunc` will run for at most 400 steps before it terminates.

To specify the actual function we are minimizing, we use a “short-hand” for specifying functions with the `@(t) ( costFunction(t, X, y) )`. This creates a function, with argument  $t$ , which calls your `costFunction`. This allows us to wrap the `costFunction` for use with `fminunc`. If you have completed the `costFunction` correctly, `fminunc` will converge on the right optimization parameters and return the final values of the cost and  $\theta$ .

Notice that by using `fminunc`, you did not have to write any loops yourself, or set a learning rate like you did for gradient descent. This is all done by `fminunc`: you only needed to provide a function calculating

the cost and the gradient. Once `fminunc` completes, `ex2.m` will call your `costFunction` function using the optimal parameters of  $\theta$ . You should see that the cost is about 0.203.

This final  $\theta$  value will then be used to plot the decision boundary on the training data, resulting in a figure similar to Figure 2. We also encourage you to look at the code in `plotDecisionBoundary.m` to see how to plot such a boundary using the  $\theta$  values.

### 1.2.4 Evaluating logistic regression

After learning the parameters, you can use the model to predict whether a particular student will be admitted. For a student with an Exam 1 score of 45 and an Exam 2 score of 85, you should expect to see an admission probability of 0.774. Another way to evaluate the quality of the parameters we have found is to see how well the learned model predicts on our training set. In this part, your task is to complete the code in `predict.m`. The `predict` function will produce “1” or “0” predictions given a dataset and a learned parameter vector  $\theta$ . After you have completed the code in `predict.m`, the `ex2.m` script will proceed to report the training accuracy of your classifier by computing the percentage of examples it got correct.

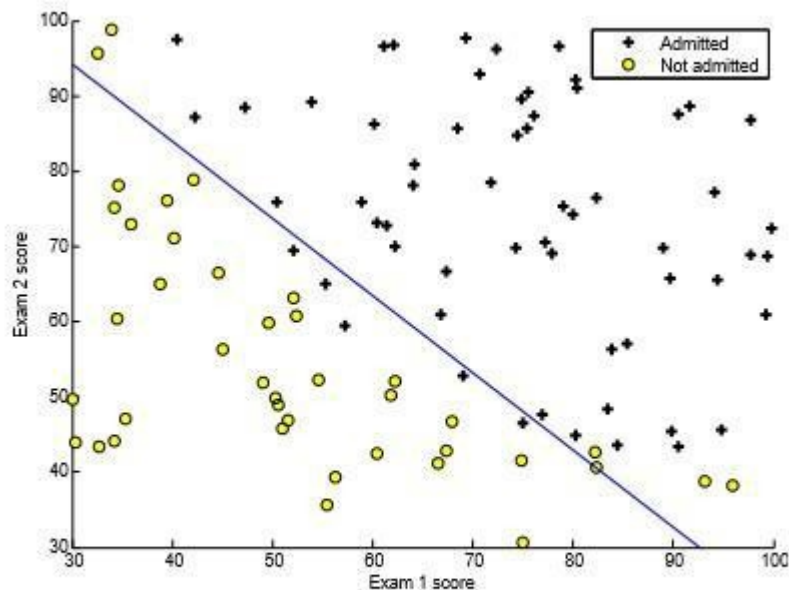


Figure 2: Training data with decision boundary

## 2. Regularized logistic regression

In this part of the exercise, you will implement regularized logistic regression to predict whether microchips from a fabrication plant passes quality assurance (QA). During QA, each microchip goes through various tests to ensure it is functioning correctly. Suppose you are the product manager of the factory and you have the test results for some microchips on two different tests. From these two tests, you would like to determine whether the microchips should be accepted or rejected. To help you make the decision, you have a dataset of test results on past microchips, from which you can build a logistic regression model. You will use another script, `ex2_reg.m` to complete this portion of the exercise.

### 2.1 Visualizing the data

Similar to the previous parts of this exercise, `plotData` is used to generate a figure like Figure 3, where the axes are the two test scores, and the positive ( $y = 1$ , accepted) and negative ( $y = 0$ , rejected) examples are shown with different markers.

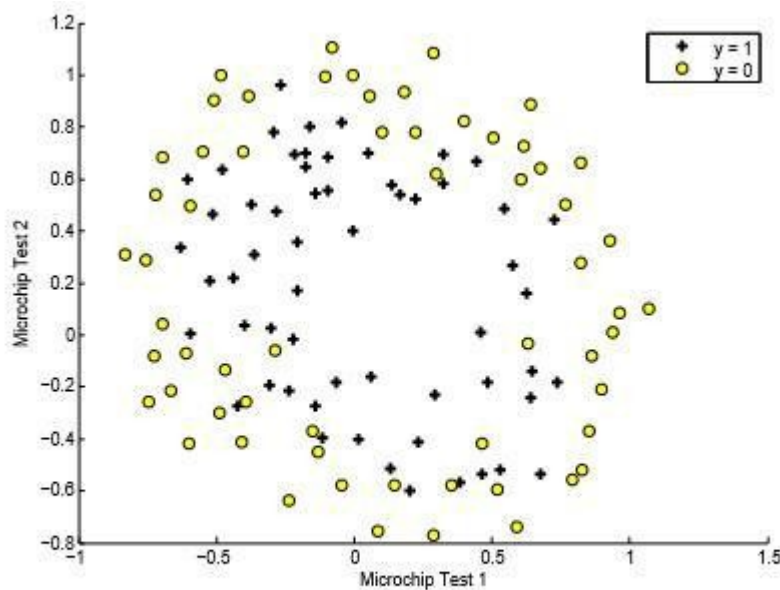


Figure 3: Plot of training data

Figure 3 shows that our dataset cannot be separated into positive and negative examples by a straight-line through the plot. Therefore, a straight-forward application of logistic regression will not perform well on this dataset since logistic regression will only be able to find a linear decision boundary.



## 2.2 Feature mapping

One way to fit the data better is to create more features from each data point. In the provided function `mapFeature.m`, we will map the features into all polynomial terms of  $x_1$  and  $x_2$  up to the sixth power.

$$\text{mapFeature}(x) = \begin{bmatrix} 1 \\ x_1 \\ x_2 \\ x_1^2 \\ x_1x_2 \\ x_2^2 \\ x_1^3 \\ \vdots \\ x_1x_2^5 \\ x_2^6 \end{bmatrix}$$

As a result of this mapping, our vector of two features (the scores on two QA tests) has been transformed into a 28-dimensional vector. A logistic regression classifier trained on this higher-dimension feature vector will have a more complex decision boundary and will appear nonlinear when drawn in our 2-dimensional plot. While the feature mapping allows us to build a more expressive classifier, it also more susceptible to overfitting. In the next parts of the exercise, you will implement regularized logistic regression to fit the data and also see for yourself how regularization can help combat the overfitting problem.

## 2.3 Cost function and gradient

Now you will implement code to compute the cost function and gradient for regularized logistic regression. Complete the code in `costFunctionReg.m` to return the cost and gradient. Recall that the regularized cost function in logistic regression is

$$J(\theta) = \frac{1}{m} \sum_{i=1}^m [-y^{(i)} \log(h_{\theta}(x^{(i)})) - (1 - y^{(i)}) \log(1 - h_{\theta}(x^{(i)}))] + \frac{\lambda}{2m} \sum_{j=1}^n \theta_j^2.$$

Note that you should not regularize the parameter  $\theta_0$ ; thus, the final summation above is for  $j = 1$  to  $n$ , not  $j = 0$  to  $n$ . The gradient of the cost function is a vector where the  $j$ th element is defined as follows:

$$\begin{aligned} \frac{\partial J(\theta)}{\partial \theta_0} &= \frac{1}{m} \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)}) x_j^{(i)} & \text{for } j = 0 \\ \frac{\partial J(\theta)}{\partial \theta_j} &= \frac{1}{m} \left( \sum_{i=1}^m (h_{\theta}(x^{(i)}) - y^{(i)}) x_j^{(i)} + \lambda \theta_j \right) & \text{for } j \geq 1 \end{aligned}$$

Once you are done, ex2 reg.m will call your costFunctionReg function using the initial value of  $\theta$  (initialized to all zeros). You should see that the cost is about 0.693.

### 2.3.1 Learning parameters using fminunc

Similar to the previous parts, you will use fminunc to learn the optimal parameters  $\theta$ . If you have completed the cost and gradient for regularized logistic regression (costFunctionReg.m) correctly, you should be able to step through the next part of ex2 reg.m to learn the parameters  $\theta$  using fminunc.

## 2.4 Plotting the decision boundary

To help you visualize the model learned by this classifier, we have provided the function plotDecisionBoundary.m which plots the (non-linear) decision boundary that separates the positive and negative examples. In plotDecisionBoundary.m, we plot the non-linear decision boundary by computing the classifier's predictions on an evenly spaced grid and then drew a contour plot of where the predictions change from  $y = 0$  to  $y = 1$ . After learning the parameters  $\theta$ , the next step in ex reg.m will plot a decision boundary similar to Figure 4.

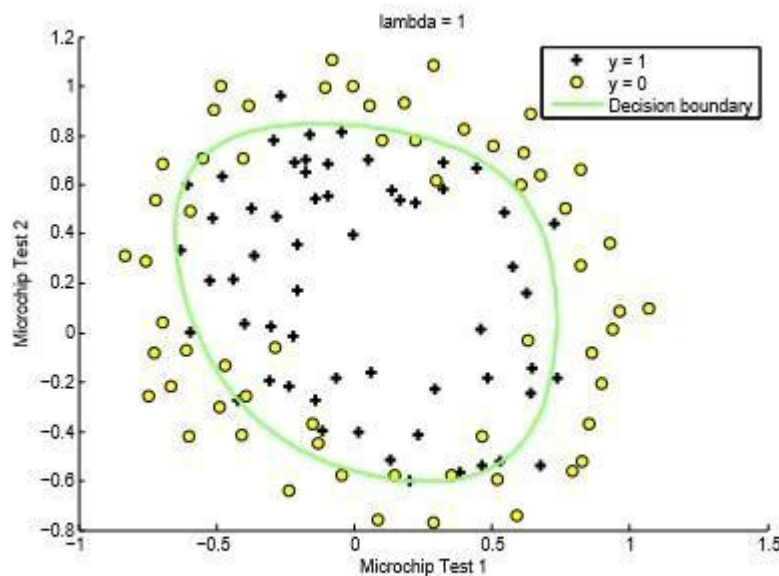


Figure 4: Training data with decision boundary ( $\lambda = 1$ )

**PS:**

**Part B comes Later! Mail Part A fafa.**

**Final date of submission 8<sup>th</sup> June**

**All submissions must be made to both me and Akhilesh. Please keep this in mind. Thanks!sha**