


Day 3: Peripheral Troubleshooting Theory (30 min): Common issues and solutions for peripherals. Practical (30 min): Troubleshoot a non-working printer.


Task 1: USB Keyboards / Mice Issues & Solutions

1. **Issue:** Unresponsive USB Port
 - **Solution:** Disconnect the peripheral and reconnect it directly to another working USB port on the laptop (avoiding unpowered USB hubs).
 -
2. **Issue:** Outdated or Corrupted Driver
 - **Solution:** Open Device Manager, expand Keyboards or Mice and other pointing devices, right-click the device, select Update driver or Uninstall device, and restart the laptop.
 -
3. **Issue:** USB Power Saving Disabling Port
 - **Solution:** In Device Manager, go to Universal Serial Bus controllers To ➡ USB Root Hub Properties ➡ Power Management tab, and uncheck "Allow the computer to turn off this device to save power".
 -
4. **Issue:** Wireless Lag / Stuttering Pointer
 - **Solution:** Move the USB wireless receiver closer to the device and replace or recharge the mouse/keyboard batteries.
 -
5. **Issue:** Incorrect Layout / Typing Wrong Characters
 - **Solution:** Go to Windows Settings ➡ Time & Language ➡ Language and ensure the input layout is set to the correct region.

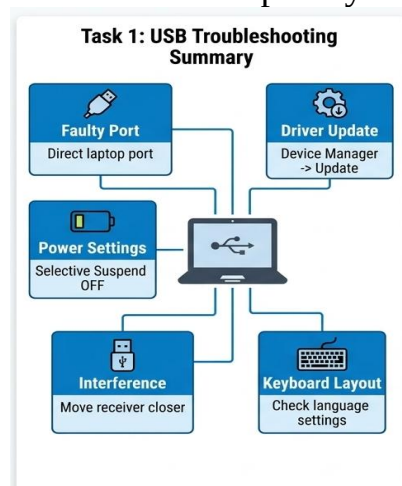

Task 2: Bluetooth Headphones Connection Troubleshooting Flow

1. **Physical Status Check:** Verify that the headphones are powered ON and have sufficient battery charge (check LED indicator).
2. **Enable Pairing Mode:** Press and hold the pairing button on the headphones until the LED indicator flashes rapidly (indicating pairing mode).
3. **Toggle Phone Bluetooth:** Go to Phone **Settings** To **Bluetooth**, toggle Bluetooth **OFF** for 5 seconds, and turn it back **ON** to refresh available connections.
4. **Unpair Previous Profile:** If listed under *Paired Devices*, tap the settings icon next to the headphones and select **Forget / Unpair**.
5. **Scan and Connect:** Tap **Pair new device** or **Scan**, select the headphones from *Available Devices*, and confirm the pairing prompt.
6. **Verify Audio Profiles:** Ensure permissions for both **Media Audio** and **Calls** are enabled in the Bluetooth device settings on the phone.

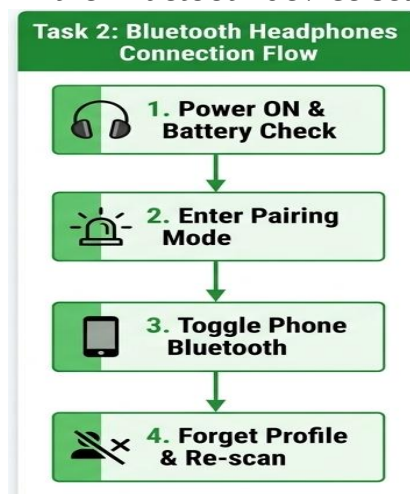

Task 3: External Webcam Checklist for Zoom (Windows 10)

1. **Physical & Cable Check:** Verify the USB cable connection and try plugging it into a direct USB 3.0/2.0 port on the motherboard/laptop.
2. **Windows Camera Privacy Settings:** Navigate to **Settings To Privacy To Camera** and ensure "Allow apps to access your camera" is switched **ON**.
3. **Desktop App Access:** Scroll down in Privacy Settings to ensure "Allow desktop apps to access your camera" is enabled for Zoom.
4. **Device Manager Verification:** Open **Device Manager** To expand **Cameras / Imaging devices** To check if the webcam is detected without any warning icons. If disabled, right-click and select **Enable device**.
5. **Zoom Camera Selection:** In the Zoom client, open **Settings To Video** To click the **Camera** dropdown menu and manually select the external webcam.
6. **Conflicting Applications Check:** Ensure no other app (e.g., Skype, Teams, Web Browser, or OBS) is using the webcam feed in the background.



7.

Task 4: Printer 'Offline' Fix via Windows Troubleshooter

Step by step Guide:

- Open Windows **Settings** (press Win + I).
- Go to **Update & Security To Troubleshoot** To click **Additional troubleshooters**
- Click on **Printer** and select **Run the troubleshooter**.
- Select the offline printer from the list and follow the on-screen prompts.

Information Provided by The Tool:

- **Print Spooler Status:** Checks if the Print Spooler service is stopped or crashed, providing an automated option to restart it.
-
- **Network & Port Diagnostics:** Detects IP address conflicts, disconnected ports, or lost network connections.
-
- **Offline Status Detection:** Identifies if the *"Use Printer Offline"* toggle is active or if stuck print jobs are locking the queue.
-
- **Driver Assessment:** Scans for missing/corrupted drivers and applies recommended repair steps.

