


Modifying and Installing CPL Policy (Local Policy) With Director

1. Open Director:
<https://163.243.34.43:8082/>
2. Select: "**SSH Simple**"
3. Login with this username and password:
User Name: admin
Password: 64****
4. Select: "**Run/Continue**"
until Director appears
5. Select: the [**Configure**] tab
6. Under the Configuration Library section
from the Show drop down (top right)
Select: "**Overlays**"
7. Navigate: Custom Folders > Policy Overlays >
(A) GLOBAL DC HTTP PROXY
8. Select from Overlays on Left:
(A) GLOBAL DC HTTP CPL Policy_Local
9. Select: "**Edit...**"
10. Under Overlay Settings window (top right)
Highlight: "**Policy Local**"
11. Select: "**Edit**"
Additions to the file need added before the last line: **end-#####-inline**
(modify the policy where needed)
(NOTE: If addition are made after the **end-#####-inline**, they will not write on the device)
12. After modifying
Select: "**OK**"
13. Select: "**OK**"
14. Select: "**No**"
When prompted to "Fetch Refreshables"
(Do not select yes, if "yes" is selected, the CPL or Local Policy will be pulled from the device, and all changes just made to the policy will be lost)
15. Under Groups section (top left)
Select: Custom Groups >
(A) Goodyear GLOBAL
16. Select: "**Execute**"
17. Check selections: Confirmation Dialog window
If correct
Select: "**Yes**"
18. Execution Results will appear
Read: Confirm the execution was completed

Should not have any red errors.

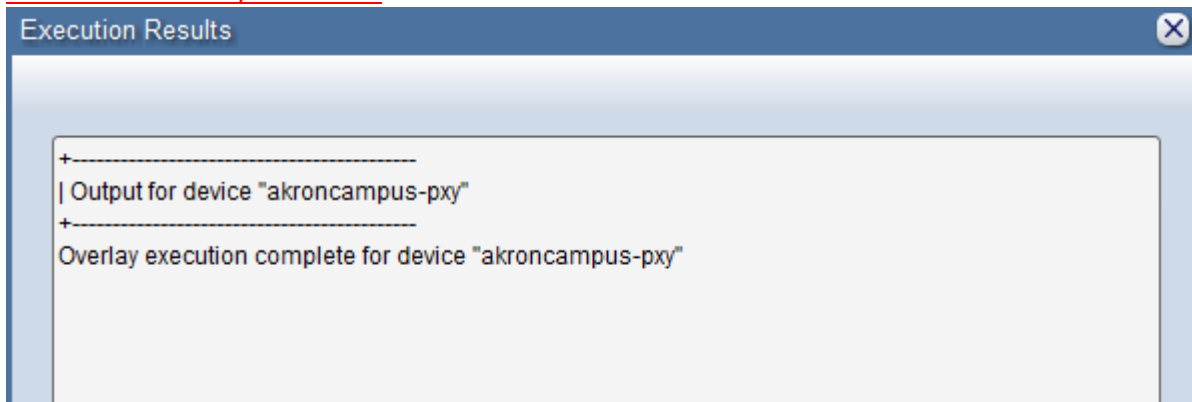

19. Exit Blue Coat Director

Close: all windows

NOTE: If an overlay is not associated with a device, the overlay will not have the ability to execute on that device. Overlays may only be executed on associated devices.