1 Data and split


AGMARKNET
Paddy (Common), Punjab, Sep–Dec

Basmati paddy
by variety

Cleaning
one price per mandi-day

Mandi graph
k nearest mandis

Time-ordered split

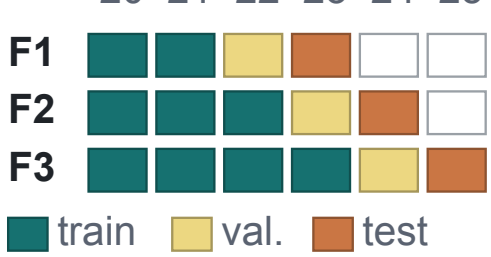

2 Models compared

Simple rules

Naive
last price

Moving avg.
last 7 dates

MSP rule
announced

Learned models neural: 5 seeds

Ridge
linear

GRU
no graph

T-GCN
graph + GRU

A3T-GCN
+ attention

Tuned on validation
k, ridge penalty, stopping

Price ranges
quantile forecasts

3 Evaluation

Errors
MAE, RMSE, MAPE
horizon 1–7 dates

Paired check
date by date
vs naive

Significance
Diebold–Mariano

Coverage
of price ranges

Selection
best on validation,
per variety, horizon

planned for Paper 1, not built yet

future work

DRAFT