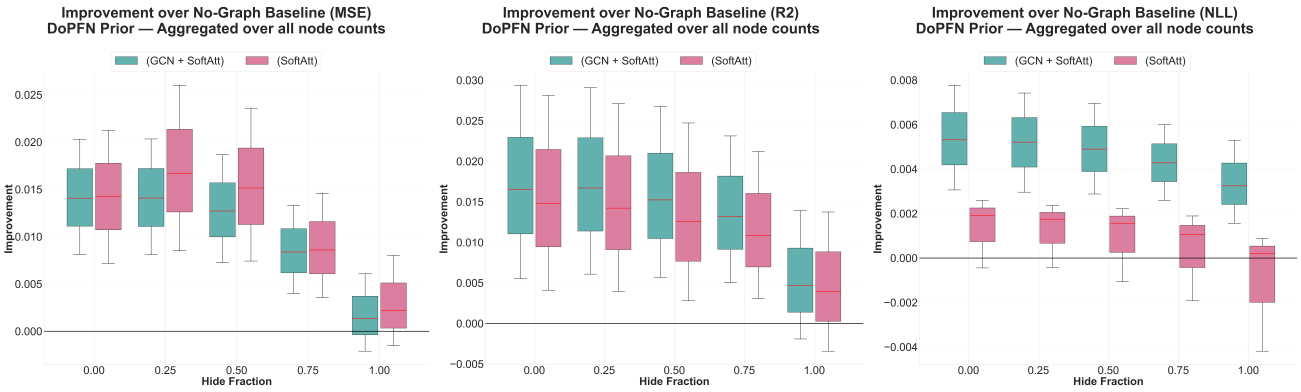

Figure 1. Performance on the DoPFN prior for different fractions of hidden entries in the ancestor matrix for the Soft Attention (Ancestor) and GCN + Soft Attention (Ancestor) graph-conditioning approaches. This experiment is fully analogous to the one presented in Figure 4 in the original paper, but uses the DoPFN prior instead of our complex mechanism prior. The finding is the same as on our complex mechanisms prior: providing full graph information significantly improves performance while GCN + Soft Attention performs better than just using Soft Attention.