

Unity Notes

Ario Bashiri

ariobashiri.com

Physics

Rigidbody (component)

- Full physics simulation — gravity, forces, momentum, collisions
- Best for: realistic movement, rolling balls, pucks, ragdolls

Rigidbody Settings Cheat Sheet

Setting	What it does
Mass	Weight, affects force reactions
Linear Damping	Slows down movement over time
Angular Damping	Slows down spinning over time
Is Kinematic	Ignores physics forces, moved only by code/transform
Collision Detection	Discrete (default) vs Continuous/Continuous Dynamic (fast objects)
Freeze Position/Rotation	Locks specific axes

Character Controller (component)

- No physics, manual movement control
- Best for: precise player movement (FPS, platformers)

Input Management

Input Manager (absolute banger)

- The new Input System package
- Uses .inputactions asset, Action Maps, event-driven callbacks (OnMove, OnJump, etc.)
- Supports rebinding, multiple devices, better overall

Input (old one)

- `UnityEngine.Input.GetKey()`, `Input.GetAxis()`
- Polling-based, simple, but no built-in rebinding or multi-device support

Camera Follow

Code

- Bad — manual `transform.position` / Quaternion math to follow the player
- Full control but painful to get right (tunneling, distortion, jitter — all the issues we debugged this whole conversation)


Camera as child object on Player

- Simplest method — just parent the camera in Hierarchy
- Automatically follows position and rotation
- Downside: less flexible for camera switching/transitions

Cinemachine (The best imo) (installed through Package Manager)

- Unity's dedicated camera system package
- Handles follow, look-at, collision avoidance, smooth transitions, shake, and more — all without custom code
- Industry standard for camera work in Unity, used in most professional projects

Note: Be sure to set **Update Method** and **Blend Update Method** to “**Fixed Update**” on the **Cinemachine Brain** component of the **main camera** after adding a CinemachineCamera. It makes the movement **much smoother**.

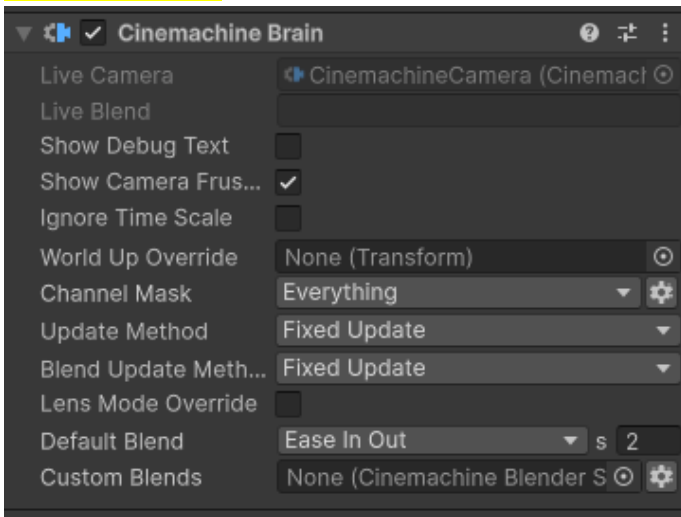

Prefabs are useful. *“Prefab everything that you can prefab”*

Prefab in other words is saving an object. It is better for **duplicating**, **better managing** objects, applying **group changes** to objects, etc.

Empty Parent Object trick

Put the model you want to attach code to as a child of an empty object. Changing the model after some time won't cause any loss since all the data are on the empty parent object.

NOTE: be sure to put the **parent object's position** at the **center (center of mass)** of the **child object**. That will fix any rotational bug.

Unity Order of Execution

- Awake() → runs once, when object is first created
- OnEnable() → runs every time the object becomes active
- Start() → runs once, after Awake, before first Update
- Update() → runs every frame

Mesh Collider [Component]

Covers every edge of the model. The most accurate (and also the most **resource-consuming**) collider.

Checking **Convex** will make the collider more basic. (useful for some cases to not waste resources)

FixedUpdate() vs Update() [method]

- **Update()** is recommended to be used for **game logic**. Must use **Time.deltaTime** for this.
- **FixedUpdate()** is recommended to be used for **Physics**. Must use **Time.fixedDeltaTime** for this.

AddForce() vs AddRelativeForce() [method]

- **AddForce()** adds a **global** force (relative to the **world's x, y or z** axis)
- **AddRelativeForce()** adds a **Local** force (relative to **the object's x, y and z** axes)

Invoke() [method]

Puts a delay before running the given method.

- **Invoke("MethodNameAsString", SecondsDelayInFloat);**

Useful Scripts

- **FindAnyObjectByType<T>()** : Finds an object automatically without dragging into Inspector
- **GetComponent<T>()** : Finding and getting objects/components (on the same object)
- **GetComponentInChildren<T>()**
- **GetComponentInParent<T>()**
- **Destroy(gameObject)**
- **Destroy(gameObject, 3f)** : destroy after delay
- **gameObject.SetActive(false)** : disables/enables the object
- **gameObject.CompareTag("Enemy")**
- **gameObject.layer = LayerMask.NameToLayer("Ground")**
- **Keyboard.current.xkey.isPressed** : The key at "x" will turn this argument true during current frames (runs continuously which is not logical for toggles)
- **Keyboard.current.xkey.wasPressedThisFrame**: considers the input only once instead of being continuous. (for toggle actions)

Caching [concept]

The **variables** we have on the top outside of the methods (in each script) is considered as "cache".

Attributes ([something])


- **[SerializeField]** → Shows a private variable in the Inspector.
- **[HideInInspector]** → Hides a public variable from the Inspector.
- **[Header("Text")]** → Adds a bold section title above the next variable(s) in the Inspector.
- **[Space]** → Adds blank vertical space in the Inspector between variables
- **[Tooltip("text")]** → A tooltip explaining what the variable does when you hover over it in the Inspector
- **[Range(min, max)]** → Turns a number field into a slider between min and max.
- **[Min(value)]** → Prevents a number from going below the specified minimum (no upper limit, no slider)

UI (Canvas)

A **canvas** must be the parent holding UI elements.

Canvas Scalar better be: “**Scale With Screen Size**” + “**Match Width Or Height**”

- For text: **TextMeshPro** is much better with many more options.
- For images: **Panel** (set sprite image onto it) (“**Set Native Size**” is really useful)

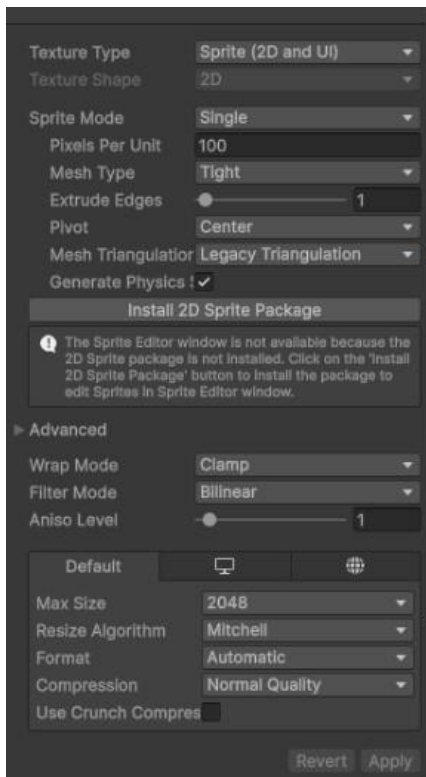

transform.Rotate() [method]

transform in general can be used to manipulate the object’s **position**, **rotation**, and **scale**.

transform.Rotate() is used for rotating in any of the axes. (takes a Vector3 or (x, y, z) as input)

rb.freezeRotation = true/false; (rigidbody)

- **false**: completely disables the object’s rotation momentum.
- **true**: enables the object to rotate and have momentum.

rb.constraints

Is used to change rigidbody constraints.

rb.constraints = RigidbodyConstraints.FreezeRotationX OR FreezePositionX

You can replace “X” with X, Y or Z, and you can write multiple constraints in one single line by separating each term using a | .

Audio Listener [component]

Is a component on the **Main Camera** object. We can setup a **surround sound** too since the main camera has the “ears” to hear sounds and Unity understands where sounds come from automatically.

AudioClip [Object]

An object to hold a single audio file which can then be used by an audioSource object to be played. See below.

Audio Source [component]

Has to be added where the audio will be played. Has options like “**Play On Awake**” and “**Loop**”.

- **audioSource.isPlaying** → returns true/false whether there is any audio being played.
- **audioSource.Play()** → plays the default audio given to the Audio Source component.
- **audioSource.Stop()** → stops whatever audio is being played.
- **audioSource.PlayOneShot(audioclip, volume)** → see below

AudioSource.PlayOneShot() [method]

Is used to play audio that are cached which allows us play **more than one audio file** through a **single Audio Source component** (Unlike audioSource.Play())

- **PlayOneShot(AudioClip clip, float volumeScale = 1.0f);**

Post Processing [component]

You can add extra post processing to the **Volume** component of the **Global Volume object** by clicking on “**Add Override**”. There are many options, some of which are:

- **Depth of Field**
- **Film Grain**
- **Lift, Gamma, Gain**

Lighting [Object]

Is added as an object and can be modified in terms of color, intense, range, etc.

There are multiple types of this object, some of which are:

- **Directional Light**
- **Point Light**
- **Spot Light**
- **Area Light**

ParticleSystem [component]

Particles are untangible 3D objects that are emitted from a source. A Particle System component can be added as a standalone object or as a component. You can use multiple Particle System objects to an object, each with their own emission, shape, color, renderer, etc. and you can access them using the ParticleSystem object type (one for each). The object then can be used like the following:

- `particleSystemObj.Play()`
- `particleSystemObj.Stop()`
- `particleSystemObj.isPlaying` → returns true/false

SceneManager [namespace]


Is used for switching between scenes. Scenes must be added to the project **Scene List** through:

File → **Build Profiles** → **Scene List** → Can add the current scene or drag them from project folder.

- `SceneManager.GetActiveScene().buildIndex` → current scene's index (in project's Scene List)
- `SceneManager.sceneCountInBuildSettings` → total number of scenes
- `SceneManager.LoadScene(int sceneIndex)` → to load scene using index (int) or scene name (string)

Changing Skybox

Make a new **material** and change its shader to any type of **Skybox** that suits the project:

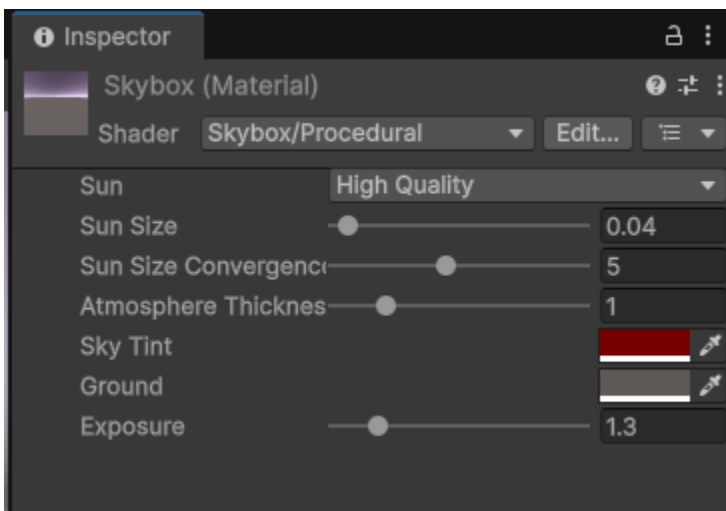

And then just drag and drop it onto the skybox.

Mathf.PingPong(float t, float length)

PingPong returns a value that increments and decrements between zero and the **length**. The value **t** needs to be a self-incrementing value like Time.time.

Vector3.Lerp(Vector3 a, Vector3 b, float t)

a	Start value, returned when t = 0
b	End value, returned when t = 1
t	Value used to interpolate between a and b

RAYCAST (IS THE MOST AMAZING THING I'VE EVER SEEN)

It shoots an **invisible line** from a point in a direction and tells you what it hits first.

Used for:

- Player "look at object to interact" (E to pick up, open doors, etc.)
- Shooting/hit detection
- Ground checks
- AI sight
- Etc.

How to use it for object interaction:

You must set the **Layer** to "**Interactable**" on the target objects. And other Layers for other use cases.

For instance, for AI bots to see player, the raycast must check if the collision has occurred to an item with the **Layer** being "**Player**"

```
1 void Start()
2 {
3     // Get the Camera component from the PlayerLook script (so raycast starts from where player is looking)
4     cam = GetComponent<PlayerLook>().cam;
5
6     // Get reference to the UI script that displays interaction prompts
7     playerUI = GetComponent<PlayerUI>();
8
9     // Get reference to the Input Manager script that reads player input
10    inputManager = GetComponent<InputManager>();
11 }
12
13 void Update()
14 {
15     // Clear the prompt text every frame first (resets if nothing is being looked at)
16     playerUI.UpdateText(string.Empty);
17
18     // Create a ray starting from the camera's position, going forward in the direction the camera is facing
19     Ray ray = new Ray(cam.transform.position, cam.transform.forward);
20
21     // Draw the ray visually in the Scene view for debugging (only visible in Editor, not in builds)
22     Debug.DrawRay(ray.origin, ray.direction * distance);
23
24     // Variable to store information about whatever the raycast hits
25     RaycastHit hitInfo;
26
27     // Fire the raycast. "out hitInfo" means the function will fill hitInfo with collision data if it hits something.
28     // "distance" limits how far the ray checks, "mask" limits which layers it can detect (ignores irrelevant objects)
29     if (Physics.Raycast(ray, out hitInfo, distance, mask))
30     {
31         // Check if the object we hit has an Interactable component attached
32         if (hitInfo.collider.GetComponent<Interactable>() != null)
33         {
34             // Store a reference to that Interactable component
35             Interactable interactable = hitInfo.collider.GetComponent<Interactable>();
36
37             // Show that object's custom prompt message (e.g. "Press E to open door")
38             playerUI.UpdateText(interactable.promptMessage);
39
40             // Check if the Interact input action was pressed this frame
41             if (inputManager.onFoot.Interact.triggered)
42             {
43                 // Call the interact function on that object (opens door, picks up item, etc.)
44                 interactable.BaseInteract();
45             }
46         }
47     }
48 }
49
```

Enemy detection using Raycast:

sightDistance = 20f

fieldOfView = 85f

```
public bool CanSeePlayer()
{
    if(player != null)
    {
        // is the player close enough to be seen?
        if (Vector3.Distance(transform.position, player.transform.position) < sightDistance)
        {
            Vector3 targetDirection = player.transform.position - transform.position - (Vector3.up * eyeHeight);
            float angleToPlayer = Vector3.Angle(targetDirection, transform.forward);
            // is the player within the field of view of enemy?
            if (angleToPlayer >= -fieldOfView && angleToPlayer <= fieldOfView)
            {
                Ray ray = new Ray(transform.position + (Vector3.up * eyeHeight), targetDirection);
                Debug.DrawRay(ray.origin, ray.direction * sightDistance);

                RaycastHit hitInfo = new RaycastHit();

                // is enemy's sight blocked by any object?
                if (Physics.Raycast(ray, out hitInfo, sightDistance))
                {
                    if (hitInfo.transform.gameObject == player)
                    {
                        return true;
                    }
                }
            }
        }
    }
    return false;
}
```