

M. H. SABOO SIDDIK POLYTECHNIC



CSS MICROPROJECT

TOPIC: RESTAURANT WEBSITE

-Under the Guidance of
Zaid Sir

Presented by:

SR.NO	ROLL NO	NAME
1.	19417	Sanskriti Mahadik.
2.	19419	Sarvesh Raikar.
3.	19420	Rakhangi Arisha.
4.	19421	Aamir Khan.
5.	20481	Mustafa Ghadai.



**MAHARASHTRA STATE
BOARD OF TECHNICAL EDUCATION**

Certificate

This is to certify that Mr/Ms. _____

Roll No. _____ of _____ Semester of Diploma in **COMPUTER ENGINEERING** of Institute **M. H. SABOO SIDDIK POLYTECHNIC** (Code: 0002) has completed the term work satisfactorily in course _____ for the academic year **2021** to **2022** as prescribed in the curriculum.

Place:

Enrollment No:


Date:

Exam. Seat No:

Subject Teacher

Head of the Department

Principal

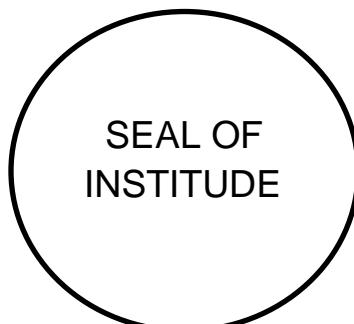



**MAHARASHTRA STATE
BOARD OF TECHNICAL EDUCATION**

Certificate

This is to certify that Mr/Ms. _____

Roll No. _____ of _____ Semester of Diploma in **COMPUTER ENGINEERING** of Institute **M. H. SABOO SIDDIK POLYTECHNIC** (Code: 0002) has completed the term work satisfactorily in course _____ for the academic year **2021** to **2022** as prescribed in the curriculum.

Place:

Enrollment No:


Date:

Exam. Seat No:

Subject Teacher

Head of the Department

Principal

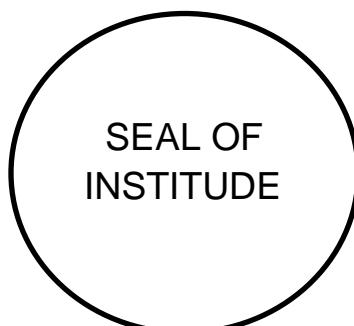



**MAHARASHTRA STATE
BOARD OF TECHNICAL EDUCATION**

Certificate

This is to certify that Mr/Ms. _____

Roll No. _____ of _____ Semester of Diploma in **COMPUTER ENGINEERING** of Institute **M. H. SABOO SIDDIK POLYTECHNIC** (Code: 0002) has completed the term work satisfactorily in course _____ for the academic year **2021** to **2022** as prescribed in the curriculum.

Place:

Enrollment No:


Date:

Exam. Seat No:

Subject Teacher

Head of the Department

Principal

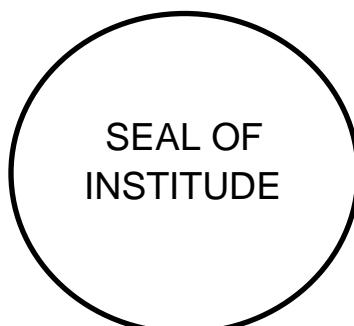



**MAHARASHTRA STATE
BOARD OF TECHNICAL EDUCATION**

Certificate

This is to certify that Mr/Ms. _____

Roll No. _____ of _____ Semester of Diploma in **COMPUTER ENGINEERING** of Institute **M. H. SABOO SIDDIK POLYTECHNIC** (Code: 0002) has completed the term work satisfactorily in course _____ for the academic year **2021** to **2022** as prescribed in the curriculum.

Place:

Enrollment No:


Date:

Exam. Seat No:

Subject Teacher

Head of the Department

Principal

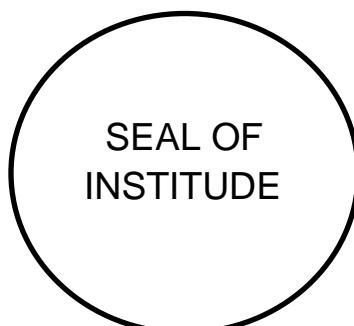



**MAHARASHTRA STATE
BOARD OF TECHNICAL EDUCATION**

Certificate

This is to certify that Mr/Ms. _____

Roll No. _____ of _____ Semester of Diploma in **COMPUTER ENGINEERING** of Institute **M. H. SABOO SIDDIK POLYTECHNIC** (Code: 0002) has completed the term work satisfactorily in course _____ for the academic year **2021** to **2022** as prescribed in the curriculum.

Place:

Enrollment No:


Date:

Exam. Seat No:

Subject Teacher

Head of the Department

Principal

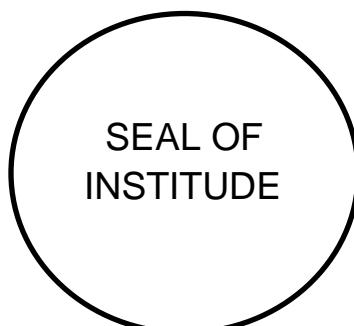

ANNEXURE

Evaluation sheet for the micro project

Academic Year: 2021-2022 Name of faculty: KHAN MOHAMMED ZAID

Course: Cascading Style Sheet Semester: V

Title of the project: Restaurant Website.

Cos addressed by Micro project:

A. _____

B. _____

Major learning outcomes achieved by students by doing the Project:

(a) Practical outcomes. _____

(b) Unit outcomes in Cognitive domain _____

(c) Outcomes in effective domain _____

Comments/suggestions about teamwork/leadership/inter-personal communication (if any)

Roll no.	Student Name	Marks out of 6 for performance in group activity	Marks out of 4 for performance in oral/presentation	Total out of 10
19417	Sanskriti Mahadik			
19419	Sarvesh Raikar			
19420	Arisha Rakhangi			
19421	Aamir Khan			
20481	Mustafa Ghadai			

KHAN MOHAMMED ZAID

(Name and Signature of Faculty)

❖ RATIONALE :

JavaScript is limited featured client side programming language. JavaScript runs at the client end through the user's browser without sending messages back and forth to the server. It is widely used by the web developers to do things such as build dynamic web pages, respond to events, create interactive forms, validate data that the visitor enters into a form, control the browser etc. This course helps student to create highly interactive web pages using these features.

❖ COURSE OUTCOMES :

- a) Create interactive web pages using program flow control structure.
- b) Implement Arrays and functions in Java script.
- c) Create event based web forms using Java script.
- d) Use JavaScript for handling cookies.
- e) Create interactive webpage using regular expressions for validations.
- f) Create Menus and navigations in web Pages.

❖ RESOURCE REQUIRED :

Sr No.	Equipment Name with Broad Specification
1.1	Computer system (Any computer system with basic configuration)
1.2	Network connection device

LITERATURE REVIEW :-

- HTML Elements :-**

Web pages would be very boring if you could not interact with or obtain information from the user, such as text, numbers, or dates. Luckily, with JavaScript this is possible. We can use this information within the web page, or it can be posted to the web server where we can manipulate it and store it in a database.

Various interface elements like Buttons, textbox, textarea, radio button, checkboxes etc are the means by which a user interact with applications. We can include many of these types of elements in our webpage. When we have such an element inside our page, we can then tie code to its events.

❖ Button :

The HTML element to create a button is </input>

For example, to create a button called myButton, which has the words “Click Me” on its face, the </input> element would need to be as follows:
<input type=“button” name=“myButton” value=“Click Me”>

The type attribute is set to button, and the value attribute is set to the text you want to appear on the face of the button

❖ TextBox :

The standard text box element enables users to enter a single line of text. This information can then be used in JavaScript code or submitted to a server for server-side processing. A text box is created by means of the <input/> element, much as the button is, but with the type attribute set to text. Again, you can choose not to include the value attribute, but if you do include it this value will appear inside the text box when the page is loaded.

For example, to create a text box 10 characters wide, with a maximum character length of 15, and initially containing the words Hello World, your <input/> element would be as follows:

<input type=“text” name=“myTextBox” size=“10” maxlength=“15” value=“Hello World”>

❖ Password TextBox Element : -

The only real purpose of the password box is to enable users to type in a password on a page and to have the password characters hidden, so that no one can look over the user's shoulder and discover his or her password. However, this protection is visual only. When sent to the server, the text in the password is sent as plain text — there is no encryption or any attempt at hiding the text (unless the page is served over a secure connection from the server).

```
<input name="password1" type="password"/>
```

❖ TextArea Box Element : -

The `<textarea>` element allows multi-line input of text. Other than this, it acts very much like the text box element.

However, unlike the text box, the `textarea` element has its own tag, the `<textarea>` tag.

It also has two additional attributes: cols and rows. The cols attribute defines how many characters wide the text area will be, and the rows attribute defines how many character rows there will be. You set the text inside the element by putting it between the start and closing tags, rather than by using the value attribute.

So if you want a `<textarea>` element 40 characters wide by 20 rows deep with initial text Hello World on the first line and Line 2 on the second line, you define it as follows:

```
<textarea name="myTextArea" cols="40" rows="20">Hello World  
line 2 </textarea>
```

❖ Checkbox And RadioButton :

A check box enables the user to check and uncheck it. Radio buttons are basically a group of check boxes where only one can be checked at a time. Creating check boxes and radio buttons requires the `</input>` element. Its type attribute is set to "checkbox" or "radio" to determine which box or button is created. To set a check box or a radio button to be checked when the page is loaded, you simply insert the attribute checked into the `<input>` tag and assign its value as checked

```
<input type="checkbox" name="chkDVD" checked="checked"  
value="DVD"/>
```

```
<input type="radio" name="radCPUspeed" checked="checked"  
value="1ghz"/>
```

To create a group of radio buttons, you simply give each radio button the same name. This creates an array of radio buttons going by that name that you can access, as you would with any array, using its index.

❖ Selection Boxes : -

Although they look quite different, the drop-down list and the list boxes are actually both elements created with the `<select>` tag. The select element has one or more options in a list that you can select from; each of these options is defined by means of one or more `<option>` elements inside the opening and closing `<select>` tags

For example, to create a list box five rows deep and populate it with seven options, your HTML would look like this:

```
<select name="theDay" size="5">
<option value="0" selected="selected">Monday</option>
<option value="1">Tuesday</option>
<option value="2">Wednesday</option>
<option value="3">Thursday</option>
<option value="4">Friday</option>
<option value="5">Saturday</option>
<option value="6">Sunday</option>
</select>
```

❖ Focus method : -

If an element is the center of the focus, any key presses made by the user will be passed directly to that element. For example, if a text box has focus, pressing keys will enter values into the text box. Also, if a button has the focus, pressing the Enter key will cause the button's onclick event handler code to fire, just as if a user had clicked the button with his mouse.

❖ Blur method :

Blur, which perhaps could be better called "lost focus," is the opposite of focus. If you want to remove a form element from being the focus of the user's attention, you can use the blur() method. When used with a form element, the blur() method usually results in the focus shifting to the page containing the form.

❖ Onclick method :

OnClick method is executed when the Mouse is clicked on the element on which it has been used

```
<button onclick="myFunction()">Click me</button>
```

❖ Regular expression :-

Regular expressions are patterns used to match character combinations in strings. In JavaScript, regular expressions are also objects. These patterns are used with the exec() and test() methods of RegExp, and with the match(), matchAll(), replace(), replaceAll(), search(), and split() methods of String. This chapter describes JavaScript regular expressions.

❖ Onmouseover :-

The onmouseover event occurs when the mouse pointer is moved onto an element, or onto one of its children. Tip: This event is often used together with the onmouseout event, which occurs when a user moves the mouse pointer out of an element.

❖ Banners :-

Displaying banners ads is a common practice for showing advertisements on web pages to the visitors. Banner ads can be static or animated.

Animated images are animated GIF files or flash movies. Flash movies are created using Macromedia Flash and the browsers must have installed flash plugin to view the movies. On the other hand, you can create some animated effect using JavaScript, like rotating static banner ads at a certain time interval.

❖ <div>

- It defines a division or section in HTML document.
- It is used as a container for HTML elements - which is then styled with CSS or manipulated with JavaScript.
- It can be styled by using class or id rule.

❖ Background-color:

- It sets the background color of an element.
- Background is the total size of an element: including padding and border (but not margin)

Color:

- It can be used to set color of a text or border.

- Colors can be specified using RGB values, HEX values, HSL (Hue, Saturation, Lightness) values or RGBA/HSLA values (A stands for Alpha - Transparency)

❖ Padding:

- It is used to create space around an element's content, inside of any defined borders.
- Values: length px / pt / % / inherit(padding value should be inherited from parent element)
- Properties: top – right – bottom – left
- E.g.: padding: 25px 50px 75px 100px -> top(25) right(50) bottom(75) left(100)
padding: 25px 50px 75px -> top(25) right and left (50) left (75)
padding: 25px 50px -> top bottom (25) right left (50)
padding: 25px -> All four paddings are 25

❖ Font-size:

- Sets the font size of different elements. Default value is medium.
- Values: small, medium, large, x-small/large, xx-small/large, smaller, larger, length px/cm, %

❖ Border:

- It allows you to specify style, width and color of an element's border.
- Border-style: dotted, dash, solid, double, groove, ridge, inset, outset, none, hidden

❖ Cursor:

- It generates a bunch of different mouse cursor.
- Values: default, auto, cell, copy, crosshair, grab, help, pointer etc

❖ Position:

- It specifies the type of positioning method used for an element
- **static**: an element with position:static is not positioned in any special way, it is positioned according to the normal flow of the page.

relative: an element with position:relative; is positioned relative to its normal position

Setting the top, right, bottom, and left properties of a relatively-positioned element will cause it to be adjusted away from its normal position. Other

content will not be adjusted to fit into any gap left by the element, fixed, absolute, sticky

Fixed: an element with position:fixed; is positioned relative to the viewport, which means it always stays in the same place even if the page is scrolled.

Absolute: An element with position: absolute; is positioned relative to the nearest positioned ancestor (instead of positioned relative to the viewport, like fixed).

Sticky: An element with position: sticky; is positioned based on the user's scroll position.

A sticky element toggles between relative and fixed, depending on the scroll position. It is positioned relative until a given offset position is met in the viewport - then it "sticks" in place (like position:fixed).

❖ Display:

It specifies the display behavior of an element.

Values:

inline: displays an element as an inline element. Any width and height property will have no effect.

Block: displays an element a block element (like <p>). It starts on a new line and takes up the whole width.

None: The element is completely removed. Can be used to hide an element.

❖ Overflow:

This property controls what happens to content that is too big to fit into an area. It specifies whether to clip the content or to add scroll bars in the element.

Values:

visible: default. The overflow is not clipped, content renders outside the element's box.

hidden: The overflow is clipped, and the rest of the content will be invisible.

scroll: The overflow is clipped and scroll bar is added to the rest of the content.

auto: similar to scroll, but it adds scrollbars only when necessary

❖ **float:**

It specifies how an element should float, used for positioning and formatting

content. E.g an image should float left to the text in a container.

Values:

left: element floats to the left of its container.

right: element floats to the right of its container.

None: Element will not float. It will be displayed just where it occurs in the text. (default).

Inherit: Element inherits float value of its parents.

Login Page: -

Code:

Html:

```
<!DOCTYPE html>
<html>
<head>
    <link rel="preconnect" href="https://fonts.googleapis.com">
    <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
    <link href="https://fonts.googleapis.com/css2?family=Tangerine:wght@700&display=swap" rel="stylesheet">
        <meta charset="UTF-8">
        <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <link rel="shortcut icon" href="i.png" type="image/png">
    <link rel="stylesheet" type="text/css" href="resstyle.css">
    <title>
        Registration Form
    </title>

</head>
<body>

<div class="mydiv" id="first">

    <h1 id="para">Welcome to our Registration Form</h1>
    <p id="sign">Sign in here</p>
    <label id="l1">Enter your Email:</label>
    <input type="text" id="t1" onkeyup="checkemail()">
    <label id="pass">Enter your password:</label>
    <input id="enterpass" type="password" onkeyup="checkpassword()"></input>
    <input id="c" type="checkbox" onchange="showpass()"/>
    <label id="confirmpass">Retype Your password:</label>
    <input type="password" id="conpass"/>
    <input type="button" id="submit" value="Submit" onclick="senddatatoserver()"/>
    <label id="sh" onmouseover="showpass1(true)" onmouseout="showpass1(false)">&nbsp;Show Password</label>

    <label id="checkmail"></label>
    <label id="checkpass"></label>
</div>
<script src="validation.js"></script>
<script src="changebackground.js"></script>
</body>

</html>
```

```
CSS:  
@import  
url('https://fonts.googleapis.com/css2?family=Dancing+Script:wght@600&family=Ta  
ngerine:wght@700&display=swap');  
  
body {  
background-image: url("fi.gif");  
background-repeat: no-repeat;  
background-size: 100vw 100vh;  
}  
  
.mydiv {  
  
position: absolute;  
top: 15vh;  
left: 3vw;  
height: 59vh;  
width: 40vw;  
background-image: url('rock.jpg');  
background-size: cover;  
position: absolute;  
  
}  
  
.mydiv:hover{  
animation: animate 6s linear;  
  
}  
@keyframes animate {  
0%{  
transform: rotateY(0deg);  
  
}  
100%{  
transform: rotateY(360deg);  
  
}  
}  
.awe{  
position: absolute;  
}  
#para {  
color:rgb(42, 243, 119);  
font-size: 45px;  
font-style: italic;  
position: absolute;  
font-family: 'Tangerine', cursive;  
left: 4vw;  
top: -1vh;
```

```
}

#sign {
font-size:25px;
color:rgb(122, 245, 245);
font-style: italic;
top:6vh;
left:15vw;
font-family: 'Dancing script',cursive;
position: absolute;
}
#l1 {
color:rgb(127, 238, 141);
position:absolute;
top:15vh;
left:3vw;
font-style:italic;
font-size: 23px;

}

#li:hover{

}

#pass{
    color:rgb(9, 216, 147);
position:absolute;
top:23vh;
left:1vw;
font-style:italic;
font-size: 23px;

}
#confirmpass{
    color:rgb(185, 235, 92);
position:absolute;
top:31vh;
font-style:italic;
font-size: 23px;
}
#t1{
    top:15vh;
    left:15vw;
    position:absolute;
    height:25px;
    width:173px;
    font-size: 16px;
    font-style:italic;
    font-family: Arial;
```

```
color: aquamarine;
border: none;
background-color: transparent;
}
#enterpass {
    top:23vh;
    left:15vw;
    position:absolute;
    height:25px;
    font-size: 16px;
    font-style:italic;
    font-family: 'Times New Roman', Times, serif;
    color: aquamarine;
    border: none;
    background-color:transparent;
    width:180px;
}
#conpass{
    top:31vh;
    left:15vw;
    position:absolute;
    height:25px;
    font-size: 16px;
    font-style:italic;
    font-family: 'Times New Roman', Times, serif;
    color: aquamarine;
    border: none;
    background-color:transparent;
    width:180px;
}
#conpass:hover{
background-color: rgba(149, 230, 84, 0.836);
}
#conpass:focus{
    color:cadetblue
}
#enterpass:hover{
background-color: aquamarine;
}
#enterpass:focus{
color: chartreuse;
}
#t1:hover{
background-color: rgb(180, 219, 219);
}
#t1:focus{
    color:cornflowerblue;
}
#submit{
```

```
position: absolute;
background-color: transparent;
height: 45px;
width: 85px;
color: aquamarine;
font-style: italic;
font-family: 'Tangerine', cursive;
font-size: 28px;
top: 37vh;
left: 12vw;
height: fit-content;
width: 95px;

}

#c{
position: absolute;
top: 27vh;
left: 14vw;
}
#sh{
position: absolute;
top: 27vh;
left: 15vw;
color: rgb(104, 235, 122);
font-family: 'Dancing script', cursive;
font-size: 17px;
}

#checkmail{
    position: absolute;
top: 15vh;
left: 28vw;
font-style: bold;
font-size: 18px;
height: 30px;
width: 120px;
text-align: center;
}
#checkpass{
    position: absolute;
top: 23vh;
left: 28vw;
text-align: center;
height: 30px;
width: 85px;
font-style: bold;
font-size: 18px;
}
```

```
Javascript:  
//initializing variables  
let awesome=document.getElementById("c");  
let label1=document.getElementById("sh");  
function showpass(){  
if(awesome.checked){  
    document.getElementById("enterpass").type="text";  
    document.getElementById("conpass").type="text";  
} else {  
    document.getElementById("enterpass").type="password";  
    document.getElementById("conpass").type="password";  
}  
}  
  
function showpass1(input){  
if(input==true){  
    document.getElementById("enterpass").type="text";  
    document.getElementById("conpass").type="text";  
} else {  
    document.getElementById("enterpass").type="password";  
    document.getElementById("conpass").type="password";  
}  
}  
  
function checkemail(){  
  
let test=document.getElementById("checkmail");  
let str=document.getElementById("t1").value;  
  
if((str.indexOf("@"))==-1){  
    test.textContent="Invalid Email";  
    test.style.backgroundColor="red";  
} else {  
    test.textContent="Good";  
    test.style.backgroundColor="lime";  
}  
  
}  
  
function checkpassword(){  
let temp=document.getElementById("checkpass");  
let temp1=document.getElementById("enterpass");  
  
if(temp1.value.length<4){  
    temp.textContent="very weak";  
    temp.style.backgroundColor="red";  
} else if(temp1.value.length>=4 && temp1.value.length<=7){
```

```

temp.textContent="medium";
temp.style.backgroundColor="yellow";
} else {
temp.textContent="Strong";
temp.style.backgroundColor="lime";
}
}


function senddatatoserver(){
//initialize all input fields
let input1=document.getElementById("t1");
let input2=document.getElementById("enterpass");
let input3=document.getElementById("conpass");

let lab1=document.getElementById("checkmail");
let lab2=document.getElementById("checkpass");

if(input1.value=="" || input2.value=="" || input3.value==""){
alert("Plz fill all details");
} else if(checkmail.style.backgroundColor=="red") {
alert("You have entered an invalid Email\n we will not accept your values");
}else if(checkpass.style.backgroundColor=="red") {
alert("Your password is too weak \try again with strong password");
}else if(checkpass.style.backgroundColor=="yellow") {
alert("Your password contain medium security \n try again with Strong password");
} else if(input2.value!=input3.value){
alert("both Passwords are not matching");
} else {
var t=input1.value;
localStorage.setItem(t,input2.value);
alert("Successfully registered");
}
}
}

```

Output:

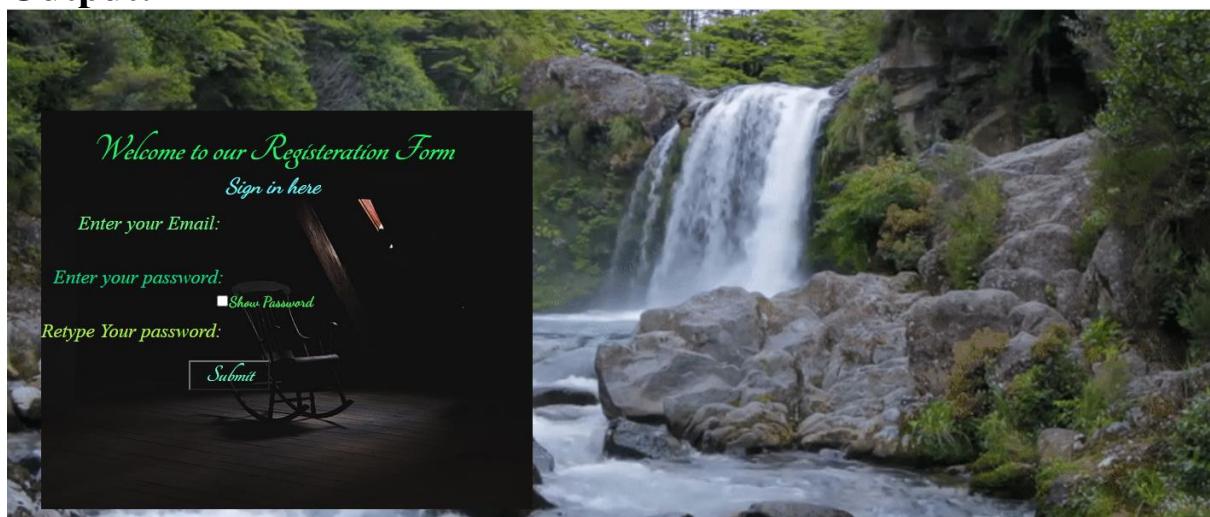

Home Page: -

Code:

```
<html>
<head>
<style>

.imgb{
border: 10px solid #A57C00;
}
.ss{
border: 5px solid #8B4513;

}

.dropbtn {
background-color:#A57C00 ;
color: white;
padding: 16px;
font-size: 16px;
border: none;
cursor: pointer;

}

* {box-sizing: border-box}
body {font-family: Verdana, sans-serif; margin:0}
.mySlides {display: none}
img {vertical-align: middle;}

/* Slideshow container */
.slideshow-container {
max-width: 1000px;
position: relative;
//margin: auto;

display: block;
margin-left: auto;
margin-right: auto;
width: 38%;
height: 38%;

}

/* Next & previous buttons */
.prev, .next {
cursor: pointer;
position: absolute;
top: 50%;
width: auto;
padding: 16px;
margin-top: -22px;
color: white;
font-weight: bold;
```

```
font-size: 18px;
transition: 0.6s ease;
border-radius: 0 3px 3px 0;
user-select: none;
}

/* Put the next button to the right */
.next {
right: 0;
border-radius: 3px 0 0 3px;
}

/* Black background on hover to see button*/
.prev:hover, .next:hover {
background-color: rgba(0,0,0,0.8);
}

/* Caption text */
.text {
color: white;
font-size: 15px;
padding: 8px 12px;
position: absolute;
bottom: 8px;
width: 100%;
text-align: center;
}

/* Fading animation */
.fade {
-webkit-animation-name: fade;
-webkit-animation-duration: 1.5s;
animation-name: fade;
animation-duration: 1.5s;
}

@-webkit-keyframes fade {
from {opacity: .4}
to {opacity: 1}
}

@keyframes fade {
from {opacity: .4}
to {opacity: 1}
}

/* On smaller screens, decrease text size */
@media only screen and (max-width: 300px) {
.prev, .next,.text {font-size: 11px}
}
```

```
#welcometo{  
color:red;  
}  
  
#gfr{  
color:#d0a92c;  
}  
  
.dropdown {  
float: left;  
position: relative;  
display: inline-block;  
}  
  
.dropdown-content {  
display: none;  
position: absolute;  
background-color: #f1f1f1;  
min-width: 160px;  
overflow: auto;  
box-shadow: 0px 8px 16px 0px rgba(0,0,0,0.2);  
right: 0;  
z-index: 1;  
}  
  
#img1{  
display: block;  
margin-left: auto;  
margin-right: auto;  
width: 18%;  
height: 38%;  
}  
  
.dropdown-content a {  
color: white;  
background-color:#A57C00;  
padding: 12px 16px;  
text-decoration: none;  
display: block;  
}  
  
.dropdown a:hover {  
background-color: #8B4513;  
}  
  
.show {  
display: block;  
}  
#special{
```

```
color:#d0a92c;
}

.gallery {
    max-width: 1000px;
    position: relative;
    /*margin: auto;

    display: block;
    margin-left: auto;
    margin-right: auto;
    width: 38%;
    height: 38%;
}
#gallery{
color:#d0a92c;
}
</style>
</head>
<body bgcolor="black">
<table width="100%" border=0% >
<tr>
<td>
</img>
</td>
<td>
<div class="dropdown">
<button onclick="myFunction()" class="dropbtn">Menus</button>
<!--Here, insert different forms links-->
<div id="myDropdown" class="dropdown-content">
    <a href="index.html">Home</a>
    <a href="#aboutus">About Us</a>
    <a href="#outlets">Outlets</a>
    <a href="#orderonline">Order Online</a>
    <a href="#bookservices">Book Our Services</a>
    <a href="#feedback">Feedback</a>
</div>
</div>
</td>
</tr>
</table>
<table border=0 width="100%">
<tr>
<td>
<h2 id="welcometo" align="center">Welcome to...</h2>
</td>
</tr>
<tr><td><h1 id="gfr" align="center">Global Fusion Restaurant</h1>
</td></tr>

</table>
```

```

<table>
<tr>
<td width=25%></td><td width="50%">
<h3 align="center" style="color:white;">To provide our guests with a comfortable, quality and
satisfying dining experience has always been our priority.
Therefore, we are leading at serving your hearts since decades!</h3>
</td>
</td>
</td>
</tr>
</table>
<!--our speciality-->
<h2 id="special" align="center" >Our specialities</h2>
<div class="slideshow-container">
<div class="mySlides fade">
</img>
</div>
<div class="mySlides fade">

</div>
<!--Hex code for <> &#10094 &#10095-->
<a class="prev" onclick="plusSlides(-1)">&#10094;</a>
<a class="next" onclick="plusSlides(1)">&#10095;</a>
</div>
<br>

<!--Gallery section-->
<br><br><br><br><br>
<div class="gallery">

<h2 id="gallery" align="center" >Our Gallery and Ambience</h2>

<p>
<p>

```

```

<p>

<p>

<p>

<p>

</div>
<br><p>
<script>
//When the button is clicked, show or hide the dropdown content
function myFunction() {
  document.getElementById("myDropdown").classList.toggle("show");
}
// Close dropdown list if the user clicks outside of it
window.onclick = function(event) {
  if (!event.target.matches('.dropbtn')) {
    var dropdowns = document.getElementsByClassName("dropdown-content");
    var i;
    for (i = 0; i < dropdowns.length; i++) {
      var openDropdown = dropdowns[i];
      if (openDropdown.classList.contains('show')) {
        openDropdown.classList.remove('show');
      }
    }
  }
}
//Slideshow Script
var slideIndex = 1;
showSlides(slideIndex);

function plusSlides(n) {
  showSlides(slideIndex += n);
}
function currentSlide(n) {
  showSlides(slideIndex = n);
}
function showSlides(n) {
  var i;
  var slides = document.getElementsByClassName("mySlides");
  var dots = document.getElementsByClassName("dot");
  if (n > slides.length) {slideIndex = 1}
  if (n < 1) {slideIndex = slides.length}
  for (i = 0; i < slides.length; i++) {
    slides[i].style.display = "none";
  }
  for (i = 0; i < dots.length; i++) {
    dots[i].className = dots[i].className.replace(" active", "");
  }
}


```

```

slides[slideIndex-1].style.display = "block";
dots[slideIndex-1].className += " active";
}
</script>
</body>
</html>

```

Output:

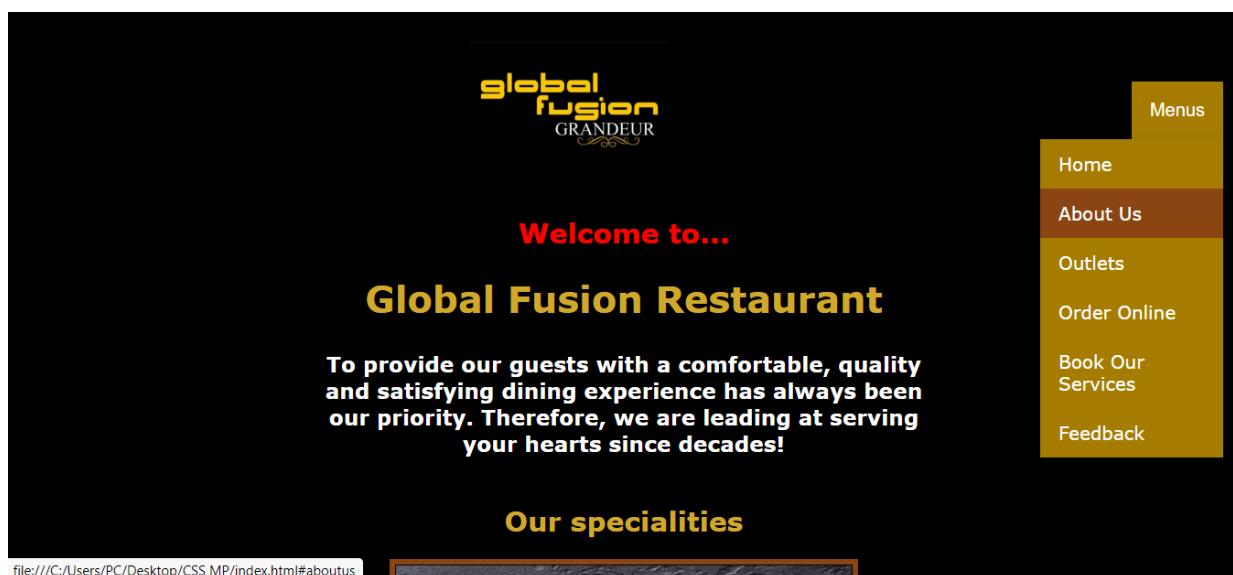

your hearts since decades!

Our specialities



Our Gallery and Ambience


your hearts since decades!

Our specialities



Our Gallery and Ambience



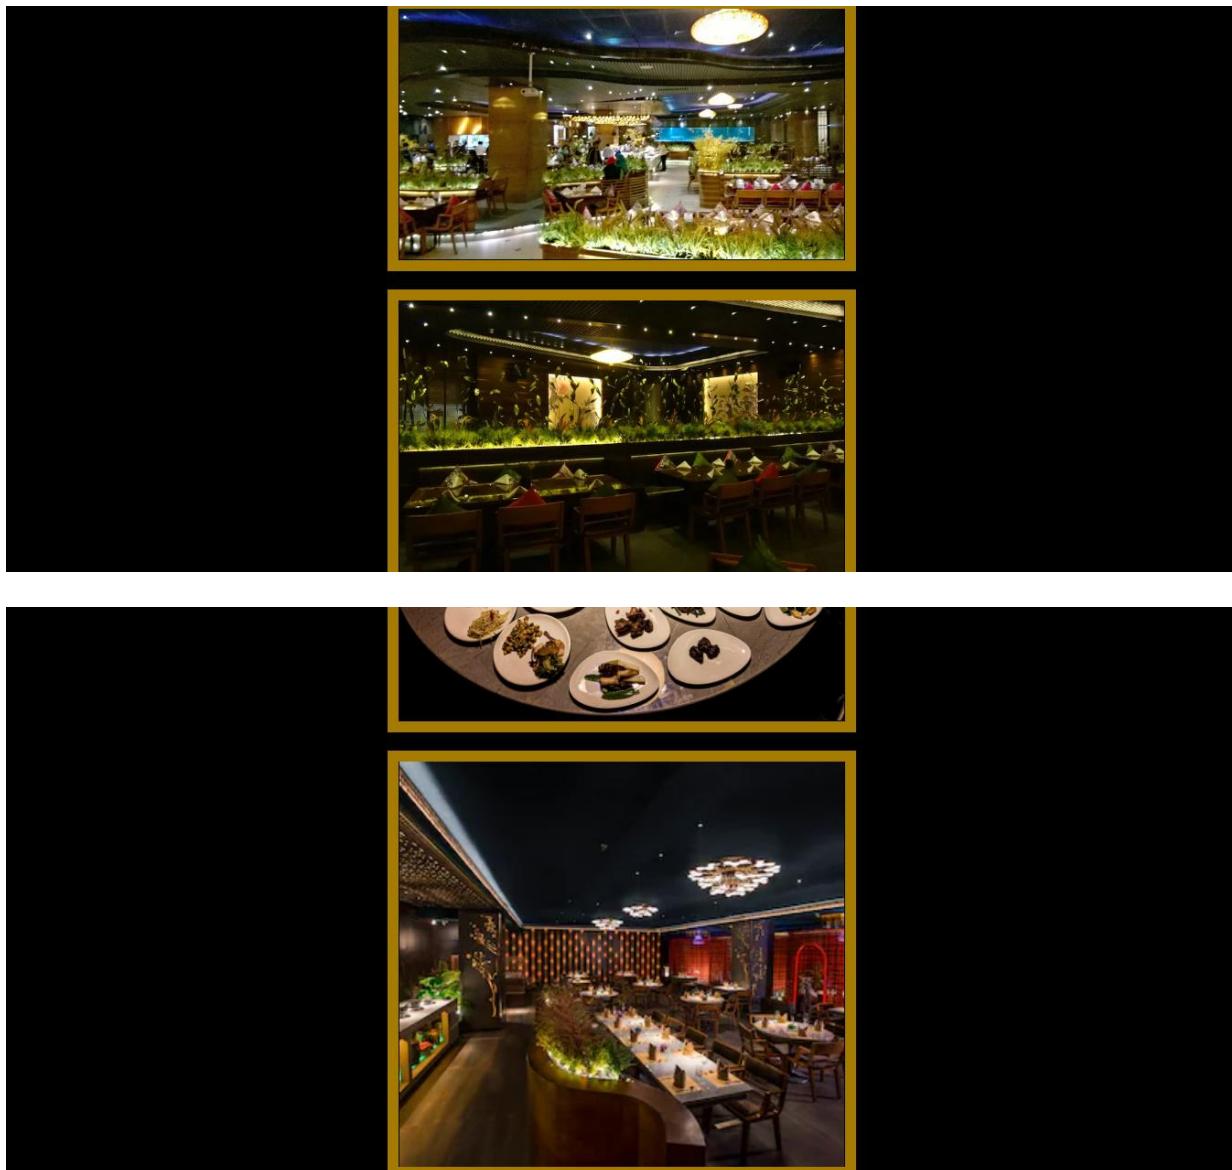

About Us:

Code:

```
<!DOCTYPE html>
<html>
<title>aboutus</title>
<style>
  body {
    background-image: url("img.jpg");
    background-color: #cccccc;
    height: 500px;
```

```
background-position: center;  
background-repeat: no-repeat;  
background-size: cover;  
  
}
```

```
body,  
h1,  
h2,  
h3,  
h4,  
h5,  
h6 {  
    font-family: "Cooper Black"  
}
```

```
</style>
```

```
<body>  
<br>  
<h1 align="center", style="color:orange"><font face="Algerian"> ABOUT US </font></h1>  
<br>  
<br>  
<h2 align= "center", style="color:white">With a spacious sitting arrangement and unique buffet  
concept Global Fusion serves a lavish spread of world cuisines. <br>
```

Live teppenyaki,sushi, fry & bake counter adds up to this ambient restaurant.

With Well Trained staff serving you freshly cooked bite sized appetizers at your table.

After the success of Global Fusion Bandra since 1993, situated at linking road,

Mr. Krishna Tamang launched Global fusion at Andheri east in 2013 saki naka making it another

```
<br> huge success among corporates, family diners and more. </h2>
```

```
<br>
```

```
<br>
```

```
<h1 align="center", style="color:orange"><font face="Algerian"> OPENING HOURS </font></h1>
```

```
<h2 align="center" , style="color:white"> Monday to Friday - 11:00 am-10:00 pm </h2>
```

```
<h2 align="center" , style="color:white">Saturday & Sunday- 12:00 pm-12:00 am</h2>
```

```
</script>
```

```
</body>
```

```
</html>
```

Output:



Outlets:

Code:

```
<!DOCTYPE html>
```

```
<html>
```

```
<title>aboutus</title>
```

```
<style>
```

```
body {
```

```
background-image: url("img.jpg");
background-color: #cccccc;
height: 500px;
background-repeat: no-repeat;
background-size: cover;
}

body,
h2,
h3,
h4,
h5,
h6 {
    font-family: "Cooper Black"
}

</style>

<body>
<br>
<h1 align="center" , style="color:orange"><font face="Algerian"> GLOBAL FUSION </font>
<br>
<h2 style="color:white" ><u> GLOBAL  FUSION  RESTAURANTS  IN  MUMBAI</u> </h2>
<script>
var a = document.createElement('a');

    var linkText = document.createTextNode("LIVE LOCATION");
    a.appendChild(linkText);
    a.title = "LIVE LOCATION";
    a.href =
"https://www.google.com/maps/search/global+fusion/@19.0620979,72.7687435,11z/data=!3m1!4b1";

    document.body.appendChild(a);

</script>
<br>
```


<h2 style="color:white"><u> GLOBAL FUSION BANDRA </u></h2>

<h2> ADDRESS: Linking Rd, opp. KFC, Bandra West, Mumbai, Maharashtra 400050</h3>

<script>

```
var a = document.createElement('a');

    var linkText = document.createTextNode("LIVE LOCATION");

    a.appendChild(linkText);

    a.title = "LIVE LOCATION";

    a.href =
"https://www.google.com/maps/place/Global+Fusion+Bandra/@19.0651817,72.831666,17z/data=!
3m1!4b1!4m5!3m4!1s0x3be7c913df8ad29f:0x1cc1338e4c255c8b!8m2!3d19.0651788!4d72.833937
7";

    document.body.appendChild(a);
```

</script>

<h2 style="color:white"><u>GLOBAL FUSION SAKINAKA </u></h2>

<h2> ADDRESS: Metro Station, Near, B-1 Times Square Building, Andheri - Kurla Rd, Marol, Andheri East, Mumbai, Maharashtra 400059 </h3>

<script>

```
var a = document.createElement('a');

    var linkText = document.createTextNode("LIVE LOCATION");

    a.appendChild(linkText);

    a.title = "LIVE LOCATION";

    a.href =
"https://www.google.com/maps/place/Global+Fusion+Sakinaka/@19.1081058,72.8816303,17z/dat
a=!3m1!4b1!4m5!3m4!1s0x3be7c86cda9bab43:0x76b1b5bc06ddec5e!8m2!3d19.108142!4d72.883
818";

    document.body.appendChild(a);
```

```
</script>

<br>
<br>

<h2 style="color:white"> <u>GLOBAL FUSION VERSOVA </u></h2>

<h2>ADDRESS: Building, Ground Mukti Culture, Model JP Rd, near Kokilaben Hospital, Model Town, Mumbai, Maharashtra 400053 </h3>

<br>

<script>

var a = document.createElement('a');

var linkText = document.createTextNode("LIVE LOCATION");

a.appendChild(linkText);

a.title = "LIVE LOCATION";

a.href =

"https://www.google.com/maps/place/Global+Fusion+Versova/@19.133054,72.8209324,17z/data=!3m1!4b1!4m5!3m4!1s0x3be7b619427b41f3:0x28075330c2d35dbb!8m2!3d19.1330359!4d72.8231341";

document.body.appendChild(a);

</script>

<br>
<br>

<h2 style="color:white"> <u>GLOBAL FUSION WORLI </u></h2>

<h2>ADDRESS: 312A, 3rd Floor, Atria Mall, Dr Annie Besant Rd, opposite Lotus Colony, Worli, Mumbai, Maharashtra 400018 </h3>

<br>

<script>

var a = document.createElement('a');

var linkText = document.createTextNode("LIVE LOCATION");

a.appendChild(linkText);

a.title = "LIVE LOCATION";
```

```

a.href =
"https://www.google.com/maps/place/Global+Fusion+Worli/@18.9912475,72.8121253,17z/data=!3m1!4b1!4m5!3m4!1s0x3be7cf76d9070c83:0x6e69782175073306!8m2!3d18.9912479!4d72.8143057";
document.body.appendChild(a);

</script><br><br><br>
</body>
</html>

```

Output:



Menu for online order:-

Menu:

Code :

```
<html>
    <head>
        <style>
            body {
                background-image: url("menu11.jpg");
                background-size: cover;
                padding: 20px;
                font-family: Arial;
            }
            .overlay {
                height: 100%;
                width: 0;
                position: fixed;
                z-index: 1;
                top: 0;
                left: 0;
                background-color: rgba(98, 170, 207, 0.76);
                overflow-x: hidden;
            }
            .overlay-content {
                position: relative;
                top: 8%;
                width: 100%;
                text-align: center;
                margin-top: 30px;
            }
            .overlay a {
                padding: 8px;
                text-decoration: none;
                font-size: 36px;
                color: #000000;
                display: block;
            }
            .overlay a:hover, .overlay a:focus {
                color: #f1f1f1;
            }
        </style>
    </head>
    <body>
        <div class="overlay">
            <div class="overlay-content">
                <a href="#">Home</a>
                <a href="#">About Us</a>
                <a href="#">Services</a>
                <a href="#">Contact Us</a>
            </div>
        </div>
    </body>
</html>
```

```

.overlay .closebtn {
    position: absolute;
    top: 20px;
    right: 45px;
    font-size: 60px;
}

.overlay a {font-size: 30px}
.overlay .closebtn {
    font-size: 40px;
    top: 15px;
    right: 35px;
}


```

</style>

</head>

<body>

```

<div id="myNav" class="overlay">
    <a href="" class="closebtn" onclick="closeNav()">&times;</a>
    <div class="overlay-content">
        <a href="Soups.html">Soups</a>
        <a href="Appetizers.html">Appetizers</a>
        <a href="FriedRice.html">Fried Rice</a>
        <a href="Noodles.html">Noodles</a>
        <a href="Snacks.html">Snacks</a>
        <a href="Pizza.html">Pizza </a>
        <a href="Burgers.html">Burgers</a>
        <a href="Beverages.html">Beverages</a>
        <a href="Desserts.html">Desserts</a>
    </div>
</div>
<font color="#ffffff">
    <br><h1>The Menu Of GLOBAL FUSION Restuarant...</h1>
    <h3>Click on the three dashes to see the menu.</h3>



    <span style="font-size:40px;cursor:pointer"
        onclick="openNav()">&#9776; MENU</span>
<script>
    function openNav() {
        document.getElementById("myNav").style.width = "100%";
    }

    function closeNav() {

```

```
document.getElementById("myNav").style.width = "0%";  
    }  
</script>  
</body>  
</html>
```

Output :

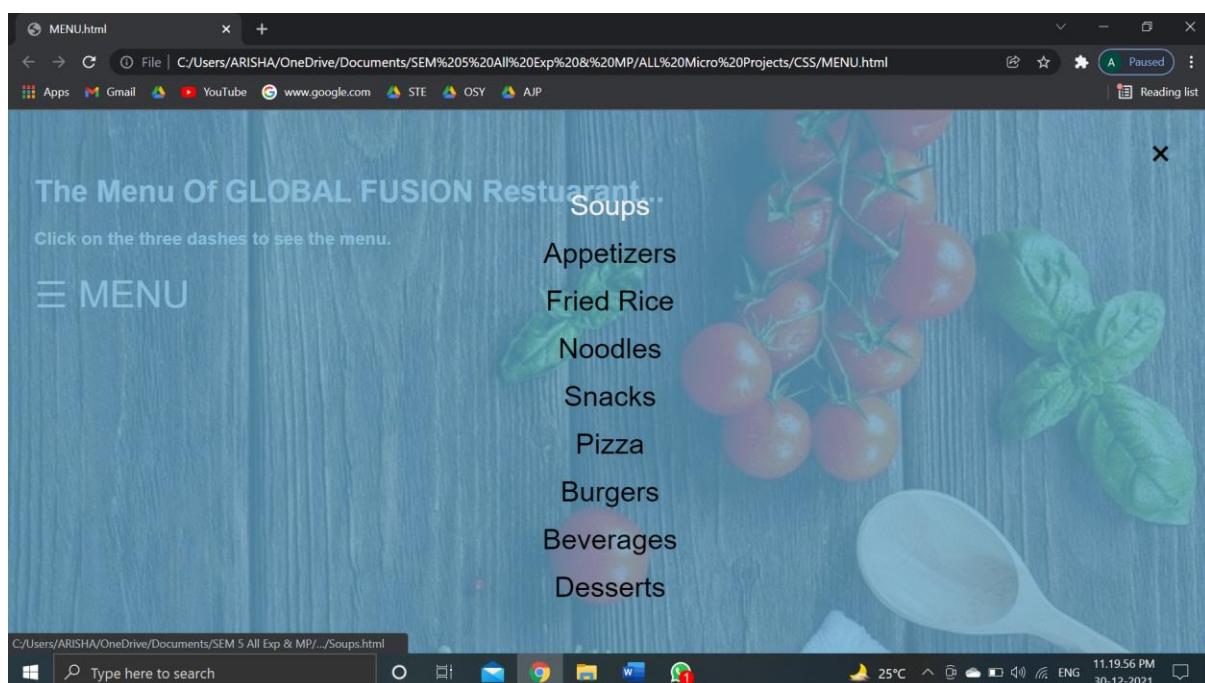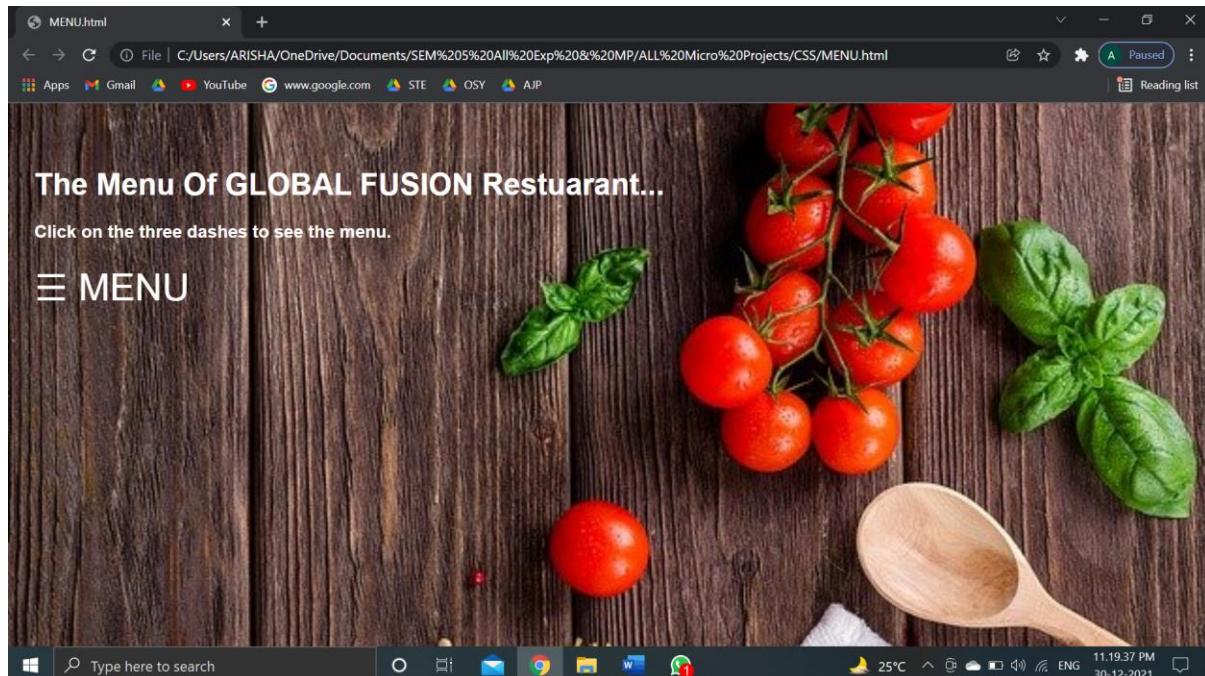

Soups:

Code:

<html>

 <head>

 <style>

 * {

 box-sizing: border-box;

 }

 body {

 background-image: url("BG.jpg");

 background-size: cover;

 background-color: #f1f1f1;

 padding: 20px;

 font-family: Arial;

 }

 .row {

 margin: 8px -16px;

 }

/* Create four equal columns that floats next to each other */

.column {

 float: left;

 width: 15%;

}

/* Content */

.content {

 background-color: white;

 padding: 10px;

}

.button {

 padding: 15px 20px;

 font-size: 14px;

 text-align: center;

 cursor: pointer;

 color: #ffffff;

 background-color: #FF5733;

 border: none;

 border-radius: 15px;

 box-shadow: 0 9px #999;

}

```

.button:hover {
    background-color: #3e8e41
}
mark {
    background-color: white;
    color: black;
}
</style>
</head>
<script>
    function myButton_onclick()
    {
        window.open("ORDER.html");
    }
</script>
<body>
<div class="main">
    <font size =
"+4"><b><mark>**SOUPS**</mark></b></font><br><br>
    <div class="row">
        <div class="column">
            <div class="content">
                
                <h3>Vegetable Clear Soup</h3>
                <p>Vegetable Clear Soup is a comforting and
light soup prepared with carrots, beans, button mushrooms, onions topped with spring
onions.</p><h2>₹190
                <button class="button"
onclick="myButton_onclick()">ORDER</button>

            </div>
        </div>
        <div class="column">
            <div class="content">
                
                <h3>Veg Garlic Burnt Soup</h3>
                <p>Veg Garlic Burnt Soup has this amazing blend
of all the vegetable like broccoli and the life changing flavours of olive oil, garlic,
onions, etc.</p><h2>₹190
            </div>
        </div>
    </div>
</div>

```

```
<button class="button"
onclick="myButton_onclick()">ORDER</button>

</div>
</div>

<div class="column">
<div class="content">

<h3>Veg Manchow Soup</h3>
<p>Veg Manchow Soup made with mixed
veggies,garlic,ginger, soya sauce & a few other ingredients. This is served with crispy
fried noodles.</p><h2>₹195
<button class="button"
onclick="myButton_onclick()">ORDER</button>

</div>
</div>

<div class="column">
<div class="content">

<h3>Veg Hot and Sour Soup</h3>
<p>Veg Hot and sour soup is a flavorful dish with
lots of fresh veggies and vibrant spices. It's a spicy, sour & hot soup & that's popular
in Indo-Chinese Cuisine.</p><h2>₹195
<button class="button"
onclick="myButton_onclick()">ORDER</button>

</div>
</div>
<div class="column">
<div class="content">

<h3>Vegetable Sweet Corn Soup</h3>
<p>Vegetable Sweet Corn Soup consists of
veggies like green peas, carrots make it more nutritious. It's very lightly spiced and
also a little bit Sweet.</p><h2>₹195
<button class="button"
onclick="myButton_onclick()">ORDER</button>
```


```

        </div>
    </div>
</div>

</body>
</html>

```

Output:

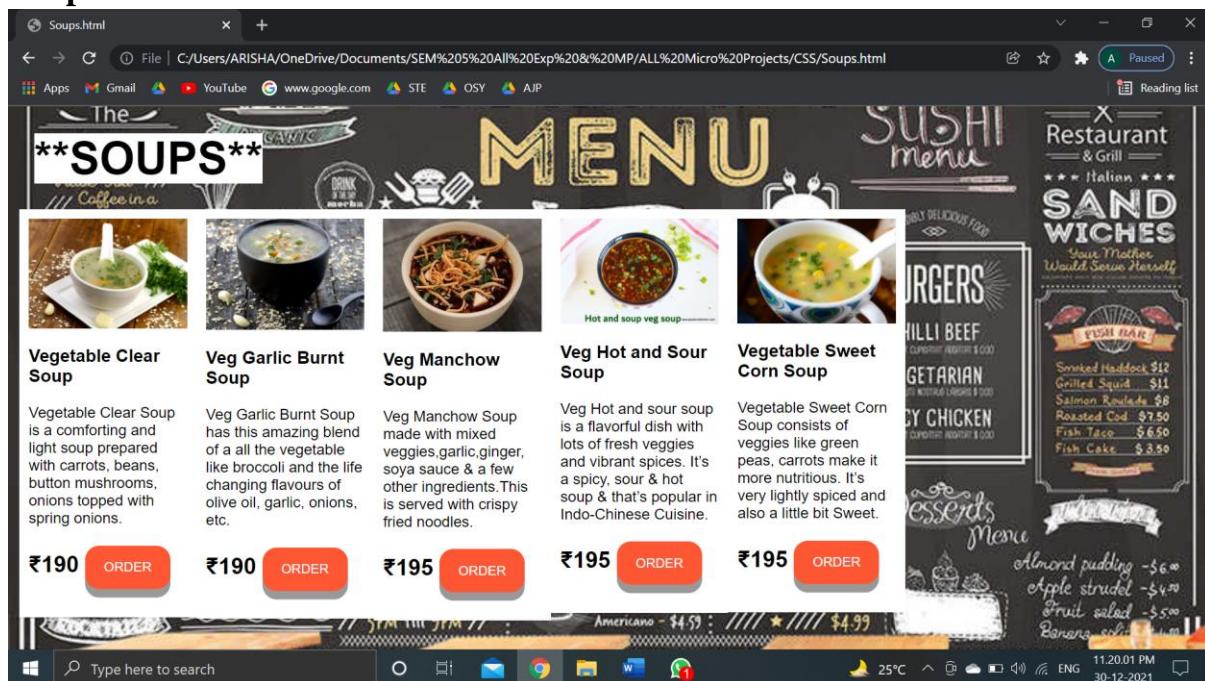

Appetizers:

Code:

```
<html>
```

```
<head>
```

```
    <style>
```

```
        * {
```

```
            box-sizing: border-box;
```

```
        }
```

```
    body {
```

```
        background-image: url("BG.jpg");
```

```
        background-size: cover;
```

```
        background-color: #f1f1f1;
```

```
        padding: 20px;
```

```
        font-family: Arial;
```

```
    }
```

```
    .row {
```

```

        margin: 8px -16px;
    }

/* Create four equal columns that floats next to each other */
.column {
    float: left;
    width: 15%;
}

/* Content */
.content {
    background-color: white;
    padding: 10px;
}

.button {
    padding: 15px 20px;
    font-size: 14px;
    text-align: center;
    cursor: pointer;
    color: #ffffff;
    background-color: #FF5733;
    border: none;
    border-radius: 15px;
    box-shadow: 0 9px #999;
}

.button:hover {
    background-color: #3e8e41
}

mark {
    background-color: white;
    color: black;
}

```

</style>

</head>

<script>

```

        function myButton_onclick() {
            window.open("ORDER.html");
        }

```

</script>

<body>

```

<div class="main">
    <font size="+4"><b><mark>**APPETIZERS**</mark></b></font><br><br>
    <div class="row">

```

```
<div class="column">
    <div class="content">
        
        <h3>Crispy Thread Paneer</h3>
        <p>The Paneer is fried in such a way that the skin is
extremely crunchy. Cooked with shezwan sauce
and bell peppers.</p>
        <h2>₹220
        <button class="button"
onclick="myButton_onclick()">ORDER</button>

    </div>
</div>

<div class="column">
    <div class="content">
        
        <h3>Paneer Chilli Dry</h3>
        <p>Chilli Paneer is a popular restaurant style Indo Chinese
starter. A spicy, tangy paneer can
served along with a bowl of rice. This recipe yields
one of the best chilli paneer dry.</p>
        <h2>₹220
        <button class="button"
onclick="myButton_onclick()">ORDER</button>

    </div>
</div>

<div class="column">
    <div class="content">
        
        <h3>Cream Corn</h3>
        <p>Cream Corn is a type of vegetable dish made by
combining pieces of whole sweetcorn with a soupy
liquid of milky residue from pulped corn kernels
scraped from the cob.</p>
        <h2>₹120
        <button class="button"
onclick="myButton_onclick()">ORDER</button>
    </div>
</div>

<div class="column">
    <div class="content">
        
```

```

<h3>Crispy Potato</h3>
<p>Crispy Potato wedges are soft pillows on the inside,
crunchy on the outside with a good kick of
garlic and parmesan cheese, and no pre-soaking or
parboiling needed.</p>


<h2>₹140
<button class="button"
onclick="myButton_onclick()">ORDER</button>
</div>
</div>
<div class="column">
<div class="content">

<h3>Veg Manchurian Dry</h3>
<p>Veg Manchurian is a tasty Indo Chinese dish.Veg
manchurian gravy recipe has a sauce or gravy in
which the fried veggies balls are tossed and
dunked.</p>
<h2>₹150
<button class="button"
onclick="myButton_onclick()">ORDER</button>
</div>
</div>
</div>
</body>

```

</html>

Output:

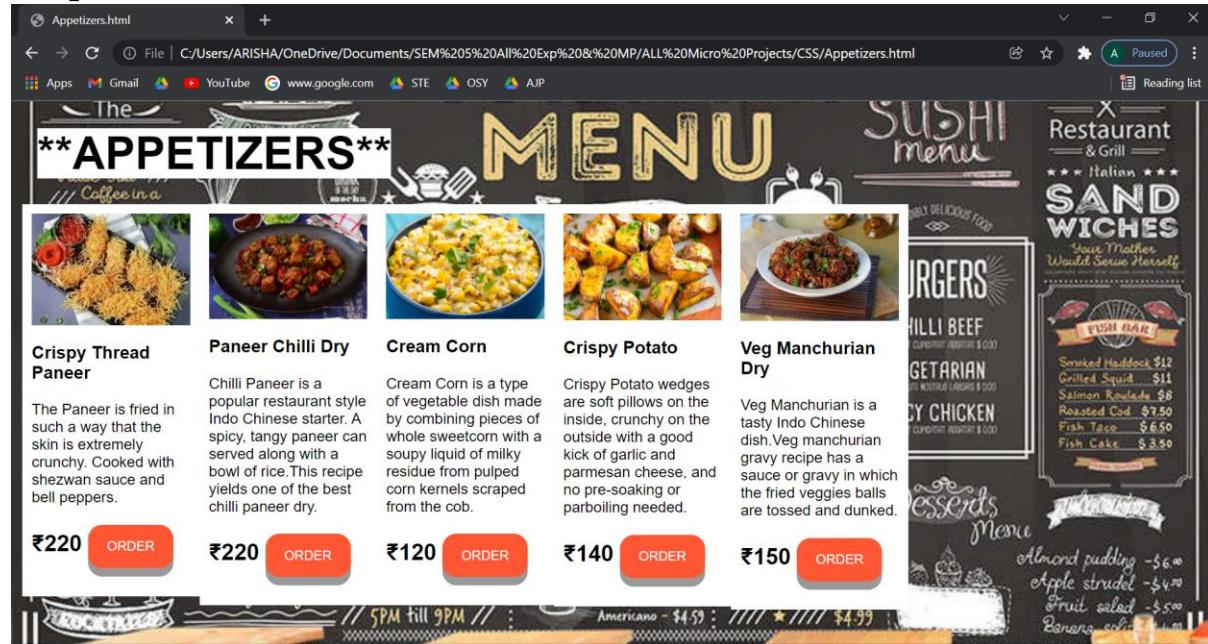

Fried Rice:**Code:**

```
<html>
    <head>
        <style>
            * {
                box-sizing: border-box;
            }

            body {
                background-image: url("BG.jpg");
                background-size: cover;
                background-color: #f1f1f1;
                padding: 20px;
                font-family: Arial;
            }

            .row {
                margin: 8px -16px;
            }

            /* Create four equal columns that floats next to each other */
            .column {
                float: left;
                width: 15%;
            }

            /* Content */
            .content {
                background-color: white;
                padding: 10px;
            }

            .button {
                padding: 15px 20px;
                font-size: 14px;
                text-align: center;
                cursor: pointer;
                color: #ffffff;
                background-color: #FF5733;
                border: none;
                border-radius: 15px;
                box-shadow: 0 9px #999;
            }

            .button:hover {
                background-color: #3e8e41
            }

            mark {
                background-color: white;
```

```

        color: black;
    }

```

}

</style>

</head>

<script>

```

        function myButton_onclick()
    {
        window.open("ORDER.html");
    }

```

</script>

<body>

<div class="main">

<mark>**FRIED RICE**</mark>

<div class="row">

<div class="column">

<div class="content">

Veg Fried Rice

Fried rice is a dish of cooked rice that has been stir-fried in a wok or a frying pan and is usually mixed with other ingredients such as eggs, vegetables, seafood, or meat.</p><h2>₹250

<button class="button" onclick="myButton_onclick()">ORDER</button>

</div>

</div>

<div class="column">

<div class="content">

Chicken Fried Rice

chicken rice is a dish of chicken and seasoned rice, served with chilli sauce and usually with cucumber garnishes. It is one of the national dishes of Singapore.</p><h2>₹270

<button class="button" onclick="myButton_onclick()">ORDER</button>

</div>

</div>

<div class="column">

<div class="content">

Veg Schezwan Fried Rice

Szechwan fried rice is a spicy stir-fried rice from Sichuan which uses doubanjiang chili sauce with garlic, green onions, and red onion. It is a spicy dish.</p><h2>₹260

```

                <button class="button"
onclick="myButton_onclick()">ORDER</button>
            </div>
        </div>

        <div class="column">
            <div class="content">
                
                    <h3>chicken schezwan fried Rice</h3>
                    <p>Chicken schezwan Fried Rice has bold flavours,
particularly the pungency and spiciness of garlic and chili peppers. It is a spicy dish.</p><h2>₹280
                    <button class="button"
onclick="myButton_onclick()">ORDER</button>


                </div>
            </div>
            <div class="column">
                <div class="content">
                    
                        <h3>Veg Triple Fried Rice</h3>
                        <p>Veg Triple Fried Rice is a Indo-Chinese dish and is a
combination of noodles and rice made with vegetables in spicy sauce and served with shezwan
gravy.</p><h2>₹290
                        <button class="button"
onclick="myButton_onclick()">ORDER</button>

                    </div>
                </div>
                <div class="column">
                    <div class="content">
                        
                            <h3>Chicken Triple Fried Rice</h3>
                            <p>Chicken Triple Fried Rice .... The word “triple” is used
as this recipe uses three main ingredients- rice, noodles and gravy is chicken gravy.</p><h2>₹300
                            <button class="button"
onclick="myButton_onclick()">ORDER</button>

                    </div>
                </div>
            </div>
        </body>
    </html>

```

Output:

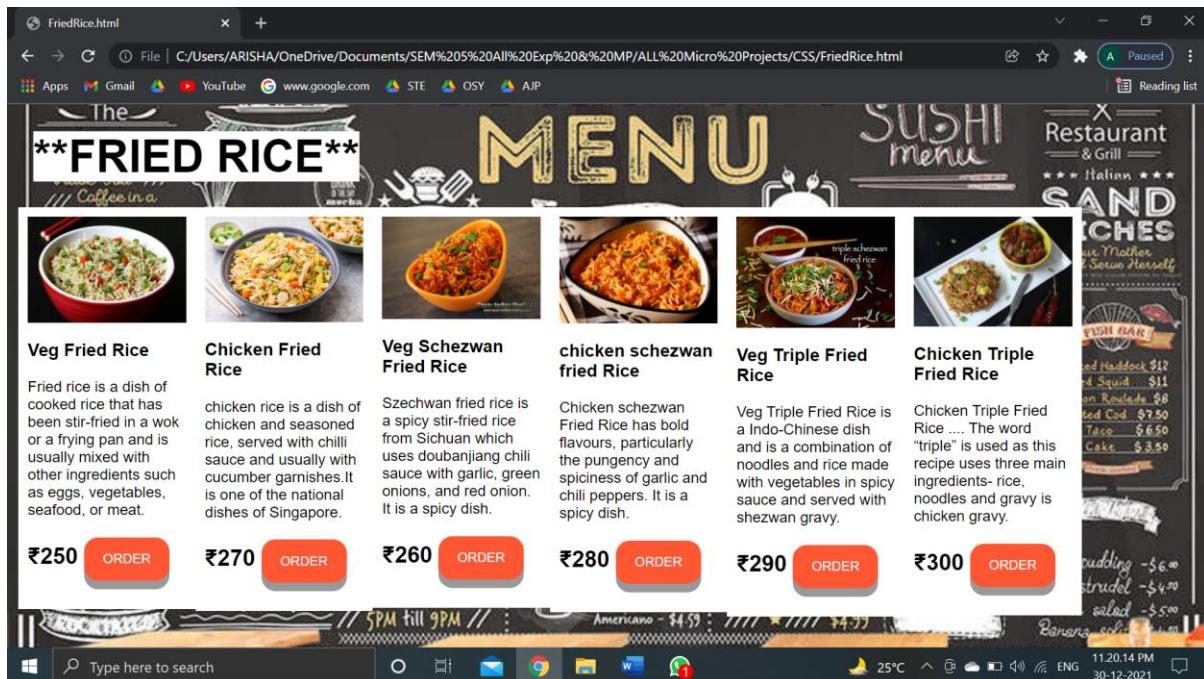

Noodles:

Code:

```
<html>
    <head>
        <style>
            * {
                box-sizing: border-box;
            }

            body {
                background-image: url("BG.jpg");
                background-size: cover;
                background-color: #f1f1f1;
                padding: 20px;
                font-family: Arial;
            }

            .row {
                margin: 8px -16px;
            }

            /* Create four equal columns that floats next to each other */
            .column {
                float: left;
                width: 15%;
            }
        </style>
    </head>
    <body>
        <div class="row">
            <div class="column">
                <h3>Noodles</h3>
                <p>Explore our delicious range of noodles, from classic to fusion, served with various toppings and sauces. Perfect for a quick meal or a satisfying dinner. Choose from our menu below and place your order now!</p>
            </div>
            <div class="column">
                <img alt="A bowl of ramen with chopsticks." data-bbox="114 110 230 200"/>
                <h4>Ramen</h4>
                <p>Our signature ramen dish, featuring a rich, flavorful broth and soft,弹牙的 noodles. Topped with a variety of toppings like sliced meat, vegetables, and seaweed. Served with a side of miso soup and a choice of dipping sauce. Price: ₹250</p>
            </div>
            <div class="column">
                <img alt="A bowl of spaghetti carbonara." data-bbox="230 110 346 200"/>
                <h4>Spaghetti Carbonara</h4>
                <p>A classic Italian dish made with spaghetti, eggs, cheese, and pancetta. Served with a side of garlic bread. Price: ₹270</p>
            </div>
            <div class="column">
                <img alt="A bowl of lo mein." data-bbox="346 110 462 200"/>
                <h4>Lo Mein</h4>
                <p>A Chinese noodle dish made with flat rice noodles, stir-fried with vegetables and meat. Served with a choice of sauce. Price: ₹260</p>
            </div>
            <div class="column">
                <img alt="A bowl of udon." data-bbox="462 110 578 200"/>
                <h4>Udon Noodles</h4>
                <p>A Japanese noodle dish made with thick, chewy udon noodles, served with a choice of broth and toppings. Price: ₹280</p>
            </div>
            <div class="column">
                <img alt="A bowl of mala noodles." data-bbox="578 110 694 200"/>
                <h4>Mala Noodles</h4>
                <p>A spicy Chinese noodle dish made with thin rice noodles, served with a spicy mala broth and toppings. Price: ₹290</p>
            </div>
            <div class="column">
                <img alt="A bowl of ramen with meat and vegetables." data-bbox="694 110 810 200"/>
                <h4>Meat Ramen</h4>
                <p>Our meaty ramen dish, featuring a rich, flavorful broth and soft,弹牙的 noodles. Topped with sliced meat, vegetables, and seaweed. Served with a side of miso soup and a choice of dipping sauce. Price: ₹300</p>
            </div>
        </div>
    </body>

```

```

/* Content */
.content {
    background-color: white;
    padding: 10px;
}
.button {
    padding: 15px 20px;
    font-size: 14px;
    text-align: center;
    cursor: pointer;
    color: #ffffff;
    background-color: #FF5733;
    border: none;
    border-radius: 15px;
    box-shadow: 0 9px #999;
}
.button:hover {
    background-color: #3e8e41
}
mark {
    background-color: white;
    color: black;
}

```

</style>

</head>

<script>

```

function myButton_onclick()
{
    window.open("ORDER.html");
}

```

</script>

<body>

<div class="main">

<mark>**NOODLES**</mark>

<div class="row">

<div class="column">

<div class="content">

<h3>Veg Hakka Noodles</h3>

<p>Hakka noodles is a Chinese preparation where boiled

noodles are stir fried with sauce and vegetables. A hakka noodle is made from unleaved

dough.</p><h2>₹180

<button class="button"

onclick="myButton_onclick()">ORDER</button>

</div>

</div>

```

<div class="column">
    <div class="content">
        
        <h3>Chicken Hakka Noodles</h3>
        <p>A Delicious hakka noodles topped with FRESH CHICKEN  

seasoning with spices, sauces and garnished with spring onion and garlic.</p><h2>₹200
        <button class="button"
onclick="myButton_onclick()">ORDER</button>
    </div>
</div>

<div class="column">
    <div class="content">
        
        <h3>Veg Schezwan Noodles</h3>
        <p>Szechwan noodles is a spicy stir-fried noodles from  

Sichuan which uses doubanjiang chilli sauce with garlic, green onions, and red onion. It is a spicy  

dish.</p><h2>₹260
        <button class="button"
onclick="myButton_onclick()">ORDER</button>
    </div>
</div>

<div class="column">
    <div class="content">
        
        <h3>Chicken schezwan Noodles</h3>
        <p>Chicken schezwan Noodles has bold flavours,  

particularly the pungency and spiciness of garlic and chilli peppers. It is a spicy dish.</p><h2>₹280
        <button class="button"
onclick="myButton_onclick()">ORDER</button>
    </div>
</div>
<div class="column">
    <div class="content">
        
        <h3>Veg Manchurian Noodles</h3>
        <p>Veg Manchurian is a class of Indo-chinese dishes  

made by deep-frying ingredient such as chicken, paneer, and flavored with soy sauce.</p><h2>₹290
        <button class="button"
onclick="myButton_onclick()">ORDER</button>
    </div>
</div>
<div class="column">
    <div class="content">


```

```

        
        <h3>Veg Stewed Noodles</h3>
        <p>Veg Stewed Noodles is a flavour combined of veggies
cooked with noodles in a tangy and wholesome sauce of vegetable stock and soya
sauce.</p><h2>₹300
        <button class="button"
        onclick="myButton_onclick()">ORDER</button>
        </div>
        </div>
        </div>
    </body>
</html>

```

Output:

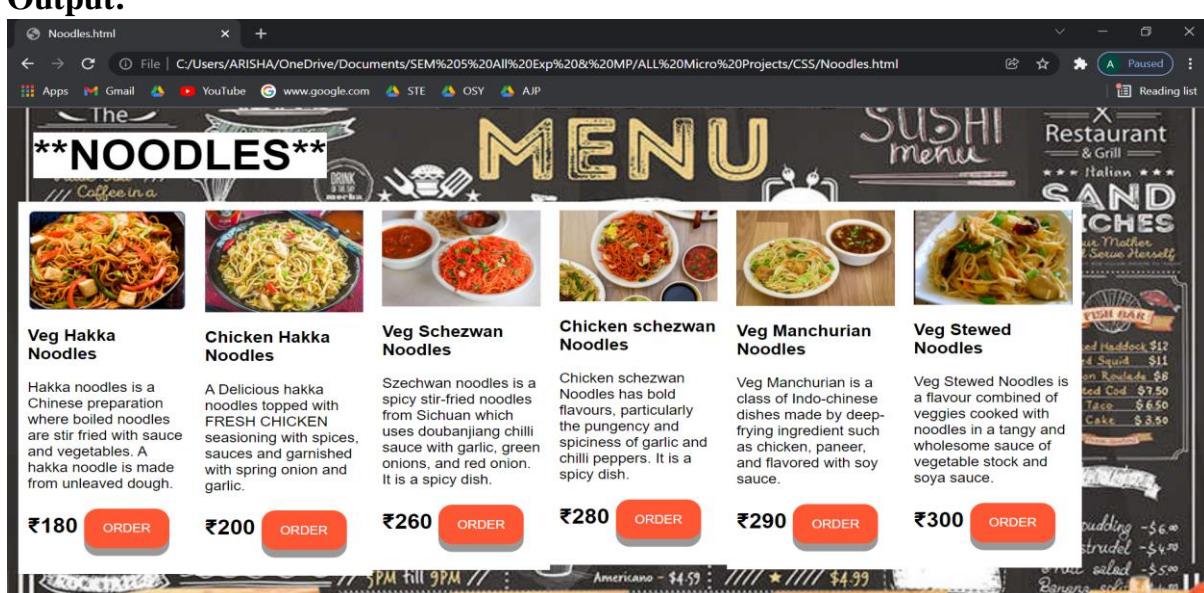

Snacks:

Code:

```

<html>
    <head>
        <style>
            * {
                box-sizing: border-box;
            }
            body {
                background-image: url("BG.jpg");
                background-size: cover;
                background-color: #f1f1f1;
                padding: 20px;
                font-family: Arial;
            }
        </style>
    </head>
    <body>
        <h1>The NOODLES</h1>
        <h2>SUSHI menu</h2>
        <h2>Restaurant & Grill</h2>
        <h2>SANDWICHES</h2>
        <h2>NOODLES</h2>
        <div>
            <h3>Veg Hakka Noodles</h3>
            <p>Hakka noodles is a Chinese preparation where boiled noodles are stir fried with sauce and vegetables. A hakka noodle is made from unleavened dough.</p>
            <img alt="Veg Hakka Noodles" data-bbox="135 415 230 460"/>
            ₹180 <button>ORDER</button>
            <h3>Chicken Hakka Noodles</h3>
            <p>A Delicious hakka noodles topped with FRESH CHICKEN seasoning with spices, sauces and garnished with spring onion and garlic.</p>
            <img alt="Chicken Hakka Noodles" data-bbox="240 415 335 460"/>
            ₹200 <button>ORDER</button>
            <h3>Veg Schezwan Noodles</h3>
            <p>Szechwan noodles is a spicy stir-fried noodles from Sichuan which uses doubanjiang chilli sauce with garlic, green onions, and red onion. It is a spicy dish.</p>
            <img alt="Veg Schezwan Noodles" data-bbox="350 415 445 460"/>
            ₹260 <button>ORDER</button>
            <h3>Chicken schezwan Noodles</h3>
            <p>Chicken schezwan Noodles has bold flavours, particularly the pungency and spiciness of garlic and chilli peppers. It is a spicy dish.</p>
            <img alt="Chicken schezwan Noodles" data-bbox="460 415 555 460"/>
            ₹280 <button>ORDER</button>
            <h3>Veg Manchurian Noodles</h3>
            <p>Veg Manchurian is a class of Indo-chinese dishes made by deep-frying ingredient such as chicken, paneer, and flavored with soy sauce.</p>
            <img alt="Veg Manchurian Noodles" data-bbox="570 415 665 460"/>
            ₹290 <button>ORDER</button>
            <h3>Veg Stewed Noodles</h3>
            <p>Veg Stewed Noodles is a flavour combined of veggies cooked with noodles in a tangy and wholesome sauce of vegetable stock and soya sauce.</p>
            <img alt="Veg Stewed Noodles" data-bbox="680 415 775 460"/>
            ₹300 <button>ORDER</button>
        </div>
    </body>
</html>

```

```
.row {
    margin: 8px -16px;
}

/* Create four equal columns that floats next to each other */
.column {
    float: left;
    width: 15%;
}

/* Content */
.content {
    background-color: white;
    padding: 10px;
}
.button {
    padding: 15px 20px;
    font-size: 14px;
    text-align: center;
    cursor: pointer;
    color: #ffffff;
    background-color: #FF5733;
    border: none;
    border-radius: 15px;
    box-shadow: 0 9px #999;
}
.button:hover {
    background-color: #3e8e41
}
mark {
    background-color: white;
    color: black;
}
</style>
</head>
<script>
    function myButton_onclick()
    {
        window.open("ORDER.html");
    }
</script>
<body>

<div class="main">
    <font size = "+4"><b><mark>**SNACKS**</mark></b></font><br><br>
    <div class="row">
        <div class="column">
            <div class="content">
```

```

        
            <h3>Vegetable Spring Roll</h3>
            <p>Spring rolls are a large variety of filled, rolled
appetizers found in East Asian, Southeast Asian cuisine. The kind of wrapper, fillings, and cooking
technique.</p><h2>₹120
                <button class="button"
onclick="myButton_onclick()">ORDER</button>
            </div>
        </div>

        <div class="column">
            <div class="content">
                
                <h3>French Fries</h3>
                <p>Classic Crinkle Cut fries lightly salted and served with
ketchup. It is made with fresh potaoes and potato fingers are deep fried in oil until golden brown
and crispy.</p><h2>₹80
                    <button class="button"
onclick="myButton_onclick()">ORDER</button>
                </div>
            </div>

            <div class="column">
                <div class="content">
                    
                    <h3>Mexican Nachos</h3>
                    <p>Nachos are a Mexican regional dish that consists of
heated tortilla chips or totopos covered with melted cheese, often served as a snack. It is loaded
with veggies</p><h2>₹160
                        <button class="button"
onclick="myButton_onclick()">ORDER</button>
                    </div>
                </div>

                <div class="column">
                    <div class="content">
                        
                        <h3>Chicken Popcorn</h3>
                        <p>Chicken Popcorn is marinated for a tender inside and
breaded for a flavorful, fun crunch on the outside. The Pieces of chicken to male popcorn are taken
from chicken breast.</p><h2>₹180
                            <button class="button"
onclick="myButton_onclick()">ORDER</button>
                        </div>
                    </div>


```

```

<div class="column">
    <div class="content">
        
        <h3>Veg Paneer Wrap</h3>
        <p>A wrap is a food dish made with a soft flatbread rolled around a filling. The filling may include shreds of lettuce, diced tomato, grilled onions, cheese, a sauce and paneer.</p><h2>₹150</h2>
        <button class="button" onclick="myButton_onclick()">ORDER</button>
    </div>
</div>
</body>
</html>

```

Output:

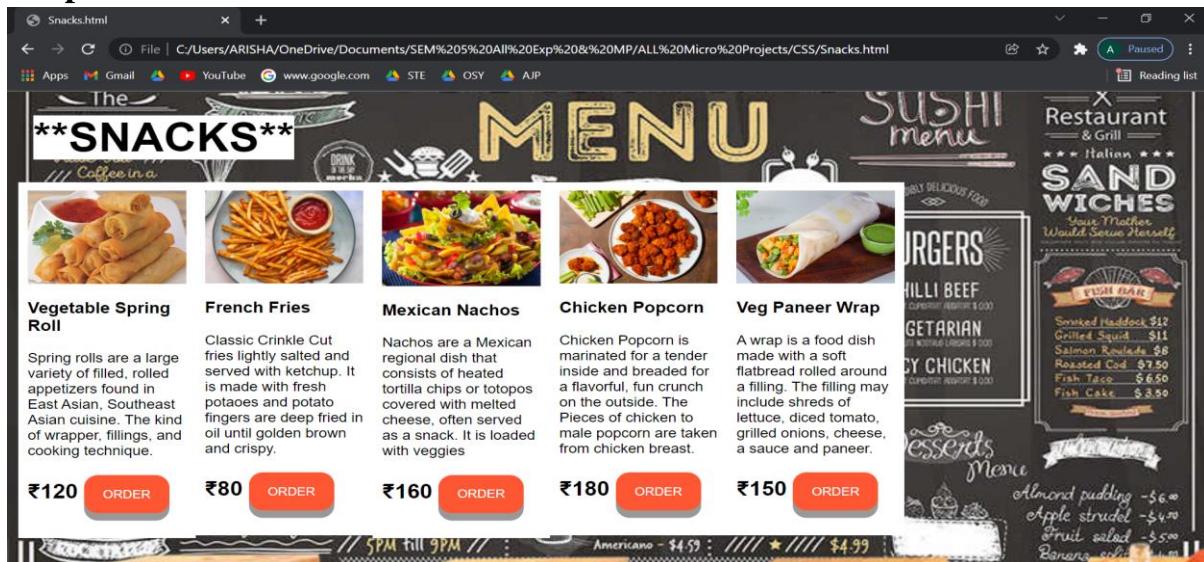

Pizza:

Code:

```
<html>
```

```

<head>
<style>
* {
    box-sizing: border-box;
}

body {
    background-image: url("BG.jpg");
    background-size: cover;
    background-color: #f1f1f1;
    padding: 20px;
    font-family: Arial;
}

```

```

.row {
    margin: 8px -16px;
}

/* Create four equal columns that floats next to each other */
.column {
    float: left;
    width: 15%;
}

/* Content */
.content {
    background-color: white;
    padding: 10px;
}
.button {
    padding: 15px 20px;
    font-size: 14px;
    text-align: center;
    cursor: pointer;
    color: #ffffff;
    background-color: #FF5733;
    border: none;
    border-radius: 15px;
    box-shadow: 0 9px #999;
}
.button:hover {
    background-color: #3e8e41
}
mark {
    background-color: white;
    color: black;
}
</style>
</head>
<script>
    function myButton_onclick()
    {
        window.open("ORDER.html");
    }
</script>
<body>

<div class="main">
<font size = "+4"><b><mark>**PIZZA**</mark></b></font><br><br>
<div class="row">
    <div class="column">

```

```

<div class="content">
    
    <h3>Margherita Pizza</h3>
    <p>Pizza Margherita is a typical Neapolitan pizza, made
with San Marzano tomatoes, mozzarella cheese, fresh basil, salt, and extra-virgin olive
oil.</p><h2>₹150
        <button class="button"
onclick="myButton_onclick()">ORDER</button>
    </div>
</div>

<div class="column">
    <div class="content">
        
        <h3>Cheese N Corn Pizza</h3>
        <p>Sweet and juicy American golden corn & real mozzarella
cheese on a cheesy base is a very sweet delectable combination.</p><h2>₹200
            <button class="button"
onclick="myButton_onclick()">ORDER</button>

        </div>
    </div>

    <div class="column">
        <div class="content">
            
            <h3>Farm House Pizza</h3>
            <p>Farm house Pizza is filled with exotic vegetables like Red,
Yellow, Green Capsicum, Olive, Jalapeno and and topped with cheese.</p><h2>₹320
                <button class="button"
onclick="myButton_onclick()">ORDER</button>
            </div>
        </div>

        <div class="column">
            <div class="content">
                
                <h3>Pappy Paneer Pizza</h3>
                <p>Pappy Paneer Pizza is loaded with Chunky Paneer, Spicy
Red Pepper and Crispy Capsicum. The panner used is Fresh and soft.</p><h2>₹300
                    <button class="button"
onclick="myButton_onclick()">ORDER</button>

                </div>
            </div>
        <div class="column">


```

```

<div class="content">
    
    <h3>Extra Vaganza Pizza</h3>
    <p>Extra Vaganza Pizza is loaded with Black Olives, Capsicum, mushroom, corn, onion, tomato and extra Cheese.</p><h2>₹350</h2>
    <button class="button" onclick="myButton_onclick()">ORDER</button>
</div>
</div>
</div>
</body>
</html>

```

Output:

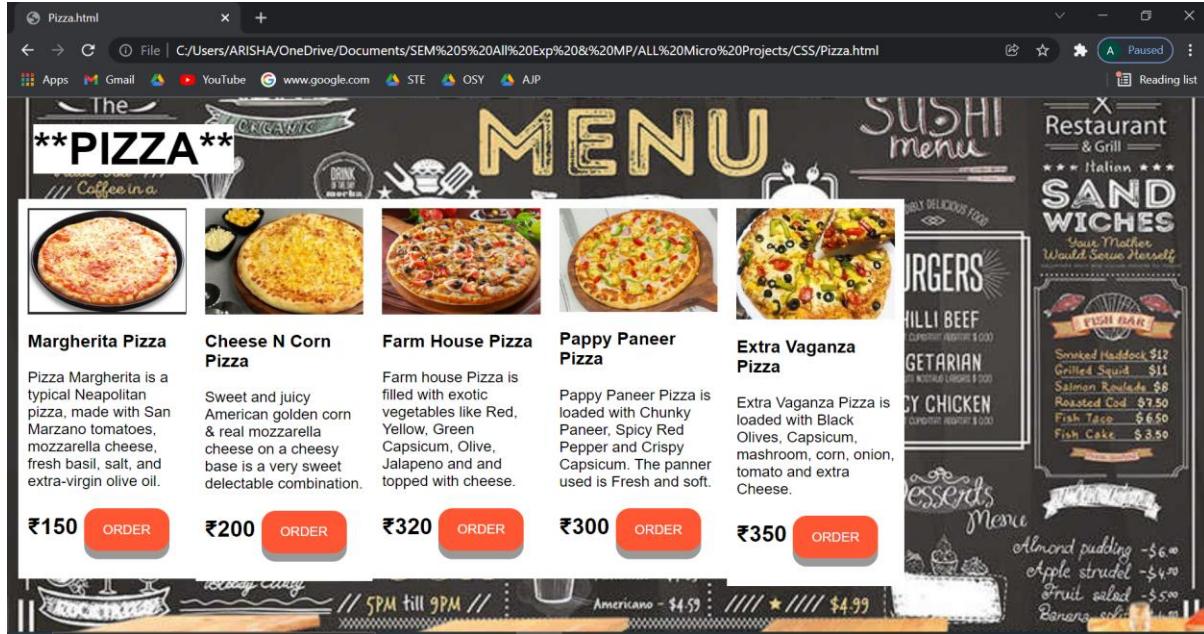

Burgers:

Code:

```

<html>
    <head>
        <style>
            * {
                box-sizing: border-box;
            }
            body {
                background-image: url("BG.jpg");
                background-size: cover;
                padding: 20px;
                font-family: Arial;
            }
        </style>
    </head>
    <body>
        // Content of the page goes here //
    </body>
</html>

```

```

.row {
    margin: 8px -16px;
}

/* Create four equal columns that floats next to each other */
.column {
    float: left;
    width: 15%;
}

/* Content */
.content {
    background-color: white;
    padding: 10px;
}
.button {
    padding: 15px 20px;
    font-size: 14px;
    text-align: center;
    cursor: pointer;
    color: #ffffff;
    background-color: #FF5733;
    border: none;
    border-radius: 15px;
    box-shadow: 0 9px #999;
}
.button:hover {
    background-color: #3e8e41
}
mark {
    background-color: white;
    color: black;
}
</style>
</head>
<script>
    function myButton_onclick()
    {
        window.open("ORDER.html");
    }
</script>
<body>

<div class="main">
<font size = "+4"><b><mark>**BURGERS**</mark></b></font><br><br>
    <div class="row">
        <div class="column">

```

```
<div class="content">
    
    <h3>Aloo Tikki Burger</h3>
    <p>The world's favorite Indian burger! Crunchy potato
and peas patty topped with veg sauce, ketchup, tomatoes and onions.</p><h2>₹105
    <button class="button"
onclick="myButton_onclick()">ORDER</button>
</div>
</div>

<div class="column">
    <div class="content">
        
        <h3>Chicken Burger</h3>
        <p>Tender and juicy chicken patty coated in spicy, crispy
batter topped with a creamy sauce and crispy shredded lettuce.</p><h2>₹140
        <button class="button"
onclick="myButton_onclick()">ORDER</button>

    </div>
</div>

<div class="column">
    <div class="content">
        
        <h3>Zinger Burger</h3>
        <p>Signature chicken burger made with a crunchy chicken
fillet patty, veggies & a delicious mayonnaise sauce.</p><h2>₹150
        <button class="button"
onclick="myButton_onclick()">ORDER</button>
    </div>
</div>

<div class="column">
    <div class="content">
        
        <h3>Paneer Burger</h3>
        <p>Cottage cheese patty coated in spicy, crispy batter
topped with a creamy sauce and crispy shredded lettuce.</p><h2>₹180
        <button class="button"
onclick="myButton_onclick()">ORDER</button>

    </div>
</div>
<div class="column">
    <div class="content">
        
        <h3>Mexican Burger</h3>
```

```

        <p>A fusion of international taste combined with a patty  

mostly aloo tikki, layered with onion, jalapeno, served with Chipotle sauce.</p><h2>₹115  

<button class="button"  

onclick="myButton_onclick()">ORDER</button>  

        </div>  

        </div>  

        </div>  


        </div>  

</body>  

</html>

```

Output:

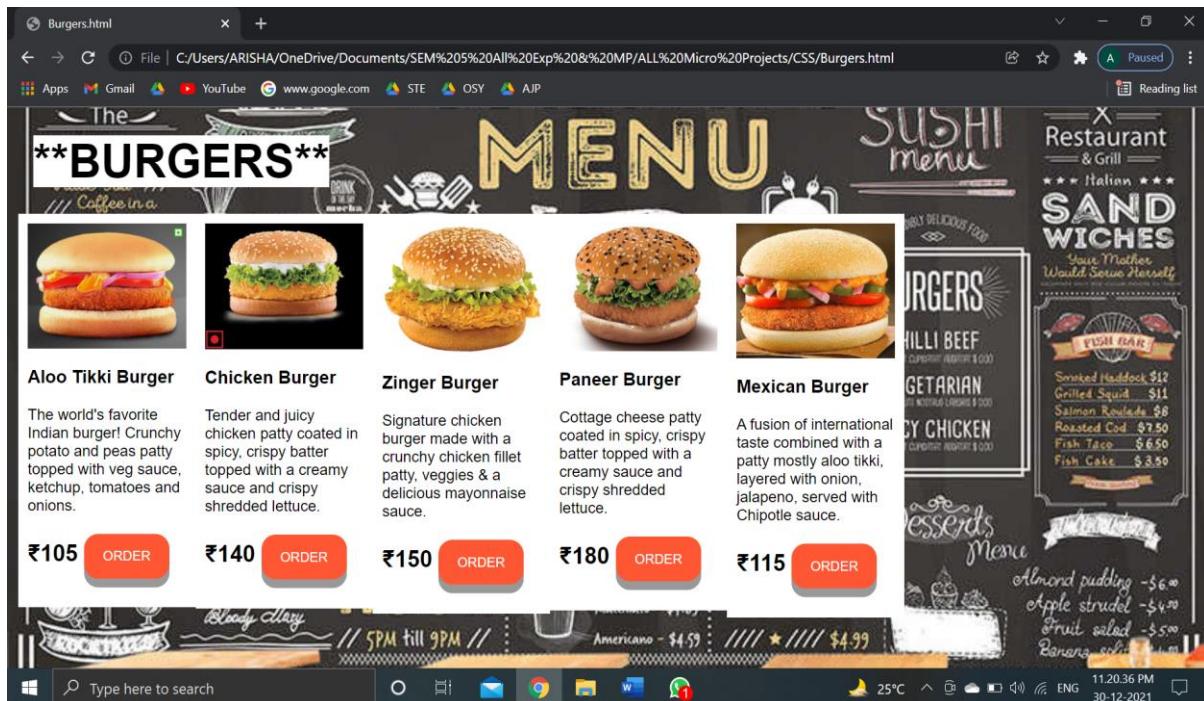

Beverages:

Code:

```

<html>  

    <head>  

        <style>  

            * {  

                box-sizing: border-box;  

            }  

            body {  

                background-image: url("BG.jpg");  

                background-size: cover;  

                background-color: #f1f1f1;  

                padding: 20px;  

                font-family: Arial;

```

```

        }

    .row {
        margin: 8px -16px;
    }

/* Create four equal columns that floats next to each other */
.column {
    float: left;
    width: 15%;
}

/* Content */
.content {
    background-color: white;
    padding: 10px;
}

.button {
    padding: 15px 20px;
    font-size: 14px;
    text-align: center;
    cursor: pointer;
    color: #ffffff;
    background-color: #FF5733;
    border: none;
    border-radius: 15px;
    box-shadow: 0 9px #999;
}
.button:hover {
    background-color: #3e8e41
}

mark {
    background-color: white;
    color: black;
}


```

</style>

</head>

<script>

```

        function myButton_onclick()
        {
            window.open("ORDER.html");
        }

```

</script>

<body>

<div class="main">

<mark>**BEVERAGES**</mark>

<div class="row">

```
<div class="column">
    <div class="content">
        
        <h3>Coffee</h3>
        <p>Experience the taste of authentic filter coffee at ever
sip.</p><h2>₹70
        <button class="button"
onclick="myButton_onclick()">ORDER</button>
    </div>
</div>

<div class="column">
    <div class="content">
        
        <h3>Cappuccino</h3>
        <p>Espresso with equal parts hot milk and steamed micro
foam.</p><h2>₹120
        <button class="button"
onclick="myButton_onclick()">ORDER</button>
    </div>
</div>

<div class="column">
    <div class="content">
        
        <h3>Mojito</h3>
        <p>Mojito is a refreshing cocktail that contains Lemon and
mint.</p><h2>₹80
        <button class="button"
onclick="myButton_onclick()">ORDER</button>
    </div>
</div>

<div class="column">
    <div class="content">
        
        <h3>Orange Mojito</h3>
        <p>Mojito is a refreshing cocktail that contains Orange and
mint.</p><h2>₹120
        <button class="button"
onclick="myButton_onclick()">ORDER</button>
    </div>
</div>
<div class="column">
```

```


<div class="content">
    
    <h3>Strawberry Juice</h3>
    <p>Strawberry Juice is a refreshing fresh fruit
juice.</p><h2>₹140
    <button class="button"
onclick="myButton_onclick()">ORDER</button>

    </div>
</div>
<div class="column">
    <div class="content">
        
        <h3>Mango Juice</h3>
        <p>This mango juice is slightly sweet, slightly
tangy.</p><h2>₹150
        <button class="button"
onclick="myButton_onclick()">ORDER</button>

    </div>
</div>
</div>
</body>
</html>

```

Output:

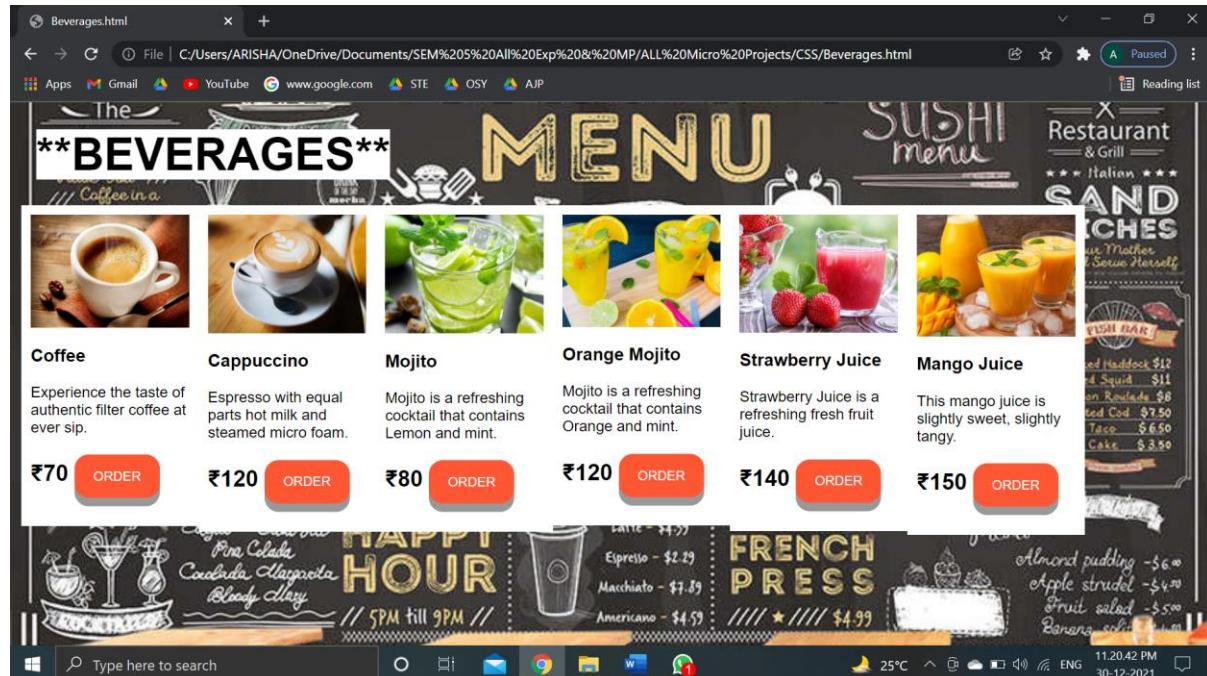

Desserts:**Code:**

```
<html>
    <head>
        <style>
            * {
                box-sizing: border-box;
            }

            body {
                background-image: url("BG.jpg");
                background-size: cover;
                background-color: #f1f1f1;
                padding: 20px;
                font-family: Arial;
            }

            .row {
                margin: 8px -16px;
            }

            /* Create four equal columns that floats next to each other */
            .column {
                float: left;
                width: 15%;
            }

            /* Content */
            .content {
                background-color: white;
                padding: 10px;
            }

            .button {
                padding: 15px 20px;
                font-size: 14px;
                text-align: center;
                cursor: pointer;
                color: #ffffff;
                background-color: #FF5733;
                border: none;
                border-radius: 15px;
                box-shadow: 0 9px #999;
            }

            .button:hover {
                background-color: #3e8e41
            }

            mark {
                background-color: white;
```

```

        color: black;
    }

```

}

</style>

</head>

<script>

```

        function myButton_onclick()
    {
        window.open("ORDER.html");
    }

```

</script>

<body>

<div class="main">

<mark>**DESSERTS**</mark>

<div class="row">

<div class="column">

<div class="content">

<h3>Chocolate Mousse</h3>

<p>Creamy chocolate mousse layered with moist

chocolate cake.</p><h2>₹90

<button class="button"

onclick="myButton_onclick()">ORDER</button>

</div>

</div>

<div class="column">

<div class="content">

<h3>Caramel Custard</h3>

<p>Heavenly delightful pudding made with milk and vanilla

cream.</p><h2>₹60

<button class="button"

onclick="myButton_onclick()">ORDER</button>

</div>

</div>

<div class="column">

<div class="content">

<h3>Walnut Brownie</h3>

<p>Heavily loaded with dark chocolate and

walnut.</p><h2>₹80

<button class="button"

onclick="myButton_onclick()">ORDER</button>

</div>

</div>


```
<div class="column">
    <div class="content">
        
        <h3>Cheesecake</h3>
        <p>Baked cheese cake with cracker base and cream
cheese.</p><h2>₹180
        <button class="button"
        onclick="myButton_onclick()">ORDER</button>

    </div>
</div>
<div class="column">
    <div class="content">
        
        <h3>Fruit Salad Cream</h3>
        <p>Fruit salad that has fruits evenly cut into pieces & mix
in cream.</p><h2>₹120
        <button class="button"
        onclick="myButton_onclick()">ORDER</button>

    </div>
</div>
<div class="column">
    <div class="content">
        
        <h3>Matki Rabdi</h3>
        <p>A delight for the sweet toothed the rabdi served in
matki.</p><h2>₹135
        <button class="button"
        onclick="myButton_onclick()">ORDER</button>

    </div>
</div>
</div>
</body>
</html>
```

Output:

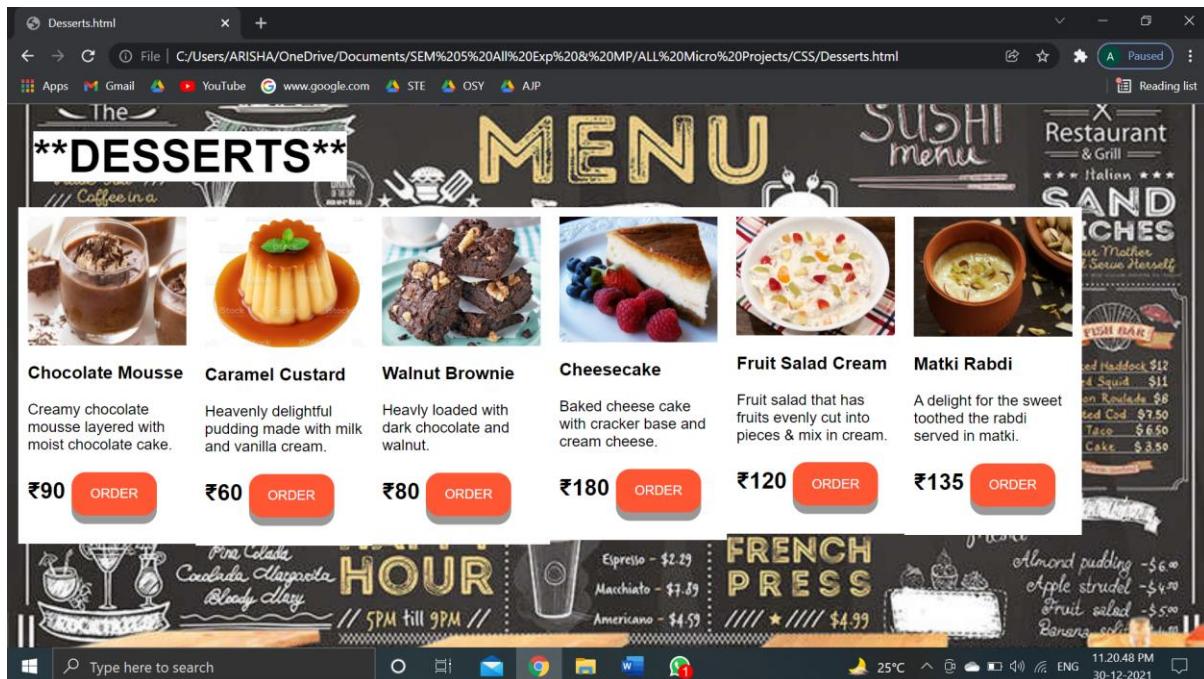

Order:

Code:

```
<html>
```

```
    <head>
```

```
        <title>Details</title>
```

```
        <style>
```

```
            body {
```

```
                background-image: url("order.jpg");
```

```
                background-size: cover;
```

```
                padding: 20px;
```

```
                font-family: Arial;
```

```
            }
```

```
.button {
```

```
    padding: 15px 20px;
```

```
    font-size: 15px;
```

```
    text-align: center;
```

```
    cursor: pointer;
```

```
    color: #ffffff;
```

```
    background-color: #FF5733;
```

```
    border: none;
```

```
    border-radius: 15px;
```

```
    box-shadow: 0 11px #999;
```

```
}
```

```
.button:hover {
```

```
background-color: #3e8e41
    }
</style>
<script>

function btnCheckForm_onclick()
{
    var myForm = document.form1;
    if(myForm.txtName.value == "" || myForm.txtPh.value == "" ||
myForm.email.value == "" || myForm.myTextArea.value == "" ||
myForm.txtCity.value == "" || myForm.txtPinCode.value == ""))
    {
        alert("Please complete all the form");
    }
    else
    {

        window.open("payment.html");
    }
}

function txtName_onblur()
{
    var txtName = document.form1.txtName.value;
    var b = /^[a-zA-Z]{1,}$/;
    if(b.test(txtName)==false)
    {
        alert("Please enter a valid Name");
    }
}

function txtPh_onblur()
{
    var txtPh = document.form1.txtPh.value;
    var a = /^[0-9]{10}$/;
    if(a.test(txtPh)==false)
    {
        alert("Please enter a valid Phone Number");
    }
}

function txtCity_onblur()
{
    var txtCity = document.form1.txtCity.value;
```

```

var c = /^[a-zA-Z]{1,}$/;
if(c.test(txtCity)==false)
{
    alert("Please enter a valid City");
}
}

function txtPinCode_onblur()
{
    var txtPinCode = document.form1.txtPinCode.value;
    var d = /^[0-9]{6}$/;
    if(d.test(txtPinCode)==false)
    {
        alert("Please enter a valid Pin Code");
    }
}

function validateEmail()
{
    var a=document.form1.email.value;
    if(a.indexOf('@') == -1 || a.indexOf('.com') == -1)
    {
        alert("Please Enter a Valid Email ID");
    }
}

</script>
</head>
<body>
<form name="form1">
<font size = "+2"><p style="color:white"><u>Please enter the
following details:</u></p></font>
<h4><p style="color:white">Name:<input type="text"
name="txtName" onblur="txtName_onblur()" size="15" /></p>
<p style="color:white">Phone Number:<input type="text"
name="txtPh" onblur="txtPh_onblur()" size="15" maxlength="10" /></p>
<p style="color:white">Email-ID:<input type="text"
name="email" onblur="validateEmail()"/></p>
<p style="color:white">Address: <textarea name="myTextArea"
cols="20" rows="3"></textarea>
<p style="color:white">City:<input type="text" name="txtCity"
onblur="txtCity_onblur()"/></p>
<p style="color:white">Pin-Code:<input type="text"
name="txtPinCode" onblur="txtPinCode_onblur()" size="8" maxlength="6"/></p>



```

```

<input type="button" class="button" value="PROCEED"
onclick="btnCheckForm_onclick()"/></h4>
</form>
</body>
</html>

```

Output:

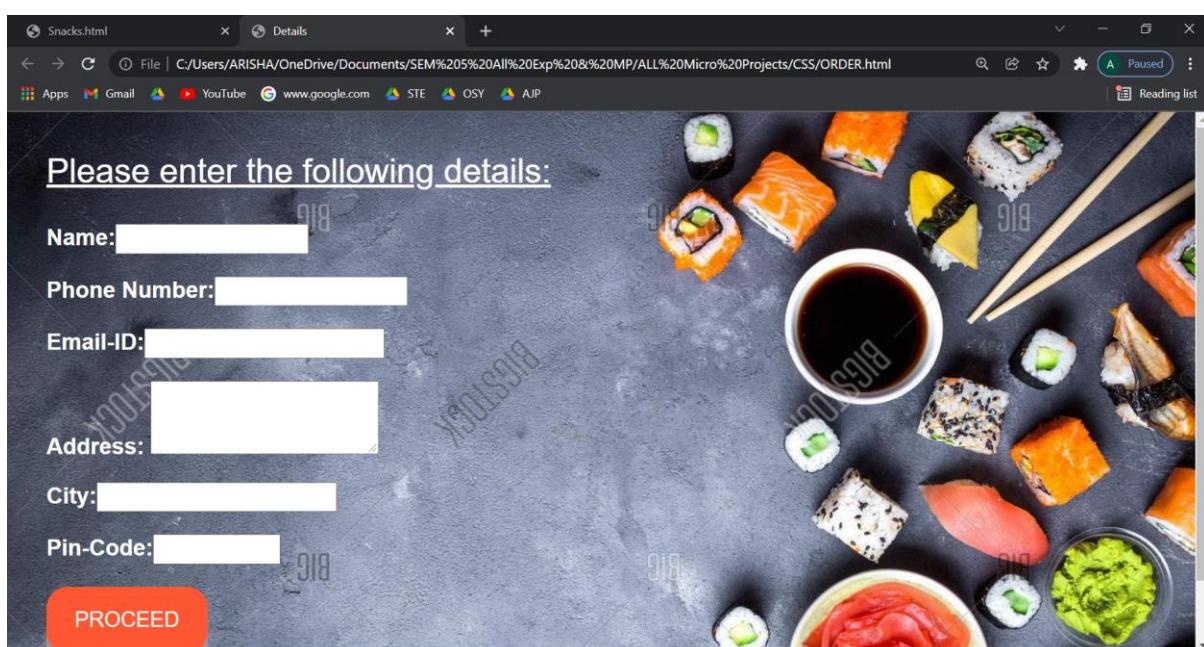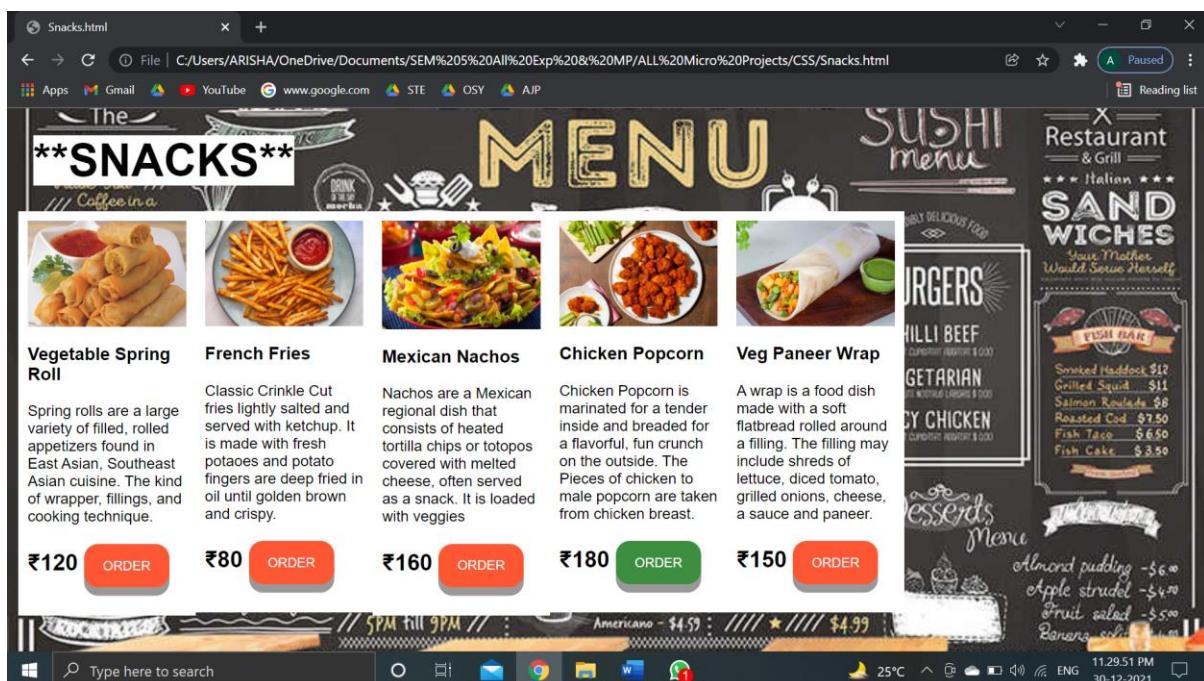

This page says
Please complete all the form

Please enter the following details:

Name:

Phone Number:

Email-ID:

Address:

City:

Pin-Code:

PROCEED

Please enter the following details:

Name: Arisha

Phone Number: 9173826148

Email-ID: aisharakhangi857@gmail.co

Abc, 123

Address:

City: Mumbai

Pin-Code: 400011

PROCEED

Payment:

Code:

<html>

```

<head>
    <title>Payment Details</title>
    <style>
        body {
            background-image: url("payment.jpg");
            background-size: cover;
            padding: 40px;
            font-family: Arial;
        }
        .button {
            padding: 15px 20px;
            font-size: 15px;
            text-align: center;
        }
    </style>

```

```

        cursor: pointer;
        color: #ffffff;
        background-color: #FF5733;
        border: none;
        border-radius: 15px;
        box-shadow: 0 11px #999;
    }
    .button:hover {
        background-color: #3e8e41
    }

```

</style>

<script>

```

function check() {
if(document.getElementById("COD").checked)
{
    window.open("COD.html");
}
else if(document.getElementById("UPI").checked)
{
    window.open("UPI.html");
}
else
{
    alert("Please select one option!!");
}
}

```

</script>

</head>

<body>

<p style="color:black"><u>Please Choose a Payment Method:</u></p>

<input type="radio" name="payment" id="COD" style="height:30px; width:50px; vertical-align: middle;">Cash on Delivery

<input type="radio" name="payment" id="UPI" style="height:30px; width:50px; vertical-align: middle;">UPI


<button class="button" onclick="check()">PROCEED</button>

</form>

</body>

</html>

Output:

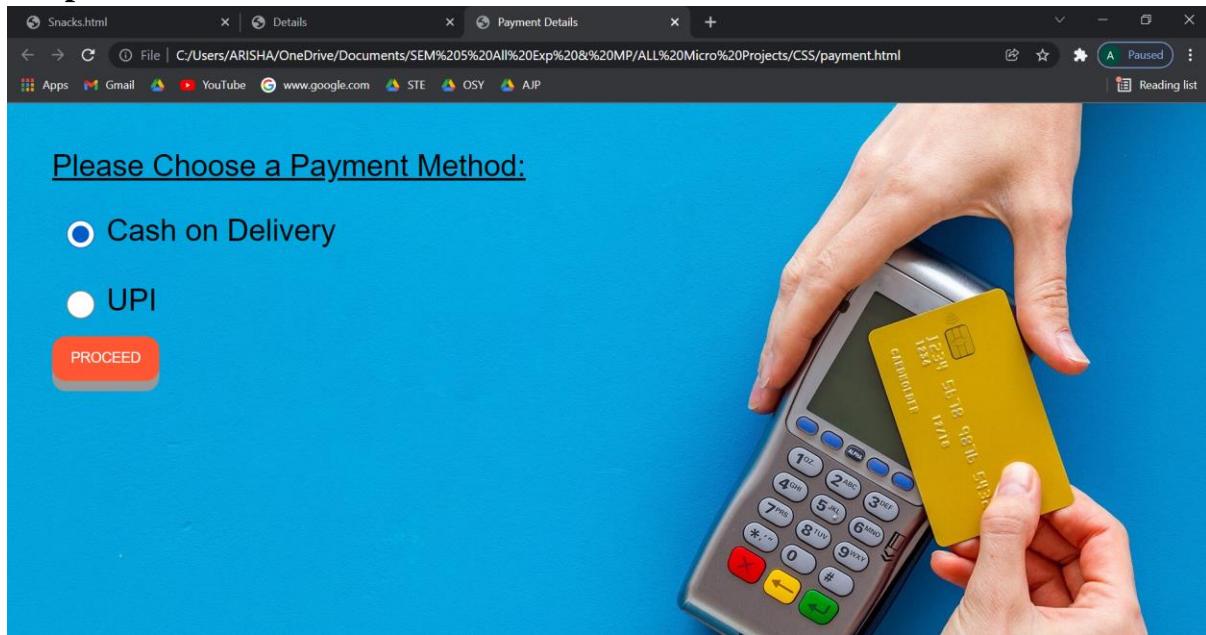

COD:

Code:

<html>

 <head>

 <title>COD</title>

 <style>

 body {

 background-image: url("done.jpg");

 background-size: cover;

 padding: 35px;

 font-family: Arial;

 }

 .center {

 margin: auto;

 width: 60%;

 }

 </style>

 </head>

 <body>

 <div class="center">


 <h1><p style="color: white">Your Order has been Successfully placed!!!!
</p></h1>

 </div>

 <h1><p style="color: white">
---->Thank you for ordering!!!

```
<br>---->Your order is confirmed  
<br>---->A confirmation message has been sent on your registered mobile number.  
<br>---->Your order will be delivered within 30 minutes.  
<br>---->For any query plz contact the restuarant.</p></h1>  
</body>  
</html>
```

Output:

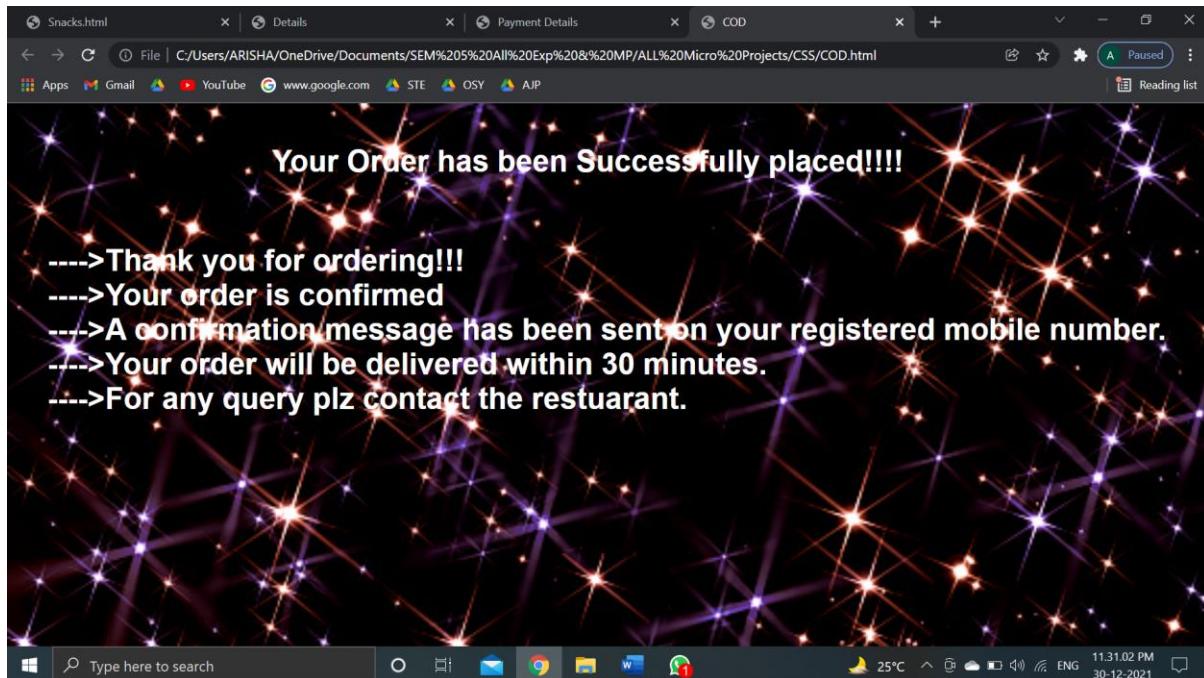

UPI:

Code:

```
<html>
```

```
    <head>
        <title>UPI</title>
        <style>
            body {
                background-image: url("UPI.jpg");
                background-size: cover;
                padding: 35px;
                font-family: Arial;
            }
        </style>
    </head>
```

```
.button {
    padding: 15px 20px;
    font-size: 15px;
    text-align: center;
    cursor: pointer;
```

```

        color: #ffffff;
        background-color: #FF5733;
        border: none;
        border-radius: 15px;
        box-shadow: 0 9px #999;
    }

.button:hover {
    background-color: #3e8e41
}
mark {
    background-color: black;
    color: white;
}
</style>
<script>
function upi_onblur()
{
    var upi = document.form1.upi.value;
    var a = /^[0-9]{6}$/;
    if(a.test(upi)==false)
    {
        alert("Please enter a valid UPI ID");
        upi.focus();
    }
}
function pw_onblur()
{
    var pw = document.form1.pw.value;
    var b = /^[0-9]{6}$/;
    if(b.test(pw)==false)
    {
        alert("Please enter a valid Password");
        pw.focus();
    }
}
function otp_onclick()
{
    var myForm = document.form1;
    if(myForm.upi.value == "" || myForm.pw.value == "")
    {
        alert("Please complete all the form");
    }
}




```


```

        else
        {
            alert("OTP has been send on your registered mobile
number");
        }
    }
    function OTP_onblur()
    {
        var OTP = document.form1.OTP.value;
        var c = /^[0-9]{6}$/;
        if(c.test(OTP)==false)
        {
            alert("Please enter a valid OTP");
        }
        else
        {
            window.open("completed.html");
        }
    }
</script>
</head>
<body>
    <form name="form1">
        <font size = "+4"><p style="color:black"><u><mark>Please
enter the following details:</mark></u></p></font>
        <h1><p style="color:black"><mark>Enter UPI
ID:</mark><input type="text" style="height:30px;font-size:20pt;" name="upi"
onblur="upi_onblur()" size="15" /></p>
        <p style="color:black"><mark>Enter Passsword:</mark><input
type="password" style="height:30px;font-size:20pt;" name="pw"
onblur="pw_onblur()" size="8" maxlength="6" /></p>
        <input type="button" class="button" value="OTP"
name="btnCheckForm" onclick="otp_onclick()"/>
        <p style="color:black"><mark>Enter OTP:</mark><input
type="text" style="height:30px;font-size:20pt;" name="OTP" onblur="OTP_onblur()"
size="8" maxlength="6" /></p>
        <button class="button"
onclick="btnCheckForm_onclick()">PAY</button></h1>
    </form>
</body>
</html>

```

Output:

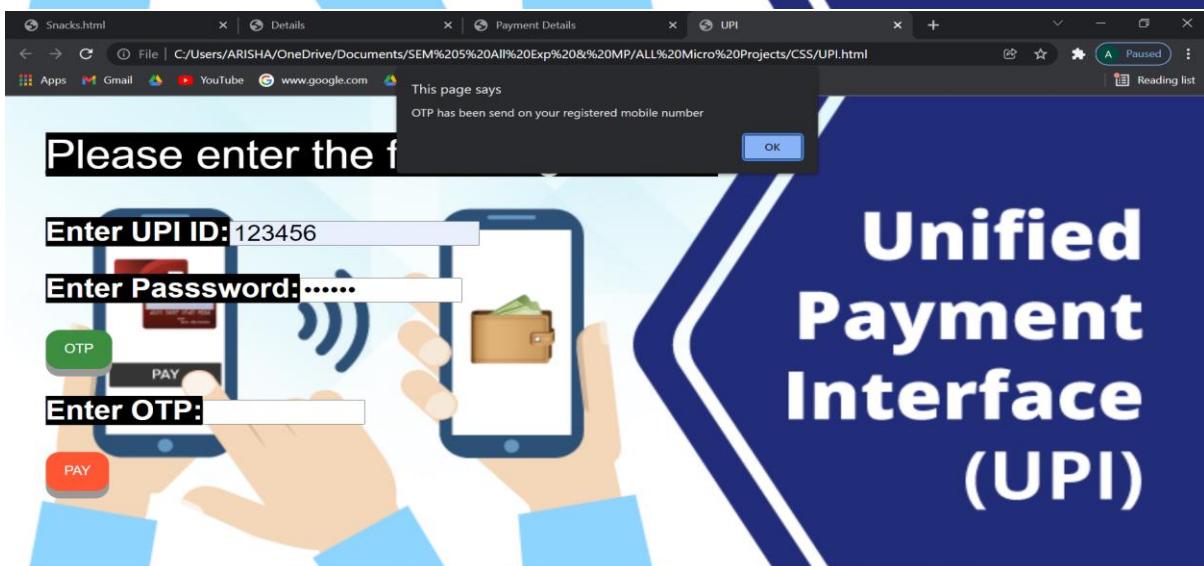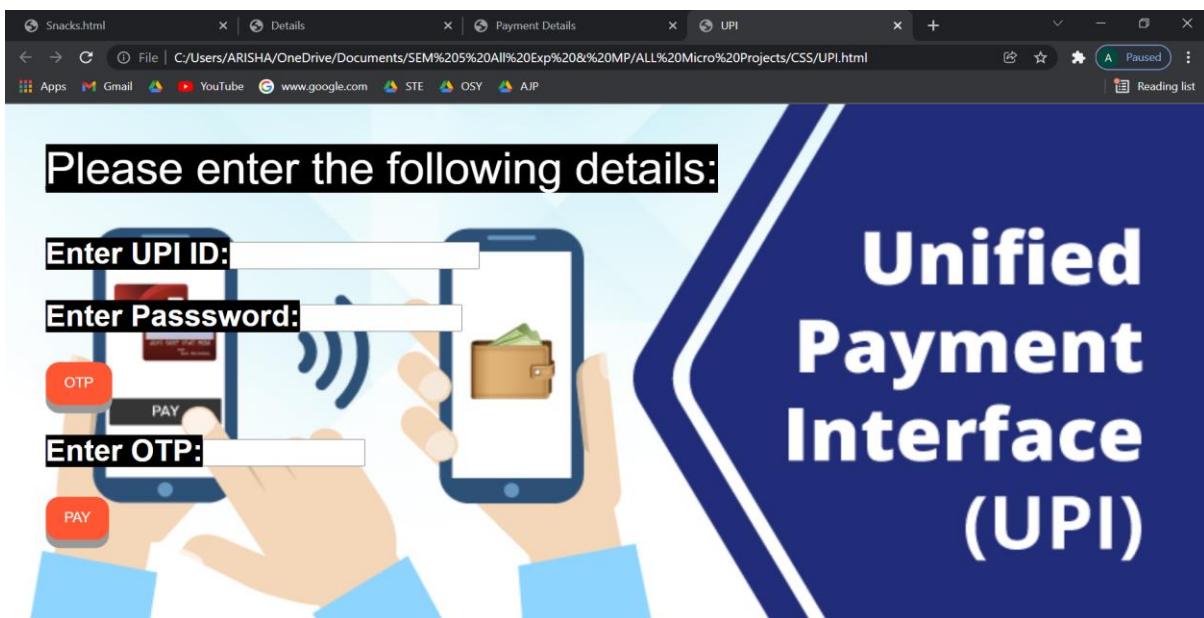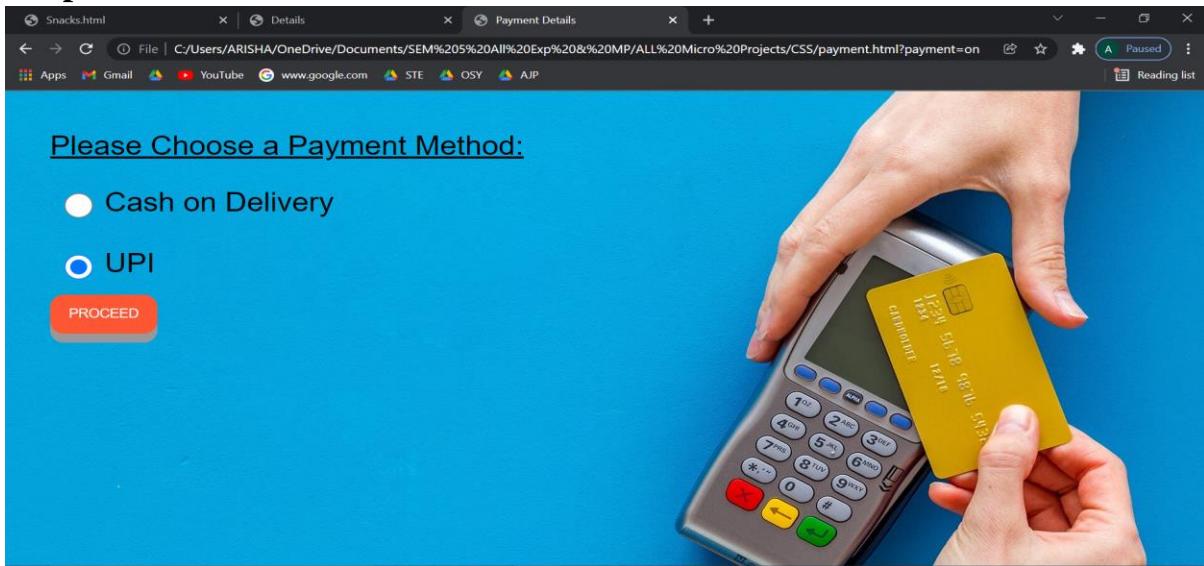

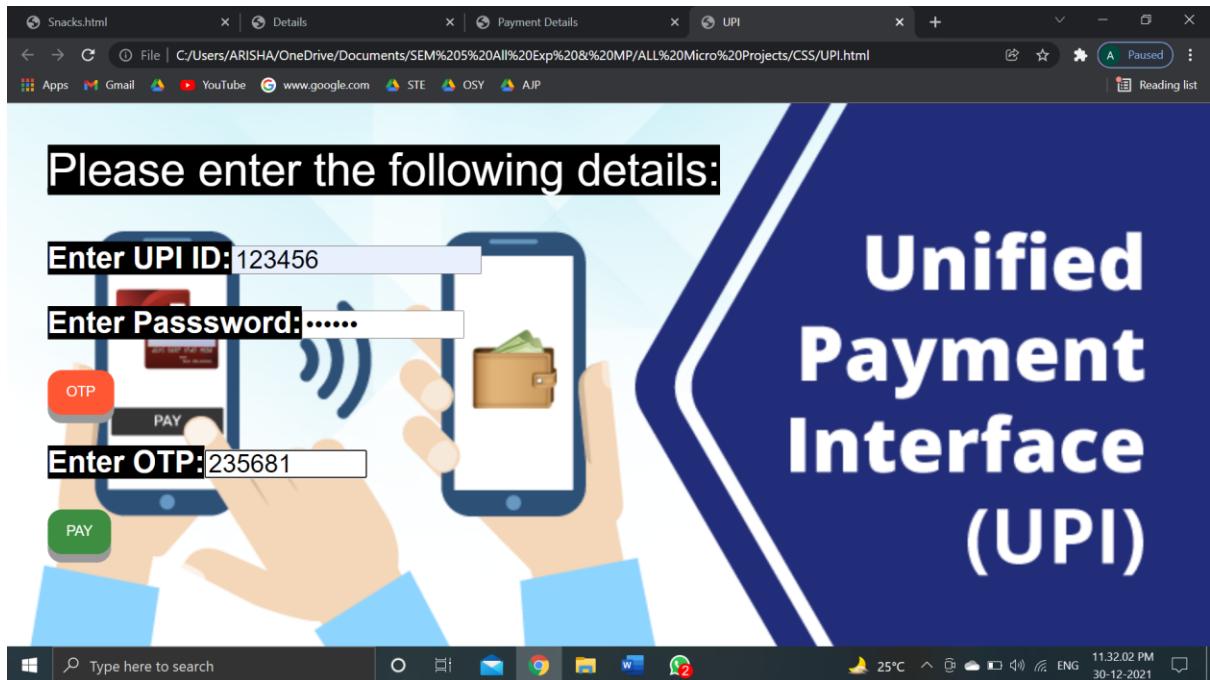

Completed:

Code:

<html>

 <head>

 <title>UPI</title>

 <style>

```
body {  
    background-image: url("done.jpg");  
    background-size: cover;  
    padding: 35px;  
    font-family: Arial;  
}
```

```
.center {
```

```
    margin: auto;  
    width: 60%;  
}
```

```
}
```

```
</style>
```

 </head>

 <body>

 <div class="center">

 <h1><p style="color: white">Transaction Successfully completed!!!!
</p></h1>

 </div>

 <h1><p style="color: white">
---->Thank you for ordering!!!

---->Your order is confirmed

---->A confirmation message has been sent on your registered mobile number.


---->Your order will be delivered within 30 minutes.

```
<br>---->For any query plz contact the restuarant.</p></h1>
```

```
</body>
```

```
</html>
```

Output:

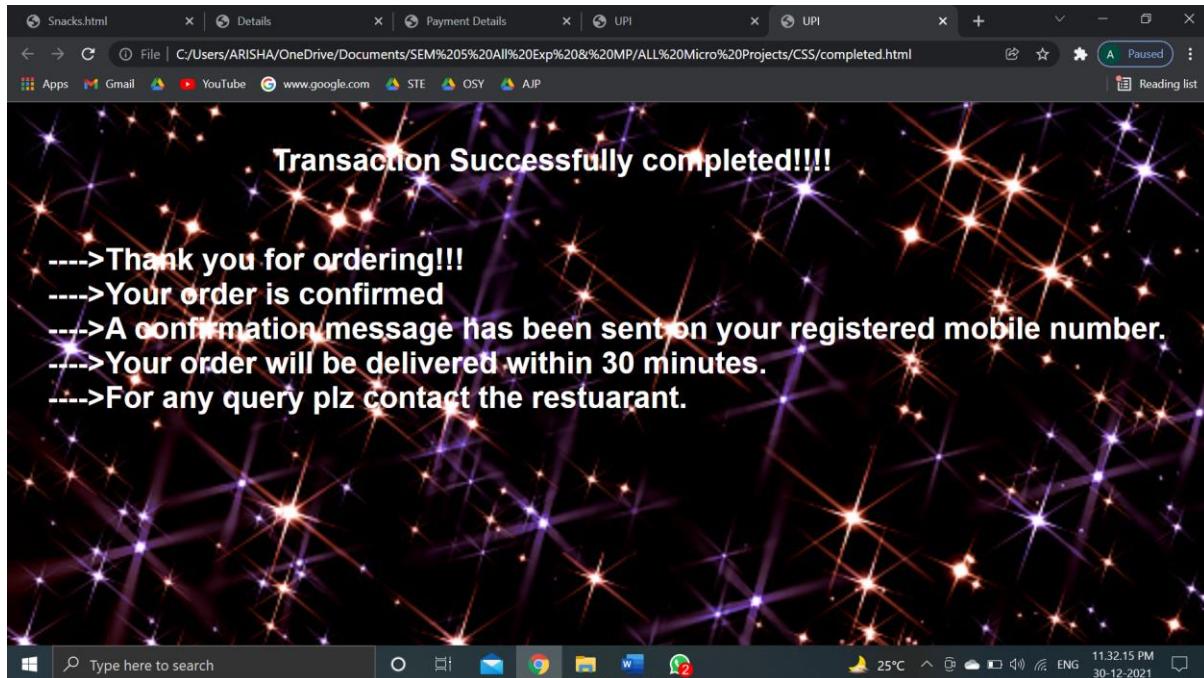

Book And Services:-

Form 1 :

Code :

```
<html>
```

```
    <head>
```

```
        <title>
```

```
            food_ordering
```

```
        </title>
```

```
        <script>
```

```
            function open_booking()
```

```
            {window.open("form2.html");}
```

```
            function open_cater()
```

```
            {window.open("form3.html");}
```

```
        </script>
```

```
    </head>
```

```
    <body style="background-image:url('food.jpg'); background-repeat:no-repeat;">
```

```
<p id="label1">Would You Like To</p>
<input type="button" id="firstpageb1" name="button1" value="RESERVE
TABLE" onclick="open_booking()">
<input type="button" id="firstpageb2" name="button2" value="BOOK FOR
CATER" onclick="open_cater()">
<p id="label2">OR</p>

<style>
#firstpageb1{
position:absolute;
font-family:Lucida Fax;
font-weight:700;
border-radius:5px;
background-color:red;
font-size:24px;
width:500px;
height:100px;
left:32%;
top:30%;
}

#firstpageb2{
position:absolute;
font-family:Lucida Fax;
font-weight:700;
border-radius:5px;
background-color:red;
font-size:24px;
width:500px;
height:100px;
left:32%;
top:57%;
}

#label1{
color:white;
position:absolute;
font-family:Lucida Fax;
font-weight:700;
font-size:26px;
text-align:center;
width:500px;
height:100px;
```


```

        left:32%;
        top:16%;
    }

#label2{
color:white;
position:absolute;
font-family:Lucida Fax;
font-weight:700;
font-size:26px;
text-align:center;
width:500px;
height:100px;
left:32%;
top:45%;
}
</style>
</body>
</html>

```

Output :

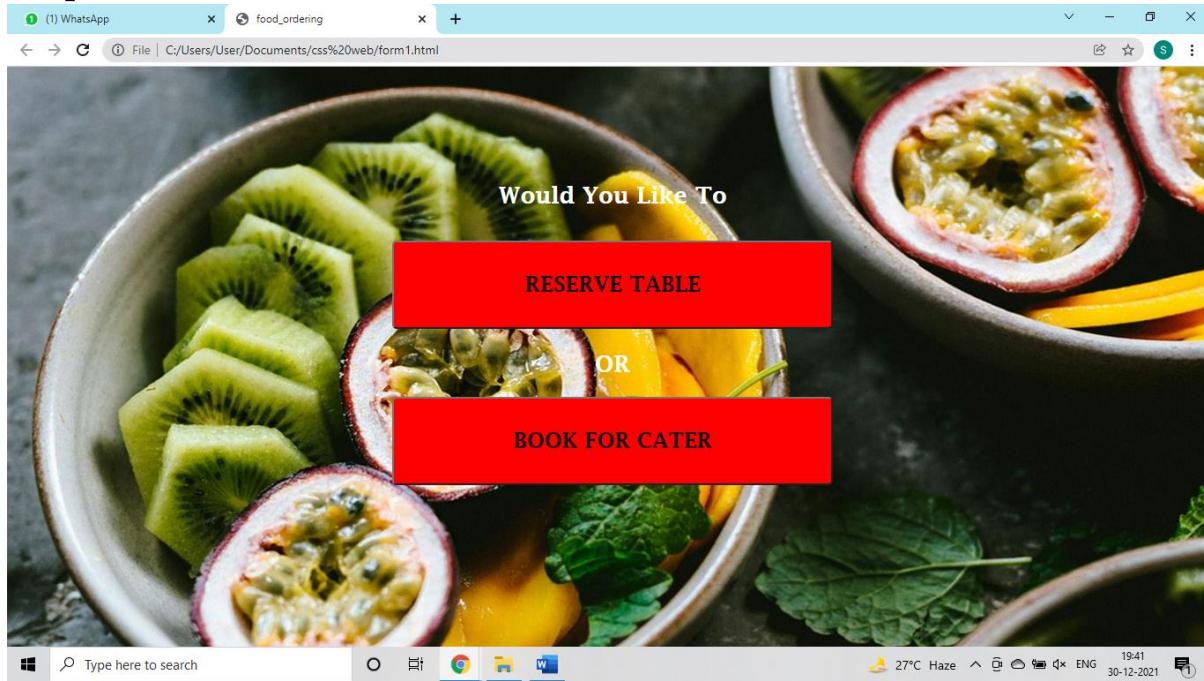

Form 2 :

Code :

```

<html>
    <head>
        <title>
            RESERVE TABLE

```

```
</title>

<script>
function validate_all()
{
listbox = document.getElementById("listbox1");
if(textbox1.value=="" || textbox2.value=="" || textbox3.value=="" ||
listbox.value == "")
    alert("Please complete all fields of the form");
else
    window.open("bookingclick.html");
}

function validate_name()
{
var letters = /^[A-Za-z\s]+$/;
var name=textbox1.value;
if(!name.match(letters))
    alert("Enter Valid Name");
}

function validate_number()
{
var regex = /^[6-9]\d{9}$/;
var number=textbox2.value;
if(!number.match(regex))
    alert("Enter a Valid Phone number");
}

function validate_membernum()
{
var regex = /^[1-9]*$/;
var number=textbox3.value;
if(!number.match(regex))
    alert("enter a valid member number(maximum member are 9)");
else if(number > 10)
    alert("enter a valid member number(maximum member are 9)");
}

function validate_date()
{
var selectedText=document.getElementById("textbox4").value;
var selectedDate = new Date(selectedText);
```

```

var now = new Date();
if (selectedDate < now)
alert("Date must be in the future");
}

function validate_radio()
{
if(document.getElementById("radio3").checked ||
document.getElementById("radio4").checked ||
document.getElementById("radio5").checked) { }
else
alert("select a session");
}

</script>
</head>

<body style="background-image:url('hotel_table.jpg'); background-repeat:repeat; background-size:cover;">

<p id="label1">LET US SERVE YOU BETTER</p>
<p id="label2">Don't wait in a line to enjoy your meal
Reserve a table with advance with us</p>
<p id="label3">Name </p> <!--Name label-->
<input id="textbox1" type="text" name="textbox1"
onblur="validate_name()"> <!--Name Text Field-->
<p id="label4">Contact.no </p> <!--Contact label-->
<input id="textbox2" type="text" name="textbox2"
onblur="validate_number()"> <!--Contact Text field-->
<p id="label5">No of Members </p> <!--Members label-->
<input id="textbox3" type="text" name="textbox3"
onblur="validate_membernum()"> <!--Members text field-->
<p id="label6" name="anc" >Date(Format : DD-MM-YYYY) </p>
<!--date label-->
<input id="textbox4" type="date" name="textbox4" onblur="validate_date()">
<!--date textbox-->
<p id="label9">Session </p> <!--Session label-->
<input id="radio3" type="radio" name="radio"> <!--radio button for
breakfast-->
<p id="label10">Breakfast </p> <!--breakfast label-->
<input id="radio4" type="radio" name="radio"> <!--radio button for
lunch-->
<p id="label11">Lunch </p> <!--lunch label-->

```

```
<input id="radio5" type="radio" name="radio">           <!--radio button for  
dinner-->  
<p id="label12">Dinner </p>                      <!--dinner label-->  
<p id="label13">Select Time-Slot </p>          <!--time slot label-->  
  
<select id="listbox1" name="listbox1" size=4 onclick="validate_radio()">  
<option value="0">9am - 1pm</option>  
<option value="1">1pm - 4pm</option>  
<option value="2">4pm - 7pm</option>  
<option value="3">7pm - 11pm</option>  
</select>  
  
<p id="label14">Please Specify the Reason for visit </p>      <!--  
Reason label-->  
<input id="submitbutton" type="button" name="submitbutton"  
value="SUBMIT" onclick="validate_all()">    <!--submit button-->  
  
<textarea id="textarea" name="textarea" cols="50" rows="15"></textarea>  
  
<style>  
#label1{  
color:black;  
position:absolute;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:5%;  
top:5%;  
}  
  
#label2{  
color:orange;  
position:absolute;  
font-family:Lucida Fax;  
font-weight:600;  
font-size:26px;  
text-align:left;  
left:5%;  
top:9%;  
}  
  
#label3{
```

```
color:white;  
position:absolute;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:5%;  
top:20%;  
}
```

```
#textbox1{  
position:absolute;  
border-radius:5px;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:15%;  
top:23%;  
}
```

```
#label4{  
color:white;  
position:absolute;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:5%;  
top:30%;  
}
```

```
#textbox2{  
position:absolute;  
border-radius:5px;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:17%;  
top:33%;  
}
```

```
#label5{
color:white;
position:absolute;
font-family:Lucida Fax;
font-weight:800;
font-size:26px;
text-align:left;
left:5%;
top:40%;
}
```

```
#textbox3{
position:absolute;
border-radius:5px;
font-family:Lucida Fax;
font-weight:800;
font-size:26px;
text-align:left;
left:23%;
top:43%;
}
```

```
#textbox4{
position:absolute;
border-radius:5px;
font-family:Lucida Fax;
font-weight:800;
font-size:26px;
text-align:left;
left:36%;
top:53%;
}
```

```
#label6{
color:white;
position:absolute;
font-family:Lucida Fax;
font-weight:800;
font-size:26px;
text-align:left;
left:5%;
top:50%;
}
```

```
#label9{
color:white;
position:absolute;
font-family:Lucida Fax;
font-weight:800;
font-size:26px;
text-align:left;
left:5%;
top:60%;
}
```

```
#radio3{
color:white;
position:absolute;
font-family:Lucida Fax;
font-weight:800;
font-size:26px;
text-align:left;
left:15%;
top:65%;
}
```

```
#label10{
color:black;
position:absolute;
font-family:Lucida Fax;
font-weight:800;
font-size:26px;
text-align:left;
left:17%;
top:60%;
}
```

```
#radio4{
color:white;
position:absolute;
font-family:Lucida Fax;
font-weight:800;
font-size:26px;
text-align:left;
left:29%;
top:65%;
```

```
    }

#label11{
color:black;
position:absolute;
font-family:Lucida Fax;
font-weight:800;
font-size:26px;
text-align:left;
left:31%;
top:60%;
}
```

```
#radio5{
color:white;
position:absolute;
font-family:Lucida Fax;
font-weight:800;
font-size:26px;
text-align:left;
left:42%;
top:65%;
}
```

```
#label12{
color:black;
position:absolute;
font-family:Lucida Fax;
font-weight:800;
font-size:26px;
text-align:left;
left:44%;
top:60%;
}
```

```
#label13{
color:white;
position:absolute;
font-family:Lucida Fax;
font-weight:800;
font-size:26px;
text-align:left;
left:5%;
```

```
top:70%;  
    }  
  
#listbox1{  
position:absolute;  
border-radius:5px  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:25%;  
top:70%;  
}  
  
#label14{  
color:white;  
position:absolute;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:5%;  
top:90%;  
}  
  
#textarea{  
position:absolute;  
font-family:Lucida Fax;  
left:44%;  
top:90%;  
}  
  
#submitbutton{  
color:black;  
background-color:orange;  
position:absolute;  
width:200px;  
height:100px;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:center;  
left:45%;
```

```

        top:150%;
        bottom:15%;
    }

</style>
</body>
</html>

```

Output :

LET US SERVE YOU BETTER
Don't wait in a line to enjoy your meal Reserve a table with advance with us

Name [redacted]

Contact.no [redacted]

No of Members [redacted]

Date(Format : DD-MM-YYYY) dd-mm-yyyy

Session • Breakfast • Lunch • Dinner

Select Time-Slot

9am - 1pm
1pm - 4pm
4pm - 7pm
7pm - 11pm

Please Specify the Reason for visit [redacted]

Session • Breakfast • Lunch • Dinner

Select Time-Slot

9am - 1pm
1pm - 4pm
4pm - 7pm
7pm - 11pm

Please Specify the Reason for visit

SUBMIT

Form 3 :

Code :

```

<html>
    <head>
        <title>

```

CATER SERVICES

</title>

<script>

function validate_all()

{

listbox1 = document.getElementById("listbox1");

listbox2 = document.getElementById("listbox2");

listbox3 = document.getElementById("listbox3");

listbox4 = document.getElementById("listbox4");

listbox5 = document.getElementById("listbox5");

listbox6 = document.getElementById("listbox6");

listbox7 = document.getElementById("listbox7");

if(textbox1.value=="" || textbox2.value=="" || textbox3.value=="" ||
listbox1.value == "" || listbox2.value == "" || listbox3.value == "" || listbox4.value ==
"" || listbox5.value == "" || listbox6.value == "" || listbox7.value == "")

 alert("Please complete all fields of the form");

else

 window.open("caterclick.html");

}

function validate_name()

{

var letters = /^[A-Za-z\s]+\$/;

var name=textbox1.value;

if(!name.match(letters))

 alert("Enter Valid Name");

}

function validate_number()

{

var regex = /^[6-9]\d{9}\$/;

var number=textbox2.value;

if(!number.match(regex))

 alert("Enter a Valid Phone number");

}

function validate_date()

{

var selectedText=document.getElementById("textbox3").value;

var selectedDate = new Date(selectedText);

var now = new Date();

if (selectedDate < now)

```

        alert("Date must be in the future");
    }

    function validate_radio()
    {
        if(document.getElementById("radio1").checked ||
document.getElementById("radio2").checked) { }
        else
            alert("Select between yes or no in the previous question");
    }
    </script>
</head>

<body style="background-image:url('food.jpg'); background-repeat:repeat; background-size:cover;">

<p id="label3">Name </p>           <!--Name label-->
<input id="textbox1" type="text" name="textbox1"
onblur="validate_name()"> <!--Name Text Field-->
<p id="label4">Contact.no </p>           <!--Contact label-->
<input id="textbox2" type="text" name="textbox2"
onblur="validate_number()"> <!--Contact Text field-->
<p id="label5">Select Members Range </p>           <!--Members label-->
<p id="label6">Date(Format:DD-MM-YYYY) </p>           <!--date label-->
<input id="textbox3" type="date" name="textbox3" onblur="validate_date()">
<!--Date Text field-->
<p id="label7">Select Time-Slot </p>           <!--time slot label-->
<p id="label8">Plz Specify the Reason for the event </p>           <!--time
slot label-->
<p id="label9">Would you like us to organize cake for the event </p>
<!--cake label-->
<p id="label12">Starter </p>           <!--starter
label-->
<p id="label13">Fast-Foods </p>           <!--fast-
foods-->
<p id="label14">Main-Course </p>           <!--main-
course-->
<p id="label15">Dessert </p>           <!--
dessert-->
<p id="label16">Select the below foods for the event </p>           <!--food
label-->

```

```
<input id="bookbutton" type="button" name="bookbutton" value="BOOK"
onclick="validate_all()"> <!--button-->

<select id="listbox1" name="listbox1" size=1> <!--Member listbox-->
<option value="0">10 - 30</option>
<option value="1">30 - 70</option>
<option value="2">70 - 100</option>
<option value="3">More than 100</option>
</select>

<select id="listbox2" name="listbox2" size=1> <!--Time slot listbox-->
<option value="0">9am - 1pm</option>
<option value="1">pm - 4pm</option>
<option value="2">4pm - 7pm</option>
<option value="3">7pm - 11pm</option>
</select>

<select id="listbox3" name="listbox2" size=4> <!--event listbox-->
<option value="0">Birthday</option>
<option value="1">Anniversary</option>
<option value="2">Ceremony</option>
<option value="3">Festival</option>
<option value="4">Other Special Occasion</option>
</select>

<select id="listbox4" name="listbox4" size=4 Multiple
onclick="validate_radio()"> <!--starter listbox-->
<option value="0">Vegetable Clear Soup</option>
<option value="1">Vegetable Burnt Garlic Soup</option>
<option value="2">Vegetable Manchow Soup</option>
<option value="3">Vegetable Hot and Sour Soup</option>
<option value="4">Vegetable Sweet Corn Soup</option>
<option value="5">Crispy Thread Paneer</option>
<option value="6">Paneer Chilli Dry</option>
<option value="7">Cream Corn</option>
<option value="8">Crispy Corn</option>
<option value="9">Veg Manchurian Dry</option>
</select>

<select id="listbox5" name="listbox5" size=4 Multiple> <!--fastfood
listbox-->
<option value="0">Veg Hakka Noodles</option>
<option value="1">Chicken Hakka Noodles</option>
```

```
<option value="2">Veg Schezwan Noodles</option>
<option value="3">Chicken Schezwan Noodles</option>
<option value="4">Veg Manchurian Noodles</option>
<option value="5">Veg Stwed Noodles</option>
<option value="6">Margherita Pizza</option>
<option value="7">Cheese N Corn</option>
<option value="8">Farm House Pizza</option>
<option value="9">Peppy Paneer Pizza</option>
<option value="10">McALoo Tikki Burger</option>
<option value="11">Chicken Burger</option>
<option value="12">Zinger Burger</option>
<option value="13">Paneer Burger</option>
<option value="14">Mexican Burger</option>
</select>
```

```
<select id="listbox6" name="listbox6" size=4 Multiple>      <!--MainCourse
listbox-->
```

```
<option value="0">Veg Fried Rice</option>
<option value="1">Chicken Fried Rice</option>
<option value="2">Veg Schezwan Fried</option>
<option value="3">Chicken Schezwan</option>
<option value="4">Veg Triple Schezwan</option>
<option value="5">Chicken Schezwan Fried Rice</option>
<option value="6">Vegetable Spring Roll</option>
<option value="7">French Fries</option>
<option value="8">Mexican Nachos</option>
<option value="9">Chicken Popcorn</option>
<option value="10">Veg paneer wrap</option>
</select>
```

```
<select id="listbox7" name="listbox7" size=4 Multiple>      <!--MainCourse
listbox-->
```

```
<option value="0">Strawberry juice</option>
<option value="1">Mango juice</option>
<option value="2">Mojito</option>
<option value="3">Orange Mojito</option>
<option value="4">Cappuccino</option>
<option value="5">Coffee</option>
<option value="6">Chocolate Mouse</option>
<option value="7">Caramel Custard</option>
<option value="8">Walnut Brownie</option>
<option value="9">Cheesecake</option>
<option value="10">Fruit Salad Cream</option>
```

```
<option value="11">Matka Rabdi</option>
</select>

<input id="radio1" type="radio" name="radio1">      <!--radio button for yes-
->
<p id="label10">YES </p>          <!--yes label-->
<input id="radio2" type="radio" name="radio1">      <!--radio button for no--
>
<p id="label11">NO </p>          <!--no label-->

</body>

<style>
#label3{
color:white;
position:absolute;
font-family:Lucida Fax;
font-weight:800;
font-size:26px;
text-align:left;
left:5%;
top:20%;
}

#textbox1{
position:absolute;
border-radius:5px;
font-family:Lucida Fax;
font-weight:800;
font-size:26px;
text-align:left;
left:12%;
top:23%;
}

#label4{
color:white;
position:absolute;
font-family:Lucida Fax;
font-weight:800;
font-size:26px;
text-align:left;
left:5%;
```

```
    top:30%;  
}  
  
#textbox2{  
position:absolute;  
border-radius:5px;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:17%;  
top:33%;  
}
```

```
#label5{  
color:white;  
position:absolute;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:5%;  
top:40%;  
}
```

```
#listbox1{  
position:absolute;  
border-radius:5px;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:30%;  
top:43%;  
}
```

```
#label6{  
color:white;  
position:absolute;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;
```

```
    left:5%;  
    top:52%;  
}
```

```
#textbox3{  
position:absolute;  
border-radius:5px;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:35%;  
top:55%;  
}
```

```
#label7{  
color:white;  
position:absolute;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:5%;  
top:65%;  
}
```

```
#listbox2{  
position:absolute;  
border-radius:5px;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:25%;  
top:68%;  
}
```

```
#label8{  
color:white;  
position:absolute;  
font-family:Lucida Fax;  
font-weight:800;
```

```
font-size:26px;  
text-align:left;  
left:5%;  
top:80%;  
}  
  
#listbox3{  
position:absolute;  
border-radius:5px;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:50%;  
top:85%;  
}
```

```
#label9{  
color:white;  
position:absolute;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:5%;  
top:105%;  
}
```

```
#radio1{  
color:black;  
position:absolute;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:60%;  
top:110%;  
}
```

```
#label10{  
color:white;  
position:absolute;
```

```
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:62%;  
top:105%;  
}
```

```
#radio2{  
color:white;  
position:absolute;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:80%;  
top:110%;  
}
```

```
#label11{  
color:white;  
position:absolute;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:82%;  
top:105%;  
}
```

```
#label12{  
color:white;  
position:absolute;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:15%;  
top:125%;  
}
```

```
#label13{  
color:white;
```

```
position:absolute;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:45%;  
top:125%;  
}
```

```
#label14{  
color:white;  
position:absolute;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:75%;  
top:125%;  
}
```

```
#label15{  
color:white;  
position:absolute;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:45%;  
top:155%;  
}
```

```
#listbox4{  
color:black;  
position:absolute;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:5%;  
top:135%;  
}
```

```
#listbox5{
```

```
color:black;  
position:absolute;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:37%;  
top:135%;  
}
```

```
#listbox6{  
color:black;  
position:absolute;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:68%;  
top:135%;  
}
```

```
#listbox7{  
color:black;  
position:absolute;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:40%;  
top:165%;  
}
```

```
#label16{  
color:white;  
position:absolute;  
font-family:Lucida Fax;  
font-weight:800;  
font-size:26px;  
text-align:left;  
left:5%;  
top:115%;  
}
```

```


#bookbutton{
color:black;
background-color:orange;
position:absolute;
width:200px;
height:80px;
font-family:Lucida Fax;
font-weight:800;
font-size:26px;
text-align:center;
left:40%;
top:200%;
}



</style>
</html>

```

Output :

S

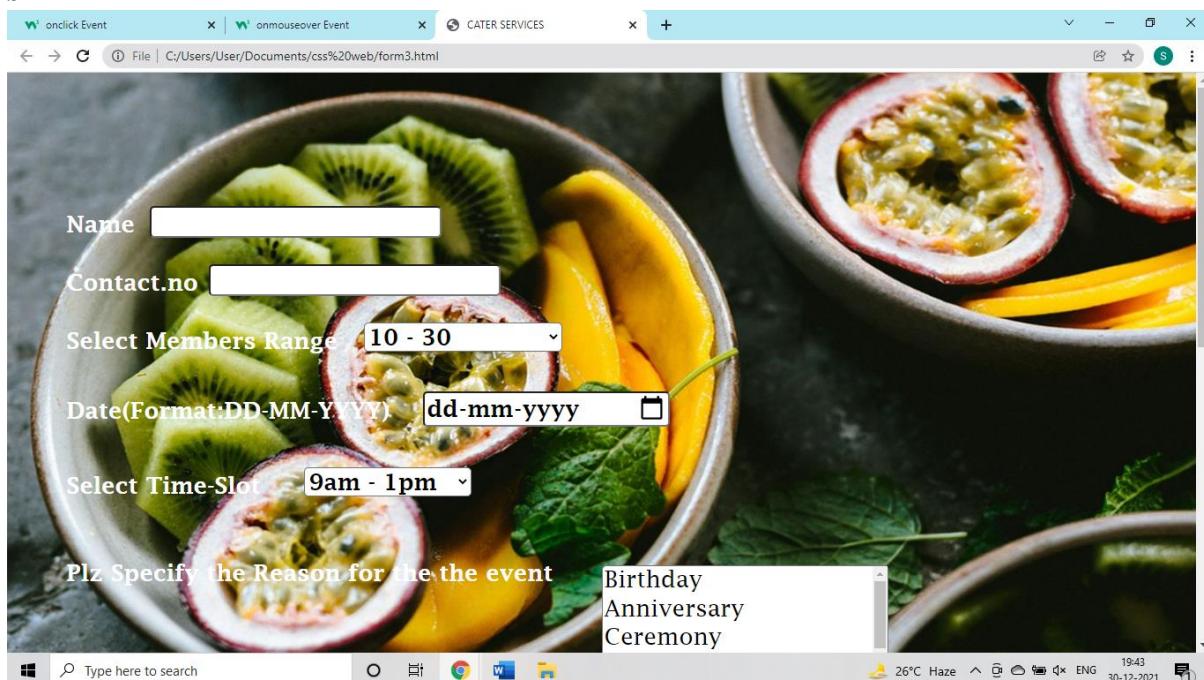

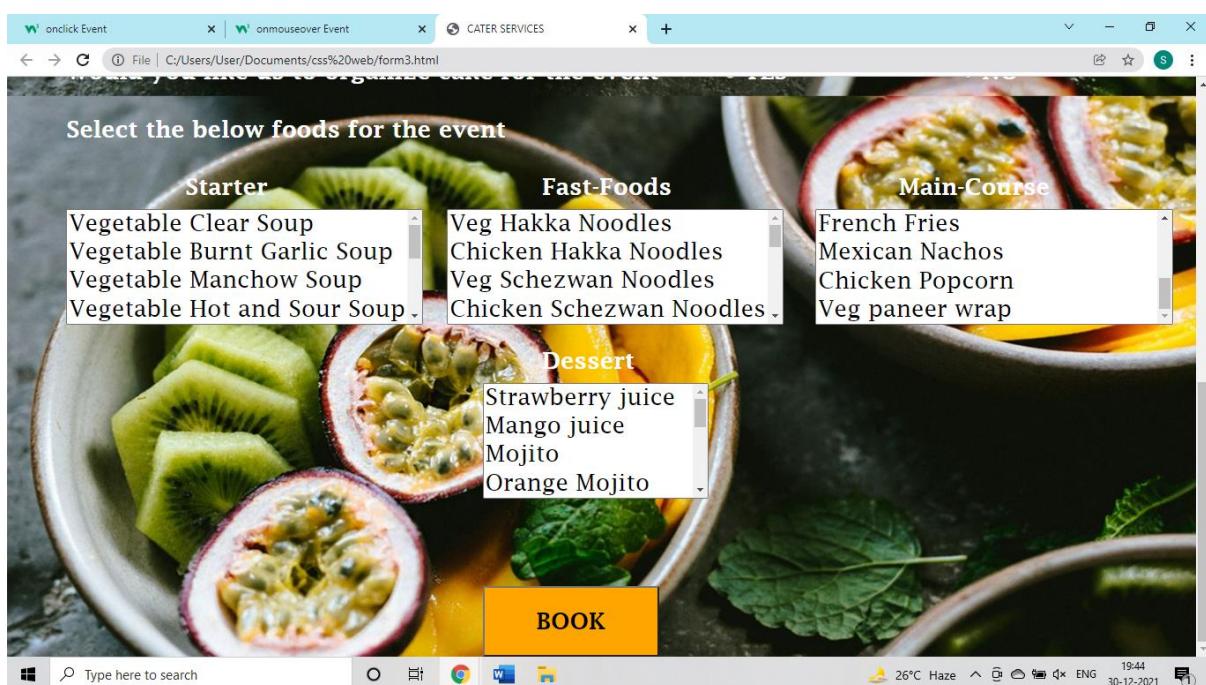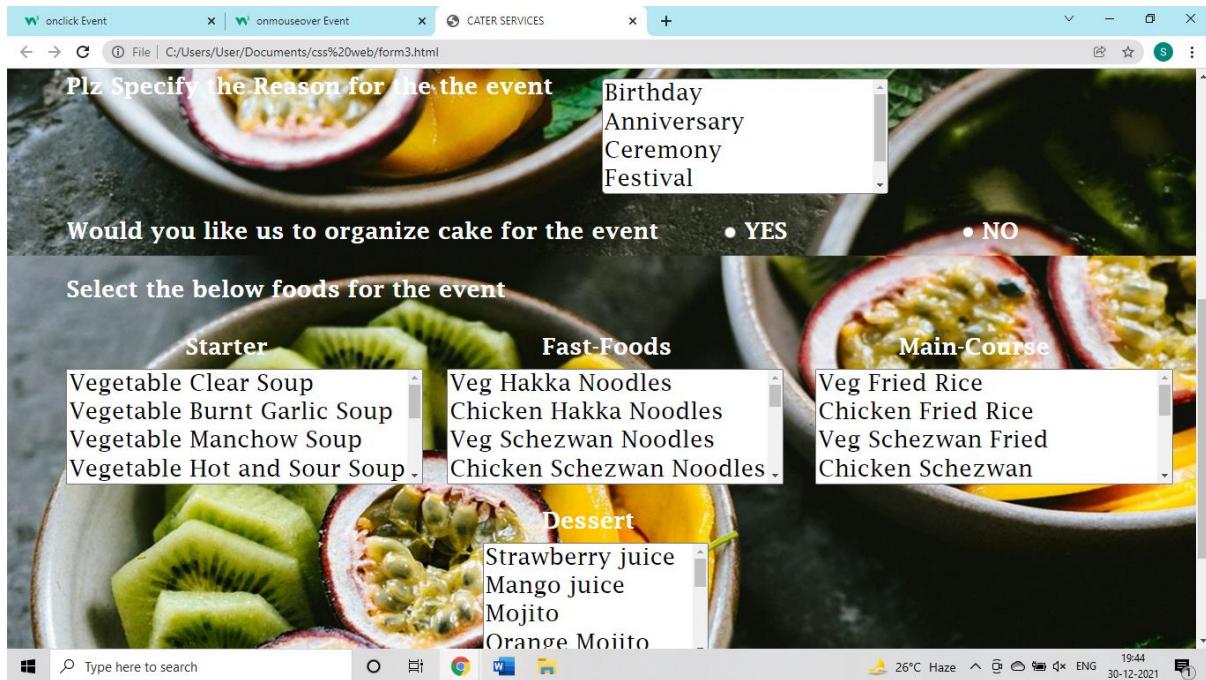

Feedback:-

Code:

Html:

```
<!DOCTYPE html>
<html>
  <head>
    <link rel="preconnect" href="https://fonts.googleapis.com">
    <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
```

```

<link
  href="https://fonts.googleapis.com/css2?family=Tangerine:wght@700&display=swap"
  rel="stylesheet">
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <link rel="shortcut icon" href="i.png" type="image/png">
  <link rel="stylesheet" type="text/css" href="feedstyle.css">
  <title>Feedback</title>

  </head>
<body>
  <div id="mydiv">
    <label id="first"><b>Feedback Form</b></label><br>
    <label id="second">Please provide your feedback below:</label>
    <label id="third"><b>How do you rate your overall experience?</b></label>
    <input type="radio" name="myradio" id="bad"><label id="b"
onmouseover="Selection(this)">&nbsp;Bad</label>
    <input type="radio" name="myradio" id="average">
    <label id="a" onmouseover="Selection(this)">&nbsp;&nbsp;Average</label>
    <input type="radio" name="myradio" id="good">
    <label id="g" onmouseover="Selection(this)">&nbsp;&nbsp;Good</label>
    <label id="comment"><b>Enter your Comment:</b></label>
    <textarea id="com" rows="8" cols="55" placeholder="Your Comments"
maxlength="70"></textarea>
    <label id="yn"><b>Enter Your Name:</b></label>
    <input type="text" id="na" placeholder="Mustafa"><input type="text" id="me"
placeholder="Mustafa251287@gmail.com">
    <label id="em"><b>Enter your Email Id:</b></label>
    <input type="button" value="Submit Your Feedback" id="button"
onclick="submiting()"/>
  </div>
  <script src="feedback.js">

</script>
</body>
</html>

```

CSS: @import url('https://fonts.googleapis.com/css2?family=Dancing+Script:wght@600&family=Tangerine:wght@700&display=swap');

```

body{
background-image: url("image1.jpg");
background-repeat: no-repeat;
background-size: 100vw 100vh;
}
#mydiv:hover{
  animation: animate 4s linear;
}

```

```
}

@keyframes animate {
  0%{
    transform: rotateY(0deg);
  }
  100%{
    transform: rotateY(360deg);
  }
}

#mydiv{
position:absolute;
border:none;
width:40vw;
height:68vh;
top:7vh;
left:30vw;
padding: 10px;
background:transparent;
border: none;
}
#first{
  color: aliceblue;
font-size: 26px;
font-family: 'Dancing script',cursive;
font-size: 30px;
}
#second{
  color:white;
font-size: 19px;
font-family: 'Dancing script',cursive;
position:absolute;
top:6vh;
}

#third{
  color:white;
font-size: 21px;
font-family: 'Dancing script',cursive;
position:absolute;
top:11vh;
}

#bad{
position:absolute;
top:14vh;
}
#b{
  color:aliceblue;
```

```
position: absolute;
top: 14vh;
left: 2vw;
}
#aaverage{
position: absolute;
top: 14vh;
left: 6vw;
}
#a{
    color:aliceblue;
position: absolute;
top: 14vh;
left: 7vw;
}
#g{
    color:aliceblue;
position: absolute;
top: 14vh;
left: 13vw;
}
#gcomment{
    color:aliceblue;
position: absolute;
top: 19vh;
font-size: 21px;
font-family: 'Dancing script',cursive;
}
#com{
    position: absolute;
top: 22vh;
font-style: italic;
font-size: 18px;
font-family: 'Dancing script',cursive;
background-color: transparent;
color:aliceblue;
}
#yn{
    position: absolute;
top: 47vh;
font-size: 21px;
font-family: 'Dancing script',cursive;
```

```

font-style:italic;
color:aliceblue;
}
#na{
position:absolute;
top:47vh;
left:11vw;
height:20px;
font-size:16px ;
background: transparent;
color: aliceblue;
}
#em{
position:absolute;
top:54vh;
left:0vw;
font-style: italic;
font-size: 21px;
font-family: 'Dancing script',cursive;
color:aliceblue;
}
#me{
position: absolute;
top:54vh;
left:12vw;
color:aliceblue;
font-size: 16px;
height:20px;
background: transparent;
}
#button{
position: absolute;
top:60vh;
padding: 10px;
font-size: 24px;
width: 40vw;
font-style: italic;
font-family:'Dancing script',cursive;
background-color:transparent;
color: aliceblue;
}

```

JS:

```

//first initializing variables
var firstcheck=document.getElementById("bad");
var secondcheck=document.getElementById("average");
var thirdcheck=document.getElementById("good");
var comment=document.getElementById("com");
var nam=document.getElementById("na");
var email=document.getElementById("me");

```

```

//main work starts drom here
function submiting(){
if((firstcheck.checked || secondcheck.checked || 
thirdcheck.checked)&&(comment.value!="" && nam.value!=""&& email.value!="")){
  if(firstcheck.checked){
var
str="Experience=BAD:Comment="+comment.value+":Name="+nam.value+":Email="
+email.value+":End of Feedback";
var temp=(nam.value).toLowerCase();
var temp1=temp+"feedback";

localStorage.setItem(temp1,str);
alert("Your Feedback is saved in our database Successfully");

} else if(secondcheck.checked){
  var
str="Experience=Average:Comment="+comment.value+":Name="+nam.value+":Ema
il="+email.value+":End of Feedback";
  var temp=(nam.value).toLowerCase();
var temp1=temp+"feedback";

localStorage.setItem(temp1,str);
alert("Your Feedback is saved in our database Successfully");

} else if(thirdcheck.checked){
  var
str="Experience=GOOD:Comment="+comment.value+":Name="+nam.value+":Email
="+email.value+":End of Feedback";
  var temp=(nam.value).toLowerCase();
var temp1=temp+"feedback";

localStorage.setItem(temp1,str);
alert("Your Feedback is saved in our database Successfully");

}
} else {
  alert("Plz fill out all values");
}

}

function Selection(check){
  var label1=document.getElementById("b");
  var label2=document.getElementById("a");
  var label3=document.getElementById("g");
if(check==label1){
  firstcheck.checked=true;
} else if(check==label2){
secondcheck.checked=true;
} else if(check==label3){
thirdcheck.checked=true;
}
}

```

```
}
```

Output:

A feedback form titled "Feedback Form" set against a dark background featuring a 3D checkered floor and glowing spheres (red and blue) on the sides. The form includes fields for comments, name, email, and a submit button.

Feedback Form
Please provide your feedback below:

How do you rate your overall experience?

Bad Average Good

Enter your Comment:

Enter Your Name:

Enter your Email Id:

Submit Your Feedback