FOOD ORDERING KUIS

MUHAMMAD ARIS RIFAL BIN AZNURIN

Report submitted in partial fulfilment of the requirements for the award of the

Diploma in Computer Science

Faculty of Science and Information Technology

INTERNATIONAL ISLAMIC UNIVERSITY COLLEGE

SELANGOR (KUIS)

2022/2023

FAKULTI SAINS & TEKNOLOGI MAKLUMAT (FSTM), KOLEJ UNIVERSITI ISLAM ANTARABANGSA SELANGOR (KUIS)

Author's Full Name : MUHAMMAD ARIS RIFAL BIN AZNURIN			
Identification Card No	: 021018-10-0505		
Title	: FOOD ORDER	RING KUIS	
Academic Session	: SESSION 1 20	22/2023	
I declare that this thesis is	classified as:		
OPEN A		the that my thesis to be published as online access (Full text)	
acknowledge that FSTM,	KUIS reserve the rig	ght as follows:	
 The thesis and final pr The library of KUIS has 	as the right to make o	ty of FSTM, KUIS. copies for the purpose of research only.	
•	ht to make copies of	the thesis for academic exchange.	
•	ht to make copies of	the thesis for academic exchange.	
3. The library has the right		the thesis for academic exchange. ———————————————————————————————————	
3. The library has the right			

ACKNOWLEDGEMENTS

First and foremost, all praises to Allah, the Almighty, for his blessing and giving us the inspiration to embark on this project. I would like to express my special thanks of gratitude to my supervisor Dr Syarbaini Ahmad as well as our FYP Coordinator Pn Siti Noor Binti Ahmad who gave me the golden opportunity to do this wonderful project on the topic Food Ordering KUIS, which also helped me in doing a lot of Research and I came to know about so many new things.

I am really thankful to them. Secondly, I would like to thank to my parents and friends who helped me a lot in finishing this project within the limited time.

I am making this project not only for the marks but to also increase my knowledge.

Thanks again to all who helped me.

ABSTRACT

The objective developing Food Ordering KUIS project is to provide a friendly, easy to use website that can provide the customer with service. Nowadays, many restaurants in Malaysia still use manually, paper-based in food ordering system. The problem using manually are probability of paper lost is high and misinterpret the handwriting of order. Food Ordering KUIS is created to solved this problem. Methodology that be used in this project is a Prototype Model.

TABLE OF CONTENTS

Content
DECLARATIONi
ACKNOWLEDGEMENTSii
ABSTRACTiii
TABLE OF CONTENTSiv
LIST OF FIGURESvii
LIST OF TABLExi
CHAPTER 1 INTRODUCTION
1.1 Introduction
1.2 Project Description
1.3 Problem Statement
1.4 Project Objective
1.5 Scope
1.6 Project Contributions
1.7 Conclusion of Chapter
CHAPTER 2 LITERATURE REVIEW
2.1 Introduction

2.2 Domain Studies4
2.3 Comparison With Similar Project5
2.4 Technologies Studies
2.5 Software And Hardware Specifications
2.6 Conclusion
CHAPTER 3 METHODOLOGY
3.1 Introduction Of Chapter
3.2 Project Methodology
3.3 System Design And Interface Design
3.4 Gantt Chart
3.5 Conclusion
CHAPTER 4 DESIGN AND DEVELOPMENT
4.1 Introduction
4.2 Project Implementation
4.3 Project Screenshot
4.4 Conclusion

CHAPTER 5 CONCLUSION AND RECOMMENDATION

5.1	Introduction	48
5.2	Lesson Learned	.48
5.3	Recommendation For Future Project	.48
5.4	Conclusion	.49

LIST OF FIGURES

Figure No.	Title	Page	
2.1	Login page	5	
2.2	Register page	6	
2.3	Admin Manage Order And Menu	6	
2.4	Customer Order Page	7	
2.5	Card Details	7	
2.6	Admin Manage Order	8	
2.7	Customer Details	8	
2.8	Admin Manage User	9	
2.9	Login Page	10	
2.10	User Interface	10	
2.11	Select Restaurant Page	11	
2.12	Menu Page	11	
2.13	Modify Items	12	
2.14	Order Information	12	
3.1	Prototype Model	17	

3.2	Use case diagram	19
3.3	Flowchart	20
3.4	ER diagram	21
3.5	Homepage	22
3.6	Login page	22
3.7	Register Customer Page	23
3.8	Menu Page	23
3.9	Order Status Page	24
3.10	Order History Page	24
3.11	Cart Page	25
3.12	Register Seller Page	25
3.13	Seller Home Page	26
3.14	Seller Manage Product	26
3.15	Seller Order Management	27
3.16	Seller Sales History	27
3.17	Admin Home Page	28
3.18	Admin Product Management	28
3.19	Admin Manage Product	29

3.20	Admin Customer Management	29
3.21	Admin Add Customer	30
3.22	Admin Café Owner Management	30
3.23	Admin Add Café Owner	31
3.24	Admin Café Management	31
3.25	Admin Sales History	32
4.1	Home Page	35
4.2	Menu Page	35
4.3	Cart Page	36
4.4	Cart Page	36
4.5	Place Order	37
4.6	Order Status	37
4.7	Order Status	38
4.8	Order History	38
4.9	Café Owner Homepage	39
4.10	Café Owner Manage Product	39
4.11	Café Owner Manage Product	40
4.12	Café Owner Order Management	40

4.13	Café Owner Change Status	41
4.14	Café Owner Order History	41
4.15	Café Owner Print Order History	42
4.16	Admin Homepage	42
4.17	Admin Product Management	43
4.18	Admin Add Product	43
4.19	Admin Customer Management	44
4.20	Admin Add Customer	44
4.21	Admin Café Owner Management	45
4.22	Admin Add Café Owner	45
4.23	Admin Change Cafename	46
4.24	Admin Order History	46
4.25	Admin Print Order History	47

LIST OF TABLES

Table No.	Title	Page	
2.3.1	Comparison between existing system	13	
2.5.2	Hardware specifications	16	

CHAPTER 1

INTRODUCTION

2.4 INTRODUCTION TO CHAPTER

This chapter is about the overview of the project, problem statement, scope objective, problem analysis and conclusion of this project. There will be explanation on why this software needed to developed and what are the problem statement within this project and what is the scope covered. Food Ordering KUIS is an online ordering system. The idea of Food Ordering KUIS is it can be used to order food and beverage for customer so they can pick up their order within their selected time thru online platform.

1.2 PROJECT DESCRIPTION

This project is about making an online ordering system for café in KUIS to make it easier for the customer to order food and beverage and make it easier for owners to organize the order. In addition, this project will help customer and owners greatly with their time because customer doesn't need to queue to order food. Now days the rapid growth in the use of internet and the technologies associated with it, the several opportunities are coming up on the web or mobile application.

1.3 PROBLEM STATEMENT

Food Ordering KUIS is designed to overcome those problems using manual system such as the possibility the paper order is high. Many cafés in KUIS use conventional system which is on paper-based, for food ordering process. Using conventional system, the cashier must jot down the order at the paper and send to the cook. The probability to make mistake was high because sometimes the cook misinterpret hand-writing order. Therefore, Food Ordering KUIS was developed to enhance the efficiency and accuracy of taking order in food ordering system. Besides that, conventional system cannot see the sales history therefore Food Ordering KUIS was designed to view the sales history of the café.

1.4 PROJECT OBJECTIVE

- To computerized the food ordering system process.
- To display details of sales history.
- To calculated price of order.

1.5 PROJECT SCOPE

The scope of the project are as the following:

- Including all café inside KUIS.
- For student, lecturer, café owner and staff use.
- The language used in this system are in English.

1.6 PROJECT CONTRIBUTIONS

- Efficient ordering system to replace traditional ordering system.
- Café owners now can view their sales history.
- Order will be more organized.

1.7 CONCLUSION OF CHAPTER

For conclusion, the main purpose of developing Food Ordering KUIS is to make it easier for the customer to order food and beverage and make it easier for owners to organize the order. Food Ordering KUIS is designed to overcome those problems using manual system. Food Ordering KUIS was developed to enhance the efficiency and accuracy of taking order in food ordering system.

CHAPTER 2

LITERATURE REVIEW

2.1 INTRODUCTION TO CHAPTER

This chapter is about the information needed, which information is needed and how the information obtained will be used in general. There will also be explanation on what do the researcher needs to develop this website and to make it more interesting.

2.2 DOMAIN STUDIES

Online food ordering is the process of ordering food for pickup from a website or app. The online food ordering can be concluded as the easiest and simplest way to order your food and beverage. This system for online food ordering is very popular method that is revolutionizing the way in which the food industry operates.

2.3 COMPARISONS WITH SIMILAR PROJECT

2.3.1 Food Ordering System

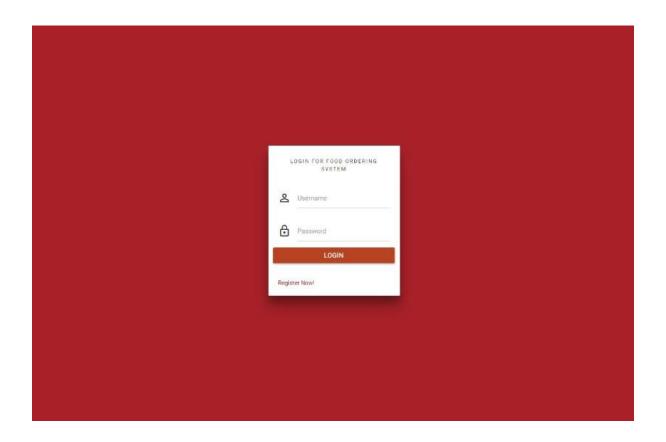


Figure 2.1 Login page

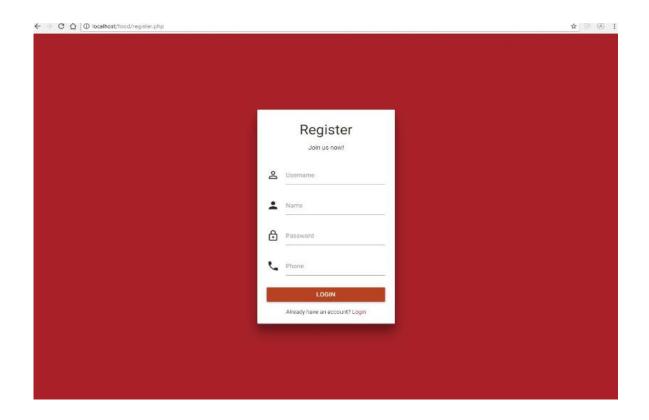


Figure 2.2 Register page

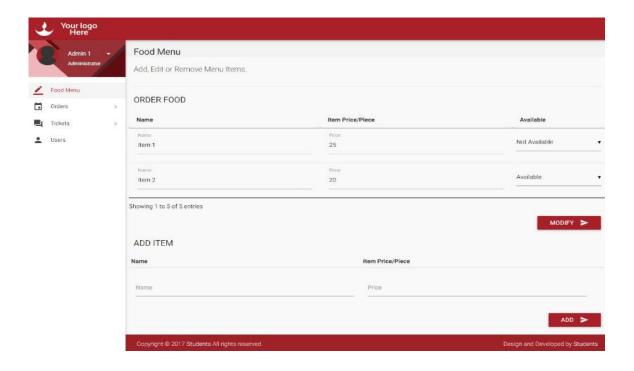


Figure 2.3 Admin Manage Order And Menu

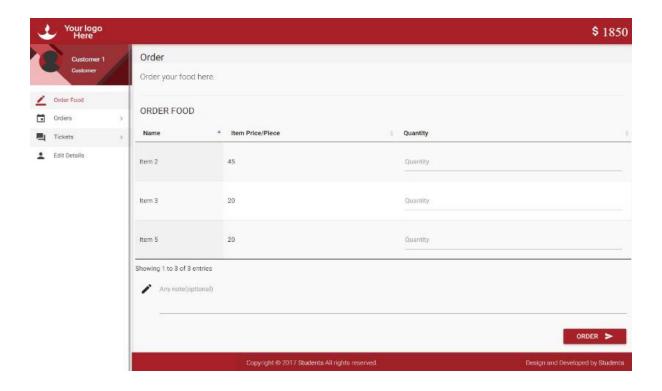


Figure 2.4 Customer Order Page

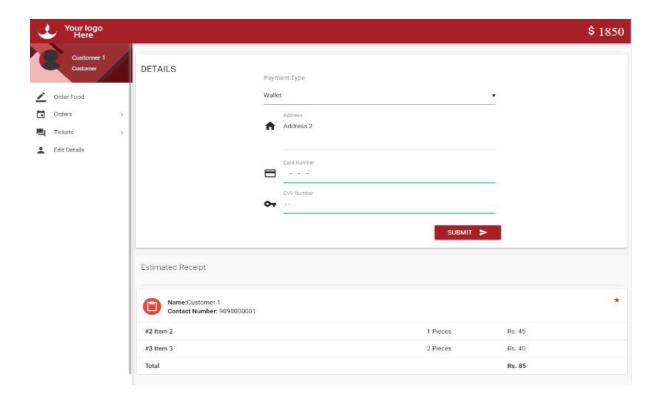


Figure 2.5 Card Details

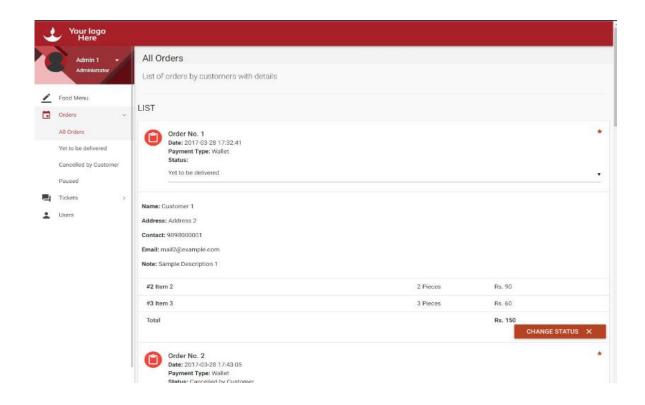


Figure 2.6 Admin Manage Order

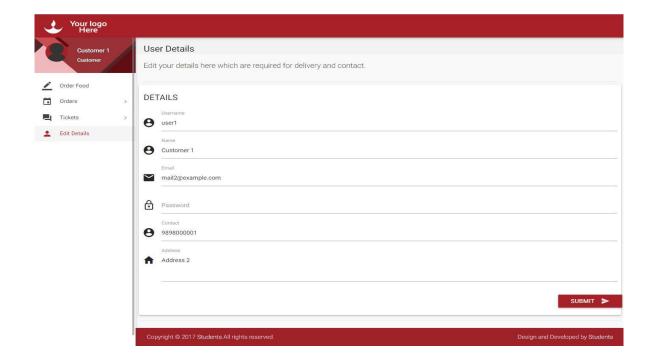


Figure 2.7 Customer Details

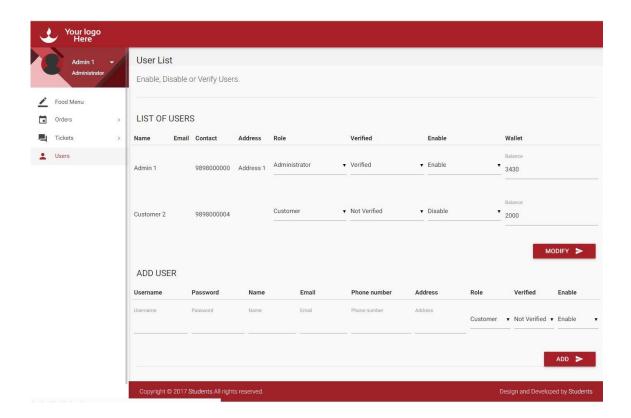


Figure 2.8 Admin Manage User

2.3.2 Online Food Ordering System

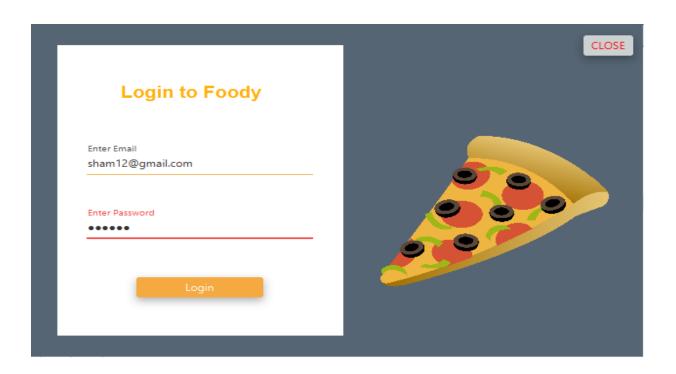


Figure 2.9 Login Page

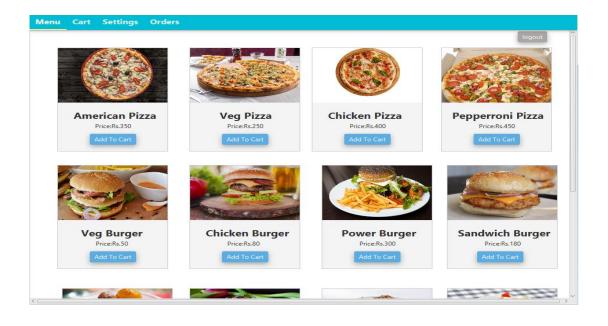


Figure 2.10 User Interface

2.3.3 Food Ordering System

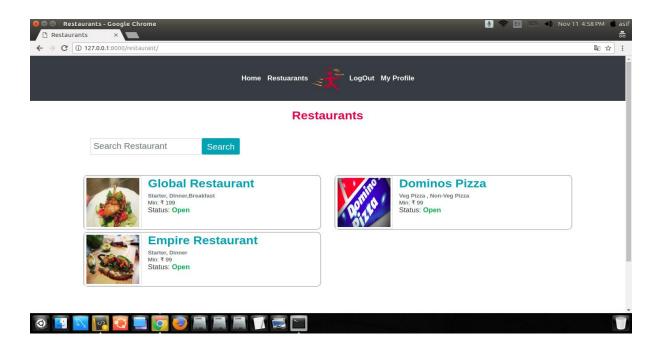


Figure 2.11 Select Restaurant Page

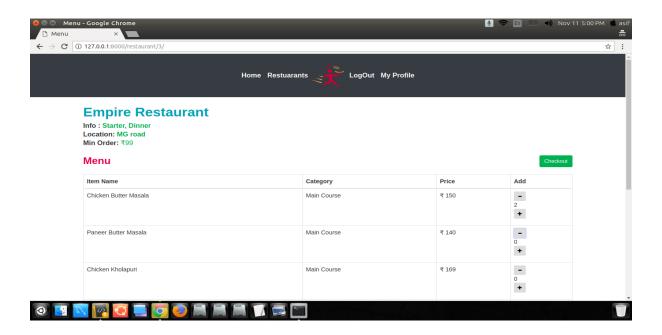


Figure 2.12 Menu Page

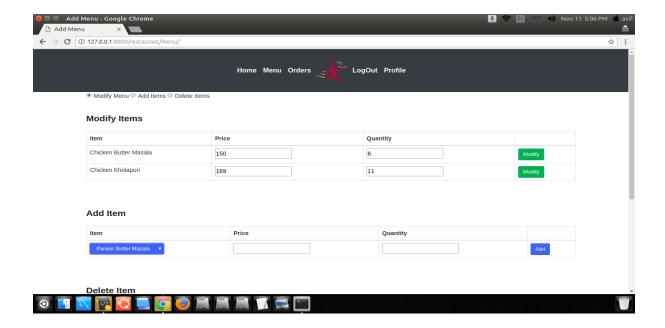


Figure 2.13 Modify Items

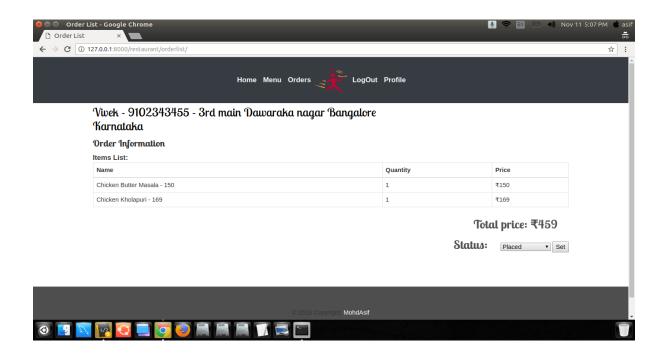


Figure 2.14 Order Information

2.3 COMPARISON BETWEEN EXISTING SYSTEM REVIEW

FEATURES	Food Ordering	Online Food	Food Ordering	Food Ordering
	System	Ordering	System	KUIS
		System		
Functionality	Yes	Yes	Yes	Yes
Interface	Simple and easy	Simple and easy	Simple and easy	Simple and easy
	to use	to use	to use	to use
Online payment	Have	Do not have	Do not have	Do no have

2.4.1 Comparison between existing system

12.0 TECNOLOGIES STUDIES

2.4.1 HTML

HTML, in full hypertext markup language, a formatting system for displaying material retrieved over the Internet. Each retrieval unit is known as a Web page (from World Wide Web), and such pages frequently contain hypertext links that allow related pages to be retrieved. HTML is the markup language for encoding Web pages. It was designed by the British scientist Sir Tim Berners-Lee at the CERN nuclear physics laboratory in Switzerland during the 1980s. HTML markup tags specify document elements such as headings, paragraphs, and tables. They mark up a document for display by a computer program known as a Web browser. The browser interprets the tags, displaying the headings, paragraphs, and tables in a layout that is adapted to the screen size and fonts available to it.

12.0.2 **PHP**

PHP started out as a small open source project that evolved as more and more people found out how useful it was. Rasmus Lerdorf unleashed the first version of PHP way back in 1994.

- PHP is a recursive acronym for "PHP: Hypertext Preprocessor".
- PHP is a server side scripting language that is embedded in HTML. It is used to manage dynamic content, databases, session tracking, even build entire e-commerce sites.
- It is integrated with a number of popular databases, including MySQL, PostgreSQL, Oracle, Sybase, Informix, and Microsoft SQL Server.
- PHP is pleasingly zippy in its execution, especially when compiled as an Apache module on the Unix side. The MySQL server, once started, executes even very complex queries with huge result sets in record-setting time.
- PHP supports a large number of major protocols such as POP3, IMAP, and LDAP.
 PHP4 added support for Java and distributed object architectures (COM and CORBA),
 making n-tier development a possibility for the first time.
- PHP is forgiving: PHP language tries to be as forgiving as possible.
- PHP Syntax is C-Like.

12.0.2 **MYSQL**

A database is a structured collection of data. It may be anything from a simple shopping list to a picture gallery or the vast amounts of information in a corporate network. To add, access, and process data stored in a computer database, you need a database management system such as MySQL Server. Since computers are very good at handling large amounts of data, database management systems play a central role in computing, as standalone utilities, or as parts of other applications.

2.4.4 Bootstrap

Bootstrap is a free and open source front end development framework for the creation of websites and web apps. The Bootstrap framework is built on HTML, CSS, and JavaScript (JS) to facilitate the development of responsive, mobile-first sites and apps.

Responsive design makes it possible for a web page or app to detect the visitor's screen size and orientation and automatically adapt the display accordingly; the mobile first approach assumes that smartphones, tablets and task-specific Mobile apps are employees' primary tools for getting work done and addresses the requirements of those technologies in design.

Bootstrap includes user interface components, layouts and JS tools along with the framework for implementation. The software is available precompiled or as source code.

12.0 SOFTWARE AND HARDWARE SPECIFICATIONS

2.5.1 SOFTWARE SPECIFICATIONS

12. Windows 11 Home Single Language

- ii. Laragon Version 5.0.0.2
- iii. Word
- iv. Visual Studio Code
- v. phpMyAdmin

2.5.2 HARDWARE SPECIFICATIONS

The hardware specifications for this project are as below.

Device	Processor	Ram
LAPTOP-INBN43A4	IntelI CoreI i3-1005G1 CPU	12.0 GB (11.7 GB usable)
	@ 1.20GHz 1.19 GHz	

2.5.2 Hardware specifications

2.6 CONCLUSION OF CHAPTER

In this chapter, overall about the literature review and why it is important to do this research. This research is very important to develop and maintain this project.

CHAPTER 3

METHODOLOGY

3.1 INTRODUCTION OF CHAPTER

Firstly, in this chapter we will discuss about the methodology that will be use for Food Ordering KUIS. Then, we will also discuss on how to plan and make the project. Furthermore, in methodology, we will explain the methods of data collection, material used and etc.

3.2 PROJECT METHODOLOGY

The Prototype model is one of the software development life cycle models in which a prototype is built with minimal requirements. This prototype is then tested and modified based on the feedback received from the client until a final prototype with desired functionalities gets created. This final prototype also acts as a base for the final product.

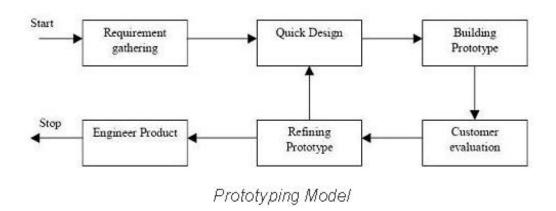


Figure 3.1 Prototype Model

Phases of Prototype Model:

Phase 1: Initial Communication

In this phase, business analysts and other individuals responsible for collecting the requirements and discussing the need for the product, meet the stakeholders or clients.

Phase 2: Quick Plan

Once basic requirements have been discussed, a quick plan of the initial prototype is made.

Phase 3: Modeling Quick Design

User interface part i.e. designing part of the prototype is carried out in this phase.

Phase 4: Development of the Prototype

In this phase, the designed prototype is coded and developed.

Phase 5: Deployment, Delivery, and Feedback of the Prototype

In this phase, the initial prototype is deployed and is accessible to clients for its use. Clients review or evaluate the prototype and they provide their feedback to the requirements gathering and development teams. Phases keep repeating until the replica of the final product is deployed.

Phase 6: Final Product Design, Implementation, Testing, Deployment, and Maintenance

Once the client finalizes a prototype, on the basis of the prototype, the final product is designed and developed. This developed product is tested by the testing team and if it is ready to go LIVE, the product is deployed and is available for end-user.

(artoftesting, 2022)

3.3 SYSTEM DESIGN AND INTERFACE DESIGN

3.3.1 USE CASE DIAGRAM

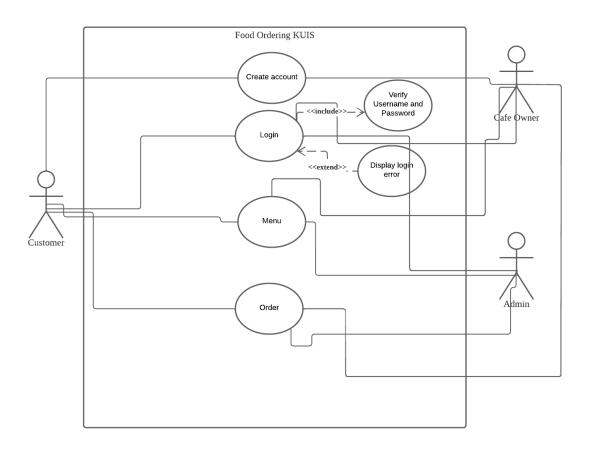


Figure 3.2 Use case diagram

3.3.2 FLOWCHART

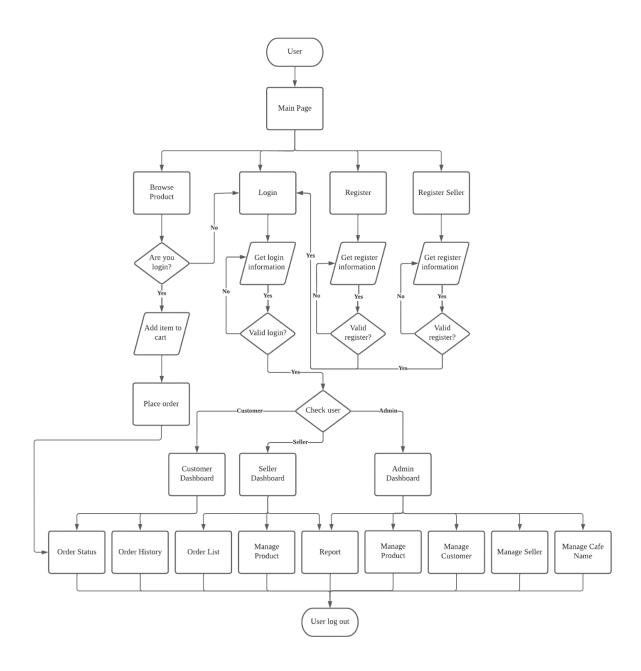


Figure 3.3 Flowchart

3.3.3 ER DIAGRAM

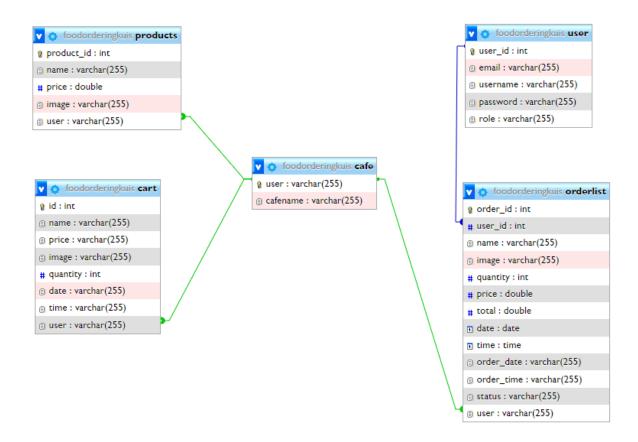


Figure 3.4 ER diagram

3.3.4 INTERFACE DESIGN

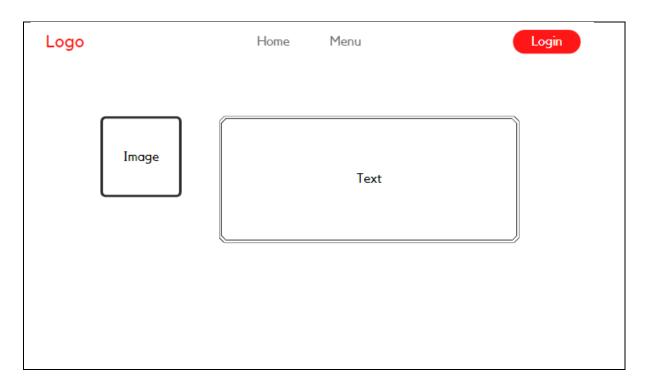


Figure 3.5 Homepage

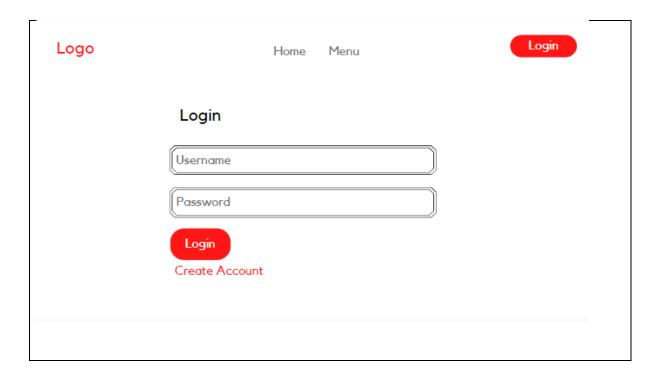


Figure 3.6 Login Page

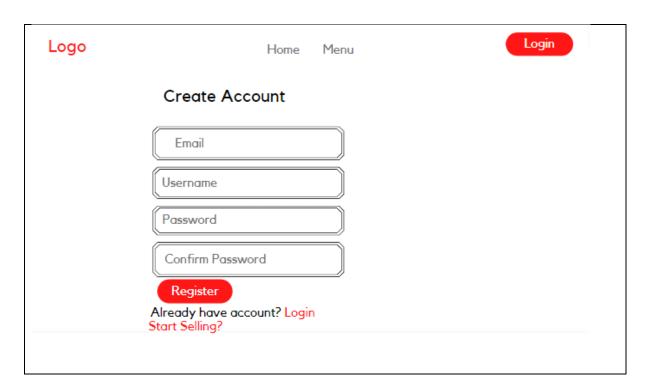


Figure 3.7 Register Customer Page

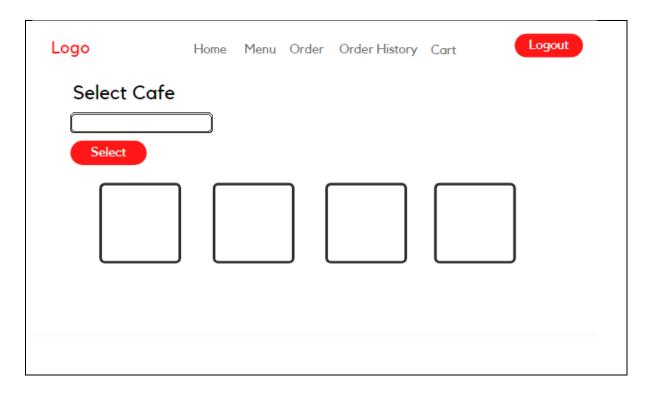


Figure 3.8 Menu Page

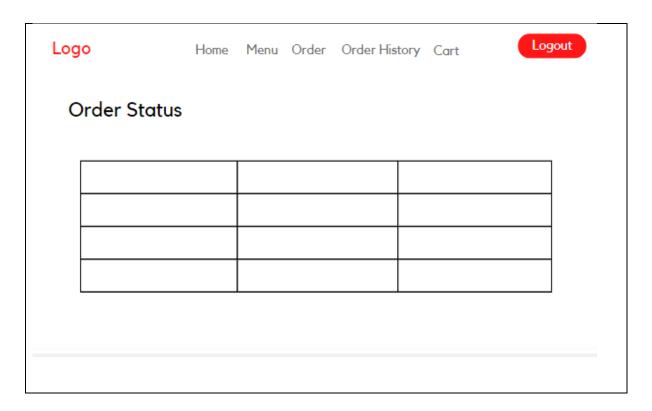


Figure 3.9 Order Status Page

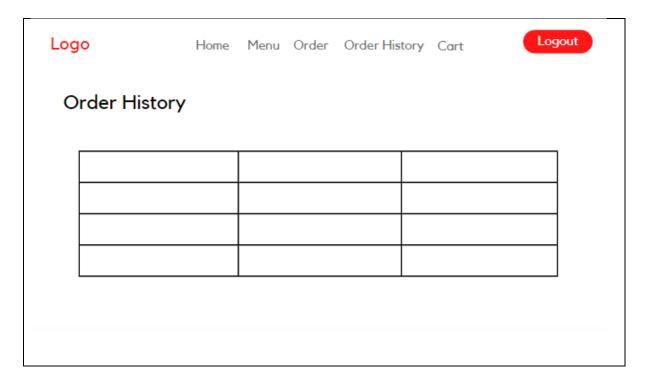


Figure 3.10 Order History Page

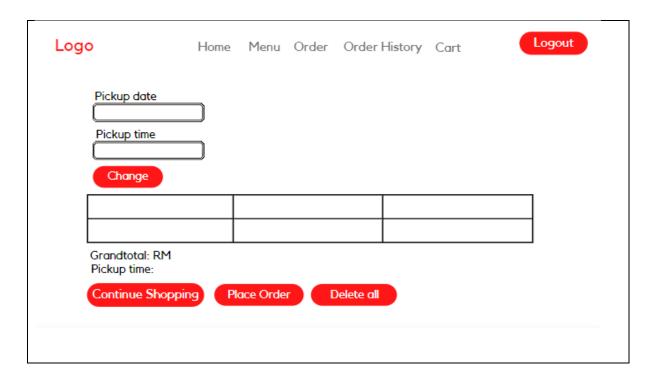


Figure 3.11 Cart Page

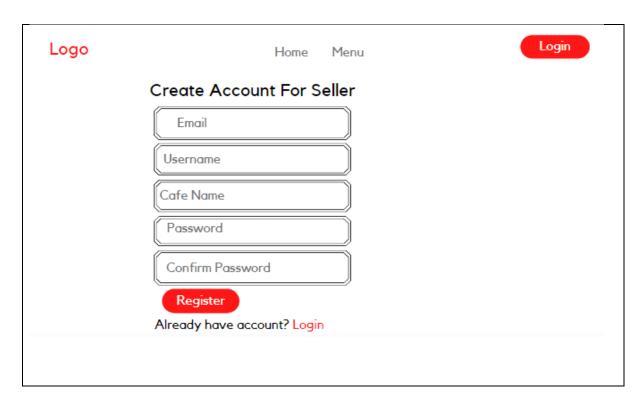


Figure 3.12 Register Seller Page

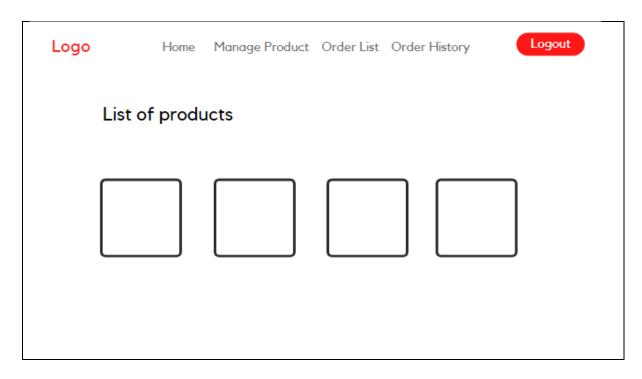


Figure 3.13 Seller Home Page

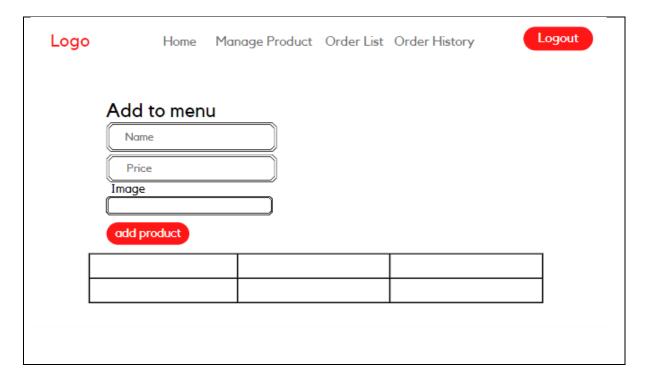


Figure 3.14 Seller Manage Product

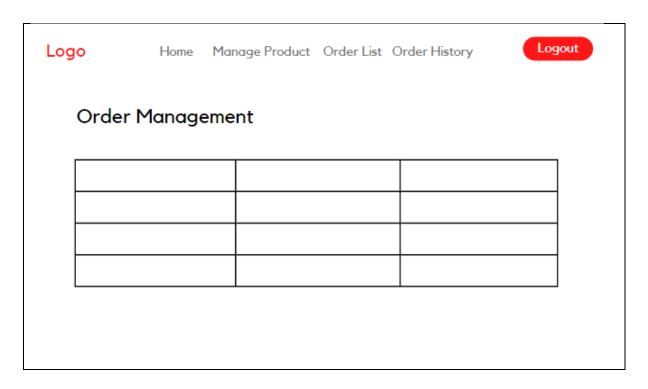


Figure 3.15 Seller Order Management

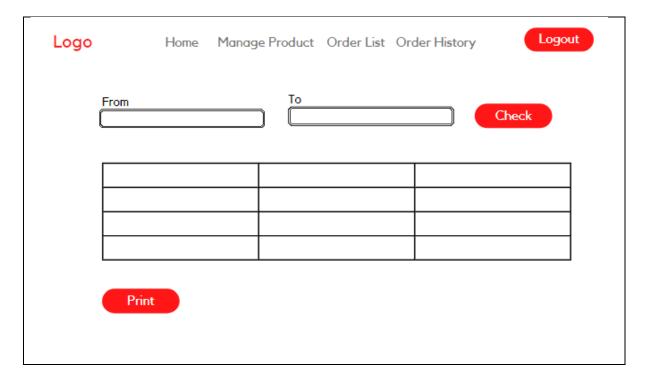


Figure 3.16 Seller Sales History

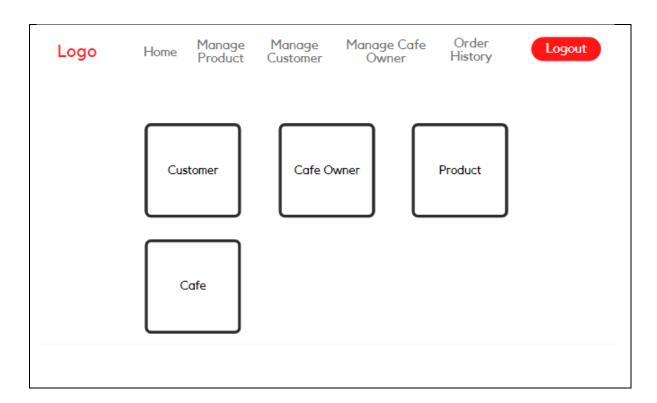


Figure 3.17 Admin Home Page

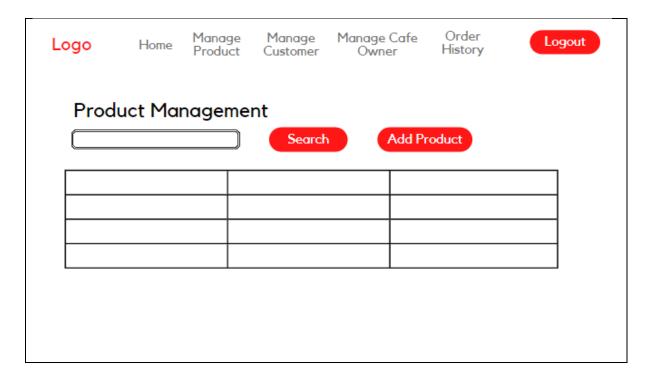


Figure 3.18 Admin Product Management

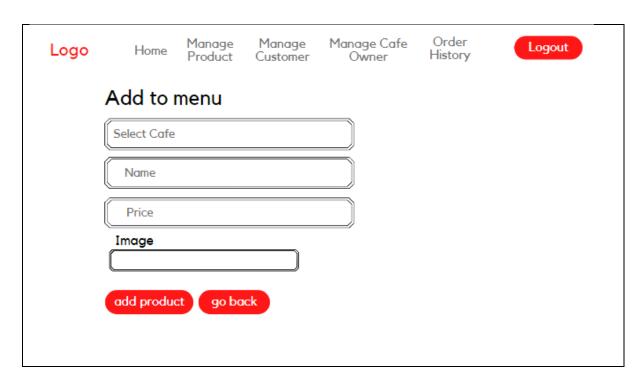


Figure 3.19 Admin Manage Product

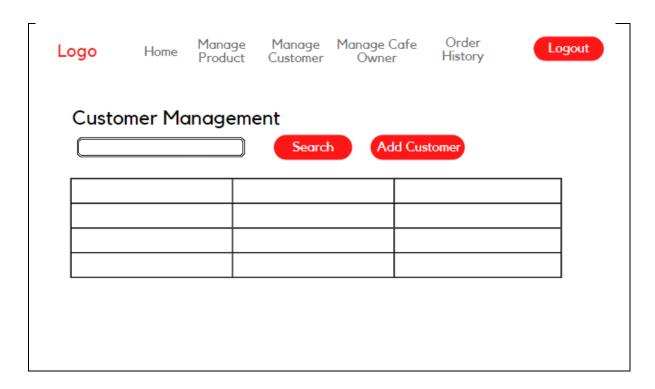


Figure 3.20 Admin Customer Management

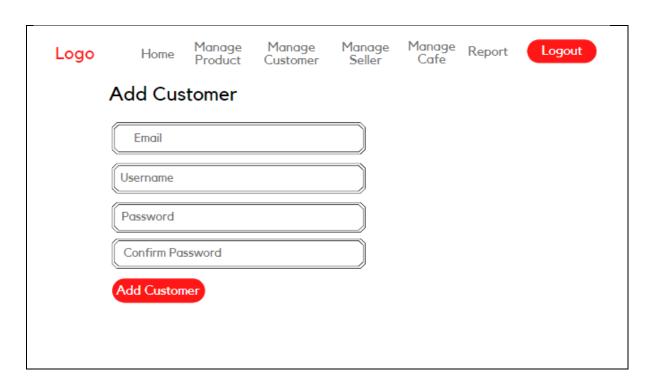


Figure 3.21 Admin Add Customer

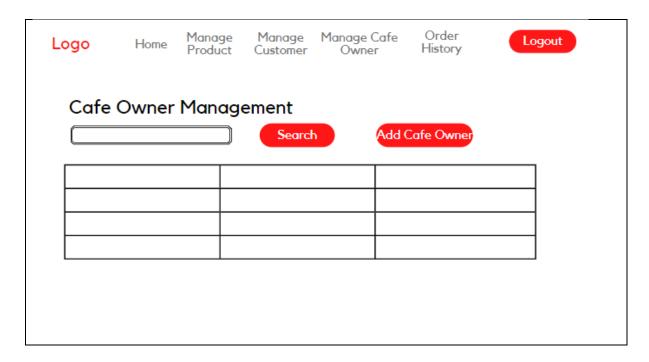


Figure 3.22 Admin Café Owner Management

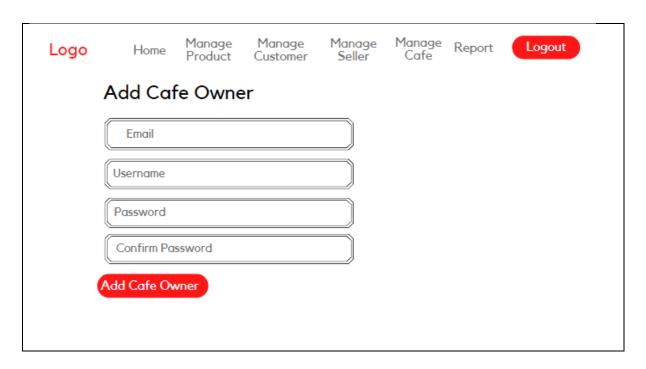


Figure 3.23 Admin Add Café Owner

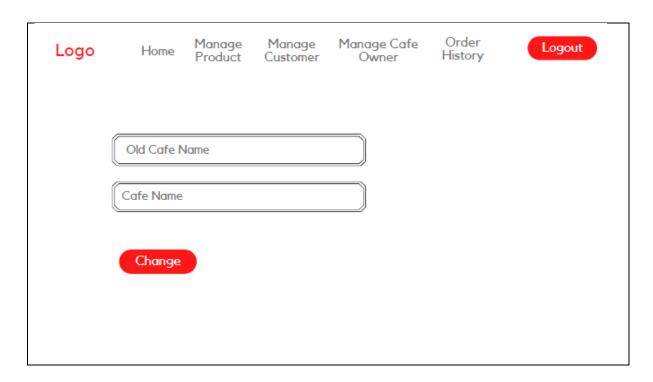


Figure 3.24 Admin Café Management

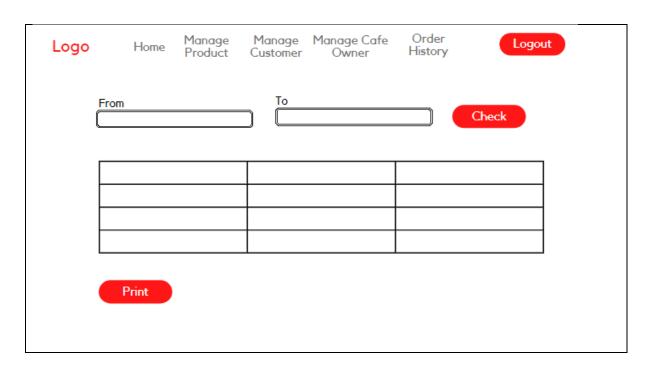


Figure 3.25 Admin Sales History

3.4 GANTT CHART

W4 W5 W6			OCTOBER 2 W13 W14 W19	DECEMBER 5 W16 W17 W18
W4 W5 W6	w7 w8 w9	9 W10 W11 W1:	2 W13 W14 W1	5 W16 W17 W1
		-	1 1 1	
		1 1 1	+	
			+	+++
			+	+++
-				+++
1 1 1			+++	+
				\top
1 1 1	1 1 1	1 1 1	1 1 1	1 1 1
		1 1 1		
		1 1 1		
		\perp	$\perp \perp \perp$	
			+	+
			++-	+
		+	+	
 		+++	+++	+
			+	
		+++	+++	+
		+ 		+ + + +
		 		+ + + +
	. — —			

3.5 CONCLUSION

The conclusion is basically shows about the flow of the system and the design of the database. It also shows concept how this system will be design.

CHAPTER 4

DESIGN & DEVELOPMENT

4.1 INRODUCTION

In this chapter we will talk about the project design and the implementation of the project which is describe about the project such as user interface of the project.

4.2 PROJECT IMPLEMENTATION

Implementation is necessary to utilize a design that has been compiled into a concrete form. The project was built using HTML, CSS, JavaScript, and PHP.

4.3 PROJECT SCREENSHOT

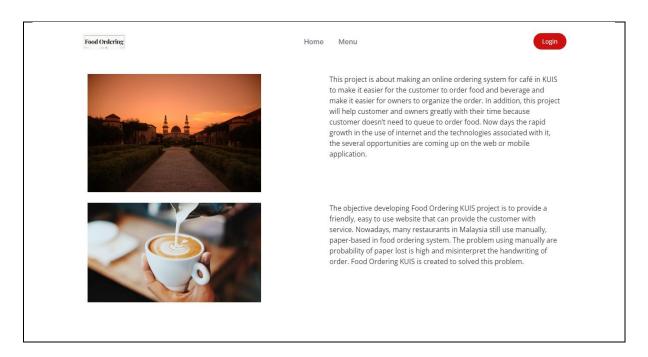


Figure 4.1 Home Page

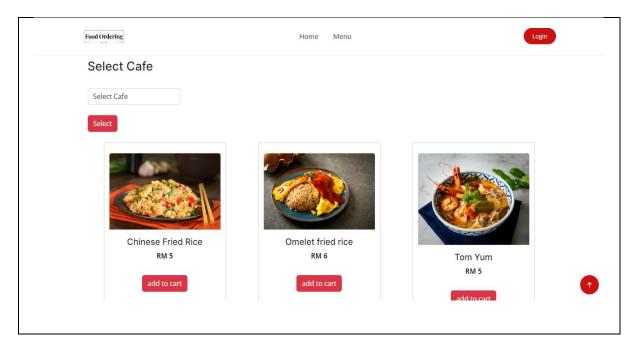


Figure 4.2 Menu Page

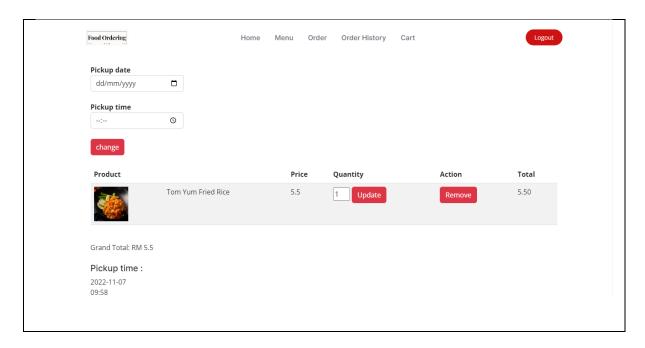


Figure 4.3 Cart Page

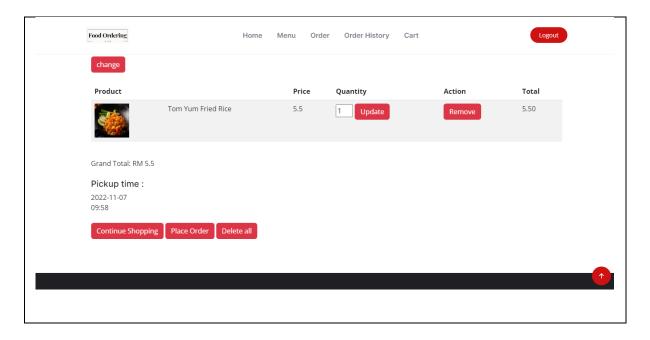


Figure 4.4 Cart Page

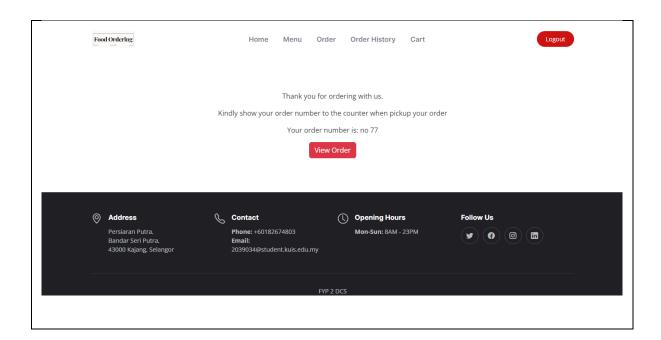


Figure 4.5 Place Order

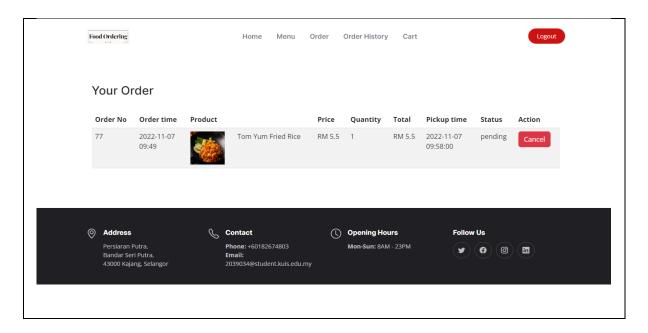


Figure 4.6 Order Status

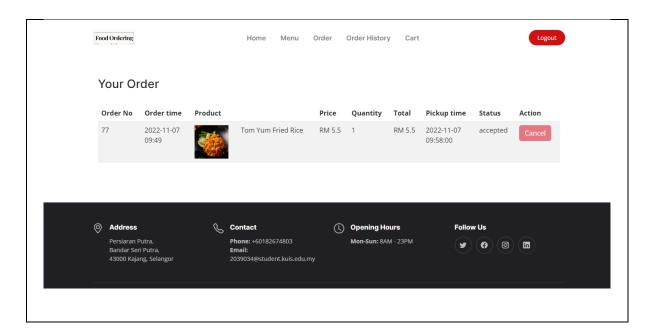


Figure 4.7 Order Status

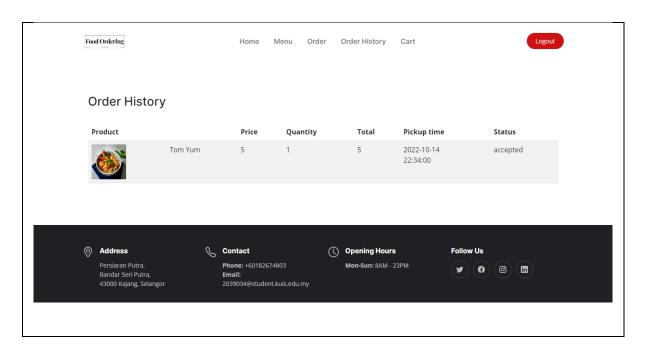


Figure 4.8 Order History

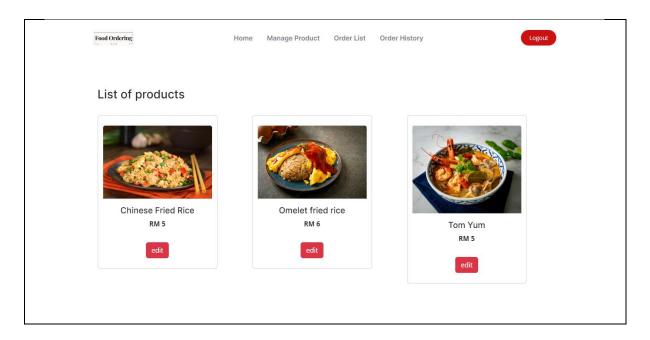


Figure 4.9 Café Owner Homepage

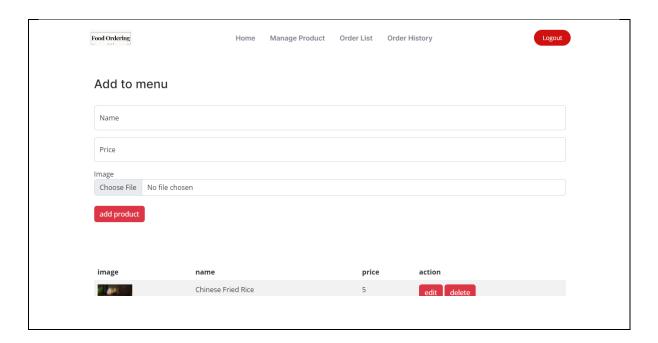


Figure 4.10 Café Owner Manage Product

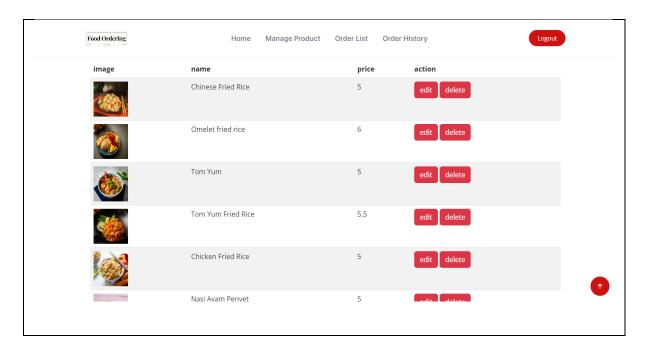


Figure 4.11 Café Owner Manage Product

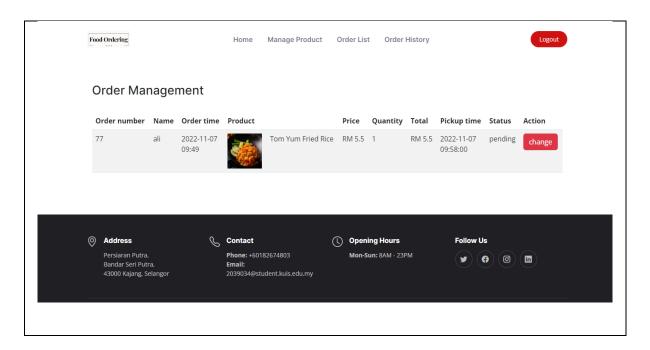


Figure 4.12 Café Owner Order Management

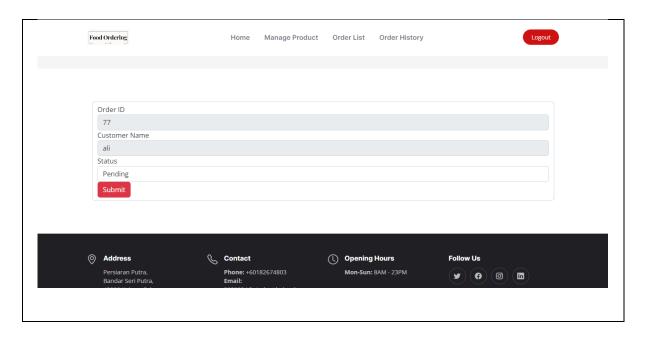


Figure 4.13 Café Owner Change Status

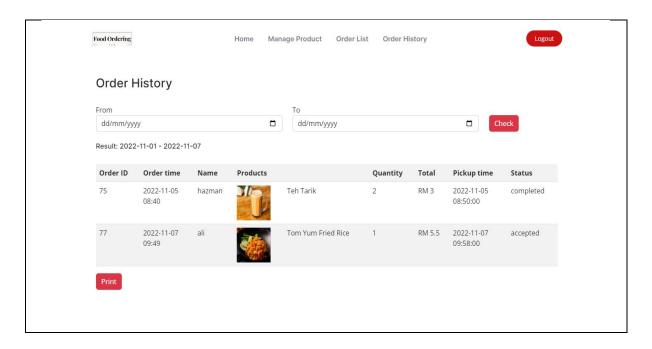


Figure 4.14 Café Owner Order History

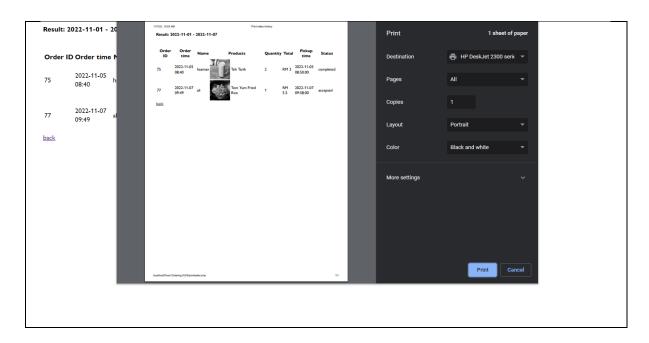


Figure 4.15 Café Owner Print Order History

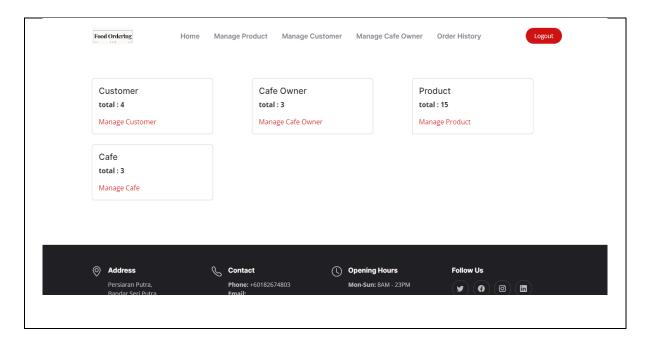


Figure 4.16 Admin Homepage

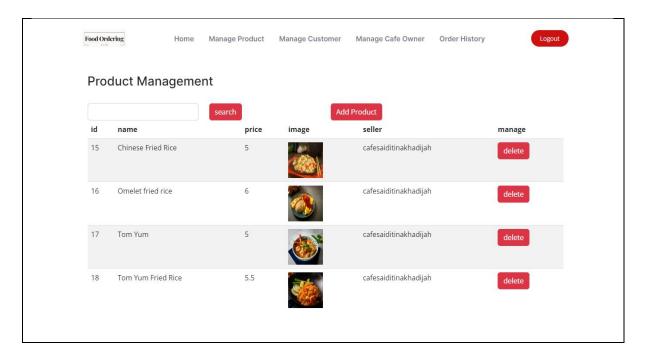


Figure 4.17 Admin Product Management

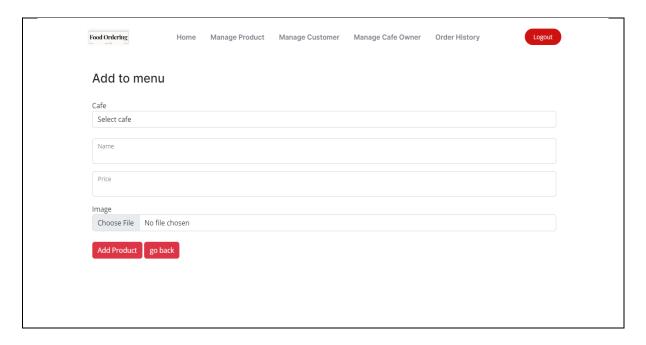


Figure 4.18 Admin Add Product

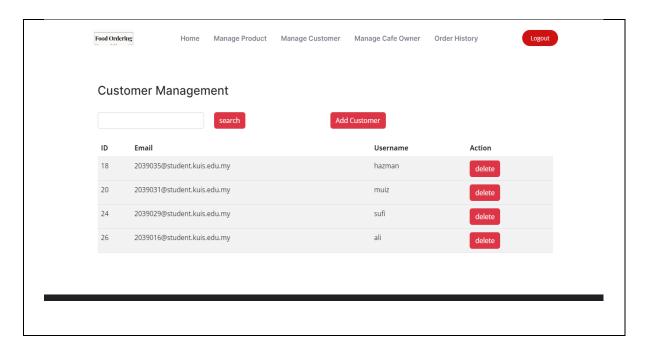


Figure 4.19 Admin Customer Management

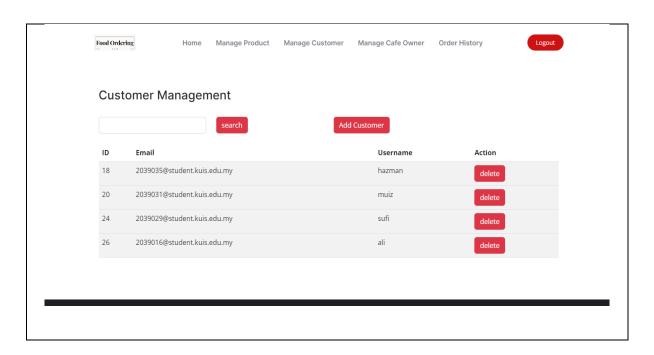


Figure 4.20 Admin Add Customer

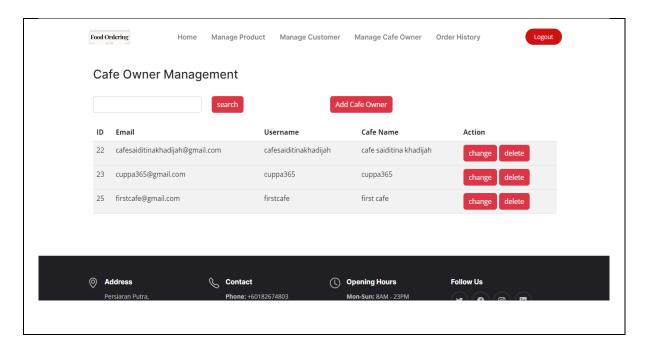


Figure 4.21 Admin Café Owner Management

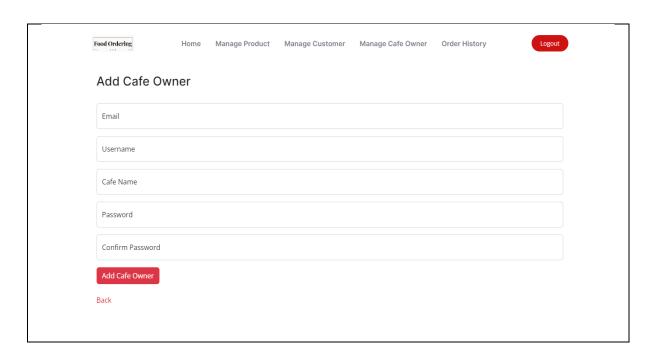


Figure 4.22 Admin Add Café Owner

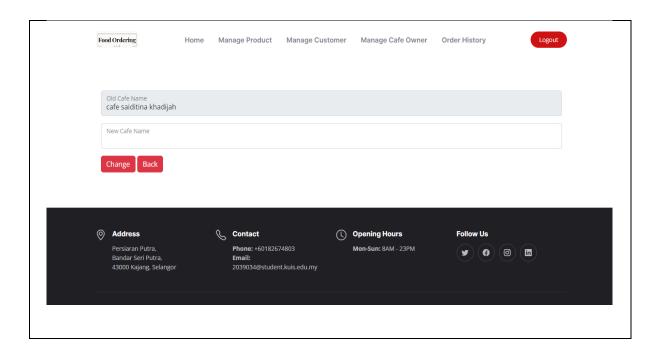


Figure 4.23 Admin Change Cafename

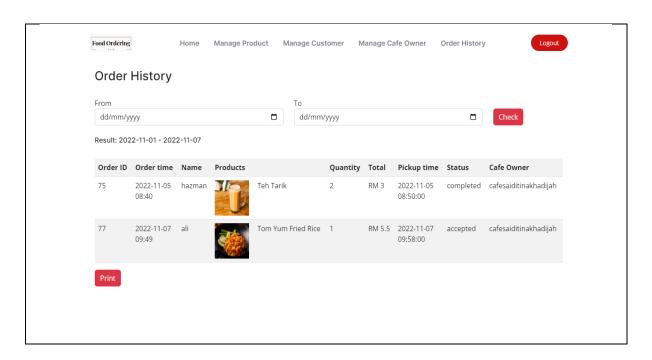


Figure 4.24 Admin Order History

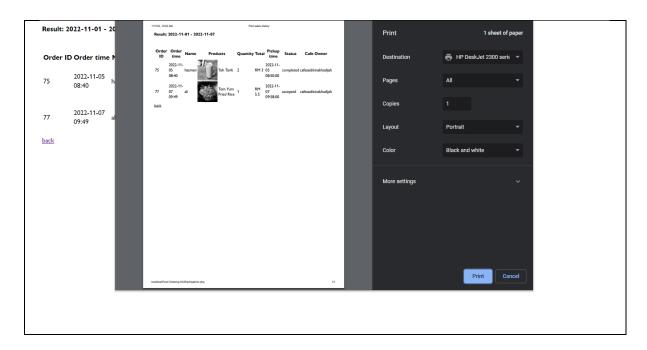


Figure 4.25 Admin Print Order History

4.4 CONCLUSION

This chapter shows the screenshot of the project of Food Ordering KUIS.

CHAPTER 5

CONCLUSION AND RECOMMENDATION

5.1 INTRODUCTION

Food Ordering KUIS can be useful to café owner in KUIS, student, lecturer and staff. Café owner can use it to see their sales history, organize order and etc. Customer can use it to order food without having to queue at the café.

5.2 LESSON LEARNED

During this project, I've learned that it is important to manage your time. Other than that, I've got to learn many functions and syntax in PHP. I've enjoy learning all of new things. This help in improving my discipline and ability to multitask.

5.3 RECOMMENDATION FOR FUTURE PROJECT CONTINUATION

We hope that Food ordering KUIS can be improve into more functionality in customizing order so that it will be much easier for customer to customizing their order to their likes.

5.4 CONCLUSION

What can be conclude for this software are this project need to be maintained and modified for creating features and make it more interactive.

REFERENCES

https://github.com/haxxorsid/food-ordering-system

 $\underline{https://github.com/winston-dsouza/Online-Food-Ordering-System}$

https://github.com/asif536/Food-Ordering-System

https://getbootstrap.com/docs/5.2/getting-started/introduction/

https://www.w3schools.com/php/

https://www.w3schools.com/MySQL/default.asp

APPENDICES

login.php

```
<?php
session_start();
include "connection.php";
include "includes/header.php";
$errors = array();
if(isset($_SESSION['username'])) {
          $role = $ SESSION['role'];
          if($role == 'admin'){
                     echo "<script> location.href='adminpage.php'; </script>";
                }
                if($role == 'cafe_owner'){
                     echo "<script> location.href='cafeownerpage.php'; </script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";</script>";
                }
                if($role == 'customer'){
                     echo "<script> location.href='home.php'; </script>";
                }
}
if (isset($_POST['login'])) {
          $username = mysqli_real_escape_string($conn, $_POST['username']);
          $password = mysqli_real_escape_string($conn, $_POST['password']);
          if (empty($username)) {
                     array_push($errors, "Username is required");
          if (empty($password)) {
                     array_push($errors, "Password is required");
          }
          if (count($errors) == 0) {
                     $password = md5($password);
                     $query = "SELECT * FROM user WHERE username='$username' AND
password='$password'";
                     $results = mysqli_query($conn, $query);
                     if (mysqli_num_rows($results) == 1) {
                                $row = mysqli_fetch_assoc($results);
                                $role = $row['role'];
                                if($role == 'admin') {
                                           $_SESSION['username'] = $username;
                                           $_SESSION['role'] = $role;
                                           $_SESSION['success'] = "You are now logged in";
                                           echo "<script> location.href='adminpage.php'; </script>";
```

```
exit;
            if($role == 'cafe_owner') {
                $_SESSION['username'] = $username;
                $ SESSION['role'] = $role;
                $_SESSION['success'] = "You are now logged in";
                echo "<script> location.href='cafeownerpage.php';
</script>";
                exit;
            }
            if($role == 'customer') {
                $ SESSION['username'] = $username;
                $_SESSION['role'] = $role;
                $_SESSION['success'] = "You are now logged in";
                echo "<script> location.href='home.php'; </script>";
                exit;
            }
        }else {
            array_push($errors, "Wrong username/password combination");
        }
   }
  }
?>
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>GrindersCafe-login</title>
</head>
<body>
    <div class="container">
    <h3>Login</h3><br>
    <form action="" method="POST">
    <?php include('errors.php'); ?>
    <br>
    <div class="form-floating mb-3">
        <input type="text" name="username" class="form-control"</pre>
placeholder="Your username" required>
        <label for="username">Username</label>
    </div>
    <div class="form-floating mb-3">
        <input type="password" name="password" class="form-control"</pre>
placeholder="Your password" required>
        <label for="password">Password</label>
```

logout.php

```
<?php
include "connection.php";

mysqli_query($conn, "DELETE FROM cart");

session_start();
session_unset();
session_destroy();

echo "<script>window.open('home.php','_self')</script>";

?>
```

register.php

```
<?php
session_start();
$errors = array();
include "includes/header.php";
include "connection.php";

if(isset($_POST['register'])) {
    $email = mysqli_real_escape_string($conn, $_POST['email']);
    $username = mysqli_real_escape_string($conn, $_POST['username']);
    $password = mysqli_real_escape_string($conn, $_POST['password']);
    $confirm_password = mysqli_real_escape_string($conn,
$_POST['confirm_password']);</pre>
```

```
$role = 'customer';
    if (empty($username)) {
        array_push($errors, "Username is required");
    }
    if (empty($email)) {
        array_push($errors, "Email is required");
    if (empty($password)) {
        array_push($errors, "Password is required");
    if($password != $confirm password) {
        array_push($errors, "The two passwords do not match");
    $user check = "SELECT * FROM user WHERE username='$username' OR
email='$email' LIMIT 1";
    $result = mysqli_query($conn, $user_check);
    $user = mysqli fetch assoc($result);
    if ($user) { // if user exists
        if ($user['username'] === $username) {
          array_push($errors, "Username already exists");
        }
        if ($user['email'] === $email) {
          array_push($errors, "email already exists");
        }
      if (count($errors) == 0) {
        $password = md5($password);//encrypt the password before saving in
the database
        $query = "INSERT INTO user (email, username, password, role)
                  VALUES('$email', '$username', '$password', '$role')";
        mysqli query($conn, $query);
        echo '<script>alert("Your registration is completed")</script>';
    }
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Register</title>
</head>
```

```
<body>
    <div class="container">
    <h3>Create Account</h3><br>
    <form action="" method="post">
    <?php include "errors.php"; ?>
    <br>
    <div class="form-floating mb-3">
        <input type="email" class="form-control" name="email"</pre>
placeholder="please enter your email">
        <label for="email">Email</label>
    </div>
    <div class="form-floating mb-3">
        <input type="text" class="form-control" name="username"</pre>
placeholder="please enter your username">
        <label for="username">Username</label>
    </div>
    <div class="form-floating mb-3">
        <input type="password" class="form-control" name="password"</pre>
placeholder="please enter your password">
        <label for="password">Password</label>
    </div>
    <div class="form-floating mb-3">
        <input type="password" class="form-control" name="confirm_password"</pre>
placeholder="please re-write your password">
        <label for="confirm password">Confirm Password</label>
    </div>
        <input type="submit" class="btn btn-danger" name="register"</pre>
value="Register"><br><br>
        Already have an account? <a href="login.php">Login</a>
        <a href="register_seller.php">Start Selling?</a>
    </form>
</div>
</body>
</html>
<?php
include "includes/footer.php";
```

register_seller.php

```
<?php
session_start();
$errors = array();
include "includes/header.php";
include "connection.php";</pre>
```

```
if(isset($ POST['register'])) {
    $email = mysqli_real_escape_string($conn, $_POST['email']);
    $username = mysqli_real_escape_string($conn, $_POST['username']);
    $cafename = $ POST['cafename'];
    $password = mysqli_real_escape_string($conn, $_POST['password']);
    $confirm_password = mysqli_real_escape_string($conn,
$_POST['confirm_password']);
    $role = 'cafe owner';
    if (empty($username)) {
        array push($errors, "Username is required");
    if (empty($email)) {
        array_push($errors, "Email is required");
    }
    if (empty($password)) {
        array push($errors, "Password is required");
    if($password != $confirm_password) {
        array_push($errors, "The two passwords do not match");
    $user check = "SELECT * FROM user WHERE username='$username' OR
email='$email' LIMIT 1";
    $result = mysqli query($conn, $user check);
    $user = mysqli_fetch_assoc($result);
    if ($user) { // if user exists
        if ($user['username'] === $username) {
          array_push($errors, "Username already exists");
        }
        if ($user['email'] === $email) {
          array_push($errors, "email already exists");
        }
      if (count($errors) == 0) {
        $password = md5($password);//encrypt the password before saving in
the database
        $query = "INSERT INTO user(email, username, password, role)
                  VALUES('$email', '$username', '$password', '$role')";
        mysqli_query($conn, $query);
        $sql = "INSERT INTO cafe(user, cafename) VALUES('$username',
'$cafename')";
        mysqli_query($conn,$sql);
        echo '<script>alert("Your registration is completed")</script>';
```

```
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Register</title>
</head>
<body>
    <div class="container">
    <h3>Create Account For Seller</h3><br>
    <form action="" method="post">
    <?php include "errors.php"; ?>
    <div class="form-floating mb-3">
        <input type="email" class="form-control" name="email"</pre>
placeholder="please enter your email">
        <label for="email">Email</label>
    </div>
    <div class="form-floating mb-3">
        <input type="text" class="form-control" name="username"</pre>
placeholder="please enter your username">
        <label for="username">Username</label>
    </div>
    <div class="form-floating mb-3">
        <input type="text" class="form-control" name="cafename"</pre>
placeholder="please enter name of your cafe">
        <label for="cafename">Cafe Name</label>
    <div class="form-floating mb-3">
        <input type="password" class="form-control" name="password"</pre>
placeholder="please enter your password">
        <label for="password">Password</label>
    </div>
    <div class="form-floating mb-3">
        <input type="password" class="form-control" name="confirm password"</pre>
placeholder="please re-write your password">
        <label for="confirm_password">Confirm Password</label>
    </div>
        <input type="submit" class="btn btn-danger" name="register"</pre>
value="Register"><br><br>
        Already have an account? <a href="login.php">Login</a>
    </form>
</div>
</body>
</html>
```

```
<?php
include "includes/footer.php";
?>
```

errors.php

home.php

```
<?php
session_start();
include "connection.php";
if (!isset($_SESSION['username'])) {
  include "includes/header.php";
if(isset($_SESSION['username'])) {
  $role = $_SESSION['role'];
 if($role == 'admin'){
    include "includes/headeradmin.php";
 }
 if($role == 'cafe_owner'){
    include "includes/headerseller.php";
 }
  if($role == 'customer'){
    include "includes/headerlog.php";
 }
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
   <meta charset="UTF-8">
```

```
<meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Homepage</title>
</head>
<body>
  <div class="container">
    <div class="row">
      <div class="col mb-4">
      <img src="image/alazhar-03.jpg" alt="masjid al-azhar" width="400">
      </div>
      <div class="col mb-4">
          This project is about making an online ordering system for café
in KUIS to make it easier for the customer to order food and beverage and
make it easier for owners to organize the order.
          In addition, this project will help customer and owners greatly
with their time because customer doesn't need to queue to order food.
          Now days the rapid growth in the use of internet and the
technologies associated with it, the several opportunities are coming up on
the web or mobile application.
      </div>
    </div>
    <div class="row">
      <div class="col mb-4">
        <img src="image/fahmi-fakhrudin-nzyzAUsbV0M-unsplash.jpg" alt=""</pre>
width="400">
      </div>
      <div class="col mb-4">
      The objective developing Food Ordering KUIS project is to provide a
friendly,
          easy to use website that can provide the customer with service.
          Nowadays, many restaurants in Malaysia still use manually, paper-
based in food ordering system.
          The problem using manually are probability of paper lost is high
and misinterpret the handwriting of order.
          Food Ordering KUIS is created to solved this problem. 
      </div>
    </div>
  </div>
</body>
</html>
include "includes/footer.php";
?>
```

menu.php

```
<?php
session start();
include "connection.php";
date_default_timezone_set('Asia/Kuala_Lumpur');
if (!isset($_SESSION['username'])) {
    include "includes/header.php";
}
else {
    include "includes/headerlog.php";
}
if(isset($ POST['add to cart'])){
    if(!$ SESSION['username']) {
        echo '<script>alert("Please login first")</script>';
        echo "<script> location.href='login.php'; </script>";
        exit;
    }
    $image = $_POST['image'];
    $name = $_POST['name'];
    $price = $_POST['price'];
    $quantity = 1;
    $user = $ POST['user'];
    $time = date("h:i", strtotime('+10 minutes'));
    $date = date("Y-m-d");
    $select_cart = mysqli_query($conn, "SELECT * FROM cart WHERE name =
'$name'");
    if(mysqli_num_rows($select_cart) > 0) {
        while($fetch = mysqli_fetch_assoc($select_cart)) {
            $qty = $fetch['quantity'];
            $qty += 1;
           echo '<script>alert("Product added to cart
successfully")</script>';
          $update = mysqli_query($conn, "UPDATE cart SET quantity = '$qty'
WHERE name = '$name'");
          echo "<script> location.href='cart.php'; </script>";
        }
    }
    else {
        $insert = mysqli query($conn, "INSERT INTO
cart(name, price, image, quantity, date, time, user)
        VALUES('$name','$price','$image','$quantity','$date','$time','$user'
) ");
        echo '<script>alert("Product added to cart successfully")</script>';
        echo "<script> location.href='cart.php'; </script>";
```

```
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Menu</title>
</head>
<body>
    <div class="container">
    <?php
    $sql = "SELECT * FROM cafe";
    $result = mysqli query($conn, $sql);
    ?>
    <h3>Select Cafe</h3><br>
    <form action="" method="post">
        <select name="selectcafe" class="form-control" style="width: 20%;">
            <option value="">Select Cafe</option>
        <?php
        while($fetch = mysqli_fetch_assoc($result)){
        ?>
            <option value="<?php echo $fetch['user'] ?>"><?php echo</pre>
$fetch['cafename'] ?></option>
        <?php } ?>
        </select><br>>
        <input type="submit" name="select" value="Select" class="btn btn-</pre>
danger">
    </form><br>
    <?php
    if(isset($_POST['select'])) {
        $select = $_POST['selectcafe'];
    ?>
    <center>
    <div class="container">
        <div class="row">
    <?php
    $query = mysqli_query($conn,"SELECT * FROM products WHERE user =
'$select'");
    if(mysqli_num_rows($query) > 0) {
        while($fetch = mysqli_fetch_assoc($query)) {
    ?>
```

```
<div class="col mb-4">
    <div class="card" style="width: 18rem;">
        <form action="" method="post" class="container text-center">
            <br>
                <img src="image/<?php echo $fetch['image'] ?>" class="card-
img-top" alt="" width="200">
                <div class="card-body">
                     <div class="card-title">
                         <h5><?php echo $fetch['name'] ?></h5>
                     </div>
                     <div class="card-text">
                         <strong>RM <?php echo $fetch['price']
?></strong>
                     </div>
                </div>
            <input type="hidden" name="image" value="<?php echo</pre>
$fetch['image']; ?>">
            <input type="hidden" name="name" value="<?php echo</pre>
$fetch['name']; ?>">
            <input type="hidden" name="price" value="<?php echo</pre>
$fetch['price']; ?>">
            <input type="hidden" name="user" value=<?php echo $fetch['user']</pre>
?>>
            <input type="submit" class="btn btn-danger" value="add to cart"</pre>
name="add to cart">
        </form><br>
    </div>
        </div>
    <?php
        }
    }
}
    ?>
    </div>
    </div>
</center>
</div>
</body>
</html>
<?php
include "includes/footer.php";
```

cart.php

```
<?php
session start();
include "connection.php";
if (!isset($ SESSION['username'])) {
    include "includes/header.php";
    $_SESSION['msg'] = "You must log in first";
    echo '<script>alert("Please login first")</script>';
    echo "<script> location.href='login.php'; </script>";
    exit;
}
else {
    include "includes/headerlog.php";
}
$query = "SELECT * FROM cart";
$results = mysqli_query($conn,$query);
$check = mysqli num rows($results);
$grandtotal = 0;
$pickup_date = "";
$pickup_time = "";
if(isset($_POST['update'])) {
    $quantity = $_POST['quantity'];
    $id = $ POST['qtyid'];
    $sql = "UPDATE cart set quantity = '$quantity' WHERE id = '$id'";
    mysqli_query($conn, $sql);
    echo "<script> location.href='cart.php'; </script>";
}
if(isset($_GET['remove'])) {
    $id = $_GET['remove'];
   mysqli_query($conn, "DELETE FROM cart WHERE id = $id");
    echo "<script> location.href='cart.php'; </script>";
if(isset($ GET['delete all'])) {
    mysqli_query($conn, "DELETE FROM cart");
    echo "<script> location.href='cart.php'; </script>";
if(isset($ POST['change'])) {
    $date = $ POST['date'];
    $time = $_POST['time'];
    mysqli_query($conn, "UPDATE cart SET date = '$date', time = '$time'");
    echo "<script> location.href='cart.php'; </script>";
}
?>
<!DOCTYPE html>
<html lang="en">
```

```
<head>
   <meta charset="UTF-8">
   <meta http-equiv="X-UA-Compatible" content="IE=edge">
   <meta name="viewport" content="width=device-width, initial-scale=1.0">
   <title>Cart</title>
</head>
<body>
   <div class="container">
   <form action="" method="post">
       <strong><label for="date">Pickup date</label><br></strong>
       <input type="date" name="date" class="form-control" style="width:</pre>
20%;"><br>
       <strong><label for="time">Pickup time</label><br></strong>
       <input type="time" name="time" class="form-control" style="width:</pre>
20%;"><br>
       <input type="submit" name="change" class="btn btn-danger"</pre>
value="change">
   </form>
   <div class="table-responsive-md">
   <?php
       if($check > 0) {
   <thead>
              Product
                  Price
                  Quantity
                  Action
                  Total
              </thead>
   <?php
       while($row = mysqli_fetch_assoc($results)){
   ?>
   <br>
       <?php $pickup_date = $row['date'];</pre>
        $pickup time = $row['time'];
    ?>
   <img src="image/<?php echo $row['image']?>" alt="" width="80"
height="80">
     <?php echo $row['name']?>
     <?php echo $row['price']?>
     <form action="" method="post">
```

```
<input type="hidden" name="qtyid" min="1" value="<?php echo</pre>
$row['id']; ?>">
         <input type="number" name="quantity" min="1" value="<?php echo</pre>
$row['quantity']; ?>" style="width: 40px">
         <input type="submit" name="update" class="btn btn-danger"</pre>
value="Update">
       </form>
     <a href="cart.php?remove=<?php echo $row['id']; ?>" class="btn"
btn-danger" onclick="return confirm('are you sure?')">Remove</a>
     <?php echo $subtotal = sprintf("%.2f",$row['price'] *
<?php
   $grandtotal += $subtotal;
       }
       ?>
   <br>
   </div>
   <?php
   }
   else {
       echo "<br><h4> Your cart is empty</h4><br>";
   }
   ?>
   <span>Grand Total: RM <?= $grandtotal; ?></span><br><br>
   <h5>Pickup time :</h5>
   <?php
   echo $pickup_date."<br>";
   echo $pickup_time."<br>>";
   if($check > 0) {
   ?>
   <a href="menu.php" class="btn btn-danger">Continue
Shopping</a>
       <a href="placeorder.php?placeorder" class="btn btn-danger">Place
Order</a>
       <a href="cart.php?delete_all" class="btn btn-danger"
<?php
   }
   ?>
</div>
</body>
</html>
<?php
```

```
include "includes/footer.php";
?>
```

placeorder.php

```
<?php
session start();
include "connection.php";
include "includes/headerlog.php";
date default timezone set('Asia/Kuala Lumpur');
$username = $_SESSION['username'];
$test = mysqli query($conn, "SELECT * FROM user WHERE username =
'$username'");
$fetch = mysqli_fetch_assoc($test);
$user_id = $fetch['user_id'];
$status = "pending";
$cur time = date("h:i");
$cur_date = date("Y-m-d");
if(isset($_GET['placeorder'])) {
    $query = "SELECT * FROM cart";
    $result = mysqli_query($conn, $query);
    if(mysqli_num_rows($result) > 0) {
        while($row = mysqli_fetch_assoc($result)){
            $cart_id = $row['id'];
           $name = $row['name'];
           $image = $row['image'];
           $quantity = $row['quantity'];
           $price = $row['price'];
           $date = $row['date'];
           $time = $row['time'];
           $user = $row['user'];
           $subtotal = sprintf("%.2f",$row['price'] * $row['quantity']);
           $insert = mysqli_query($conn, "INSERT INTO orderlist
(user_id,name,image,quantity,price,total,date,time,order_date,order_time,sta
tus, user)
           VALUES('$user_id','$name','$image','$quantity','$price','$subtota
1','$date','$time','$cur_date','$cur_time','$status','$user')");
           if($insert == true) {
            mysqli_query($conn, "DELETE FROM cart WHERE id = $cart_id");
           }
```

```
}
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Place Order</title>
</head>
<body>
    <div class="container">
    <?php
    $dis = mysqli_query($conn,"SELECT * FROM orderlist WHERE user_id =
'$user_id' ORDER BY order_id DESC");
    $cap = mysqli_fetch_assoc($dis);
    ?>
    <center>
        Thank you for ordering with us.
        Kindly show your order number to the counter when pickup your
order
        Your order number is: no <?php echo $cap['order_id'] ?>
        <a href="orderstatus.php" class="btn btn-danger">View Order</a>
    </center>
</div>
</body>
</html>
<?php
include "includes/footer.php";
```

orderstatus.php

```
<?php
session_start();
include "includes/headerlog.php";
include "connection.php";
date_default_timezone_set('Asia/Kuala_Lumpur');
$date = date("Y-m-d");

$username = $_SESSION['username'];
$test = mysqli_query($conn, "SELECT * FROM user WHERE username = '$username'");</pre>
```

```
$fetch = mysqli_fetch_assoc($test);
$user id = $fetch['user id'];
$query = "SELECT * FROM orderlist WHERE user_id = $user_id";
$result = mysqli_query($conn,$query);
if(isset($_GET['cancel'])) {
   $order id = $ GET['cancel'];
   mysqli_query($conn, "DELETE FROM orderlist WHERE order_id");
   echo "<script> location.href='orderstatus.php'; </script>";
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
   <meta charset="UTF-8">
   <meta http-equiv="X-UA-Compatible" content="IE=edge">
   <meta name="viewport" content="width=device-width, initial-scale=1.0">
   <title>Order Status</title>
</head>
<body>
   <div class="container">
   <h3>Your Order</h3><br>
   <div class="table-responsive-md">
   <thead>
          Order No
              Order time
              Product
             Price
             Quantity
             Total
             Pickup time
             Status
             Action
          </thead>
       <?php
   if(mysqli num rows($result) > 0) {
       while($row = mysqli_fetch_assoc($result)){
          if($row['status'] == 'pending' || $row['status'] == 'accepted')
{
   ?>
       <?php echo $row['order id'] ?>
```

```
<?php
              echo $row['order_date'];
              echo "<br>";
              echo $row['order_time'];
              ?>
          <img src="image/<?php echo $row['image']?>" alt=""
width="80" height="80">
          <?php echo $row['name'] ?>
          RM <?php echo $row['price'] ?>
          <?php echo $row['quantity'] ?>
          RM <?php echo $row['total'] ?>
          <?php
              echo $row['date'];
              echo "<br>";
              echo $row['time'];
              ?>
          <?php echo $row['status'] ?>
          <?php
          if($row['status'] == 'pending'){
          ?>
          <a href="orderstatus.php?cancel=<?php echo $row['order id'];
?>" class="btn btn-danger" onclick="return confirm('are you
sure?')">Cancel</a>
          <?php
          }
          else {
          <button class="btn btn-danger" disabled>Cancel</button>
          <?php
          }
          ?>
       <?php
          }
       }
   }
   else{
       echo "<h3>Your order list is empty</h3>";
   }
   ?>
   </div>
</div>
</body>
```

```
</html>
<?php
include "includes/footer.php";
?>
```

orderhistory.php

```
<?php
session_start();
include "includes/headerlog.php";
include "connection.php";
date_default_timezone_set('Asia/Kuala_Lumpur');
$date = date("Y-m-d");
$username = $_SESSION['username'];
$test = mysqli_query($conn, "SELECT * FROM user WHERE username =
'$username'");
$fetch = mysqli fetch assoc($test);
$user_id = $fetch['user_id'];
$sql = "SELECT * FROM orderlist WHERE user_id = '$user_id'";
$results = mysqli_query($conn,$sql);
?>
<!DOCTYPE html>
<html lang="en">
<head>
   <meta charset="UTF-8">
   <meta http-equiv="X-UA-Compatible" content="IE=edge">
   <meta name="viewport" content="width=device-width, initial-scale=1.0">
   <title>Order History</title>
</head>
<body>
   <div class="container">
   <h3>Order History</h3><br>
   <div class="table-responsive-md">
   <thead>
           Order Time
              Product
              Price
              Quantity
              Total
```

```
Pickup time
             Status
          </thead>
       <?php
   if(mysqli_num_rows($results) > 0) {
      while($row = mysqli_fetch_assoc($results)){
          if($row['date'] <= $date) {</pre>
             if($row['status'] == 'completed' || $row['status'] ==
'rejected') {
   ?>
      <?php
             echo $row['order date'];
             echo "<br>";
             echo $row['order_time'];
          <img src="image/<?php echo $row['image']?>" alt=""
<?php echo $row['name'] ?>
          RM <?php echo $row['price'] ?>
          <?php echo $row['quantity'] ?>
          RM <?php echo $row['total'] ?>
          <?php
             echo $row['date'];
             echo "<br>";
             echo $row['time'];
             ?>
          <?php echo $row['status'] ?>
      <?php
             }
          }
      }
   else{
      echo "<h3>There is no order history</h3>";
   }
   ?>
   </div>
   </div>
</body>
</html>
```

```
<?php
include "includes/footer.php";
?>
```

cafeownerpage.php

```
<?php
session_start();
include "includes/headerseller.php";
include "connection.php";
$user = $_SESSION['username'];
?>
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Document</title>
</head>
<body>
    <div class="container">
        <h3>List of products</h3><br>
    <div class="row">
    <?php
    $query = mysqli_query($conn,"SELECT * FROM products WHERE user =
'$user'");
    if(mysqli_num_rows($query) > 0) {
        while($fetch = mysqli fetch assoc($query)) {
    ?>
        <div class="col mb-4">
    <div class="card" style="width: 18rem;">
    <form action="" method="post" class="container text-center">
        <br>>
            <img src="image/<?php echo $fetch['image'] ?>" class="card-img-
top" alt="" width="200">
            <div class="card-body">
        <div class="card-title">
            <h5><?php echo $fetch['name'] ?></h5>
        </div>
        <div class="card-text">
            <strong>RM <?php echo $fetch['price'] ?></strong>
        </div>
            </div>
```

```
<input type="hidden" name="image" value="<?php echo $fetch['image'];</pre>
?>">
        <input type="hidden" name="name" value="<?php echo $fetch['name'];</pre>
?>">
        <input type="hidden" name="price" value="<?php echo $fetch['price'];</pre>
?>">
        <input type="hidden" name="user" value=<?php echo $fetch['user'] ?>>
        <a href="update.php?edit=<?php echo $fetch['product_id'];?>"
class="btn btn-danger"
        onclick="return confirm('are you sure?')">edit</a>
    </form><br>
    </div>
        </div>
    <?php
    }
    ?>
    </div>
</body>
</html>
<?php
include "includes/footer.php";
```

manageproduct.php

```
<?php
session_start();
include "includes/headerseller.php";
include "connection.php";
if (!isset($_SESSION['username'])) {
    $_SESSION['msg'] = "You must log in first";
    echo "<script> location.href='login.php'; </script>";
    exit;
}
$username = $_SESSION['username'];
if(isset($_POST['submit'])) {
    $name=$_POST['name'];
    $price=$_POST['price'];
    $image = $_FILES['image']['name'];
    $tmpname =$_FILES['image']['tmp_name'];
    $folder = 'image/'.$image;
```

```
$sql = "INSERT INTO products (name, price, image, user)
        VALUES ('$name', '$price', '$image', '$username')";
    $result = mysqli query($conn, $sql);
    if ($result == true) {
           move_uploaded_file($tmpname, $folder);
           echo "$name successfully added";
    }
    else {
        echo "error : ".mysqli_error($conn);
    }
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Product Management</title>
</head>
<body>
    <div class="container">
    <h3>Add to menu</h3><br>
        <form method="post" action="" enctype="multipart/form-data">
            <div class="form-floating mb-3">
                <input type="text" name="name" class="form-control"</pre>
placeholder="enter product name" required>
                <label for="name">Name</label>
            </div>
            <div class="form-floating mb-3">
                <input type="text" name="price" class="form-control"</pre>
placeholder="enter product price" required>
                <label for="price">Price</label>
            </div>
                <label for="image">Image</label><br>
                <input type="file" accept="image/png, image/jpeg, image/jpg"</pre>
name="image" class="form-control" required><br>
                <input type="submit" name="submit" class="btn btn-danger"</pre>
value="add product">
        </form>
    <?php
if(isset($_GET['delete'])){
```

```
$id=$_GET['delete'];
   mysqli query($conn, "DELETE FROM products WHERE product id = $id");
   echo "<script> location.href='manageproduct.php'; </script>";
}
$select = mysqli_query($conn, "SELECT * FROM products WHERE user =
'$username'");
?>
   <thead>
           image <br>
           name <br>
           price <br>
           action <br>
       </thead>
<?php
while($row = mysqli_fetch_assoc($select)) {
?>
<img src="image/<?php echo $row['image']?>" alt="" width="80"
height="80">
   <?php echo $row['name']?>
   <?php echo $row['price']?>
   >
       <a href="update.php?edit=<?php echo $row['product_id'];?>"
class="btn btn-danger"
       onclick="return confirm('are you sure?')">edit</a>
       <a href="manageproduct.php?delete=<?php echo $row['product_id'];?>"
class="btn btn-danger"
       onclick="return confirm('are you sure?')">delete</a>
   <?php
};
?>
   </div>
</body>
</html>
<?php
include "includes/footer.php";
```

?>

update.php

```
<?php
session_start();
include "includes/headerseller.php";
<!DOCTYPE html>
<html lang="en">
<head>
   <meta charset="UTF-8">
   <meta http-equiv="X-UA-Compatible" content="IE=edge">
   <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Update</title>
</head>
<body>
    <div class="container">
   <?php
   include "connection.php";
   $id = $_GET['edit'];
   if(isset($_POST['update'])) {
        $name=$_POST['name'];
        $price=$_POST['price'];
        $image = $_FILES['image']['name'];
        $tmpname =$_FILES['image']['tmp_name'];
        $folder = 'image/'.$image;
        $update = "UPDATE products SET name='$name', price='$price',
image='$image'
       WHERE product_id='$id'";
        $result = mysqli_query($conn, $update);
        if ($result == true) {
            move_uploaded_file($tmpname, $folder);
            echo "$name successfully added";
        }
        else {
            echo "error : ".mysqli_error($conn);
```

```
}
    ?>
    <div>
        <?php
        $select = mysqli_query($conn, "SELECT * FROM products WHERE
product_id='$id'");
        while($row = mysqli fetch assoc($select)) {
        <form method="post" action="" enctype="multipart/form-data">
            <h3>Add to menu</h3>
            <div class="form-floating mb-3">
                <input type="text" name="name" class="form-control"</pre>
placeholder="enter product name" value="<?php echo $row['name']; ?>">
                <label for="name">Name</label>
            </div>
            <div class="form-floating mb-3">
                <input type="text" name="price" class="form-control"</pre>
placeholder="enter product price" value="<?php echo $row['price']; ?>">
                <label for="price">Price</label>
            </div>
                <label for="image">Image</label><br>
                <input type="file" accept="image/png, image/jpeg, image/jpg"</pre>
name="image" class="form-control"><br>
                <input type="submit" name="update" class="btn btn-danger"</pre>
value="update product">
                <a href="manageproduct.php" class="btn btn-danger">Back</a>
        </form>
        <?php
        }
        ?>
    </div>
</div>
</body>
</html>
<?php
include "includes/footer.php";
```

```
<?php
session_start();
include "includes/headerseller.php";
include "connection.php";
date_default_timezone_set('Asia/Kuala_Lumpur');
$date = date("Y-m-d");
$user = $_SESSION['username'];
$query = "SELECT orderlist.*, user.username FROM orderlist
INNER JOIN user ON orderlist.user_id = user.user_id WHERE user = '$user'";
$result = mysqli_query($conn, $query);
?>
<!DOCTYPE html>
<html lang="en">
<head>
   <meta charset="UTF-8">
   <meta http-equiv="X-UA-Compatible" content="IE=edge">
   <meta name="viewport" content="width=device-width, initial-scale=1.0">
   <title>Order List</title>
</head>
<body>
   <div class="container">
   <h3>Order Management</h3><br>
   <div class="table-responsive-md">
   <thead>
          Order number
              Name
              Order time
              Product
             Price
             Quantity
             Total
              Pickup time
             Status
             Action
          </thead>
       <?php
       if(mysqli num rows($result) > 0) {
          while($row = mysqli_fetch_assoc($result)){
```

```
if($row['status'] == 'pending' || $row['status'] ==
'accepted') {
       ?>
       <?php echo $row['order id']; ?>
          <?php echo $row['username'] ?>
          <?php echo $row['order_date']; ?><br>
             <?php echo $row['order_time']; ?>
          <img src="image/<?php echo $row['image']?>" alt=""
width="80" height="80">
          <?php echo $row['name']; ?>
          RM <?php echo $row['price']; ?>
          <?php echo $row['quantity']; ?>
          RM <?php echo $row['total']; ?>
          <?php
             echo $row['date'];
             echo "<br>";
             echo $row['time'];
              ?>
          <?php echo $row['status']; ?>
          <a href="changestatus.php?change=<?php echo $row['order id']"
?>" class="btn btn-danger">change</a>
       <?php
             }
          }
       }
   ?>
   </div>
</div>
</body>
</html>
<?php
include "includes/footer.php";
```

reportseller.php

```
<?php
session_start();</pre>
```

```
include "includes/headerseller.php";
include "connection.php";
$user = $_SESSION['username'];
?>
<!DOCTYPE html>
<html lang="en">
<head>
   <meta charset="UTF-8">
   <meta http-equiv="X-UA-Compatible" content="IE=edge">
   <meta name="viewport" content="width=device-width, initial-scale=1.0">
   <title>Report</title>
</head>
<body>
   <div class="container">
       <h3>Order History</h3><br>
       <form action="" method="post">
           <div class="row">
               <div class="col-5">
                   <label for="date1">From</label>
                   <input type="date" name="date1" class="form-control">
               </div>
               <div class="col-5">
                   <label for="date2">To</label>
                   <input type="date" name="date2" class="form-control">
               </div>
               <div class="col-2">
                   <br>
                   <input type="submit" name="check" class="btn btn-danger"</pre>
value="Check">
               </div>
           </div>
       </form><br>
       <?php
       if(isset($ POST['check'])) {
           $date1 = $_POST['date1'];
           $date2 = $_POST['date2'];
           $sql = "SELECT orderlist.*, user.username FROM orderlist
           INNER JOIN user ON orderlist.user id = user.user id WHERE user =
'$user' AND date BETWEEN '$date1' AND '$date2'";
           $results = mysqli query($conn,$sql);
           echo "<h6>Result: " . $date1 . " - ". $date2 . "</h6><br>";
       <div class="table-responsive-md">
```

```
Order ID
             Order time
             Name
             Products
             Quantity
             Total
             Pickup time
             Status
          <?php
          if(mysqli_num_rows($results) > 0) {
             while($row = mysqli fetch assoc($results)){
          ?>
          <?php echo $row['order_id'] ?>
             <?php echo $row['order_date']; ?><br>
                 <?php echo $row['order_time']; ?>
             <?php echo $row['username'] ?>
             <img src="image/<?php echo $row['image']?>" alt=""
width="80" height="80">
             <?php echo $row['name'] ?>
             <?php echo $row['quantity'] ?>
             RM <?php echo $row['total'] ?>
             <?php echo $row['date']; ?><br>
                 <?php echo $row['time']; ?>
             <?php echo $row['status'] ?>
          <?php
             }
          }
          else {
             echo "There is no record";
          }
      }
          ?>
      </div>
      <form action="printseller.php" method="post">
          <input type="hidden" name="export1" value="<?php echo $date1;</pre>
          <input type="hidden" name="export2" value="<?php echo $date2;</pre>
?>">
          <input type="submit" name="print" class="btn btn-danger"</pre>
value="Print">
```

printseller.php

```
<?php
session_start();
include "connection.php";
if(isset($_POST['print'])){
   $date1 = $_POST['export1'];
   $date2 = $ POST['export2'];
   $sql = "SELECT orderlist.*,user.username FROM orderlist
          INNER JOIN user ON orderlist.user_id = user.user_id WHERE date
BETWEEN '$date1' AND '$date2'";
   $results = mysqli_query($conn,$sql);
   echo "<h4>Result: " . $date1 . " - ". $date2 . "</h4><br>";
?>
<!DOCTYPE html>
<html lang="en">
<head>
   <meta charset="UTF-8">
   <meta http-equiv="X-UA-Compatible" content="IE=edge">
   <meta name="viewport" content="width=device-width, initial-scale=1.0">
   <title>Print sales history</title>
</head>
<body>
   <div class="container">
       Order ID
             Order time
             Name
             Products
             Quantity
             Total
             Pickup time
             Status
```

```
<?php
          if(mysqli num rows($results) > 0) {
              while($row = mysqli_fetch_assoc($results)){
          ?>
          <?php echo $row['order_id'] ?>
              <?php echo $row['order_date']; ?><br>
                 <?php echo $row['order_time']; ?>
              <?php echo $row['username'] ?>
              <img src="image/<?php echo $row['image']?>" alt=""
width="80" height="80">
              <?php echo $row['name'] ?>
              <?php echo $row['quantity'] ?>
              RM <?php echo $row['total'] ?>
              <?php echo $row['date']; ?><br>
                 <?php echo $row['time']; ?>
              <?php echo $row['status'] ?>
          <?php
                 }
              }
          }
          ?>
       <script type="text/javascript">
          window.print();
       </script>
       <a href="reportseller.php">back</a>
   </div>
</body>
</html>
```

adminpage.php

```
<?php
session_start();
include "connection.php";
include "includes/headeradmin.php";

if (!isset($_SESSION['username'])) {
    $_SESSION['msg'] = "You must log in first";</pre>
```

```
echo "<script> location.href='login.php'; </script>";
   exit:
}
$query1 = mysqli query($conn, "SELECT count(*) as total FROM user WHERE role
= 'customer'");
$query2 = mysqli_query($conn, "SELECT count(*) as total FROM user WHERE role
= 'cafe_owner'");
$query3 = mysqli query($conn, "SELECT count(*) as total FROM products");
$query4 = mysqli_query($conn, "SELECT count(*) as total FROM cafe");
$data1 = mysqli fetch assoc($query1);
$data2 = mysqli fetch assoc($query2);
$data3 = mysqli fetch assoc($query3);
$data4 = mysqli fetch assoc($query4);
?>
<!DOCTYPE html>
<html lang="en">
<head>
   <meta charset="UTF-8">
   <meta http-equiv="X-UA-Compatible" content="IE=edge">
   <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Admin Dashboard</title>
</head>
<body>
   <div class="containter">
        <div class="row">
           <div class="col mb-4">
             <div class="card" style="width: 18rem;">
                <div class="card-body">
                   <h5 class="card-title">Customer</h5>
                   <strong>total : <?php echo</pre>
$data1['total']; ?></strong>
                   <a href="manageclient.php" class="card-link">Manage
Customer</a>
               </div>
            </div>
            </div>
            <div class="col mb-4">
             <div class="card" style="width: 18rem;">
               <div class="card-body">
                   <h5 class="card-title">Cafe Owner</h5>
                   <strong>total : <?php echo</pre>
$data2['total']; ?></strong>
                   <a href="managevendor.php" class="card-link">Manage Cafe
Owner</a>
               </div>
```

```
</div>
           </div>
           <div class="col mb-4">
            <div class="card" style="width: 18rem;">
               <div class="card-body">
                   <h5 class="card-title">Product</h5>
                   <strong>total : <?php echo</pre>
$data3['total']; ?></strong>
                   <a href="product.php" class="card-link">Manage
Product</a>
               </div>
            </div>
           </div>
       </div>
       <div class="row">
       <div class="col mb-4">
            <div class="card" style="width: 18rem;">
               <div class="card-body">
                   <h5 class="card-title">Cafe</h5>
                   <strong>total : <?php echo</pre>
$data4['total']; ?></strong>
                   <a href="managevendor.php" class="card-link">Manage
Cafe</a>
               </div>
            </div>
           </div>
       </div>
   </div>
</body>
</html>
<?php
include "includes/footer.php";
```

product.php

```
<?php
session_start();
include "includes/headeradmin.php";
include "connection.php";

if(isset($_GET['delete'])){
    $id=$_GET['delete'];
    mysqli_query($conn, "DELETE FROM products WHERE product_id = $id");
    echo "<script> location.href='product.php'; </script>";
```

```
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
   <meta charset="UTF-8">
   <meta http-equiv="X-UA-Compatible" content="IE=edge">
   <meta name="viewport" content="width=device-width, initial-scale=1.0">
   <title>Products</title>
</head>
<body>
   <div class="container">
   <h3>Product Management</h3><br>
   <form action="" method="get">
       <div class="row">
           <div class="col-3">
               <input type="text" class="form-control" name="search">
           </div>
           <div class="col-3">
               <input type="submit" name="submit" value="search" class="btn</pre>
btn-danger">
           </div>
           <div class="col-3">
               <a href="addproduct.php" class="btn btn-danger">Add
Product</a>
           </div>
       </div>
   </form>
   <thead>
           id
           name
           price
           image
           seller
           manage
       </thead>
<?php
if(isset($_GET['submit'])) {
   $search = $_GET['search'];
   echo "<h5>Search result: ".$search."</h5>";
}
else{
   $search = "";
$res = mysqli_query($conn, "SELECT * FROM products WHERE name LIKE
'%$search%' OR user LIKE '%$search%'");
```

```
if(mysqli_num_rows($res) > 0) {
   while($row = mysqli fetch assoc($res)){
?>
       <?php echo $row['product_id']; ?>
          <?php echo $row['name']; ?>
          <?php echo $row['price']; ?>
          <img src="image/<?php echo $row['image']?>" alt=""
width="80" height="80">
          <?php echo $row['user']; ?>
              <a href="product.php?delete=<?php echo</pre>
$row['product_id'];?>" class="btn btn-danger"
              onclick="return confirm('are you sure?')">delete</a>
          <?php
   }
}
?>
   </div>
</body>
</html>
<?php
include "includes/footer.php";
```

addproduct.php

```
<div class="container">
    <?php
    if(isset($_POST['add'])) {
        $name=$_POST['name'];
        $price=$ POST['price'];
        $image = $_FILES['image']['name'];
        $tmpname =$_FILES['image']['tmp_name'];
        $folder = 'image/'.$image;
        $user = $_POST['cafe'];
        $add = "INSERT INTO products (name,price,image,user)
        VALUES ('$name', '$price', '$image', '$user')";
        $result = mysqli_query($conn, $add);
        if ($result == true) {
            move_uploaded_file($tmpname, $folder);
            echo "$name successfully added";
        }
        else {
            echo "error : ".mysqli_error($conn);
        }
    }
    ?>
    <div>
        <form method="post" action="" enctype="multipart/form-data">
            <h3>Add to menu</h3><br>
            <label for="cafe">Cafe</label>
            <select name="cafe" class="form-control">
                <option value="">Select cafe</option>
                <?php
                $select = mysqli_query($conn,"SELECT * FROM cafe");
                if(mysqli num rows($select) > 0) {
                    while($cafe = mysqli_fetch_assoc($select)) {
                ?>
                <option value="<?php echo $cafe['user']; ?>"><?php echo</pre>
$cafe['cafename']; ?></option>
                <?php
                    }
                }
                ?>
            </select><br>
            <div class="form-floating mb-3">
                <input type="text" name="name" class="form-control">
                <label for="name">Name</label>
            </div>
```

```
<div class="form-floating mb-3">
                 <input type="text" name="price" class="form-control">
                 <label for="price">Price</label>
            </div>
                <label for="image">Image</label><br>
                 <input type="file" accept="image/png, image/jpeg, image/jpg"</pre>
name="image" class="form-control"><br>
                 <input type="submit" name="add" class="btn btn-danger"</pre>
value="Add Product">
                 <a href="product.php" class="btn btn-danger">go back</a>
        </form>
    </div>
</div>
</body>
</html>
<?php
include "includes/footer.php";
```

manageclient.php

```
<?php
session start();
include "connection.php";
include "includes/headeradmin.php";
if(isset($ GET['delete'])){
    $id=$_GET['delete'];
    mysqli_query($conn, "DELETE FROM user WHERE user_id = $id");
    echo "<script> location.href='manageclient.php'; </script>";
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Customer Management</title>
</head>
<body>
    <div class="container">
    <h3>Customer Management</h3><br>
    <form action="" method="get">
```

```
<div class="row">
           <div class="col-3">
              <input type="text" class="form-control" name="search">
           </div>
           <div class="col-3">
              <input type="submit" name="submit" value="search" class="btn</pre>
btn-danger">
          </div>
          <div class="col-3">
              <a href="addcus.php" class="btn btn-danger">Add Customer</a>
          </div>
       </div>
   </form><br>
   <thead>
          ID
           Email
          Username
           Action
       </thead>
   <?php
   if(isset($_GET['submit'])) {
       $search = $_GET['search'];
       echo "<h5>Search result: ".$search."</h5>";
   }
   else{
       $search = "";
       $res = mysqli query($conn, "SELECT * FROM user WHERE role
='customer' AND username LIKE '%$search%'");
       while($cus = mysqli_fetch_assoc($res)) {
   ?>
   <?php echo $cus['user id']; ?>
          <?php echo $cus['email']; ?>
           <?php echo $cus['username']; ?>
          <a href="manageclient.php?delete=<?php echo</pre>
$cus['user_id'];?>" class="btn btn-danger"
              onclick="return confirm('are you sure?')">delete</a>
          <?php
       }
       ?>
       </div>
```

```
</body>
</html>
<?php
include "includes/footer.php";
?>
```

addcus.php

```
<?php
session_start();
$errors = array();
include "includes/headeradmin.php";
include "connection.php";
if(isset($_POST['register'])) {
    $email = mysqli_real_escape_string($conn, $_POST['email']);
   $username = mysqli real escape string($conn, $ POST['username']);
   $password = mysqli real escape string($conn, $ POST['password']);
    $confirm_password = mysqli_real_escape_string($conn,
$ POST['confirm password']);
   $role = 'customer';
   if (empty($username)) {
        array_push($errors, "Username is required");
   if (empty($email)) {
        array_push($errors, "Email is required");
   if (empty($password)) {
        array_push($errors, "Password is required");
   if($password != $confirm_password) {
        array_push($errors, "The two passwords do not match");
   $user_check = "SELECT * FROM user WHERE username='$username' OR
email='$email' LIMIT 1";
   $result = mysqli_query($conn, $user_check);
   $user = mysqli_fetch_assoc($result);
   if ($user) { // if user exists
        if ($user['username'] === $username) {
          array_push($errors, "Username already exists");
        if ($user['email'] === $email) {
```

```
array_push($errors, "email already exists");
        }
      }
      if (count($errors) == 0) {
        $password = md5($password);//encrypt the password before saving in
the database
        $query = "INSERT INTO user (email, username, password, role)
                  VALUES('$email', '$username', '$password', '$role')";
        mysqli query($conn, $query);
        echo '<script>alert("Your registration is completed")</script>';
    }
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Add Customer</title>
</head>
<body>
    <div class="container">
    <h3>Add Customer</h3><br>
    <form action="" method="post">
    <?php include "errors.php"; ?>
    <br>
    <div class="form-floating mb-3">
        <input type="email" class="form-control" name="email"</pre>
placeholder="please enter your email">
        <label for="email">Email</label>
    </div>
    <div class="form-floating mb-3">
        <input type="text" class="form-control" name="username"</pre>
placeholder="please enter your username">
        <label for="username">Username</label>
    </div>
    <div class="form-floating mb-3">
        <input type="password" class="form-control" name="password"</pre>
placeholder="please enter your password">
        <label for="password">Password</label>
    </div>
    <div class="form-floating mb-3">
        <input type="password" class="form-control" name="confirm_password"</pre>
placeholder="please re-write your password">
        <label for="confirm password">Confirm Password</label>
```

managevendor.php

```
<?php
session_start();
include "connection.php";
include "includes/headeradmin.php";
if(isset($ GET['delete'])){
    $id=$_GET['delete'];
    mysqli_query($conn, "DELETE FROM user WHERE user_id = $id");
    echo "<script> location.href='managevendor.php'; </script>";
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Cafe Owner Management</title>
</head>
<body>
    <div class="container">
    <h3>Cafe Owner Management</h3><br>
    <form action="" method="get">
        <div class="row">
            <div class="col-3">
                <input type="text" name="search" class="form-control">
            </div>
            <div class="col-3">
                <input type="submit" name="submit" value="search" class="btn</pre>
btn-danger">
```

```
</div>
          <div class="col-3">
              <a href="addsell.php" class="btn btn-danger">Add Cafe
Owner</a>
          </div>
       </div>
   </form><br>
   <thead>
          ID
          Email
          Username
          Cafe Name
          Action
       </thead>
   <?php
   if(isset($_GET['submit'])) {
       $search = $_GET['search'];
       echo "<h5>Search result: ".$search."</h5>";
   }
   else {
       $search = "";
   }
       $res = mysqli_query($conn, "SELECT user.*, cafe.cafename FROM user
       INNER JOIN cafe ON user.username = cafe.user WHERE role
='cafe owner' AND username LIKE '%$search%'");
       while($cus = mysqli_fetch_assoc($res)) {
   ?>
   <?php echo $cus['user_id']; ?>
          <?php echo $cus['email']; ?>
          <?php echo $cus['username']; ?>
          <?php echo $cus['cafename']; ?>
          <a href="cafename.php?change=<?php echo $cus['user_id'];?>"
class="btn btn-danger"
              onclick="return confirm('are you sure?')">change</a>
              <a href="managevendor.php?delete=<?php echo</pre>
$cus['user_id'];?>" class="btn btn-danger"
              onclick="return confirm('are you sure?')">delete</a>
          <?php
       }
       ?>
       </div>
```

```
</body>
</html>
<?php
include "includes/footer.php";
?>
```

addsell.php

```
<?php
session_start();
$errors = array();
include "includes/headeradmin.php";
include "connection.php";
if(isset($_POST['register'])) {
    $email = mysqli_real_escape_string($conn, $_POST['email']);
   $username = mysqli real escape string($conn, $ POST['username']);
   $cafename = $ POST['cafename'];
   $password = mysqli_real_escape_string($conn, $_POST['password']);
    $confirm password = mysqli real escape string($conn,
$_POST['confirm_password']);
   $role = 'cafe_owner';
   if (empty($username)) {
        array_push($errors, "Username is required");
   if (empty($email)) {
        array_push($errors, "Email is required");
   if (empty($password)) {
        array_push($errors, "Password is required");
   if($password != $confirm_password) {
        array_push($errors, "The two passwords do not match");
   $user_check = "SELECT * FROM user WHERE username='$username' OR
email='$email' LIMIT 1";
   $result = mysqli_query($conn, $user_check);
   $user = mysqli_fetch_assoc($result);
   if ($user) { // if user exists
        if ($user['username'] === $username) {
         array_push($errors, "Username already exists");
        }
```

```
if ($user['email'] === $email) {
          array_push($errors, "email already exists");
        }
      }
      if (count($errors) == 0) {
        $password = md5($password);//encrypt the password before saving in
the database
        $query = "INSERT INTO user(email, username, password, role)
                  VALUES('$email', '$username', '$password', '$role')";
        mysqli_query($conn, $query);
        $sql = "INSERT INTO cafe(user, cafename) VALUES('$username',
'$cafename')";
        mysqli query($conn,$sql);
        echo '<script>alert("Your registration is completed")</script>';
    }
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Add Cafe Owner</title>
</head>
<body>
    <div class="container">
        <h3>Add Cafe Owner</h3><br>
        <form action="" method="post">
        <?php include "errors.php"; ?>
        <div class="form-floating mb-3">
            <input type="email" class="form-control" name="email"</pre>
placeholder="please enter your email">
            <label for="email">Email</label>
        </div>
        <div class="form-floating mb-3">
            <input type="text" class="form-control" name="username"</pre>
placeholder="please enter your username">
            <label for="username">Username</label>
        </div>
        <div class="form-floating mb-3">
            <input type="text" class="form-control" name="cafename"</pre>
placeholder="please enter name of your cafe">
            <label for="cafename">Cafe Name</label>
        </div>
        <div class="form-floating mb-3">
```

```
<input type="password" class="form-control" name="password"</pre>
placeholder="please enter your password">
            <label for="password">Password</label>
        </div>
        <div class="form-floating mb-3">
            <input type="password" class="form-control"</pre>
name="confirm_password" placeholder="please re-write your password">
            <label for="confirm_password">Confirm Password</label>
        </div>
            <input type="submit" class="btn btn-danger" name="register"</pre>
value="Add Cafe Owner"><br><br>
        </form>
        <a href="managevendor.php">Back</a>
    </div>
</body>
</html>
<?php
include "includes/footer.php";
```

cafename.php

```
<?php
session_start();
include "includes/headeradmin.php";
include "connection.php";
$user_id = $_GET['change'];
$select = mysqli query($conn,"SELECT cafe.cafename, user.* FROM cafe
INNER JOIN user ON cafe.user = user.username WHERE user id = '$user id'");
$show = mysqli_fetch_assoc($select);
$user = $show['username'];
if(isset($_POST['changecn'])) {
    $newcafename = $_POST['cafename'];
    mysqli_query($conn,"UPDATE cafe set cafename = '$newcafename' WHERE user
= '$user'");
    echo "<script> location.href='managevendor.php'; </script>";
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
```

```
<meta http-equiv="X-UA-Compatible" content="IE=edge">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Change Cafe Name</title>
</head>
<body>
    <div class="container">
        <form action="" method="post">
            <div class="form-floating mb-3">
                <input type="text" name="oldcafename" class="form-control"</pre>
value="<?php echo $show['cafename']; ?>" readonly>
                <label for="oldcafename">Old Cafe Name</label>
            </div>
            <div class="form-floating mb-3">
                <input type="text" name="cafename" class="form-control">
                <label for="cafename">New Cafe Name</label>
            </div>
            <input type="submit" name="changecn" class="btn btn-danger"</pre>
value="Change">
            <a href="managevendor.php" class="btn btn-danger">Back</a>
        </form>
    </div>
</body>
</html>
<?php
include "includes/footer.php";
```

reportadmin.php

```
<form action="" method="post">
       <div class="row">
       <div class="col-5">
          <label for="date1">From</label>
          <input type="date" name="date1" class="form-control">
       </div>
       <div class="col-5">
          <label for="date2">To</label>
          <input type="date" name="date2" class="form-control">
       </div>
       <div class="col-2">
          <br>
          <input type="submit" name="check" class="btn btn-danger"</pre>
value="Check">
       </div>
       </div>
   </form><br>
       <?php
       if(isset($_POST['check'])) {
          $date1 = $_POST['date1'];
          $date2 = $_POST['date2'];
          $sql = "SELECT orderlist.*,user.username FROM orderlist
          INNER JOIN user ON orderlist.user_id = user.user_id WHERE date
BETWEEN '$date1' AND '$date2'";
          $results = mysqli query($conn,$sql);
          echo "<h6>Result: " . $date1 . " - ". $date2 . "</h6><br>";
       ?>
       <div class="table-responsive-md">
       Order ID
              Order time
              Name
              Products
              Quantity
              Total
              Pickup time
              Status
              Cafe Owner
          <?php
          if(mysqli_num_rows($results) > 0) {
              while($row = mysqli fetch assoc($results)){
          ?>
          <?php echo $row['order_id'] ?>
```

```
<?php echo $row['order date']; ?><br>
                  <?php echo $row['order_time']; ?>
              <?php echo $row['username'] ?>
               <img src="image/<?php echo $row['image']?>" alt=""
width="80" height="80">
              <?php echo $row['name'] ?>
              <?php echo $row['quantity'] ?>
              RM <?php echo $row['total'] ?>
              <?php echo $row['date']; ?><br>
                  <?php echo $row['time']; ?>
              <?php echo $row['status'] ?>
              <?php echo $row['user'] ?>
           <?php
              }
           }
           else {
              echo "There is no record found";
           }
       }
           ?>
       </div>
       <form action="printadmin.php" method="post">
           <input type="hidden" name="export1" value="<?php echo $date1;</pre>
?>">
           <input type="hidden" name="export2" value="<?php echo $date2;</pre>
?>">
           <input type="submit" name="print" class="btn btn-danger"</pre>
value="Print">
       </form>
   </div>
</body>
</html>
<?php
include "includes/footer.php";
```

printadmin.php

```
<?php
```

```
session_start();
include "connection.php";
if(isset($_POST['print'])){
   $date1 = $ POST['export1'];
   $date2 = $_POST['export2'];
   $sql = "SELECT orderlist.*,user.username FROM orderlist
          INNER JOIN user ON orderlist.user_id = user.user_id WHERE date
BETWEEN '$date1' AND '$date2'";
   $results = mysqli_query($conn,$sql);
   echo "<h4>Result: " . $date1 . " - ". $date2 . "</h4><br>";
?>
<!DOCTYPE html>
<html lang="en">
<head>
   <meta charset="UTF-8">
   <meta http-equiv="X-UA-Compatible" content="IE=edge">
   <meta name="viewport" content="width=device-width, initial-scale=1.0">
   <title>Print sales history</title>
</head>
<body>
   <div class="container">
       >
              Order ID
              Order time
              Name
             Products
             Quantity
             Total
             Pickup time
             Status
              Cafe Owner
          <?php
          if(mysqli_num_rows($results) > 0) {
             while($row = mysqli fetch assoc($results)){
          ?>
          <?php echo $row['order_id'] ?>
                 <?php echo $row['order date']; ?><br>
                 <?php echo $row['order_time']; ?>
              <?php echo $row['username'] ?>
              <img src="image/<?php echo $row['image']?>" alt=""
width="80" height="80">
```

```
<?php echo $row['name'] ?>
             <?php echo $row['quantity'] ?>
             RM <?php echo $row['total'] ?>
             <?php echo $row['date']; ?><br>
                 <?php echo $row['time']; ?>
             <?php echo $row['status'] ?>
             <?php echo $row['user'] ?>
          <?php
                 }
             }
          }
          ?>
      <script type="text/javascript">
          window.print();
      </script>
      <a href="reportadmin.php">back</a>
   </div>
</body>
</html>
```

header.php

```
k
href="https://fonts.googleapis.com/css2?family=Open+Sans:ital,wght@0,300;0,4
00;0,500;0,600;0,700;1,300;1,400;1,600;1,700&family=Amatic+SC:ital,wght@0,30
0;0,400;0,500;0,600;0,700;1,300;1,400;1,500;1,600;1,700&family=Inter:ital,wg
ht@0,300;0,400;0,500;0,600;0,700;1,300;1,400;1,500;1,600;1,700&display=swap"
rel="stylesheet">
  <!-- Vendor CSS Files -->
  <link href="assets/vendor/bootstrap/css/bootstrap.min.css"</pre>
rel="stylesheet">
  <link href="assets/vendor/bootstrap-icons/bootstrap-icons.css"</pre>
rel="stylesheet">
  <link href="assets/vendor/aos/aos.css" rel="stylesheet">
  <link href="assets/vendor/glightbox/css/glightbox.min.css"</pre>
rel="stylesheet">
  <link href="assets/vendor/swiper/swiper-bundle.min.css" rel="stylesheet">
 <!-- Template Main CSS File -->
  <link href="assets/css/main.css" rel="stylesheet">
</head>
<body>
  <!-- ====== Header ====== -->
  <header id="header" class="header fixed-top d-flex align-items-center">
    <div class="container d-flex align-items-center justify-content-</pre>
between">
      <a href="home.php" class="logo d-flex align-items-center me-auto me-</pre>
lg-0">
        <img src="image/logofok.png" alt="">
      </a>
      <nav id="navbar" class="navbar">
        <l
          <a href="home.php">Home</a>
          <a href="menu.php">Menu</a>
        </nav><!-- .navbar -->
      <a class="btn-book-a-table" href="login.php">Login</a>
      <i class="mobile-nav-toggle mobile-nav-show bi bi-list"></i></i>
      <i class="mobile-nav-toggle mobile-nav-hide d-none bi bi-x"></i></i></or>
    </div>
  </header><!-- End Header -->
```

headeradmin.php

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="utf-8">
  <meta content="width=device-width, initial-scale=1.0" name="viewport">
  <title>Food Ordering Kuis</title>
  <meta content="" name="description">
  <meta content="" name="keywords">
  <!-- Favicons -->
  <link href="assets/img/favicon.png" rel="icon">
  <link href="assets/img/apple-touch-icon.png" rel="apple-touch-icon">
 <!-- Google Fonts -->
  <link rel="preconnect" href="https://fonts.googleapis.com">
  <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
  klink
href="https://fonts.googleapis.com/css2?family=Open+Sans:ital,wght@0,300;0,4
00;0,500;0,600;0,700;1,300;1,400;1,600;1,700&family=Amatic+SC:ital,wght@0,30
0;0,400;0,500;0,600;0,700;1,300;1,400;1,500;1,600;1,700&family=Inter:ital,wg
ht@0,300;0,400;0,500;0,600;0,700;1,300;1,400;1,500;1,600;1,700&display=swap"
rel="stylesheet">
  <!-- Vendor CSS Files -->
```

```
<link href="assets/vendor/bootstrap/css/bootstrap.min.css"</pre>
rel="stylesheet">
  <link href="assets/vendor/bootstrap-icons/bootstrap-icons.css"</pre>
rel="stylesheet">
  <link href="assets/vendor/aos/aos.css" rel="stylesheet">
  <link href="assets/vendor/glightbox/css/glightbox.min.css"</pre>
rel="stylesheet">
  <link href="assets/vendor/swiper/swiper-bundle.min.css" rel="stylesheet">
  <!-- Template Main CSS File -->
  <link href="assets/css/main.css" rel="stylesheet">
</head>
<body>
  <!-- ===== Header ====== -->
  <header id="header" class="header fixed-top d-flex align-items-center">
    <div class="container d-flex align-items-center justify-content-</pre>
between">
      <a href="adminpage.php" class="logo d-flex align-items-center me-auto</pre>
me-lg-0">
      <img src="image/logofok.png" alt="">
      <nav id="navbar" class="navbar">
        <u1>
          <a href="adminpage.php">Home</a>
          <a href="product.php">Manage Product</a>
          <a href="manageclient.php">Manage Customer</a>
          <a href="managevendor.php">Manage Cafe Owner</a>
          <a href="reportadmin.php">Order History</a>
        </nav><!-- .navbar -->
      <a class="btn-book-a-table" href="logout.php">Logout</a>
      <i class="mobile-nav-toggle mobile-nav-show bi bi-list"></i></i>
      <i class="mobile-nav-toggle mobile-nav-hide d-none bi bi-x"></i></i></or>
    </div>
  </header><!-- End Header -->
  <main id="main">
    <!-- ===== Breadcrumbs ====== -->
    <div class="breadcrumbs">
      <div class="container">
```

headerlog.php

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="utf-8">
  <meta content="width=device-width, initial-scale=1.0" name="viewport">
 <title>Food Ordering Kuis</title>
 <meta content="" name="description">
 <meta content="" name="keywords">
 <!-- Favicons -->
 <link href="assets/img/favicon.png" rel="icon">
 <link href="assets/img/apple-touch-icon.png" rel="apple-touch-icon">
 <!-- Google Fonts -->
 <link rel="preconnect" href="https://fonts.googleapis.com">
 <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
 klink
href="https://fonts.googleapis.com/css2?family=Open+Sans:ital,wght@0,300;0,4
00;0,500;0,600;0,700;1,300;1,400;1,600;1,700&family=Amatic+SC:ital,wght@0,30
0;0,400;0,500;0,600;0,700;1,300;1,400;1,500;1,600;1,700&family=Inter:ital,wg
ht@0,300;0,400;0,500;0,600;0,700;1,300;1,400;1,500;1,600;1,700&display=swap"
rel="stylesheet">
 <!-- Vendor CSS Files -->
  <link href="assets/vendor/bootstrap/css/bootstrap.min.css"</pre>
rel="stylesheet">
  <link href="assets/vendor/bootstrap-icons/bootstrap-icons.css"</pre>
rel="stylesheet">
  <link href="assets/vendor/aos/aos.css" rel="stylesheet">
```

```
<link href="assets/vendor/glightbox/css/glightbox.min.css"</pre>
rel="stylesheet">
 <link href="assets/vendor/swiper/swiper-bundle.min.css" rel="stylesheet">
 <!-- Template Main CSS File -->
 <link href="assets/css/main.css" rel="stylesheet">
</head>
<body>
 <!-- ===== Header ===== -->
 <header id="header" class="header fixed-top d-flex align-items-center">
   <div class="container d-flex align-items-center justify-content-</pre>
between">
     <a href="home.php" class="logo d-flex align-items-center me-auto me-</pre>
lg-0">
     <img src="image/logofok.png" alt="">
     </a>
      <nav id="navbar" class="navbar">
       <l
          <a href="home.php">Home</a>
          <a href="menu.php">Menu</a>
         <a href="orderstatus.php">Order</a>
          <a href="orderhistory.php">Order History</a>
          <a href="cart.php">Cart</a>
       \langle u1 \rangle
     </nav><!-- .navbar -->
     <a class="btn-book-a-table" href="logout.php">Logout</a>
     <i class="mobile-nav-toggle mobile-nav-show bi bi-list"></i></i>
     <i class="mobile-nav-toggle mobile-nav-hide d-none bi bi-x"></i></i></or>
    </div>
  </header><!-- End Header -->
  <main id="main">
   <!-- ===== Breadcrumbs ====== -->
   <div class="breadcrumbs">
      <div class="container">
       <div class="d-flex justify-content-between align-items-center">
          </div>
```

headerseller.php

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="utf-8">
  <meta content="width=device-width, initial-scale=1.0" name="viewport">
  <title>Food Ordering Kuis</title>
  <meta content="" name="description">
  <meta content="" name="keywords">
  <!-- Favicons -->
  <link href="assets/img/favicon.png" rel="icon">
  <link href="assets/img/apple-touch-icon.png" rel="apple-touch-icon">
  <!-- Google Fonts -->
  <link rel="preconnect" href="https://fonts.googleapis.com">
  <link rel="preconnect" href="https://fonts.gstatic.com" crossorigin>
  link
href="https://fonts.googleapis.com/css2?family=Open+Sans:ital,wght@0,300;0,4
00;0,500;0,600;0,700;1,300;1,400;1,600;1,700&family=Amatic+SC:ital,wght@0,30
0;0,400;0,500;0,600;0,700;1,300;1,400;1,500;1,600;1,700&family=Inter:ital,wg
ht@0,300;0,400;0,500;0,600;0,700;1,300;1,400;1,500;1,600;1,700&display=swap"
rel="stylesheet">
  <!-- Vendor CSS Files -->
  <link href="assets/vendor/bootstrap/css/bootstrap.min.css"</pre>
rel="stylesheet">
  <link href="assets/vendor/bootstrap-icons/bootstrap-icons.css"</pre>
rel="stylesheet">
  <link href="assets/vendor/aos/aos.css" rel="stylesheet">
  <link href="assets/vendor/glightbox/css/glightbox.min.css"</pre>
rel="stylesheet">
  <link href="assets/vendor/swiper/swiper-bundle.min.css" rel="stylesheet">
  <!-- Template Main CSS File -->
```

```
<link href="assets/css/main.css" rel="stylesheet">
</head>
<body>
 <!-- ===== Header ===== -->
 <header id="header" class="header fixed-top d-flex align-items-center">
   <div class="container d-flex align-items-center justify-content-</pre>
between">
     <a href="cafeownerpage.php" class="logo d-flex align-items-center me-</pre>
auto me-lg-0">
     <img src="image/logofok.png" alt="">
     </a>
     <nav id="navbar" class="navbar">
       <u1>
         <a href="cafeownerpage.php">Home</a>
         <a href="manageproduct.php">Manage Product</a>
         <a href="orderlist.php">Order List</a>
         <a href="reportseller.php">Order History</a>
       </nav><!-- .navbar -->
     <a class="btn-book-a-table" href="logout.php">Logout</a>
     <i class="mobile-nav-toggle mobile-nav-show bi bi-list"></i></i>
     <i class="mobile-nav-toggle mobile-nav-hide d-none bi bi-x"></i></i></or>
   </div>
 </header><!-- End Header -->
  <main id="main">
   <!-- ===== Breadcrumbs ====== -->
   <div class="breadcrumbs">
     <div class="container">
       <div class="d-flex justify-content-between align-items-center">
         </div>
     </div>
   </div><!-- End Breadcrumbs -->
   <section class="sample-page">
     <div class="container" data-aos="fade-up">
```

```
</div>
 </section>
</main><!-- End #main -->
<!-- ===== Footer ====== -->
<footer id="footer" class="footer">
 <div class="container">
    <div class="row gy-3">
      <div class="col-lg-3 col-md-6 d-flex">
        <i class="bi bi-geo-alt icon"></i></i>
        <div>
          <h4>Address</h4>
          >
            Persiaran Putra, <br>
            Bandar Seri Putra, <br>
            43000 Kajang, Selangor
          </div>
      </div>
      <div class="col-lg-3 col-md-6 footer-links d-flex">
        <i class="bi bi-telephone icon"></i></i></or>
        <div>
          <h4>Contact</h4>
          >
            <strong>Phone:</strong> +60182674803<br>
            <strong>Email:</strong> 2039034@student.kuis.edu.my<br>
          </div>
      </div>
      <div class="col-lg-3 col-md-6 footer-links d-flex">
        <i class="bi bi-clock icon"></i>
        <div>
          <h4>Opening Hours</h4>
            <strong>Mon-Sun:</strong> 8AM - 23PM<br>
          </div>
      </div>
      <div class="col-lg-3 col-md-6 footer-links">
        <h4>Follow Us</h4>
```

```
<div class="social-links d-flex">
            <a href="#" class="twitter"><i class="bi bi-twitter"></i></a>
            <a href="#" class="facebook"><i class="bi bi-facebook"></i></a>
            <a href="#" class="instagram"><i class="bi bi-</pre>
instagram"></i></a>
            <a href="#" class="linkedin"><i class="bi bi-linkedin"></i></a>
        </div>
      </div>
    </div>
    <div class="container">
      <div class="copyright">
        FYP 2 DCS
      </div>
      <div class="credits">
        Food Ordering KUIS
      </div>
    </div>
  </footer><!-- End Footer -->
  <!-- End Footer -->
  <a href="#" class="scroll-top d-flex align-items-center justify-content-</pre>
center"><i class="bi bi-arrow-up-short"></i></a>
  <div id="preloader"></div>
  <!-- Vendor JS Files -->
  <script src="assets/vendor/bootstrap/js/bootstrap.bundle.min.js"></script>
  <script src="assets/vendor/aos/aos.js"></script>
  <script src="assets/vendor/glightbox/js/glightbox.min.js"></script>
  <script src="assets/vendor/purecounter/purecounter_vanilla.js"></script>
  <script src="assets/vendor/swiper/swiper-bundle.min.js"></script>
  <script src="assets/vendor/php-email-form/validate.js"></script>
  <!-- Template Main JS File -->
  <script src="assets/js/main.js"></script>
</body>
</html>
```

connection.php

```
$servername = "localhost";
$username = "root";
$password = "abcd1234";
$dbname = "foodorderingkuis";

$conn = new mysqli($servername, $username, $password, $dbname);

if ($conn->connect_error) {
    die("Connection failed: " . $conn->connect_error);
    }

?>
```