

Overtone

Architecture of a Cross-Cultural Generative Music Engine in Rust

Simon Knight

Adelaide, Australia

March 2026 • Version 1.0.0


Last updated: March 11, 2026

Abstract. Overtone is a terminal-based cross-cultural generative music engine written in Rust that produces full arrangements from declarative parameter configurations. The system combines manual oscillator synthesis, spectral sample analysis, and a hierarchical energy model to generate arrangement-aware music spanning Western electronic and Indian classical traditions in real time. This report presents the architecture of the synthesis pipeline, formalises the four-level energy model that drives pattern density and timbral evolution, describes the DSP chain (biquad filters, Schroeder reverb, ping-pong delay, sidechain compression), details the sample intelligence subsystem that classifies and blends audio samples with synthesised output, and documents the Ableton Live integration via OSC and Link. On an Apple M2 workstation the engine renders a 64-bar stereo track in 18 ms—approximately 470× real time—while maintaining 64-bit internal precision throughout the signal path.

Contents

1	Introduction	1
2	Theoretical Foundations	2
2.1	Psytrance Theory: Rhythmic Drive and Energy Arcs	2
2.2	Indian Classical Theory: Raga and Tala	2
2.3	Philosophical Foundations: Nada Brahma	4
2.4	Aesthetic Framework: The Navarasa	4
2.5	Cross-Cultural Synthesis in Overtone	4
3	Musical Lineage and Canonical Influences	5
3.1	Hindustani and Carnatic Reference Works	5
3.2	Psytrance Benchmarks	5
3.3	The Goa Convergence: A Brief History	5
3.4	Microtonal Intonation: The 22 Shrutis	5
4	Architecture	5
4.1	Module Decomposition	6
4.2	Key Data Structures	6
4.3	The Two-Stage Pipeline: Composition vs. Generation	6
5	The Energy Model	7
5.1	Macro Curve	8
5.2	Meso Breathing	8
5.3	Micro Groove	8
5.4	Sub-Channel Gating	8
6	Synthesis Engines	9
6.1	Kick Drum	9
6.2	Bass Synthesiser	10
6.3	Timbral Geometries: Acid and Resonance	10
6.4	Percussion	11
6.5	Lead (FM Synthesis)	12
6.6	Drone (Tanpura)	13
6.7	Pad (Ensemble)	13
6.8	Plucked String (Sitar/Veena/Sarod/Santoor)	14
6.9	Shruti Box (Electronic Harmonium)	14
6.10	Tom Drum	14
7	DSP Processing Chain	15
7.1	Biquad Filter	15
7.2	Sidechain Compression	15
7.3	Ping-Pong Delay	16
7.4	Schroeder Reverb	16
7.5	Master Processing	17
7.6	Wavetable Oscillator	17
7.7	PolyBLEP Anti-Aliasing	17
8	Sample Intelligence	18
8.1	Feature Extraction	18
8.2	Classification	19
8.3	Profile Caching	20
8.4	Energy-Aware Placement	20
8.5	Synth/Sample Blending	20
9	Pattern Generation	20
9.1	Energy-Driven Density	20
9.2	Presets and Variation	21
9.3	Micro-Timing Humanisation	21
9.4	Psytrance Pattern Logic: The Psy_Groove	21
9.5	Raga-Aware Melody Generation	21
9.6	Arrangement Sections	22
10	Eastern Musical Traditions in Electronic Music	22

10.1	Specific Raga Profiles and Their Applications	22
10.2	Tala Accent Cycles and Rhythmic Structures.	23
10.3	Indian Classical Structural Devices	23
10.4	Yoga Flow and Rasa-to-Energy Mapping	24
10.5	Motif Foreshadowing via Sub-Channel Preview	25
10.6	Drone, Ornamentation, and Cadential Devices	25
10.7	Time, Notation, and Breath.	25
10.8	Indian Classical Performance Forms	25
10.9	Cross-Cultural Fusion: The Raga-Trance Logic	26
10.10	Thaat Classification (Hindustani)	27
10.11	Rasa (Aesthetic Emotion)	27
10.12	Murchhana (Modal Rotation)	28
10.13	Chakra Energy Mapping	28
10.14	Rhythmic Devices	29
10.15	Prahar: Time-of-Day Mood Selection.	30
10.16	Micro-Expression: Meend and Andolan.	31
10.17	Sargam and the 12-Tone Grid	31
10.18	Bol Notation and Percussive Synthesis.	31
10.19	Rhythm and Breath: Pranayama in Synthesis	31
10.20	Jugalbandi (Duet Framework).	31
10.21	Saptak Hierarchy and Register Mapping	32
10.22	Tanpura Drone: Harmonic Spectrum and Consonance	32
10.23	Shruti Box: Additive Synthesis of the Drone	32
10.24	Performance Arc (Alap-Jor-Gat)	33
10.25	Planned Extensions	33
10.26	Implemented Music-Theory Features (Eastern Layer)	33
10.27	Music Theory Primer for Parameterised Generation.	38
11	Ableton Integration	40
11.1	MIDI Export.	40
11.2	MIDI Import Strategy: Generative Overriding.	40
11.3	OSC Bridge and Non-Blocking Push	40
11.4	Ableton Link	41
11.5	Scene Control	42
12	Terminal User Interface	42
12.1	Screen State Machine	42
12.2	Re-Render Protocol	42
12.3	Theme System	42
12.4	Tala Circle Visualisation	43
12.5	Energy Colour Mapping	43
13	Streaming Engine	43
13.1	Architecture.	43
13.2	Block Processing	43
13.3	Synth/Sample Blending.	44
13.4	Sample Library	44
13.5	Playback and Live Parameters	44
14	Session and Preset Management	45
14.1	Sessions	45
14.2	Presets	45
15	Evaluation	45
15.1	Rendering Performance	45
15.2	Memory Footprint.	46
15.3	Concurrency Analysis.	46
15.4	Signal Characteristics	46
16	Future Directions: Narrative Arc Builder	46
16.1	The Deck and Tarot Metaphor	47
16.2	Intelligent Recommendation and Transition Cost (C_T)	47
16.3	Auto-Bridge and Multi-Genre Thematic Fading.	47
16.4	Anchor Drop-Ins and Backward-Solving	47

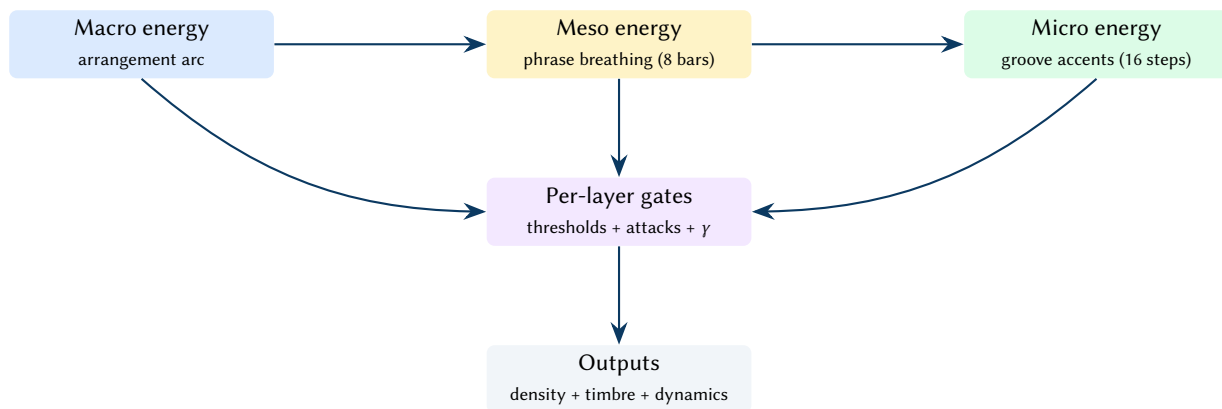

Conceptual point. Overtone treats “energy” as a multi-scale control signal: arrangement-level intent (macro) is shaped by phrase breathing (meso) and groove accents (micro), then lowered into per-layer gating that directly controls pattern density and timbral brightness.

Figure 1. Energy as a multi-scale control signal. This is the organising abstraction that connects high-level intent to low-level synthesis and pattern decisions.

16.5	Social Collaboration and The Generative Git-Tree	47
16.6	Semantic Zoom (Macro-to-Micro UX)	48
16.7	Natural Language Prompting (The Oracle)	48
16.8	Semantic Sample Stitching (Vector Database)	48
16.9	Macro-Driven Micro-Timing (Deep Humanization)	49
16.10	3D Audiovisual Representation.	50
16.11	Environmental and Gestural Generative Seeds	50
17	Web UI and Visualization Architecture	50
17.1	Headless Backend and SPA Frontend	50
17.2	Live Remote Jamming (Multi-User Sync)	51
18	Future Explorations: The Live Ecosystem	51
19	Future Explorations: Global Ethnomusicology Expansion	51
19.1	Arabic Maqam and 24-TET Microtonality	51
19.2	Indonesian Gamelan: Kotekan and Interlocking Rhythms	51
19.3	Japanese Aesthetics: Ma and Pentatonics.	51
20	Conclusion	52
	List of Figures	53
	List of Tables	57
	List of Design Decisions & Rules	60
	Revision History	60

1 Introduction

Psytrance is a subgenre of electronic dance music characterised by driving kick drums at 140–150 BPM, hypnotic bass lines built from filtered sawtooth oscillators, layered percussive textures, and carefully sculpted energy arcs that build tension and release over multi-minute arrangements. Producing a psytrance track in a conventional digital audio workstation (DAW) requires manually programming drum patterns, designing filter sweeps, tuning sidechain compression, and arranging dozens of clips across a timeline—a process that demands both musical knowledge and significant technical skill.

This report describes *Overtone*, a Rust-based generative music engine that automates the core production workflow. The user specifies high-level parameters—tempo, mood, key, energy curve—and the engine generates a complete stereo mix with kick, bass, hi-hat, clap, lead, and sample layers, all shaped by a hierarchical energy model that controls pattern density, filter modulation, and sample placement across the arrangement.

The system is designed around three principles:

1. **Energy-driven composition.** A four-level energy model (macro curve, meso breathing, micro groove, sub-channel gating) determines *what* plays *when* and *how loudly*, replacing manual arrangement with a declarative energy specification.
2. **Hybrid synthesis.** Each musical element can be rendered from manual oscillators, from classified audio samples, or from a configurable blend of both—adapting the timbral palette to the energy state of the arrangement.
3. **DAW integration.** MIDI export, real-time OSC clip pushing via AbletonOSC, and Ableton Link transport synchronisation allow the generator to function as a compositional front-end for professional production workflows.

The remainder of this report is structured as follows. Section 4 presents the system architecture and module decomposition. Section 5 formalises the energy model. Section 6 describes the synthesis engines (kick, bass, percussion, lead, and the additional drone, pad, plucked string, shruti box, and tom engines). Section 7 details the DSP processing chain, including the wavetable oscillator and PolyBLEP anti-aliasing. Section 8 covers the sample intelligence subsystem. Section 9 explains pattern generation and melody generation. Section 10 documents the eastern musical traditions layer, the Indian music theory modules (melakarta, thaata, rasa, murchhana), and the rhythmic device engines (tihai, korvai, layakari, nadai, tani, and the performance arc). Section 11 documents the Ableton integration layer, including MIDI import. Section 12 describes the terminal user interface. Section 13 presents the real-time streaming engine. Section 14 covers session and preset management. Section 15 evaluates rendering performance, and section 20 concludes with future directions.

2 Theoretical Foundations

Overtone is built upon two distinct yet complementary musical traditions: Western electronic dance music (specifically psytrance) and Indian classical music (both Hindustani and Carnatic). This section details the theoretical frameworks from both traditions and explains how they are integrated within the engine.

2.1 Psytrance Theory: Rhythmic Drive and Energy Arcs

Psytrance is fundamentally a music of *texture* and *momentum*. Unlike functional harmony which relies on chord progressions, psytrance derives its narrative from the evolution of timbre over a static tonal center.

2.1.1 The Kick and Bass Relationship

The "engine room" of any psytrance track is the phase-coherent interplay between the kick drum and the bassline. The kick provides a steady quarter-note pulse (~140–150 BPM), while the bass occupies the 16th-note subdivisions between the kicks. The most common rhythmic relationship is the *offbeat* or *triplet* bass:

- **Offbeat:** Bass hits on every 16th note *except* the downbeat (e.g., [Kick, Bass, Bass, Bass]).
- **K&B Syncopation:** Sidechain compression is critical here; the bass signal must "duck" (attenuate) when the kick triggers to prevent low-frequency masking and speaker clipping.

2.1.2 Psytrance Sub-genres and Rhythmic Character

While the core kick-and-bass relationship is universal, different sub-genres of psytrance employ distinct rhythmic and timbral strategies.

- **Full-On:** High-energy, melodic, and fast (~145 BPM). Characterised by "rolling" basslines (three 16th notes per beat) and frequent melodic hooks.
- **Darkpsy / Forest:** Higher tempos (150 BPM+) with a focus on organic, eerie soundscapes and complex, glitchy percussion. The bass is often more syncopated or "galloping."
- **Progressive:** Slower tempos (135–140 BPM) with a focus on deep, atmospheric grooves and minimal melodic changes. Employs "offbeat" bass patterns for a spacious feel.
- **Hi-Tech:** Extreme tempos (160–200 BPM) with ultra-dense percussive patterns and rapid-fire synth stabs.

2.1.3 Energy-Driven Arrangement

Structure in psytrance is defined by *energy density*. Tracks typically follow a "Long Journey" arc:

1. **Intro:** Minimal percussion, atmospheric pads, drone elements.
2. **Build:** Progressive addition of percussion layers (hi-hats, claps) and increasing filter brightness.
3. **Drop/Peak:** Full rhythmic density, aggressive leads, maximum energy.
4. **Breakdown:** Sudden removal of rhythmic drive, focus on melodic motifs and atmospheric textures.

2.2 Indian Classical Theory: Raga and Tala

Indian classical music is built on two pillars: *Raga* (melodic mode) and *Tala* (rhythmic cycle).

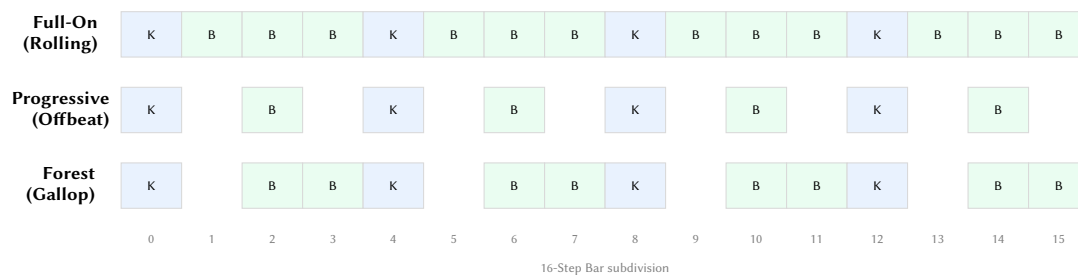


Figure 2. Comparison of foundational rhythmic patterns across psytrance sub-genres. *K* indicates a kick drum hit; *B* indicates a bass note. Full-On relies on a continuous 16th-note roll, Progressive creates space with offbeats, and Forest uses a syncopated gallop.

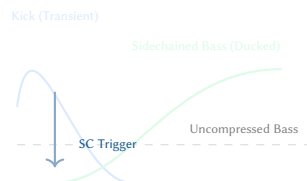


Figure 3. Phase-coherent sidechain alignment. To prevent frequency masking in the critical 40–100 Hz region, Overtone's sidechain compressor attenuates the bass signal during the first 10–20 ms of each kick hit, creating the "pumping" sensation foundational to the genre.

2.2.1 Raga: The Melodic Framework

A raga is more than a scale; it is a "color" or "mood" with specific grammatical rules.

- **Aroh/Avroh:** The specific paths for ascending and descending. Some notes may be skipped in ascent (*vakra*) but included in descent.
- **Vadi and Samvadi:** The "King" and "Queen" notes. These are the most important degrees of the raga, where phrases typically land or resolve.
- **Pakad:** A characteristic melodic phrase that uniquely identifies the raga.

2.2.2 Tala: The Rhythmic Framework

2.2.3 Tala Structure: Matra, Vibhag, and Avartan

A Tala cycle is organised into a clear hierarchy of temporal units.

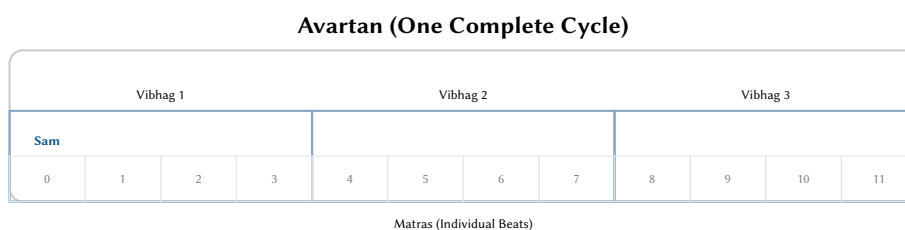


Figure 4. The temporal hierarchy of a Tala. Individual beats (*matras*) are grouped into sections (*vibhags*), which together form the full cycle (*avartan*). Overtone uses this hierarchy to determine where to place accents and rhythmic flourishes.

2.2.4 Additive vs. Divisive Rhythm

Unlike Western music, which is primarily *divisive* (dividing a whole note into halves, quarters, etc.), Indian rhythm is *additive*—constructing larger cycles from smaller units of time.

Tala is a cyclical time system. A cycle (*avartan*) is divided into beats (*matras*), which are grouped into sections (*vibhags*).

- **Sam:** The first beat of the cycle, and the point of ultimate resolution.
- **Khali:** The "empty" beat, typically indicated by a wave of the hand, providing a structural counterpoint to the emphasized beats (*tali*).

2.2.5 Gamaka: Microtonal Ornamentation

Identity in raga music is carried by *gamakas*—ornaments that move between or around the notes.

- **Meend:** A continuous, expressive glide (portamento) between two notes.

Divisive (4/4)	1/4	1/4	1/4	1/4
Additive (3+2+2)	3 Matras	2 Matras	2 Matras	

Figure 5. Additive rhythm construction. While Western 4/4 meter is built by dividing a bar into four equal parts, Indian Talas like Rupak are built by adding unequal sections (3+2+2) together. Overtone uses this additive logic to generate asymmetric syncopations.

- **Andolan:** A slow, gentle oscillation around a note.
- **Kampita:** A faster vibrato-like oscillation.

2.3 Philosophical Foundations: Nada Brahma

The engine's approach to sound is grounded in the ancient concept of *Nada Brahma* ("The world is sound"). In this worldview, the universe is not composed of matter, but of vibrations.

Design Decision 1: Nada Brahma in Overtone

This philosophy manifests in Overtone through the ****Tanpura Drone****. The drone is not merely an accompaniment; it is the *prana* (breath) of the track. It represents the unmanifested potential from which all melody and rhythm emerge. In the engine, the drone is the only layer that is never truly silent, even at zero energy, providing a vibrational constant that anchors the listener.

2.4 Aesthetic Framework: The Navarasa

The emotional character of Overtone's output is guided by the *Navarasa*—the nine "juices" or aesthetic essences defined in the *Natya Shastra*. Rather than simple "Happy" or "Sad" binary moods, Overtone uses these nuanced states to bias its generative parameters.

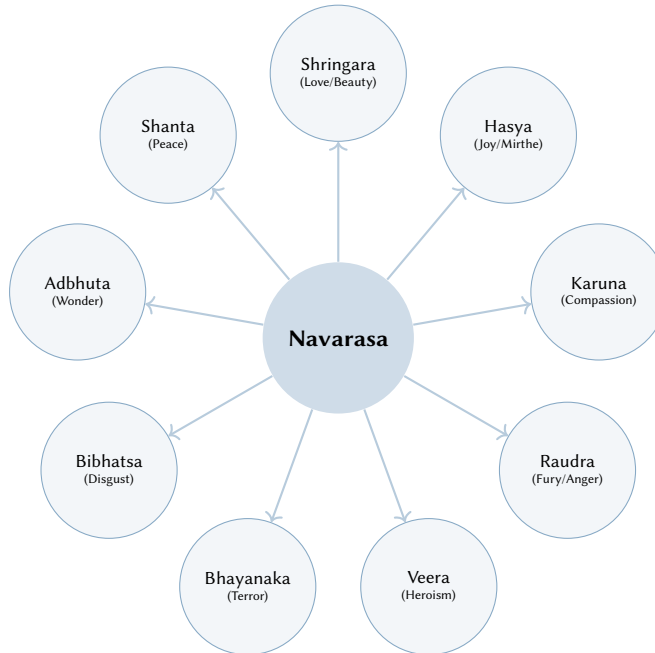


Figure 6. The Navarasa emotional mapping. Overtone maps these nine aesthetic states to BPM ranges, energy curve selection, and scale constraints. For example, *Veera* (Heroic) biases the engine toward Ahir Bhairav and rising energy, while *Shanta* (Peace) triggers meditative drones and low-density patterns.

2.5 Cross-Cultural Synthesis in Overtone

Overtone bridges these worlds by mapping the grammatical rules of Indian classical music onto the 16-step grid and energy-driven arrangement of electronic music.

1. **Tala as Syncopation:** Rather than using complex time signatures, Overtone uses Tala cycles (e.g., Rupak 7, Jhaptal 10) to generate *accent patterns* across the 4/4 grid.

2. **Energy as Rasa:** The energy model is mapped to the *Navarasa* (nine aesthetic emotions). Low energy maps to *Shanta* (peace), while high energy maps to *Veera* (heroism) or *Raudra* (fury).
3. **Yoga-Flow Energy:** Arrangement arcs are modeled after *Yoga Asana* sequences—starting with grounding (Muladhara), building heat through the solar plexus (Manipura), and concluding in meditative dissolution (Sahasrara).

3 Musical Lineage and Canonical Influences

Overtone's algorithms are not built in a vacuum; they are informed by specific canonical works from both the Psytrance and Indian Classical traditions. These pieces served as benchmarks during the development of the "Raga-Trance" logic.

3.1 Hindustani and Carnatic Reference Works

The engine's melodic and ornamental rules were tuned to replicate the phrasing found in these significant recordings:

- **Ustad Bismillah Khan (Raga Ahir Bhairav):** His Shehnai recordings of Ahir Bhairav influenced the engine's *Meend* (glide) logic, specifically the way the flat second (Re) is approached with extreme expressive weight.
- **Pandit Shivkumar Sharma (Raga Malkauns):** The sparse, meditative patterns of the Santoor in Malkauns served as the basis for Overtone's low-energy ambient/drone generators.
- **L. Subramaniam (Carnatic Violin):** His virtuosic use of *Gamaka* ornaments provided the technical reference for the engine's GamakaSpec implementation.

3.2 Psytrance Benchmarks

The rhythmic and timbral character of the engine was cross-referenced against foundational works of the genre:

- **Hallucinogen — Twisted (1995):** Informed the engine's acid lead synthesis and the use of extreme filter resonance modulations.
- **Astral Projection — Trust in Trance (1996):** Influenced the "Goa" style melodic layering and the use of Phrygian Dominant scales.
- **Ajja — Psychogenica (2007):** Served as a benchmark for modern "Forest" style syncopation and organic, glitchy percussion logic.

3.3 The Goa Convergence: A Brief History

The unique "Raga-Trance" hybrid implemented in Overtone traces its spiritual lineage to the beaches of Goa, India, in the late 1980s and early 1990s. This period saw a profound convergence:

- **The Arrival of Electronics:** International travellers brought early synthesizers (Roland TB-303, SH-101) and drum machines to the region.
- **Acoustic Context:** These electronic sounds were played against a backdrop of live Hindustani classical music and the persistent drone of the Tanpura.
- **The Birth of Goa Trance:** This fusion gave birth to Goa Trance, a genre that prioritised hypnotic, raga-like melodic cycles and "squelchy" acid textures over Western harmonic progressions. Overtone formalises this history into code.

3.4 Microtonal Intonation: The 22 Shrutis

While Overtone defaults to 12-Tone Equal Temperament (12-TET), its internal tuning engine is designed to support the ****22 Shrutis****—the microtonal divisions used in Indian classical music.

Design Decision 2: The Shruti Math

In Hindustani theory, an octave is divided into 22 unequal intervals. These are often modeled as rational frequency ratios rather than logarithmic divisions. For example, the *Chatushruti Rishabh* (Major Second) might be tuned to 9/8 (~204 cents) instead of the 12-TET 200 cents. Overtone's `shruti_purity` parameter allows the user to blend between these "pure" ratios and standard Western tuning.

4 Architecture

Overtone is implemented as a single Rust binary (edition 2021) comprising nine top-level modules. The crate compiles to approximately 12 MB on macOS and has no runtime dependencies beyond the system audio driver (CoreAudio on macOS, ALSA on Linux).

Table 1. Comparison of selected Shruti ratios vs. 12-TET cents.

Note (Swar)	Ratio	Just Cents	12-TET Cents
Shuddha Sa (Tonic)	1/1	0.0	0
Komal Re (Flat 2nd)	256/243	90.2	100
Shuddha Re (Nat 2nd)	9/8	203.9	200
Komal Ga (Flat 3rd)	32/27	294.1	300
Shuddha Ga (Nat 3rd)	81/64	407.8	400
Shuddha Ma (Nat 4th)	4/3	498.0	500
Pancham (Fifth)	3/2	702.0	700

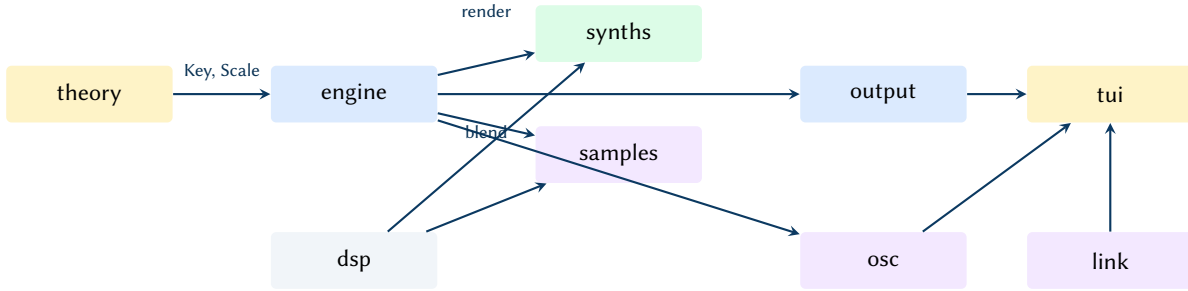


Figure 7. Module dependency graph. Colours indicate functional layers: gold for music theory, blue for core engine and output, green for synthesis, purple for integration and samples, grey for DSP primitives.

4.1 Module Decomposition

Figure 7 illustrates the module dependency graph. Data flows left to right: the theory module provides musical primitives (keys, scales, moods) to the engine, which orchestrates pattern generation and calls into synths and samples for audio rendering. The dsp module provides shared signal processing primitives consumed by all synthesis code. The output module handles WAV export, MIDI export, and real-time playback. The osc and link modules manage Ableton integration, and the tui module provides the interactive terminal interface.

4.2 Key Data Structures

The system is organised around three central data structures:

- `GeneratorConfig` — the single source of truth for all generation parameters (BPM, key, mood, filter settings, energy curve, mute/solo state, pattern presets, humanisation level). Serialisable via `serde` for session persistence.
- `EnergyModel` — the hierarchical energy calculator that maps a bar number to per-element energy levels (section 5).
- `RenderResult` — the immutable output of a render pass, containing interleaved stereo samples, per-element stems, bar pattern metadata for visualisation, and MIDI export data.

Design Decision 3: Single Source of Truth

`GeneratorConfig` flows unmodified from CLI parsing through the TUI state into the Generator. Any parameter change in the TUI triggers a full re-render from the config, ensuring that the audio output always exactly reflects the visible parameter state. This design eliminates an entire class of state-synchronisation bugs at the cost of a re-render on every change—a cost that is negligible at 18 ms per 64-bar track (section 15).

4.3 The Two-Stage Pipeline: Composition vs. Generation

The system is architected as a two-stage pipeline where the `**Compositional Logic**` is strictly decoupled from the `**Audio Generation**`. This separation ensures that the engine can function as a standalone compositional front-end for DAWs (via MIDI/OSC) even when audio rendering is bypassed.

Figure 8 illustrates this split. The pipeline first resolves the musical structure into an immutable set of `NoteEvent` sequences before branching into one or more output targets.


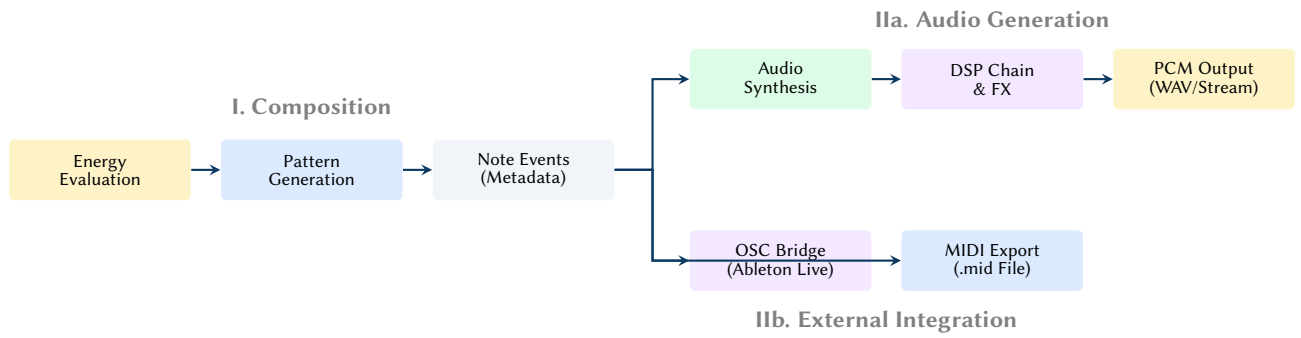


Figure 8. The decoupled pipeline architecture. The Composition stage (I) is deterministic and produces a structured event set. This set can then be rendered to high-precision audio (IIa) or exported directly to external environments (IIb).

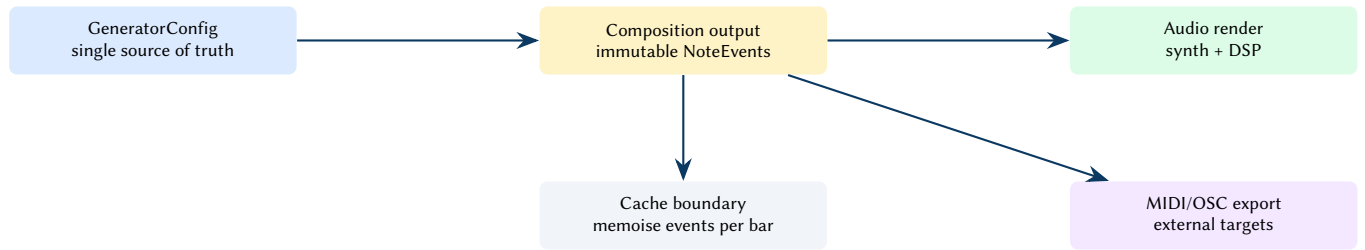

Conceptual point. The key product of Stage I is the immutable event representation. This can be cached, inspected in the TUI, rendered to audio, or exported to external tools. The engine is a compositional front-end, not only a synthesiser.

Figure 9. Data-boundary view of the two-stage pipeline. The immutable NoteEvent set is the stable interface between composition and multiple consumers (audio, MIDI, OSC), and is a natural caching boundary.

1. **Stage I: Composition** — The EnergyModel is queried to determine the arrangement density and rhythmic character for each bar. The generators then produce NoteEvent sequences (pitch, velocity, timing) that exist purely as metadata.
2. **Stage II: Rendering (Optional)** — The note events are dispatched to either the internal synthesis engines (Stage IIa) or pushed to external targets like Ableton Live (Stage IIb).

Design Decision 4: Decoupled Output Targets

Because the RenderResult stores the note metadata separately from the audio buffers, the user can iterate on the composition (Stage I) while monitoring the TUI visualisation, and only commit to the computationally expensive audio rendering (Stage IIa) when necessary. Conversely, the engine can act as a pure "MIDI brain" for Ableton Live, bypassing the synthesis layer entirely to save CPU cycles.

5 The Energy Model

The energy model is the central organising abstraction of the generator. Rather than manually arranging patterns on a timeline, the user defines an energy curve and the model determines pattern density, filter modulation depth, sample selection, and element entry/exit timing. The model operates at four hierarchical levels.

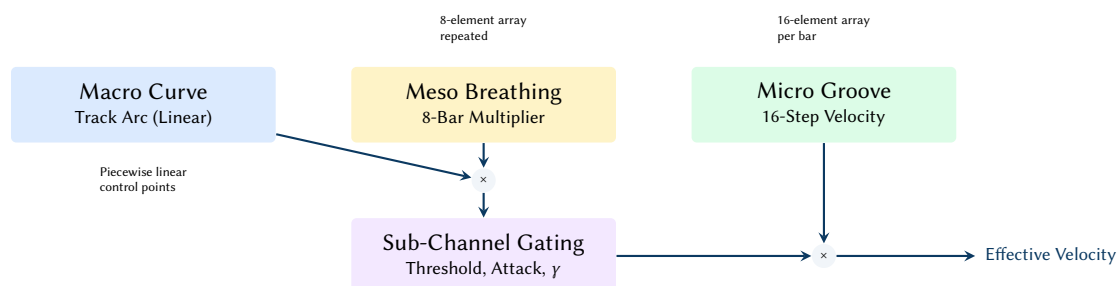


Figure 10. The four-level energy hierarchy. Macro and meso levels combine to drive the sub-channel gate, which is then modulated by the micro groove to produce the final step velocity.

5.1 Macro Curve

The macro curve defines the overall energy arc of the track as a piecewise-linear function $E_{\text{macro}}(b)$ over bar number b . It is specified as a sequence of control points $(b_i, e_i) \in [0, B] \times [0, 1]$ where B is the total number of bars:

$$E_{\text{macro}}(b) = e_i + (e_{i+1} - e_i) \cdot \frac{b - b_i}{b_{i+1} - b_i}, \quad b_i \leq b < b_{i+1} \quad (1)$$

Four named presets provide common arrangement shapes:

- **build_and_drop** — rises to 0.9 at 30%, drops to 0.3 at 35%, climbs to 1.0 at 70%, falls to 0.2 at end.
- **full_set** — monotonic rise from 0.2 to 1.0 at 75%, then a gentle decline to 0.7.
- **wave** — oscillating peaks at 0.6, 0.8, 0.9, 1.0 with valleys between, creating a rolling energy feel.
- **tension_release** — two sharp drops (0.7 $\rightarrow$ 0.2 at 30%, 0.9 $\rightarrow$ 0.3 at 60%) with recovery climbs, resolving to 1.0 at 90%.

5.2 Meso Breathing

The meso pattern imposes a phrase-level breathing rhythm as an 8-element multiplier array $M = [m_0, \dots, m_7]$ that repeats every 8 bars. The default *breathing* pattern is:

$$M_{\text{breathing}} = [0.85, 0.90, 0.95, 1.0, 1.0, 0.95, 0.90, 0.85] \quad (2)$$

The combined energy at bar b is $E(b) = \text{clamp}(E_{\text{macro}}(b) \cdot M[b \bmod 8], 0, 1)$.

5.3 Micro Groove

The micro groove shapes velocity at the 16th-note level within each bar. A 16-element array $G = [g_0, \dots, g_{15}]$ multiplies the velocity of each step, creating rhythmic accents. The *psy_groove* preset emphasises downbeats and offbeat drive:

$$G_{\text{psy}} = [1.0, 0.6, 0.75, 0.5, 0.9, 0.55, 0.8, 0.5, 0.95, 0.6, 0.75, 0.5, 0.85, 0.55, 0.8, 0.65] \quad (3)$$

5.4 Sub-Channel Gating

Each of the five musical elements (kick, bass, hi-hat, clap, lead) has an independent sub-channel that gates and shapes the element's response to the macro energy. A sub-channel is defined by four parameters:

Table 2. Default sub-channel parameters. The response curve exponent controls how aggressively the element responds to energy changes: < 1 gives a gentle ramp, > 1 gives a sharp threshold effect.

Element	Onset Bar	Threshold	Attack (bars)	Response γ
Kick	0	0.05	2	0.7
Bass	4	0.15	4	1.0
Hi-hat	8	0.25	4	1.2
Clap	8	0.35	2	1.5


The effective energy level for element i at bar b is:

$$E_i(b) = \begin{cases} 0 & \text{if } b < \text{onset}_i \text{ or } E(b) < \text{thresh}_i \\ \left(\min\left(1, \frac{b - b_{\text{active}}}{\text{attack}_i}\right) \cdot E(b) \right)^{\gamma_i} & \text{otherwise} \end{cases} \quad (4)$$

where b_{active} is the first bar at which both conditions (onset reached and threshold exceeded) are satisfied. The attack ramp fades the element in over attack_i bars after activation, and the response exponent γ_i shapes the energy-to-density transfer function.

Design Decision 5: Staggered Entry

The sub-channel onset and threshold parameters create a natural staggered entry: kick appears first (bar 0), bass enters at bar 4 once energy exceeds 0.15, and percussion layers arrive at bar 8. This mirrors the arrangement conventions of psytrance production, where elements are introduced progressively during the intro and build sections.

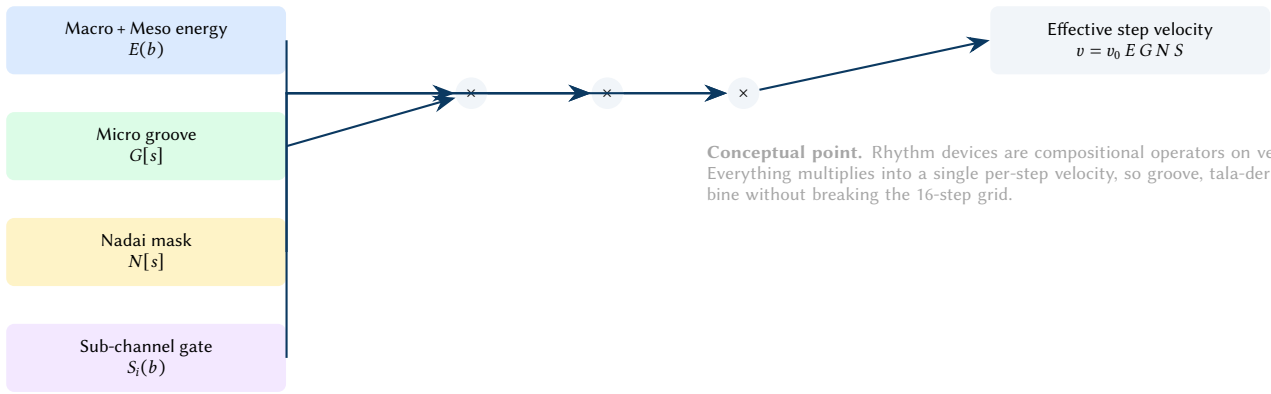

Conceptual point. Rhythm devices are compositional operators on velocity, not independent. Everything multiplies into a single per-step velocity, so groove, tala-derived masks, and energy combine without breaking the 16-step grid.

Figure 11. Velocity composition in the engine. Macro/meso energy, micro groove, nadai masks, and per-layer gates combine multiplicatively into the final step velocity used by pattern emitters.

6 Synthesis Engines

The generator includes four dedicated synthesis engines, each implementing the specific timbral characteristics of its target element. All synthesis operates in f64 precision; conversion to f32 occurs only at the final output stage.

6.1 Kick Drum

The kick drum synthesiser produces up to 300 ms of audio per hit by summing three layers:

1. **Main body** — a sine oscillator with an exponential pitch envelope sweeping from $f_{\text{start}} \approx 150$ Hz to $f_{\text{end}} \approx 50$ Hz. The instantaneous frequency is:

$$f(t) = f_{\text{end}} + (f_{\text{start}} - f_{\text{end}}) \cdot e^{-\alpha_p t} \quad (5)$$

where $\alpha_p \approx 35$ controls the pitch decay rate. The amplitude envelope is $a(t) = e^{-\alpha_a t}$ with $\alpha_a \approx 8$.

2. **Sub-harmonic** — a 25 Hz sine with a slower decay ($\alpha_{\text{sub}} \approx 2.5$) at 35% of the main body level. This extends the low-frequency sustain without muddying the transient.
3. **Click transient** — a short (~ 3 ms) burst of a high-frequency sine at ~ 3500 Hz with a linear fade-out. The click provides the initial attack snap that helps the kick cut through the mix.

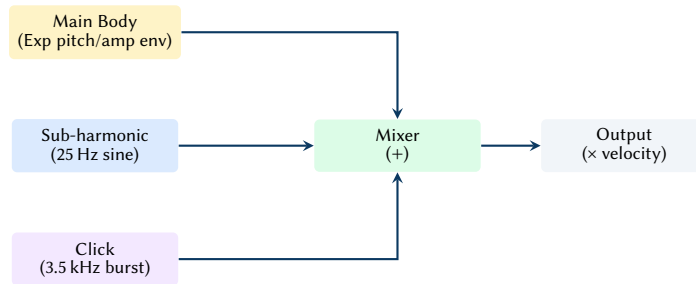


Figure 12. Kick drum synthesis model: parallel summation of main body, sub-harmonic, and click layers.

Phase Accumulation

All oscillators in the generator use phase accumulation ($\phi += f/f_s$) rather than direct computation ($\sin(2\pi f t)$). This is essential for the kick's pitch sweep: recomputing $\sin(2\pi f(t) \cdot t)$ with a time-varying $f(t)$ produces phase discontinuities that manifest as audible clicks at the sweep inflection points.

Design Decision 6: Critical Evaluation: Hardcoded Envelopes and Inflexibility

The kick synthesiser heavily relies on hardcoded constants to achieve its characteristic psytrance punch. For instance, the total duration of the kick is locked at 0.30 seconds ($\sim 13,230$ samples at 44.1 kHz), and the sub-harmonic frequency is fixed to exactly 25 Hz.

While humanisation provides minor random variations, this rigid 3-layer architecture cannot accommodate drastically different kick styles, such as acoustic emulation, 808-style long decays, or hardstyle gabber kicks. The strict 0.30s cutoff abruptly zeroes out the engine, which can lead to low-frequency

clicks if the envelope hasn't fully decayed. A more robust implementation would parameterize the decay curves and duration, making it a true general-purpose drum synthesiser rather than a single-trick pony.

6.1.1 Humanisation

The humanize parameter (0–1) scales per-hit random variation across all three layers. The humanised parameters and their variation ranges at full humanisation are:

- Start frequency: ± 12 Hz
- End frequency: ± 3 Hz
- Pitch decay rate: ± 4
- Click frequency: ± 400 Hz
- Click level: $\pm 8\%$
- Sub level: $\pm 7\%$

6.2 Bass Synthesiser

The bass engine renders one note at a time with a subtractive synthesis architecture: two detuned oscillators into a modulated biquad filter, followed by waveshaping and an ADSR amplitude envelope.

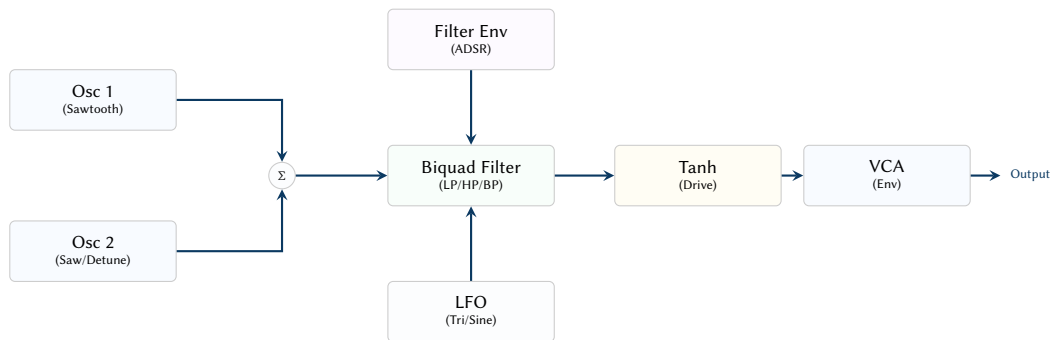


Figure 13. The bass synth signal flow. Dual sawtooth oscillators are summed and passed through a multi-mode biquad filter. Cutoff frequency is modulated by both an ADSR envelope and a free-running LFO. The signal is then saturated via a tanh function and shaped by the VCA envelope.

6.2.1 Oscillator Section

Two oscillators run simultaneously: a main oscillator at the note frequency f_0 and a detuned oscillator at $f_0 \cdot 2^{7/1200}$ (+7 cents). Each oscillator can be either a naive sawtooth (phase accumulation) or a wavetable oscillator scanning through a loaded wavetable. The mix ratio is 70% main, 30% detuned, creating a chorus-like thickening effect.

6.3 Timbral Geometries: Acid and Resonance

The "Acid" sound, characteristic of both Goa Trance and modern Psytrance, is defined by extreme, non-linear filter resonance. Overtone models this using a modified biquad filter with a resonance-dependent gain boost and soft-clipping.

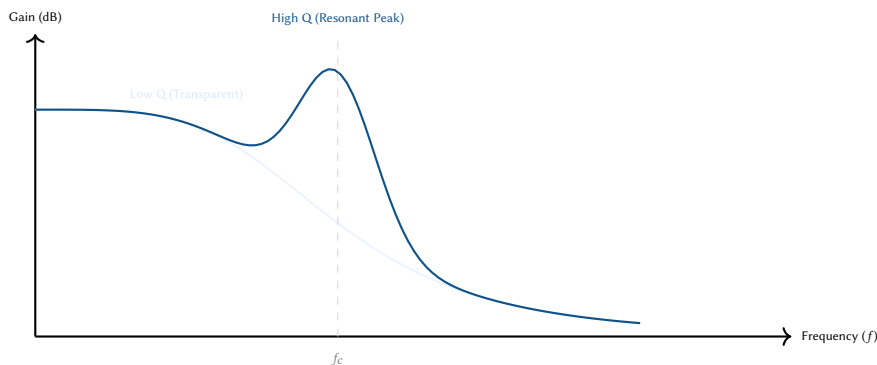


Figure 14. Filter response geometries. The "Acid" character is achieved by a sharp resonant peak at the cutoff frequency (f_c). When the cutoff is modulated by a fast envelope, this peak sweeps through the harmonics of the sawtooth oscillator, creating the characteristic "wow" and "squelch" textures.

The BiquadFilter implements a resonance Q that can exceed 20.0, entering the region of self-oscillation. To prevent digital instability, the signal is passed through a tanh waveshaper in the filter’s feedback loop, mimicking the saturation of analogue circuits.

The biquad filter cutoff is modulated per-sample by three sources:

$$f_c(n) = f_{\text{base}} + \underbrace{E_{\text{filt}}(n) \cdot A_{\text{env}}}_{\text{envelope}} + \underbrace{L(n) \cdot D_{\text{lfo}}}_{\text{LFO}} \quad (6)$$

where $E_{\text{filt}}(n)$ is the filter envelope output (AD shape with configurable attack, decay, sustain, and amount in Hz), and $L(n)$ is the LFO output (unipolar, 0–1) with depth D_{lfo} in Hz. The filter’s `set_params( $f_c$ ,  $Q$ )` method recomputes the RBJ biquad coefficients at every sample—a deliberate design choice that trades computational cost for artifact-free modulation.

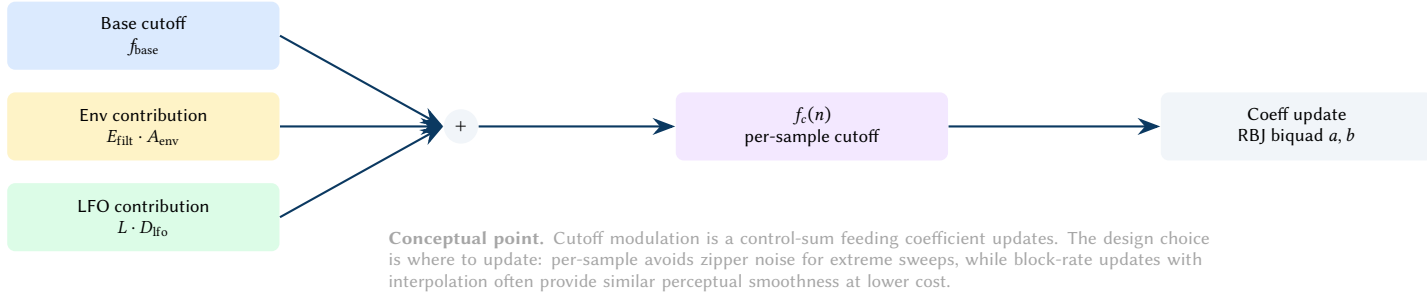


Figure 15. Filter modulation as a control-sum graph. Multiple modulation sources sum into $f_c(n)$, which drives coefficient updates and then sample processing.

Design Decision 7: Critical Evaluation: Per-Sample Coefficient Updates & Hardcoding

While updating biquad coefficients per-sample prevents audible zipper noise during extremely fast filter sweeps (e.g., acid-style 0 ms attack envelopes), it incurs a substantial and often unnecessary computational penalty. At 44.1 kHz, computing trigonometric functions for coefficients on every sample dominates the bass rendering profile. In professional audio engines, block-rate updates (every 32–64 samples) combined with parameter interpolation are standard practice and achieve identical perceptual smoothness at a fraction of the cost.

Furthermore, the amplitude envelope segments are strictly hardcoded (3 ms attack, 40 ms decay, 70% sustain, 30 ms release). While this guarantees a tight, psytrance-appropriate transient, it severely limits the engine’s versatility for slower, evolving basslines in ambient or down-tempo contexts. The decision to hardcode these values rather than exposing them in the `GeneratorConfig` reflects a rigid design bias toward high-energy dance music, undermining the engine’s stated goal of cross-genre adaptability.

Four filter envelope presets are provided:

Table 3. Filter envelope presets. The *amount* parameter specifies the peak cutoff offset in Hz above the base frequency.

Preset	Attack (ms)	Decay (ms)	Sustain	Amount (Hz)
Off	—	—	—	0
Acid	0	180	5%	2000
Slow Sweep	50	500	20%	1500
Pluck	0	80	0%	3000

6.3.1 Waveshaping and Envelope

The filtered signal is passed through a tanh waveshaper: $y = \tanh(1.3x)$, which adds odd harmonics and provides soft saturation. The amplitude envelope is a simple ADSR with fixed segments: 3 ms linear attack, 40 ms exponential decay to 70% sustain, sustain hold for the note duration, and 30 ms linear release.

6.4 Percussion

6.4.1 Hi-Hat

Hi-hats combine two sources: white noise filtered through a biquad HPF, and a metallic sine tone at approximately 7500 Hz. Closed hi-hats use a 7000 Hz HPF cutoff and fast amplitude decay (e^{-100t} , ~30 ms effective duration). Open hi-hats use a lower 6000 Hz cutoff and slower decay (e^{-15t} , ~150 ms).

6.4.2 Clap

The clap synthesiser produces a multi-tap noise envelope: three consecutive 10 ms bursts at 15 ms spacing (attenuating at 100%, 80%, 60%), followed by a 100 ms filtered noise tail with exponential decay. A 1000 Hz HPF removes low-frequency content. The multi-tap structure simulates the “multiple hands clapping” effect that gives the sound its characteristic scattered attack.

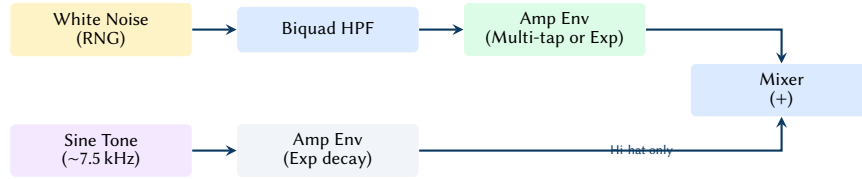


Figure 16. Percussion synthesis model. Hi-hats blend filtered noise with a metallic sine tone, while the clap relies entirely on a multi-tap noise envelope.

Design Decision 8: Critical Evaluation: Overly Simplistic Percussion Models

The percussion synthesiser reveals the most significant compromises in the engine’s sound design. The hi-hat relies on a single metallic sine wave blended with filtered white noise, completely missing the complex, inharmonic interplay of multiple square wave oscillators (as seen in classic TR-808/909 architectures). This leads to a thin, somewhat static top-end.

Similarly, the clap synthesiser relies on a rigidly hardcoded 3-tap delay structure (15 ms spacing). Real claps have stochastic tap spacing and density that varies per hit. By locking these parameters, the clap loses its organic feel and quickly becomes repetitive, necessitating the heavy use of the sample library (section 13.4) to mask the synthesiser’s limitations.

6.5 Lead (FM Synthesis)

The lead synthesiser implements two-operator FM synthesis:

$$y(t) = A(t) \cdot \sin \left(2\pi f_c t + \underbrace{I \cdot E_{fm}(t) \cdot \sin(2\pi f_m t)}_{\text{modulator}} \right) \quad (7)$$

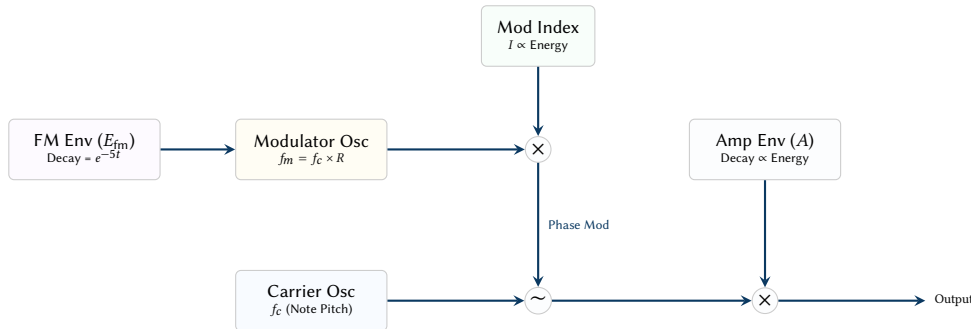


Figure 17. Two-operator FM Synthesis architecture. The modulator oscillator frequency (f_m) is a ratio (R) of the carrier pitch. The modulation depth (Index I) is dynamically scaled by the macro energy level, meaning higher energy sections produce much brighter, richer sideband harmonics. The FM envelope (E_{fm}) creates a “pluck” or “wow” transient.

where f_c is the carrier frequency (note pitch), $f_m = f_c \cdot R$ is the modulator frequency (R is the FM ratio), I is the modulation index, and $E_{fm}(t) = e^{-5t}$ is a fast FM envelope that creates a time-varying timbre. The modulation index I and carrier amplitude decay are scaled by the macro energy level: higher energy produces brighter, longer lead tones.

Design Decision 9: Critical Evaluation: Simplistic FM and Lack of Anti-Aliasing

The lead engine’s implementation of FM synthesis is overly simplistic and suffers from significant structural limitations. Relying entirely on a hardcoded e^{-5t} decay envelope for the modulation index prevents the creation of brass-like swells or complex evolving textures that define modern FM patches. More critically, the engine applies phase modulation directly to the carrier using a naive sine accumulator without any form of bandlimiting or oversampling. As the modulation index I scales up with macro energy,

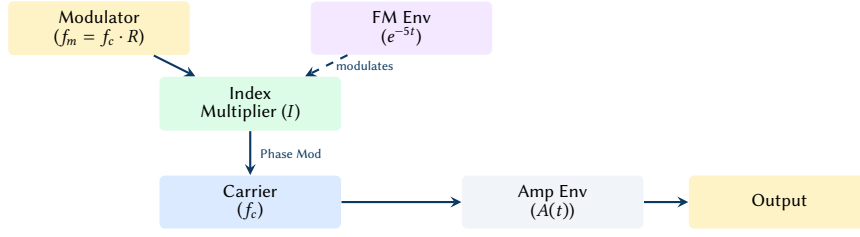


Figure 18. Lead synthesiser signal flow using 2-operator FM.

the generated sidebands quickly exceed the Nyquist frequency, folding back into the audible spectrum as harsh, inharmonic aliasing. While some degree of aliasing is characteristic of early digital synths (e.g., the Yamaha DX7), the absence of even rudimentary oversampling here degrades the high-frequency fidelity during peak energy sections, leading to a brittle and fatiguing sound.

6.6 Drone (Tanpura)

The drone synthesiser models a four-string tanpura, providing a continuous harmonic reference that fills sparse, low-energy sections of the arrangement.

6.6.1 Architecture

Four independent DroneString instances run in parallel, each consisting of two detuned oscillators (fundamental plus a cents-offset copy), three harmonics (fundamental at 100%, 2nd at 30%, 3rd at 15%), and a bandpass filter (220 Hz, $Q = 0.9$). The strings are tuned to Sa (low), Sa (low, slightly detuned), Pa or Ma (depending on the active raga’s preferred drone third), and Sa (high octave).

Each string has a *pluck cycle*: a periodic re-excitation at intervals between 0.84 s and 1.18 s (staggered across strings to prevent phase alignment). The per-string envelope is:

$$a(t) = A_{\text{attack}}(t) \cdot e^{-4t/T_{\text{decay}}} \cdot (0.5 + 0.5 \sin(2\pi f_s t)) \quad (8)$$

where A_{attack} is a 2 ms linear ramp, $T_{\text{decay}} = 3$ s, and the sinusoidal swell adds $\pm 4\%$ amplitude variation that simulates the characteristic tanpura “throb”.

6.6.2 Volume and Energy

The drone volume is *inversely* proportional to the macro energy level: $v = (0.08 + 0.12 \cdot (1 - E_{\text{macro}})) \cdot (c_v/0.15)$, where c_v is the user-configurable drone volume (default 0.15). This ensures the drone fills space during intros and breakdowns but recedes as percussion and bass dominate during peaks.

6.6.3 Jhala Layer

At high energy ($E > 0.85$) on eastern scales, the drone activates a *jhala* layer—rapid, rhythmically accented strikes on the upper strings. The jhala uses a 25% duty-cycle pulse wave with a four-hit accent cycle (strong 1.0, weak 0.55, weak 0.50, medium 0.75). The strike rate escalates with energy: eighth notes below 0.90, sixteenth notes from 0.90 to 0.95, thirty-second notes above 0.95.

6.7 Pad (Ensemble)

The pad synthesiser produces sustained, textured chords using a “super-saw” topology: three PolyBLEP sawtooth oscillators per voice, with up to four voices active simultaneously.

6.7.1 Voice Structure

Each PadVoice contains three oscillators at the note frequency, $+1.5\%$ detune, and -1.5% detune. Initial phases are spread at 0.0, 0.33, and 0.66 to prevent destructive cancellation on attack. A global LFO at 0.2 Hz modulates all pitches by $\pm 0.5\%$, creating a slow drift.

The amplitude envelope uses long segments: 2.0 s linear attack, sustain hold, and 3.0 s linear release. The filter is a biquad LPF whose cutoff is modulated by both the LFO and the input amplitude:

$$f_c = 800 + L(t) \cdot 400 + |x_{\text{mix}}| \cdot 200 \quad \text{Hz} \quad (9)$$

6.7.2 Ensemble Chorus

A stereo chorus effect decorrelates the output using two delay taps per channel (15 ms left, 22 ms right) from 50 ms circular buffers. The mix is 70% dry, 30% wet.

When triggered from the streaming engine, the pad voices a minor chord voicing by default: root, minor third (+3 semitones), perfect fifth (+7), and minor seventh (+10).

6.8 Plucked String (Sitar/Veena/Sarod/Santoor)

The plucked string engine uses Karplus–Strong synthesis [1] with preset-specific extensions for four Indian string instruments.

6.8.1 Karplus–Strong Model

A delay line of length $N = f_s/f_0$ samples is excited with a short noise burst (lowpass-filtered), then fed back through a one-pole averaging filter:

$$y[n] = (1 - d) \cdot \frac{x[n] + x[n-1]}{2} + d \cdot y[n-1] \quad (10)$$

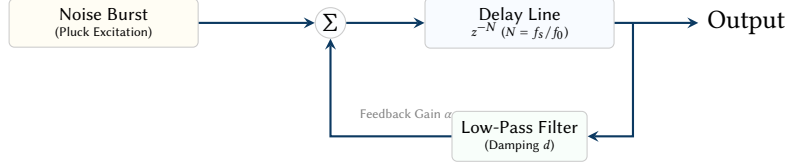


Figure 19. Karplus-Strong physical modeling architecture. A short burst of noise (the "pluck") is fed into a delay line representing the string length. The output is fed back through a low-pass filter, causing higher frequencies to decay faster than fundamental frequencies, realistically simulating a plucked acoustic string.

where d is the damping coefficient and the feedback gain controls the decay time. Table 4 lists the preset parameters.

Table 4. Plucked string preset parameters.

Preset	Feedback	Damping	Jawari	Sympathetic	Resonance
Sitar	0.997	0.12	Yes (0.85)	6 strings	0.06
Veena	0.995	0.25	No	4 strings	0.05
Sarod	0.993	0.10	No	5 strings	0.04
Santoor	0.986	0.08	No	0	—

6.8.2 Jawari (Bridge Buzz)

The sitar preset includes a *jawari* filter that models the curved bridge responsible for the instrument's characteristic nasal buzz. Below a buzz threshold, the signal is reshaped: $y = \text{sign}(x) \cdot |x|^{0.65}$, emphasising upper partials at low amplitudes. The bridge curve parameter (0.85) controls the wet/dry blend.

6.8.3 Sympathetic Strings

Up to six sympathetic strings (Karplus–Strong instances with feedback 0.998 and damping 0.28) resonate in response to the main string output, scaled by a resonance coefficient. The sympathetic halo is mixed at 25% of main amplitude.

6.9 Shruti Box (Electronic Harmonium)

The shruti box synthesiser models an Indian harmonium drone with bellows-driven amplitude modulation.

6.9.1 Oscillator Bank

Four oscillators generate harmonically rich reed tones using six-harmonic additive synthesis: $y = 0.25 \sum_{k=1}^6 h_k \sin(2\pi k f \phi)$, where the default harmonic amplitudes are $h = [1.0, 0.3, 0.7, 0.15, 0.5, 0.08]$. The number of active oscillators depends on the mode: Minimal (1), Standard (2), Devotional (2), Full (4).

6.9.2 Bellows Envelope

An asymmetric triangle LFO at 0.25 Hz simulates the pump action: $a_{\text{bellows}}(t) = 1 - d + d \cdot T(t)$, where $d = 0.15$ is the modulation depth and $T(t)$ is an asymmetric triangle (40% rise, 60% fall) that models fast push and slow pull.

The output passes through per-channel bandpass filters (520 Hz, $Q = 0.9$) with the right channel offset by +3% for stereo width. Filter cutoff modulates with energy: $f_c = 420 + 280 \cdot E$ Hz.

6.10 Tom Drum

The tom drum synthesiser renders deep, resonant drum hits with three distinct articulations modelled after tabla strokes:

- **Dha** (open resonant) — pitch sweep from $2.5f_0$ to f_0 (14 ms decay), detuned second oscillator, second harmonic at -12 dB, 2 ms noise burst. 500 ms duration, LPF at $4f_0$.

- **Tin** (closed sharp) — higher pitch ($f_0 \cdot 2^{7/12} \cdot 1.3$), fast decay (22 ms), metallic ring partial at $2.7f_0$ (−9.5 dB), BPF at $8f_0$. 80 ms duration.
- **Ghe** (sliding bass) — pitch sweep from $f_0 \cdot 2^{-5/12}$ to $0.6f_0$ (10 ms decay), 1 ms noise burst, LPF at 400 Hz. 300 ms duration.

All three use exponential pitch envelopes: $f(t) = f_{\text{end}} + (f_{\text{start}} - f_{\text{end}}) \cdot e^{-\alpha_p t}$. Per-hit randomisation is applied to detune ratio, noise level, and amplitude decay rate.

7 DSP Processing Chain

The dsp module provides shared signal processing primitives used by all synthesis engines and the master effects chain. Figure 20 illustrates the signal flow through the effects stage.

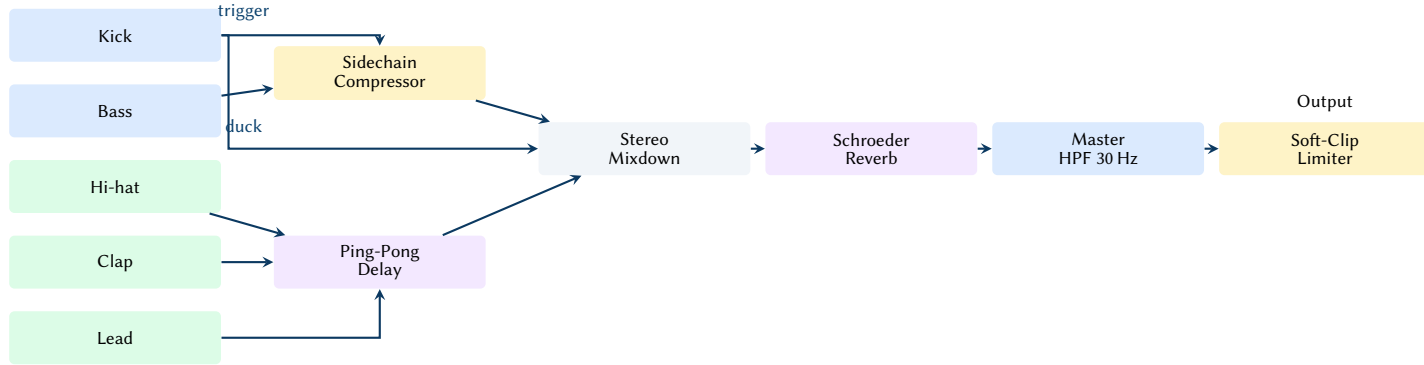


Figure 20. Master effects signal flow. The kick triggers the sidechain compressor which ducks the bass. Hi-hat, clap, and lead pass through the ping-pong delay before joining the stereo bus.

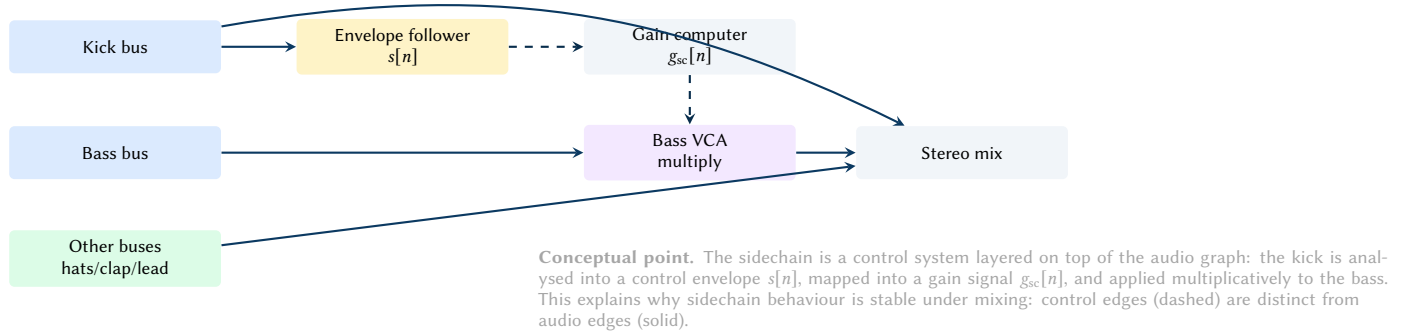


Figure 21. Sidechain compression as a control graph. Dashed arrows carry control signals; solid arrows carry audio. This framing clarifies how the kick shapes bass dynamics without being mixed into the control path.

7.1 Biquad Filter

The Biquad struct implements a second-order IIR filter using the RBJ Audio EQ Cookbook [2] formulas. It supports four filter types: low-pass, high-pass, band-pass, and notch. The filter processes samples using Direct Form II Transposed:

$$y[n] = b_0x[n] + b_1x[n-1] + b_2x[n-2] - a_1y[n-1] - a_2y[n-2] \quad (11)$$

Stability is maintained by clamping the cutoff frequency to $[20, 0.45f_s]$ Hz and the Q factor to $[0.5, 20]$. The upper cutoff clamp at $0.45f_s$ (rather than $0.5f_s$) prevents numerical instability as ω_0 approaches π .

7.2 Sidechain Compression

The sidechain compressor ducks the bass signal using the kick's amplitude envelope as a control signal:

$$g_{sc}[n] = 1 - d \cdot \min(3 \cdot s[n], 1) \quad (12)$$

where $d = 0.75$ is the duck depth and $s[n]$ is the kick envelope follower with instantaneous attack and exponential release:

$$s[n] = \begin{cases} |x_{\text{kick}}[n]| & \text{if } |x_{\text{kick}}[n]| > s[n-1] \\ s[n-1] \cdot \alpha_r & \text{otherwise} \end{cases} \quad (13)$$

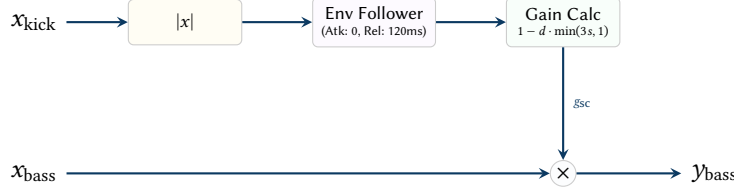


Figure 22. Sidechain compression signal flow. The absolute value of the kick signal drives an envelope follower with instantaneous attack and exponential release. This envelope calculates a dynamic gain reduction (g_{sc}) which is multiplied against the bass signal, ducking it to create rhythmic pumping.

where $\alpha_r = e^{-1/(0.12f_s)}$ gives a 120 ms release time constant.

7.3 Ping-Pong Delay

The PingPongDelay uses two circular buffers (left and right) with cross-feedback routing and a one-pole IIR low-pass filter in each feedback path for analog-style warmth:

$$\text{buf}_L[w] = x_L + \text{fb}_R \cdot k \quad (14)$$

$$\text{buf}_R[w] = x_R + \text{fb}_L \cdot k \quad (15)$$

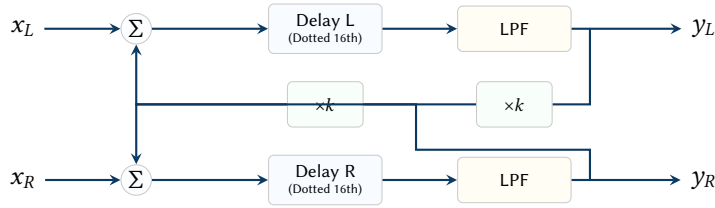


Figure 23. Ping-Pong Delay topology. Left and right channel inputs (x_L , x_R) are fed into independent delay lines. The output of each delay line is low-pass filtered (for analog-style damping), multiplied by the feedback coefficient k , and routed into the input sum of the *opposite* channel's delay line, creating a stereo bouncing effect.

where k is the feedback coefficient (clamped to 0.95 maximum) and w is the write position. The delay time is tempo-synchronised: a dotted 16th note at the current BPM, computed as $t_d = 0.375 \cdot 60/\text{BPM}$ seconds.

Default parameters: 35% feedback, 60% damping coefficient, 20% wet mix.

7.4 Schroeder Reverb

The StereoReverb implements the classic Schroeder topology [3] with decorrelated channels:

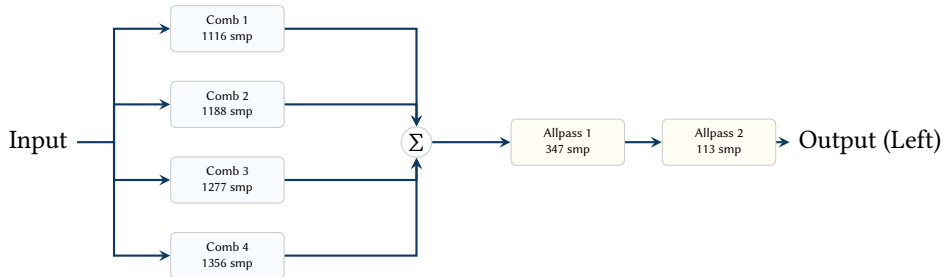


Figure 24. Schroeder Reverb topology (Left Channel). The input signal is fed in parallel to four comb filters with mutually prime delay lengths. Their outputs are summed and passed serially through two allpass filters to increase echo density without coloring the sound.

1. **Four parallel comb filters per channel** (eight total). Delay lengths at 44.1 kHz are chosen to be mutually prime to prevent flutter echo: left channel uses {1116, 1188, 1277, 1356} samples; right channel uses {1139, 1211, 1300, 1379}. A one-pole low-pass filter in each feedback path provides frequency-dependent damping.

2. **Two series allpass filters per channel.** Delays: left {556, 441}, right {579, 464}. The allpass coefficient $g = 0.5$.
3. **Wet/dry mix** at 12% wet.

Default parameters: decay coefficient 0.4, damping 0.7, giving an approximate RT60 of 0.6 s.

7.5 Master Processing

Two final processing stages are applied to the stereo mix:

- **30 Hz high-pass filter** — a second-order Butterworth (biquad HPF, $Q = 0.707$) removes subsonic energy accumulated from the kick's sub-harmonic layer and bass oscillator DC drift.
- **Soft-clip limiter** — normalises to -0.5 dBFS peak, then applies a tanh soft clipper with a knee at 0.9:

$$y = \begin{cases} x & |x| \leq 0.9 \\ \text{sign}(x) \cdot (0.9 + 0.1 \cdot \tanh(\frac{|x|-0.9}{0.1})) & |x| > 0.9 \end{cases} \quad (16)$$

7.6 Wavetable Oscillator

The Wavetable structure stores multi-cycle waveforms as a flat `Vec<f32>` with a fixed cycle length (default 2048 samples). The WavetableOscillator scans through cycles using two parameters: phase (position within a single cycle, 0–1) and `cycle_pos` (morphing position across cycles, 0–1).

7.6.1 Cross-Cycle Interpolation

Sample lookup uses bilinear interpolation across both the cycle dimension and the phase dimension:

$$y(\text{cp}, \phi) = (1 - \alpha) \cdot S(c_0, \phi) + \alpha \cdot S(c_1, \phi) \quad (17)$$

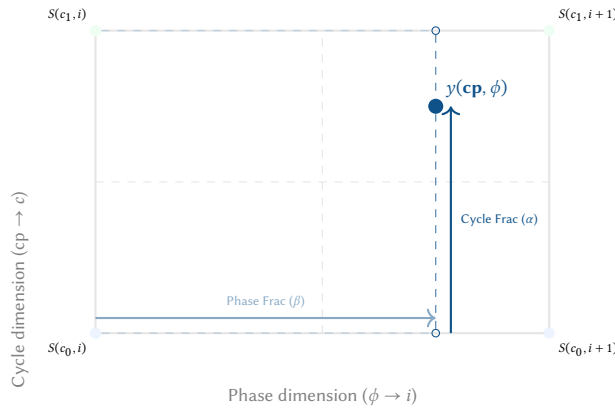


Figure 25. Bilinear cross-cycle interpolation in the Wavetable Oscillator. To prevent zipper noise when sweeping wavetables and aliasing when playing high pitches, the engine first interpolates horizontally between adjacent samples (i and $i + 1$) within two adjacent wave cycles (c_0 and c_1), and then interpolates vertically between the resulting values.

where $c_0 = \lfloor \text{cp} \cdot (N_c - 1) \rfloor$, $c_1 = c_0 + 1$, α is the fractional cycle position, and $S(c, \phi)$ performs linear interpolation within a single cycle between adjacent samples. This produces smooth timbral morphing as `cycle_pos` sweeps from the first waveform shape to the last.




Figure 26. Wavetable oscillator data flow: WAV loading, cycle storage, and bilinear interpolation at playback.

7.6.2 Wavetable Library

The WavetableLibrary maintains a HashMap of named wavetables. Two synthetic defaults are generated at initialisation: a sawtooth (2048-sample linear ramp -1 to $+1$) and a square (50% duty pulse). Additional wavetables are loaded from a user-specified directory by scanning for WAV files and splitting each into 2048-sample cycles.

7.7 PolyBLEP Anti-Aliasing

The PolyblepOscillator reduces digital aliasing on sawtooth and square waveforms by applying a second-order polynomial correction at phase discontinuities.

7.7.1 Correction Function

The PolyBLEP residual is a piecewise quadratic applied near $t = 0$ and $t = 1$ in the phase domain:

$$\text{polyblep}(t, \Delta t) = \begin{cases} \frac{t}{\Delta t} \left(2 - \frac{t}{\Delta t}\right) - 1 & t < \Delta t \\ \left(\frac{t-1}{\Delta t}\right)^2 + 2 \frac{t-1}{\Delta t} + 1 & t > 1 - \Delta t \\ 0 & \text{otherwise} \end{cases} \quad (18)$$

where $\Delta t = f/f_s$ is the phase increment per sample.

7.7.2 Bandlimited Waveforms

The corrected sawtooth subtracts the PolyBLEP residual from the naive ramp: $y_{\text{saw}} = (2t - 1) - \text{polyblep}(t, \Delta t)$. The square applies the correction twice—at $t = 0$ and at $t = 0.5$ —to smooth both transitions:

$$y_{\text{sq}} = \text{sign}(0.5 - t) + \text{polyblep}(t, \Delta t) - \text{polyblep}((t + 0.5) \bmod 1, \Delta t) \quad (19)$$

The PolyBLEP oscillator is currently used in the pad synthesiser (section 6.7) for alias-free detuned sawtooths, and is available for future application to lead and bass oscillators.


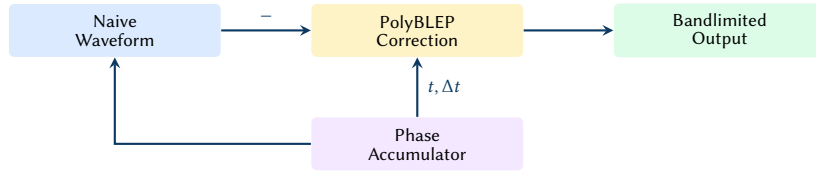


Figure 27. PolyBLEP anti-aliasing: the correction term is subtracted from the naive waveform at phase discontinuities.



Conceptual point. Aliasing originates at phase discontinuities (saw reset). Phase accumulator maintains continuity of phase under time-varying frequency; PolyBLEP then removes the discontinuity, yielding a waveform that remains stable under fast modulation.

Figure 28. Oscillator correctness view: phase accumulation + bandlimiting. This unifies the time-domain source of aliasing (discontinuities) with the algorithmic fix (PolyBLEP).

8 Sample Intelligence

The sample intelligence subsystem analyses, classifies, and blends audio samples with the synthesised output. It operates in four stages: spectral analysis, rule-based classification, cached profile storage, and energy-aware placement.


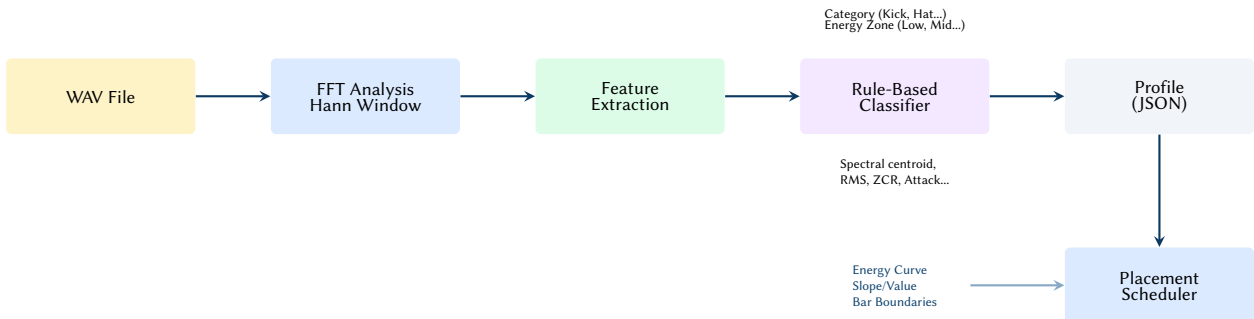


Figure 29. The sample intelligence pipeline. Raw audio is processed via spectral analysis to extract acoustic features, classified into categories and energy zones, and stored as JSON profiles. The scheduler then uses macro energy state to place samples across the arrangement.

8.1 Feature Extraction

The analyzer module extracts seven acoustic features from each loaded WAV file using `rustfft` [4] for spectral analysis:

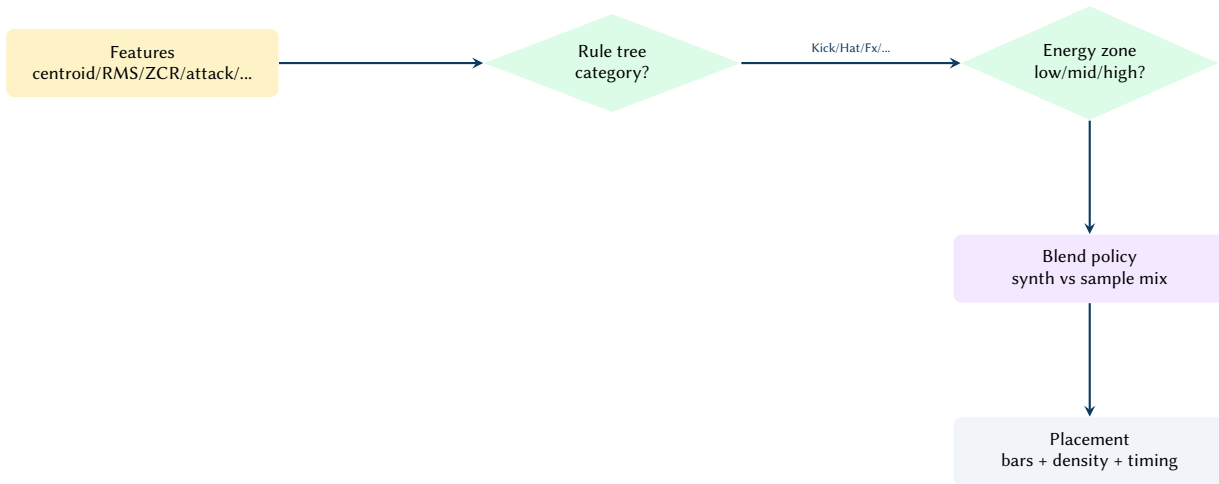

Conceptual point. Sample intelligence is a decision system, not just a pipeline: classification produces discrete labels (category, energy zone) that select a blending policy, which then determines how samples are mixed with synthesis and where they appear in the arrangement.

Figure 30. Sample intelligence as a decision DAG. Discrete classifications choose a blending policy which drives placement and mix decisions, making sample use energy-aware rather than purely random.

Table 5. Extracted acoustic features per sample.

Feature	Unit	Method
Spectral centroid	Hz	Energy-weighted mean frequency from Hann-windowed FFT ($\bar{f} = \sum f_i X_i / \sum X_i $)
RMS level	0–1	Root mean square amplitude
Zero crossing rate	0–1	Sign change count normalised by sample length
Attack time	ms	Time to reach 90% of peak RMS (5 ms analysis frames)
Tonal score	0–1	Normalised autocorrelation peak over lags 1 to $N/2$
Amplitude slope	—	Linear regression slope of per-frame RMS (positive = riser)
Brightness	0–1	Normalised centroid: $\min(1, \text{centroid}/10000)$

8.2 Classification

The classifier module applies a rule-based decision tree to assign each sample to one of nine categories: Kick, Snare, Hat, Clap, Bass, Fx, Riser, Texture, Vocal.

```

fn classify(profile: &SampleProfile, hint: Option<SampleCategory>)
  -> SampleCategory
{
  let p = profile;
  if p.spectral_centroid < 300.0
    && p.zcr < 0.05
    && p.attack_ms < 50.0
  {
    return SampleCategory::Kick;
  }
  if p.duration_ms > 2000.0 && p.amplitude_slope > 0.0 {
    return SampleCategory::Riser;
  }
  if p.spectral_centroid > 3000.0 && p.zcr > 0.15 {
    return SampleCategory::Hat;
  }
  // ... additional rules omitted for brevity
  hint.unwrap_or(SampleCategory::Fx)
}

```



```
}

```

When the rule-based classifier cannot determine a category, it falls back to a directory-name hint (e.g. a sample in a `kicks/` subdirectory is classified as `Kick`).

8.3 Profile Caching

Computed profiles are stored as sidecar JSON files (`<stem>.sample.json`) alongside the source WAV. Cache validity is checked against the source file's modification timestamp and a schema version counter, ensuring that profiles are automatically recomputed when the analyser is updated.

8.4 Energy-Aware Placement

The `PlacementScheduler` pre-computes per-bar placement decisions for non-drum sample categories (FX hits, risers, textures, fills, vocals) based on the macro energy curve's value and slope:

- **Risers** — placed at 4-bar boundaries when the energy slope exceeds 0.15, with length chosen from {4, 8, 16} bars to match the estimated climb duration.
- **FX hits** — at 4-bar boundaries when energy > 0.80; additionally at 2-bar boundaries when energy > 0.90.
- **Textures** — on energy plateaus ($|\text{slope}| < 0.05$) above 0.30 energy, at 4/8/16-bar intervals depending on density.
- **Fills** — at 4-bar boundaries above threshold, always at 8 and 16-bar boundaries.
- **Vocals** — every 16 bars, outside the 0.4–0.8 energy range (appearing in intros and peaks but not mid-energy builds).

8.5 Synth/Sample Blending

Each element's output can be pure synthesis, pure sample playback, or a weighted blend. The default blend ratio is computed from the macro energy level:

$$r_{\text{blend}} = \text{clamp}(0.8 \cdot E_{\text{macro}}, 0, 0.8) \quad (20)$$

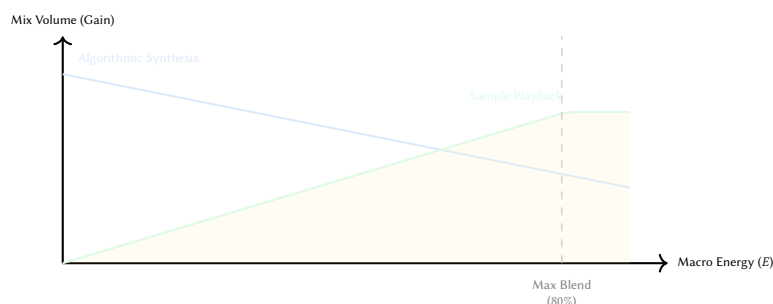


Figure 31. Synth/Sample energy blending. At low energy, the output is almost entirely driven by the internal algorithmic synthesis engines. As macro energy increases towards the peak, parsed audio samples are faded in, providing organic complexity and timbral density to the climax.

At low energy, synthesis dominates (clean, controlled sound); at high energy, samples are blended in (adding the organic variation and complexity of real recordings). Per-element blend overrides are available in the TUI.

9 Pattern Generation

All pattern generators take an `EnergyState` (the combined output of the energy model for the current bar) and produce a `BarPattern` containing a vector of `NoteEvent` structs:

```
pub struct NoteEvent {
    pub step: u8,           // 0..15 (16th note grid)
    pub velocity: f64,      // 0.0..1.0
    pub pitch_hz: f64,      // fundamental frequency
    pub duration_steps: u8, // note length in 16ths
    pub timing_offset_samples: i32, // micro-timing humanisation
}
```

9.1 Energy-Driven Density

Pattern density scales with the element's energy level. For bass, the number of active steps per bar is:

$$N_{\text{steps}} = \text{round}(4 + E_{\text{bass}} \cdot 12) \quad (21)$$

yielding 4 steps at zero energy (quarter notes) and 16 steps at full energy (continuous 16th notes).

9.2 Presets and Variation

Each element has multiple pattern presets that define distinct rhythmic characters. Table 6 summarises the kick presets as a representative example.

Table 6. Kick pattern presets. Each preset defines placement rules that are further modulated by the energy level.

Preset	Description
Default	Beats 1 and 3 always; beats 2 and 4 if energy > 0.3; ghost 16ths if > 0.7; stochastic pickups and flams
Minimal	Beats 1 and 3 only
Driving	All four beats plus probabilistic 16th-note fills
Breakbeat	Syncopated placement at steps {0, 3, 6, 10, 14}

9.3 Micro-Timing Humanisation

Three layers of humanisation are applied, all scaled by the global humanize parameter (0–1):

1. **Velocity jitter** — $\pm 12\%$, with softer hits varying more: $\text{jitter} = 1 \pm 0.12 \cdot (1 - v \cdot 0.5)$.
2. **Micro-timing** — downbeats are displaced by ± 1 ms; offbeats by ± 3.5 ms. At 44.1 kHz, 3.5 ms is approximately 154 samples.
3. **Timbral variation** (kick only) — per-hit variation in pitch envelope, click frequency, and sub-harmonic level (section 6.1).

MIDI Preservation

Micro-timing offsets are preserved in MIDI export. At 960 PPQ, one tick is approximately 0.44 ms at 142 BPM, so a ± 3.5 ms offset maps to ± 8 MIDI ticks—sufficient resolution to reproduce the humanisation feel in a DAW.

9.4 Psytrance Pattern Logic: The Psy_Groove

The quintessential psytrance rhythm is a 16th-note subdivision where the kick drum occupies the first 16th note of each quarter-note beat (the "four-to-the-floor" foundation). The bassline interacts with this grid to create the driving momentum characteristic of the genre. Overtone implements several variations of this relationship:

- **Offbeat (1/1):** The most foundational pattern, where a single bass hit occurs on the 16th note immediately following each kick.
- **Rolling (3/1):** Three consecutive bass hits follow each kick, filling the remaining 16th-note slots in the beat. This creates a relentless, "rolling" forward motion.
- **Galloping (1/2):** A long kick hit followed by two rapid bass hits, creating a "gallop" feel (e.g., [Kick, gap, Bass, Bass]).
- **Syncopated (16th):** Bass hits are placed on syncopated 16th-note positions (e.g., steps 3, 6, 9, 12), creating cross-rhythmic tension against the steady kick pulse.

These patterns are implemented in `engine/patterns.rs` using a step-weighting system. At low energy, the engine prefers simple offbeat patterns; as energy increases, it transitions into rolling or syncopated variations to heighten the driving feel.

9.5 Raga-Aware Melody Generation

The `RagaMelodyGenerator` produces bar-length melodic patterns for lead synthesis when an eastern scale is active. It respects the raga's aroh (ascending path) and avroh (descending path) and weights pitch selection toward the vadi (primary important tone) and samvadi (secondary important tone).

9.5.1 Density and Direction

Note density scales with macro energy: 3 notes per bar below 45% energy, 4 notes between 45% and 75%, and 8 notes above 75%. The generator maintains a traversal direction (ascending or descending) that flips with 25% probability each bar, producing melodic contour variety. Pitch candidates are drawn from the direction-appropriate path when the scale defines explicit aroh/avroh sequences.

9.5.2 Pitch Selection

At low energy (< 0.45), pitches are drawn uniformly from the scale's stable tones (root, preferred drone third, perfect fifth). At higher energy, a weighted random selection favours the vadi (40% probability) and samvadi (25%), with the remaining probability spread across all allowed degrees. Octave selection is one octave above the root by default, with a 15% chance of jumping to two octaves above 75% energy.

9.5.3 Ornamentation

Each generated note may receive a GamakaSpec ornament based on the raga's per-pitch gamaka rules:

- **Andolan** — slow oscillation (0.9 Hz, 20–60 cents depth).
- **Kampita** — sharp vibrato (4.0 Hz, 8–25 cents depth).
- **Meend** — pitch glide from the previous note (90 ms slide), triggered when the interval is ≤ 4 semitones and energy exceeds 45%.
- **Kan-swar** — grace note approach (± 1 semitone, 20 ms), triggered at 15% probability above 65% energy.

Note duration decreases with energy: 3 steps (held) below 45%, 2 steps at moderate energy, 1 step (rapid-fire) above 75%. Velocity is accented on the first note of each bar (0.95) and jittered by $\pm 8\%$ on subsequent notes.

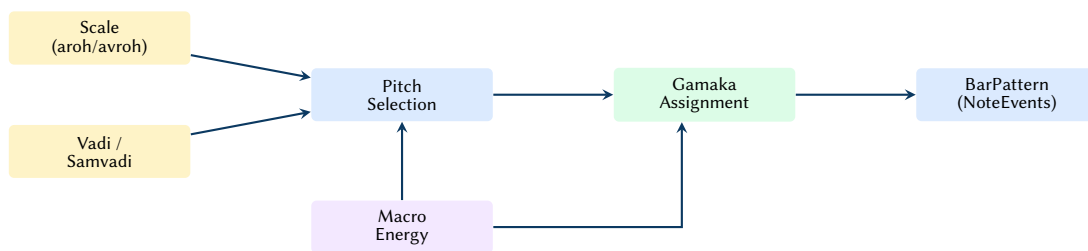


Figure 32. Raga melody generation: scale constraints and vadi/samvadi weighting feed pitch selection, energy controls density and ornamentation depth, and gamaka rules produce per-note ornaments.

9.6 Arrangement Sections

The arrangement module classifies each bar into one of four structural sections—Intro, Build, Peak, or Breakdown—using a heuristic decision tree over the macro energy curve's value, slope, and song progress:

Table 7. Arrangement section detection heuristics. Progress is measured as bar/total_bars.

Section	Conditions
Intro	Progress $< 12\%$ and energy < 0.45 ; or energy < 0.35 at any point
Build	Slope > 0.02 (rising energy); or default for mid-range energy
Peak	Energy ≥ 0.85
Breakdown	Progress $> 30\%$, slope < -0.04 , energy < 0.60 ; or energy < 0.35 after 30% progress

These section labels are used by MIDI export, Ableton scene mapping, and TUI status display.

10 Eastern Musical Traditions in Electronic Music

While the initial design targeted classic Western modes and 16-step psytrance syncopation, the architecture generalises cleanly to other musical traditions. This project includes raga-inspired scales and tala-inspired accent cycles that can be applied without changing the global time signature.

10.1 Specific Raga Profiles and Their Applications

While all 72 melakarta scales are available, the generator provides several hand-crafted raga-inspired profiles used in the mood presets:

- **Bhairav (Hindustani):** Characterized by flattened 2nd (Re) and 6th (Dha) degrees. It creates a solemn, dawn-like character, making it effective for meditative intros and "Dark Phrygian" style psytrance.
- **Ahir Bhairav (Hindustani):** Combines the Bhairav lower tetrachord with a more major-sounding upper tetrachord. It is bright yet devotional, ideal for progressive melodies and "Goa Sunrise" themes.
- **Todi (Hindustani):** An intensely chromatic and tense raga, used to create maximum psychedelic tension during energy build-ups.

- **Malkauns (Hindustani):** A pentatonic (five-note) raga of deep introspection and late-night calm. Its sparse structure is ideal for ambient drones and "Samay" midnight presets.
- **Charukesi (Carnatic):** A lyrical and highly emotional raga, used for progressive themes that require a balance of melodic warmth and mystic color.

10.2 Tala Accent Cycles and Rhythmic Structures

Indian classical rhythm (*tala*) is modeled as a cyclic system of accentuation. Rather than using complex time signatures, Overtone applies tala-derived velocity multipliers onto the 16-step grid.



Figure 33. Cyclic representations of Rupak and Jhaptal Talas. These cycles define the underlying "pulse" onto which Overtone superimposes its 16-step electronic patterns, creating complex cross-rhythms.

The relationship between the cyclic tala and the linear DAW grid is a source of "polyrhythmic" interest.

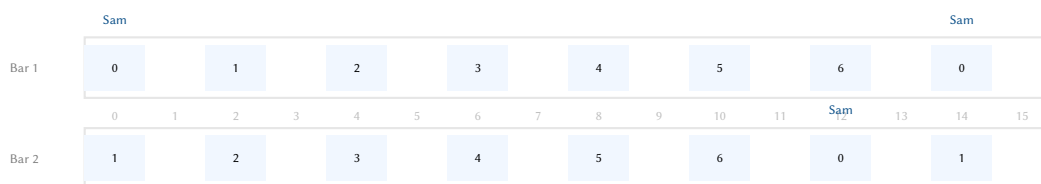



Figure 34. Tala-to-grid alignment. A 7-beat Rupak cycle (mapped here to 8th-note steps) drifts relative to the 16-step bar boundary. The *Sam* (beat 0) moves from step 0 in Bar 1 to step 14 in Bar 1, and step 12 in Bar 2, creating evolving syncopation.

Rather than using complex time signatures, Overtone applies tala-derived velocity multipliers onto the 16-step grid:

- **Rupak (7 beats):** Often interpreted as [3, 2, 2]. Its syncopation against the 16-step grid creates an evolving cross-rhythmic pattern that resolves every 7 beats.
- **Jhaptal (10 beats):** interpreted as [2, 3, 2, 3]. It creates a steady yet complex groove suitable for mid-tempo progressive tracks.
- **Ektal (12 beats):** Often used in fast-tempo compositions, providing a high-density rhythmic drive.

10.3 Indian Classical Structural Devices

Beyond interval sets, the generator implements several structural devices to maintain authentic formal development:



Conceptual point. A tihai is a constraint-satisfaction pattern: choose a motif and an inter-phrase spacing so that the third repetition resolves exactly on *sam*. This makes cadences audible even when harmony is static.

Figure 35. Tihai as a generative constraint. The generator selects motif and spacing so the third repetition resolves on the cycle downbeat (*sam*).

- **Aroh and Avroh:** Many ragas have different paths for ascending (*aroh*) and descending (*avroh*). The melodic generator maintains a directional traversal state and selects pitch candidates based on these paths.

- **Vadi and Samvadi:** The "King" and "Queen" notes are emphasized through a weighting bias in the pitch selection algorithm, ensuring the melodic center of the raga is properly established.
- **Gamakas (Ornaments):** The system can attach GamakaSpec metadata to notes (meend, andolan, kampita), which the internal synthesis engines interpret as per-sample frequency or amplitude modulations.
- **Tihai:** A cadential device where a phrase is repeated three times to resolve on the downbeat (*sam*). The engine can generate a tihai as a final bar-override before a section boundary (e.g., from Build to Peak).
- **Sangati:** Repetition with progressive elaboration. Each time a phrase is repeated across multiple bars, the engine can slightly increase the melodic density or add ornaments to mimic the live development of a composition.
- **Jugalbandi:** A call-and-response duet mode where two synthesis layers (e.g., Lead and FM String) exchange phrases, with the "respondent" layer varying the "caller's" motif.

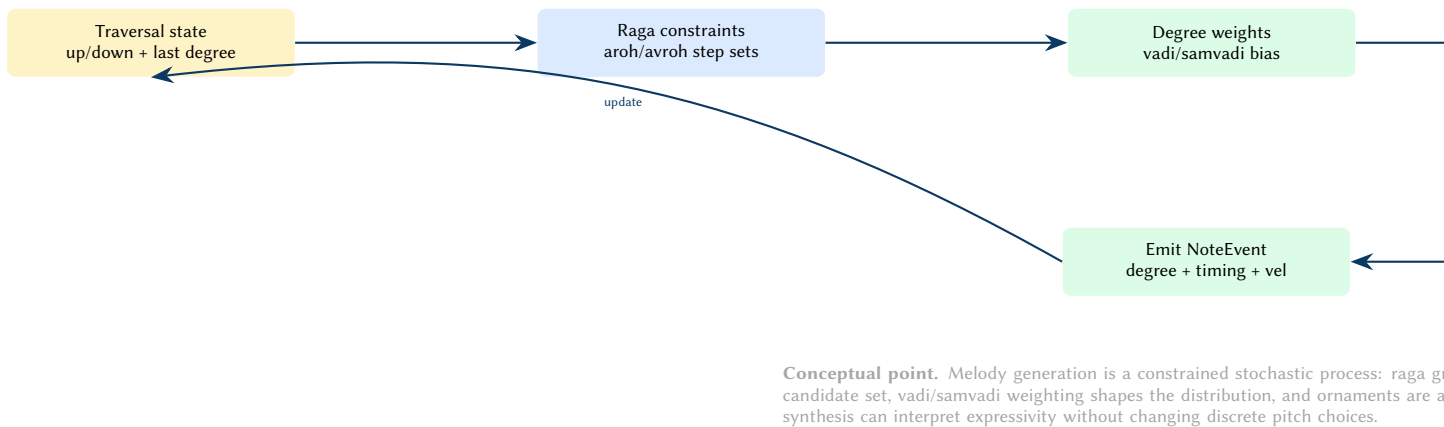


Figure 36. Raga-aware pitch selection as a decision DAG. Constraints define what is legal, weights define what is likely, and ornaments carry expressive motion as metadata.

10.4 Yoga Flow and Rasa-to-Energy Mapping

Overtone extends the traditional Western arrangement by mapping the energy model to the aesthetic and philosophical frameworks of Indian music:

1. **Navarasa:** The "Nine Emotions" framework. The generator can bias parameters based on a selected rasa:
 - **Shanta (Peace):** Lower energy, slow breath LFO, drone-dominant.
 - **Veera (Heroic):** Rising energy, sharp attacks, Ahir Bhairav scale.
 - **Adbhuta (Wonder):** Moderate energy, high filter resonance, random walk arpeggios.
2. **Chakra Architecture:** Arrangement arcs are modeled after *Yoga Asana* sequences. The "Yoga Flow" energy curve moves from Muladhara (grounding/intro) to Manipura (strength/peak) and then to Sahasrara (transcendence/cool-down).

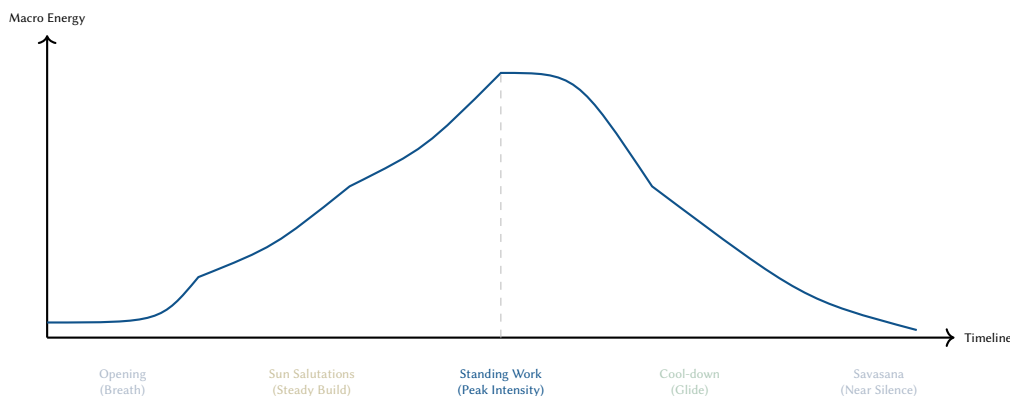


Figure 37. The 7-phase "Yoga Flow" macro energy curve. Unlike the multi-peak "Long Journey" EDM curve, this arc represents a continuous, single-peak meditation structure, moving smoothly from grounding (Muladhara) to high-energy effort (Manipura), resolving in peaceful dissolution (Sahasrara).

10.5 Motif Foreshadowing via Sub-Channel Preview

Sub-channel gating includes a preview window below the main activation threshold. In this region elements can appear as sparse "ghost" hits, hinting at future motifs before the full density arrives.

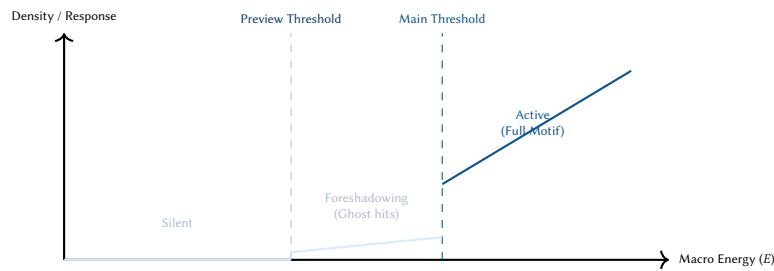


Figure 38. The Sub-Channel Preview mechanism. Instead of an abrupt binary switch when an element becomes active, the engine provides a "preview window." In this energy band, the element emits occasional low-velocity hits, telegraphing its arrival to the listener before full activation.

The result is a stronger sense of narrative continuity: motifs are introduced, developed, and then brought into the foreground.

10.6 Drone, Ornamentation, and Cadential Devices

Beyond interval sets and accent cycles, Indian classical identity is often carried by a small set of structural devices:

- **Tanpura drone** — a continuous pitch reference (Sa–Pa–Sa) that anchors intonation and fills sparse sections. The engine can render a four-string drone layer tuned to the active key and mixed inversely with macro energy.
- **Aroh/avroh constraints** — ragas are not only scales; they encode preferred ascending and descending motion. A raga-aware melody generator uses directional step sets and avoids stepwise motion that contradicts the raga's character.
- **Vadi/samvadi weighting** — note hierarchy influences phrase landing points and perceived emotional center. The melodic generator can weight pitch selection toward the vadi (primary) and samvadi (secondary) degrees.
- **Gamaka** — ornaments such as meend (glide), kan-swar (grace approach), and andolan/kampita (oscillation) provide micro-expression that distinguishes ragas even in 12-TET approximations.
- **Tabla bols and articulation** — percussive syllables (e.g., Dha, Tin, Ghe) encode stroke families and resonance. The tom layer can attach articulation metadata to events and render different envelopes/spectra per stroke.
- **Tihai and korvai** — cadential patterns that resolve on sam (downbeat). These devices can be inserted at section boundaries to increase formal coherence and create a clear sense of arrival.

10.7 Time, Notation, and Breath

Two additional ideas extend the system beyond purely pattern-driven EDM generation:

- **Samay** — time-of-day associations can bias raga selection toward traditional prahar groupings.
- **Sargam + bols in the TUI** — displaying Sa/Re/Ga/Ma or bol initials in the step grid provides a musically meaningful view of eastern-mode patterns.
- **Breath-synched modulation** — a slow asymmetric LFO can modulate global dynamics and timbre (filter cutoff, wetness), and reduce high-frequency density during exhale to support meditative outputs.

10.8 Indian Classical Performance Forms

Both Hindustani and Carnatic traditions follow structured performance arcs that progressively introduce melodic and rhythmic elements.

10.8.1 Hindustani Performance Form: Alap–Jor–Jhala–Gat

A typical Hindustani performance begins with a slow, non-metered introduction and builds toward a fast, rhythmic climax.

- **Alap:** A free-form, meditative introduction where the artist explores the raga's personality. In Overtone, this is mapped to the Intro section with drones and sparse pads.
- **Jor:** A steady pulse is introduced, but without a fixed rhythmic cycle (tala). Melodic density increases.
- **Jhala:** Rapid, rhythmic strumming or striking toward the end of the Alap/Jor section, creating a sense of anticipation.

- **Gat:** The main rhythmic composition begins, accompanied by a tala. This maps to the Build and Peak sections of the EDM arrangement.

10.8.2 Carnatic Performance Form: Alapana–Kriti–Tani

Carnatic music emphasizes composed devotional songs (*kriti*) and virtuosic improvisation.

- **Alapana:** The melodic introduction (similar to Alap).
- **Kriti:** The main composed piece, often with three sections: *Pallavi* (refrain), *Anupallavi* (second section), and *Charanam* (final section).
- **Niraval and Kalpanaswaram:** Improvisation based on a line of the kriti or on solfege (*sargam*).
- **Tani Avartanam:** A dedicated percussion solo section, often appearing toward the end of a performance. Overtone implements this as a percussion-only breakdown.

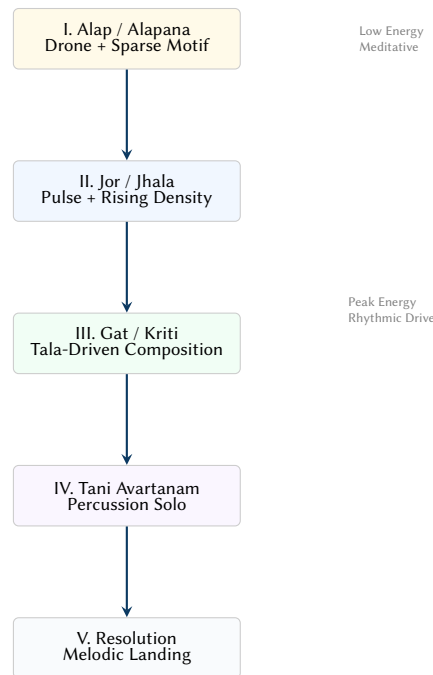


Figure 39. The performance arc implemented in Overtone. The engine maps the traditional Indian classical progression onto the EDM energy model, moving from non-metered melodic exploration to high-density rhythmic cycles.

10.9 Cross-Cultural Fusion: The Raga-Trance Logic

Overtone's unique contribution is the algorithmic fusion of these styles. The "Raga-Trance" logic is implemented as follows:

1. **Structural Mapping:** The Hindustani *Gat* phase is mapped to the psytrance "Drop." The transition from Alap to Gat mirrors the EDM "Build."
2. **Rhythmic Interplay:** Tala-derived accent cycles are superimposed on the four-to-the-floor kick foundation. This creates a "polyrhythmic" feel within a stable 4/4 timeline.
3. **Timbral Blending:** Synth leads use *Meend* (glide) and *Kampita* (vibrato) modulations to sound like a Sitar or Veena while maintaining the sonic weight of an acid bassline.

The theory/melakarta module implements the complete Carnatic 72-melakarta system as a generative lookup table. Each melakarta is defined by its canonical number (1–72), name, seven-note interval set, chakra group, and tonal character description.

10.9.1 Hindustani Thaats System

While the Carnatic tradition uses the exhaustive 72-melakarta system, the Hindustani tradition (North India) typically uses a subset of ten foundational scales called *thaats*. Overtone implements these as presets for quick access to traditional Hindustani colors.

The ten thaats are: Bilawal, Kalyan, Khamaj, Bhairav, Bhairavi, Asavari, Todi, Purvi, Marwa, and Kafi. Each corresponds to a specific set of *komal* (flat) and *tivra* (sharp) notes.

The 72 melakartas are derived by combining variations of the lower tetrachord (*purvanga*) and the upper tetrachord (*uttaranga*).

The 72 melakartas are generated combinatorially from three independent choices:



Figure 40. The Hindustani Thaata classification. Each thaata represents a heptatonic interval set that serves as a parent scale for many ragas. Overtone’s Thaata selector allows users to pivot between these North Indian modal centers instantly.

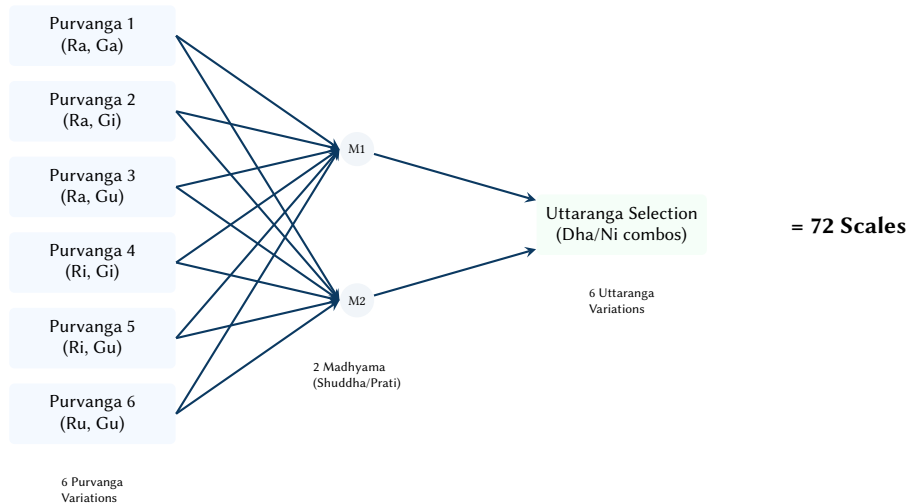


Figure 41. The combinatorial logic of the 72 Melakartas. Six purvanga variations are multiplied by two madhyama positions and six uttaranga variations ($6 \times 2 \times 6 = 72$). Each group of six purvanga/madhyama combinations forms a *Chakra*.

1. **Ma (madhyama)** – 2 options: shuddha (5 semitones) or prati (6 semitones).
2. **Ri–Ga pairs** – 6 combinations from $\{(1, 2), (1, 3), (1, 4), (2, 3), (2, 4), (3, 4)\}$ semitones.
3. **Da–Ni pairs** – 6 combinations from $\{(8, 9), (8, 10), (8, 11), (9, 10), (9, 11), (10, 11)\}$ semitones.

The total $2 \times 6 \times 6 = 72$ ragas are indexed into 12 chakras (6 ragas per chakra) via $\text{chakra} = \lfloor (n - 1)/6 \rfloor$. Nine notable ragas with hardcoded personality descriptions are highlighted for UI display: Kanakangi (“mysterious, tense”), Mayamalavagowla (“grand, devotional”), Natabhairavi (“pathos”), Kharaharapriya (“versatile, deep”), Harikambhoji (“bright, joyful”), Dheerasankarabharanam (“complete, bright”), Chalanata (“alien, otherworldly”), Kamavardhini (“intense, dramatic”), and Mechakalyani (“serene, luminous”).

10.10 Thaata Classification (Hindustani)

The theory/thaata module defines the 10 canonical thaats of Hindustani music, each with a seven-note interval set, tonal character, time-of-day association, and example ragas. Table 8 summarises the system.

The `thaata_for_scale()` function maps raga names used elsewhere in the engine (e.g., “bhairav”, “todi”) to their parent thaata, enabling the TUI to display tradition context alongside the active scale.

10.11 Rasa (Aesthetic Emotion)

The theory/rasa module implements the *navarasa* framework—nine canonical aesthetic emotions from Indian aesthetics—as complete synthesis parameter profiles. Each rasa maps to a tempo, preferred ragas, energy curve, filter character, reverb character, gamaka style, laya, nadai, drone volume, and shruti purity.

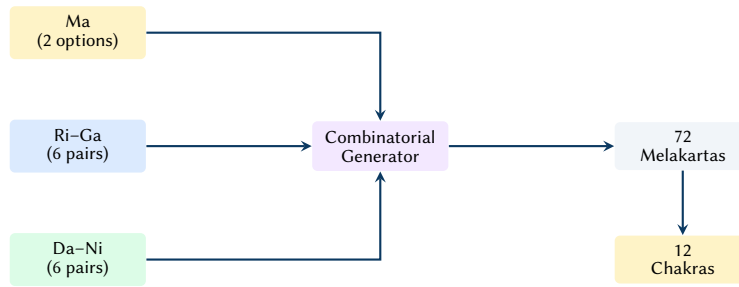


Figure 42. Melakarta generation: three independent pitch choices yield 72 canonical ragas grouped into 12 chakras.

Table 8. The 10 Hindustani thaats with interval sets and time associations.

Thaat	Intervals	Time / Character
Bilawal	[0, 2, 4, 5, 7, 9, 11]	Late morning / bright
Kalyan	[0, 2, 4, 6, 7, 9, 11]	Early evening / serene
Khamaj	[0, 2, 4, 5, 7, 9, 10]	Late evening / romantic
Bhairav	[0, 1, 4, 5, 7, 8, 11]	Dawn / devotional
Purvi	[0, 1, 4, 6, 7, 8, 11]	Evening twilight / serious
Marwa	[0, 1, 4, 6, 7, 9, 11]	Twilight / restless
Kafi	[0, 2, 3, 5, 7, 9, 10]	Late evening / romantic
Asavari	[0, 2, 3, 5, 7, 8, 10]	Late morning / pathos
Bhairavi	[0, 1, 3, 5, 7, 8, 10]	Any time / conclusion
Todi	[0, 1, 3, 6, 7, 8, 11]	Late morning / dark

When a rasa is selected, its `RasaProfile` can be applied to `GeneratorConfig` to configure the entire synthesis chain from a single aesthetic intent.

10.12 Murchhana (Modal Rotation)

The `theory/murchhana` module implements scale rotation—the classical technique of deriving new ragas by starting a scale from a different degree. The algorithm subtracts the pivot degree’s semitone value from all intervals modulo 12, then sorts and deduplicates:

$$I'_k = (I_k - I_d) \bmod 12, \quad k = 0, \dots, 6 \quad (22)$$

The resulting interval set is cross-referenced against all known ragas and the 10 thaats to identify matches. This enables the engine to discover related ragas through transposition, supporting modulation planning and scale reinterpretation.

10.12.1 Live Murchhana Rotation

Murchhana is integrated into the render pipeline via the `murchhana_degree` field on `GeneratorConfig` (optional, 0–6). When set, an `EffectiveKey` abstraction wraps the rotated interval set and is threaded through all pitch generation:

- **Bass patterns** — the function `generate_bass_pattern_with_arp_effective()` generates bass notes normally, then quantises each pitch to the nearest effective pitch class by minimum semitone distance.
- **Melody, alankar, and pakad** — each generator’s `generate_bar_with_effective()` method indexes scale degrees against the rotated intervals rather than the original scale.
- **Drone tuning** — the shruti box Sa frequency is shifted to the rotated degree’s pitch class, keeping the drone consonant with the new modal center.

The TUI exposes murchhana via Shift+1–7 (select rotation degree) and Shift+0 (disable), with the current degree displayed in the status header. Because murchhana modifies the `EffectiveKey` rather than the underlying scale, the original raga identity is preserved in metadata while the audible pitch set transforms.

10.13 Chakra Energy Mapping

The `theory/chakra` module maps the macro energy level to a seven-chakra frequency model, where each chakra defines a spectral focus region, filter range, synthesis character, and element emphasis.

Table 9. The nine rasas with representative synthesis parameters.

Rasa	Emotion	BPM	Energy	Filter	Laya	Shruti
Shringara	Love	125	wave	Warm	Ekgun	0.80
Karuna	Sorrow	118	yoga_flow	Dark	Vilambit	0.90
Raudra	Fury	150	tension_release	Aggressive	Chaugun	0.70
Veera	Heroism	145	full_set	Warm	Dugun	0.75
Bhayanaka	Terror	135	tension_release	Unstable	Tigun	0.80
Bibhatsa	Disgust	130	flat	Harsh	Ekgun	0.60
Adbhuta	Wonder	132	long_journey	Wide	Ekgun	0.85
Hasya	Joy	140	build_and_drop	Bright	Dugun	0.75
Shanta	Serenity	110	ambient_med.	Soft	Vilambit	1.00

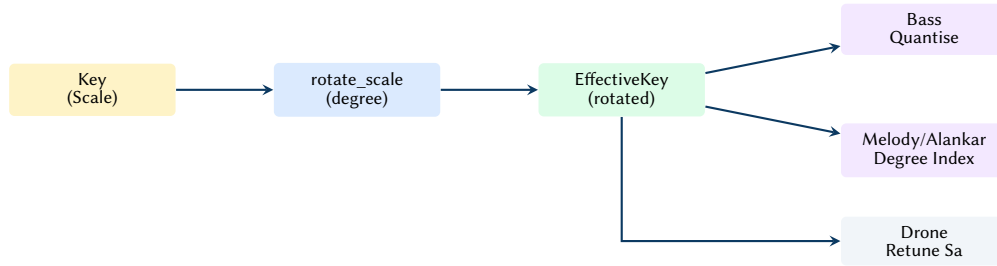


Figure 43. Murchhana integration: the original scale is rotated by degree, producing an EffectiveKey that is threaded through bass quantisation, melody generation, and drone retuning.

10.14 Rhythmic Devices

The engine implements six Indian classical rhythmic devices as composable bar-level pattern transformations.

10.14.1 Tihai (Cadential Resolution)

A *Tihai* is a polyrhythmic device used to conclude a section. It consists of a melodic or rhythmic phrase repeated exactly three times so that the final note lands precisely on the *Sam* (the downbeat of the next cycle).

The generator calculates the Tihai structure using the equation:

$$3 \times P + 2 \times G = L \quad (23)$$

where P is the length of the repeated phrase in steps, G is the length of the gap between phrases, and L is the total length required to reach the downbeat.

The *TihaiGenerator* produces 16-step resolution patterns by expanding a 4-step phrase three times with 2-step gaps: $[P_4] + [G_2] + [P_4] + [G_2] + [P_4] = 16$ steps. Three phrase variants are available, chosen randomly. The triple repetition resolving on the final step creates a strong sense of arrival at sam (the downbeat).

10.14.2 Korvai (Acceleration Build)

10.14.3 Korvai (Acceleration Build)

A *Korvai* is a rhythmic composition typically played by percussionists to transition between sections. In Overtone, it is used to create a 8-bar progressive build.

The *KorvaiBuilder* implements an 8-bar progressive acceleration:

10.14.4 Layakari (Time-Stretch)

The *LayakariState* rescales note positions within a bar by a multiplier drawn from five classical speed levels:

- **Vilambit** (0.5×) – half-time, meditative.
- **Ekgun** (1.0×) – normal speed.
- **Dugun** (2.0×) – double-time.
- **Tigun** (3.0×) – triple-time (polyrhythmic).
- **Chaugun** (4.0×) – quadruple-time.

Table 10. Chakra-to-energy mapping. Each chakra defines the active spectral region as energy rises through the track.

Chakra	Energy Range	Filter (Hz)	Character
Muladhara	0.00–0.08	30–120	Deep, grounding
Svadhithana	0.08–0.18	80–250	Flowing, warm
Manipura	0.18–0.35	150–500	Powerful, driving
Anahata	0.35–0.55	300–800	Open, melodic
Vishuddha	0.55–0.72	500–1200	Expressive, bright
Ajna	0.72–0.88	800–2000	Clear, piercing
Sahasrara	0.88–1.00	1500–8000	Ethereal, dissolving

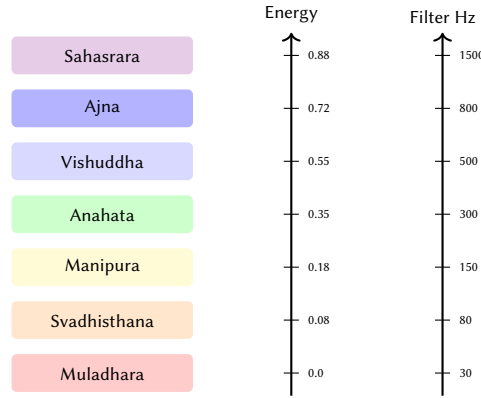


Figure 44. Chakra energy mapping: as macro energy rises, the active spectral focus ascends through the seven chakras.

The rescaling algorithm maps each note’s step position: $s' = \text{round}(s/m)$, clamps to $[0, 15]$, and resolves collisions by retaining the highest-velocity note. Smooth transitions between speeds are interpolated over a configurable bar window.

10.14.5 Nadai (Subdivision Grouping)

Nadai (or *Gati* in Hindustani) refers to the internal subdivision of a beat. While the underlying tempo remains constant, the number of pulses per beat changes, altering the rhythmic “feel” and syncopation. Overtone implements this as a velocity-multiplier mask applied over the 16-step grid.

The `NadaiState` imposes grouping-based accent patterns over the 16-step grid. Five subdivision sizes are supported: Chatusra (4), Tisra (3), Khanda (5), Misra (7), and Sankirna (9). The accent pattern assigns velocity multipliers:

$$v_k = \begin{cases} 1.0 & k \bmod g = 0 \quad (\text{primary accent}) \\ 0.6 & k \bmod g = 1 \quad (\text{secondary accent}) \\ 0.3 & \text{otherwise} \quad (\text{weak}) \end{cases} \quad (24)$$

where g is the group size. Nadai selection can be driven automatically by macro energy: Chatusra below 0.55, Tisra from 0.55 to 0.72, Khanda from 0.72 to 0.86, Misra from 0.86 to 0.95, and a return to Chatusra above 0.95 for the final climax.

10.14.6 Tani Avartanam (Solo Structure)


The `TaniAvartanam` defines a four-phase solo section (Opening, Development, Climax, Resolution) scheduled at a specific bar range. During a tani, percussion elements are suppressed and melodic density increases progressively, creating a breath in the accompaniment.

10.14.7 Sangati (Progressive Elaboration)

The `sangati` module adds a subtle energy boost that rises linearly over 8-bar cycles: $\Delta E = (b \bmod 8)/8 \cdot 0.12$, creating a “second time through” feel where each repetition of a phrase is slightly more energetic than the last.

10.15 Prahar: Time-of-Day Mood Selection

In Hindustani classical music, ragas are traditionally associated with specific times of day or night, known as *prahars* (3-hour periods). Overtone implements this via the `samay` mood preset, which selects a raga based on the current system time.

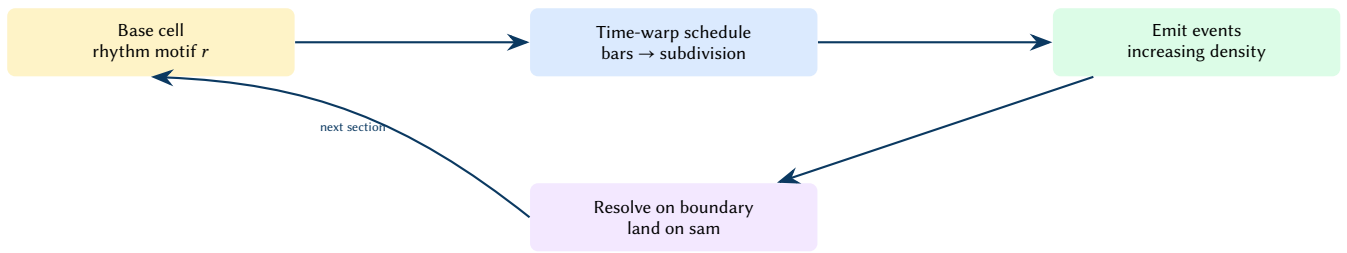

Conceptual point. A korvai is a structured acceleration: it keeps a recognisable motif while changing the internal subdivision schedule over bars. This preserves identity while increasing perceived speed, then resolves cleanly onto the next section downbeat.

Figure 45. Korvai as structured acceleration. The generator holds a motif constant while scheduling subdivision increases across bars, producing a build that still resolves on sam.

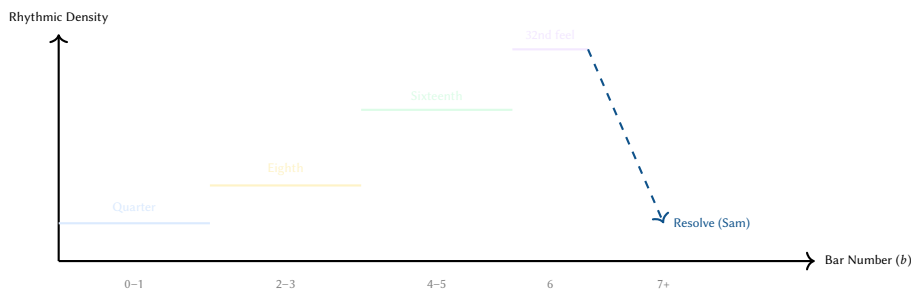


Figure 46. Korvai rhythmic acceleration. The density of note placement increases logarithmically over the 8-bar cycle, creating a "speeding up" sensation that resolves on the first beat of the next section.

10.16 Micro-Expression: Meend and Andolan

The identity of a raga is often found in the movement *between* the notes. Overtone implements two primary micro-expressions:

- **Meend (Glide):** A continuous portamento between two discrete pitches. In the engine, this is implemented as a per-sample frequency ramp over a duration D_m .
- **Andolan (Oscillation):** A slow, gentle vibrato around a specific note, often used on the *vadi* swar.

10.17 Sargam and the 12-Tone Grid

Indian music uses seven primary notes (*Saptak*): Sa, Re, Ga, Ma, Pa, Dha, Ni. These are mapped to the 12-tone chromatic grid based on the active scale's intervals.

10.18 Bol Notation and Percussive Synthesis

Indian percussion uses a system of mnemonic syllables called *bols* to encode specific drum strokes. Overtone's percussion engine interprets these bols to dynamically adjust synthesis parameters.

- **Dha / Dhin:** Open, resonant strokes with high sustain and prominent low-frequency content.
- **Tin / Na:** Sharp, metallic strokes with high-frequency emphasis and short decay.
- **Ghe / Ga:** Bass-heavy "resonant" strokes, often used to provide the low-end foundation.

10.19 Rhythm and Breath: Pranayama in Synthesis

In Indian classical thought, rhythm is intrinsically linked to the breath (*Prana*). A long exhale typically corresponds to a reduction in activity and a focus on sustained tones. Overtone implements this as a slow, asymmetrical LFO called the *Breath LFO*.

The Breath LFO is a global modulation source that biases:


- **Filter Cutoff:** Higher frequency during "inhale" peaks.
- **Density:** Increases note probability during rising phases.
- **Space:** Increases reverb wetness and decay during the long "exhale."

10.20 Jugalbandi (Duet Framework)

Jugalbandi translates to "entwined twins" and refers to a duet between two soloists. In Overtone, this is implemented as an algorithmic handover between two synthesis layers (e.g., Lead and Drone/Pad).

Table 11. Korvai acceleration stages over 8 bars.

Bars	Stage	Density
0–1	Quarter	4 hits/bar
2–3	Eighth	8 hits/bar
4–5	Sixteenth	16 hits/bar
6	Thirty-second feel	16 hits (accented)
7+	Resolve	1 hit (downbeat only)

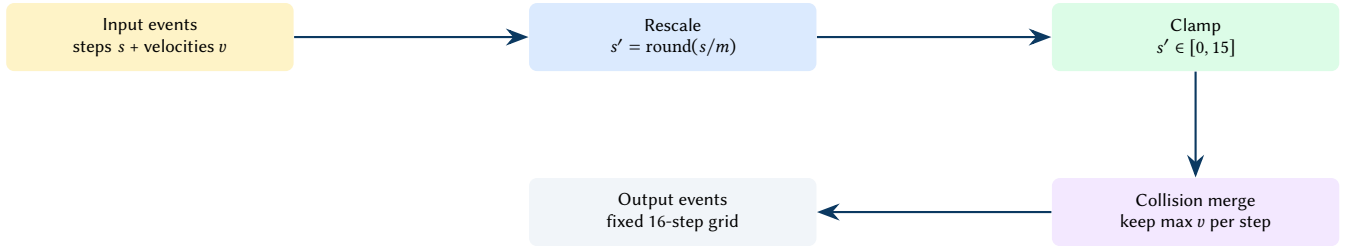

Conceptual point. Layakari is a many-to-one mapping. Rescaling can collapse distinct events onto the same step; the collision rule (max velocity wins) preserves accents while preventing double-hits that would break the fixed-grid renderer.

Figure 47. Layakari as a rescale + merge transform. The collision rule is what makes time-warp safe on a fixed 16-step grid.

The `JugalbandiMode` enum defines four call-and-response modes: Off, MelodicDuet (lead + pad/drone interaction), RhythmicDuet (kick + bass polyrhythmic conversation), and Full (all elements in duet mode).

The handover logic follows a three-step process:

1. **Snapshot:** The engine records the `BarPattern` of the caller during its active phase.
2. **Variation:** A transformation function is applied to the degrees and timing (e.g., $D' = (D_{max} - D)$ for inversion).
3. **Trigger:** The respondent's sub-channel is activated while the caller is gated, creating the "answer."

The active mode is controlled by the performance arc (section 10.24).

10.21 Saptak Hierarchy and Register Mapping

Indian classical music operates across three primary octaves: *Mandra* (Lower), *Madhya* (Middle), and *Taar* (Upper). Overtone maps its musical elements to these registers to ensure a balanced spectral distribution.

The `EffectiveKey` module handles octave transpositions automatically based on the element type.

10.22 Tanpura Drone: Harmonic Spectrum and Consonance

The Tanpura is a four-stringed instrument that provides the foundational drone for all raga music. Its unique timbre is characterised by a rich, shimmering harmonic spectrum produced by the *jivari* (bridge).

The `synths/drone` module uses a dedicated FM architecture to replicate this shimmering effect. Four oscillators are tuned to the traditional Tanpura intervals (typically Pa–Sa–Sa–Sa) and modulated by a slow random walk to simulate the natural variations of the plucked strings.

10.23 Shruti Box: Additive Synthesis of the Drone

The Shruti Box is a bellows-driven reed instrument used to provide a stable drone. Unlike the shimmering plucked strings of the Tanpura, the Shruti Box provides a solid, organ-like foundation. Overtone implements this via additive synthesis of harmonically-related sine waves.

The `synths/shruti_box` engine uses a fixed set of reed-inspired spectral weights. To add "air" and realism, a small amount of filtered white noise is mixed in, and each harmonic is slightly detuned to replicate the imperfections of physical reeds.

In Indian music, *Laya* (tempo) is categorized into three speeds: *Vilambit* (Slow), *Madhya* (Medium), and *Drut* (Fast). Overtone maps these to the macro energy curve to provide a non-linear intensity build.

The `LayaState` also supports *Layakari* (rhythmic multiplication), allowing for mid-bar tempo doubling or tripling.



Figure 48. Layakari time-stretching: the same rhythmic phrase at normal (1×), double (2×), and triple (3×) speed within a fixed 16-step bar.

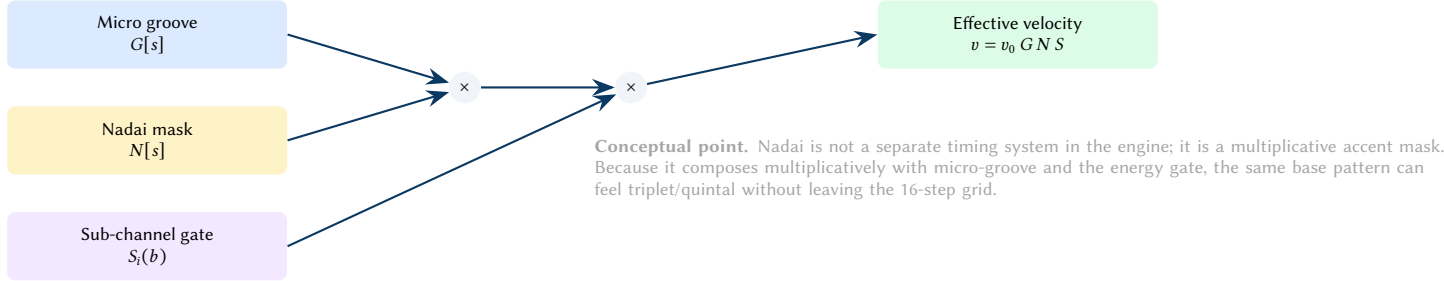


Figure 49. Nadai as mask composition. The final per-step velocity is a product of groove accents, nadai grouping, and the energy gate for the element/layer.

10.24 Performance Arc (Alap–Jor–Gat)

The PerformanceArc orchestrates the entire track trajectory using the classical three-part raga concert structure.

10.24.1 Phase Boundaries

The arc divides the total bar count into three phases using mode-dependent ratios:

Table 12. Performance arc mode boundaries as percentages of total bars.

Mode	Alap (%)	Jor (%)	Gat (%)
Standard	30	30	40
AlapHeavy	40	25	35
GatHeavy	20	20	60

10.24.2 Feature Gating

Each phase activates a FeatureSet that controls which synthesis elements, rhythmic devices, and ornamental techniques are available:

- **Alap** — drone and lead only. Breath LFO active, gamaka intensity 1.0, no percussion. Solo melodic exploration.
- **Jor** — kick and bass enter. Jugalbandi set to MelodicDuet, sangati enabled, gamaka intensity 0.7.
- **Gat** — all elements active. Korvai, tihai, tani, and layakari enabled. Jugalbandi escalates from MelodicDuet (first 70%) to Full (final 30%). Jhala activates in the final 15%. Gamaka intensity decreases from 0.55 to 0.35 as rhythmic clarity takes priority.

10.25 Planned Extensions

The same architecture supports additional eastern concepts as future work: extended murchhana-based modulation planning, a Vilambit–Madhya–Drut tempo layering within the Gat phase, and deeper rasa-to-parameter mapping for emotion-driven composition.

10.26 Implemented Music-Theory Features (Eastern Layer)

The eastern layer is not solely conceptual: it is implemented across the generator configuration, theory primitives, and TUI interaction model. This section documents the concrete features that currently ship, how they are represented in code, and how they influence rendering.

Raga Scale Sets and Phrase Seeds Raga-coloured scale sets are defined in the theory layer as interval lists (12-TET semitone offsets) with optional phrase metadata in `src/theory/scales.rs`. In addition to a scale *name* and *intervals*, selected ragas expose a *pakad* structure: a characteristic phrase plus explicit ascending/descending degree sequences. This enables two distinct uses:

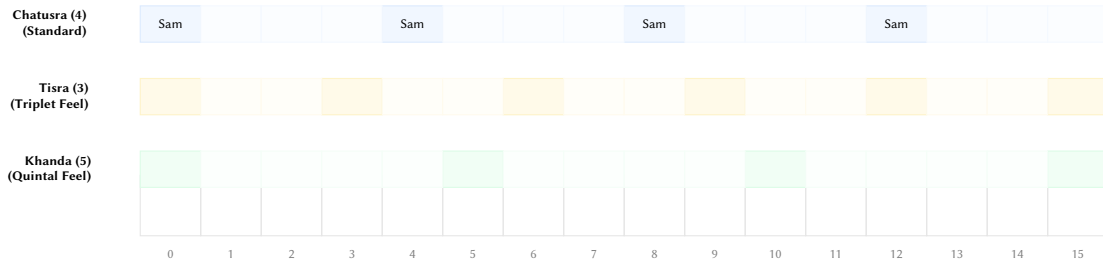


Figure 50. Nadai subdivision masks. By applying these velocity multipliers, Overtone creates the sensation of different pulse groupings (3, 4, 5) while maintaining a strict 4/4 temporal grid. This is used to drive "Eastern Swing" and polyrhythmic lead variations.

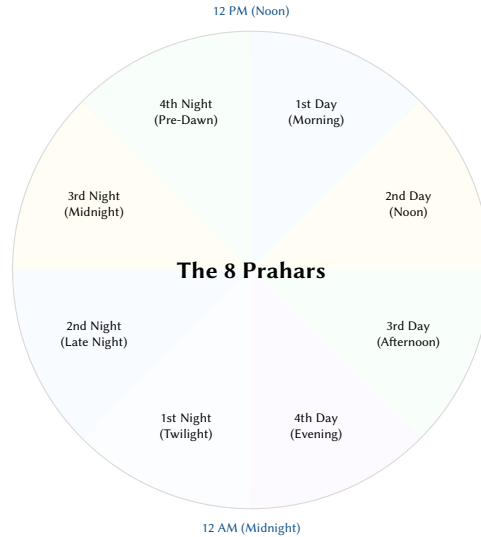


Figure 51. The Prahar cycle. Overtone's samay mode queries the system clock to determine the current 3-hour period and selects a raga with the appropriate emotional "juice" (Rasa). For example, pre-dawn tracks default to Raga Bhairav, while late-night tracks favor Malkauns.

- **Constraint** — all pitch selection is constrained to the active scale.
- **Identity injection** — pakad phrases can be injected as melodic seeds, giving a recognisable contour beyond raw interval choice.

Pakad Engine (Phrase-Based Melody Generation) When a selected scale provides a pakad, the engine can instantiate a `PakadEngine` (`src/engine/pakad.rs`) that cycles through a small phrase bank (characteristic, ascending, descending). For each bar it generates a sparse-to-dense pattern as a function of macro energy:

- Density increases with energy (fewer notes at low energy; more notes at high energy).
- Step stride shortens as energy rises (quarter-note feel $\rightarrow$ 8ths $\rightarrow$ 16ths).
- A controlled variation mode perturbs degrees by ± 1 with probability increasing above mid energy, while remaining in-scale.

This mechanism is intentionally lightweight: it preserves the generator's parameterised design while allowing raga identity to emerge from recurring phrase contours.

Alankar Generator (Permutation Exercises as Ornamented Runs) The generator includes an `AlankarGenerator` (`src/engine/alankar.rs`) that emits bar-length note patterns derived from alankar-style degree permutations. Implemented variants include Sequential, Skip, Mirror, Spiral, Zigzag, and Vakra (a constrained random walk). For instance, the *Sequential* permutation generates degrees by sliding a window:

$$D_i = (C + i) \bmod N, \quad i = 0, \dots, M - 1 \quad (25)$$

where C is the current scale cursor, N is the number of intervals in the scale, and M is the number of notes generated per bar based on the laya (speed) and energy level. The generator exposes:

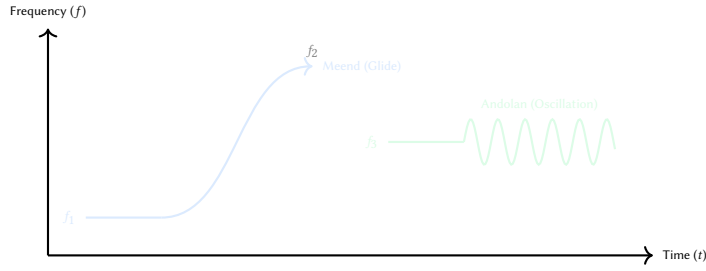


Figure 52. Visualisation of melodic micro-expressions. Meend provides a non-linear frequency transition between notes, while Andolan adds a characteristic slow oscillation to steady tones.




Figure 53. The mapping of Sargam notes to the 12-semitone grid. Lower-case letters (r, g, d, n) indicate *komal* (flat) variants, while upper-case (R, G, D, N) indicate *shuddha* (natural) or *tivra* (sharp) variants. Sa and Pa are fixed (*achala*).

- **Type** — selects the permutation strategy.
- **Window size** — controls the size of the scale-degree window used by some strategies.
- **Direction** — ascending, descending, or stochastic.
- **Speed (laya)** — maps to steps-per-note (e.g., slower at low energy; faster at high energy).

In the current composition logic the alankar layer is treated as a high-energy embellishment: it can take over lead generation above an energy threshold to produce fast, raga-constrained runs without requiring explicit note programming.

Bol Text Input (Tabla Syllables to Step Grid) The TUI provides a bol text entry mode for quickly imposing a tala/tabla-inspired rhythm onto the tom/percussion lane (`src/tui/app.rs`). A bol string is parsed by the bol parser (`src/engine/bol_parser.rs`) into tokens; each token can carry an articulation label and a velocity. Tokens are then mapped onto a 16-step bar by wrapping or truncation. The resulting per-step overrides are written into the next bar's pattern override state (steps, velocity, and articulation arrays) via the step-edit override structures in `src/engine/generator.rs`.

This feature provides a human-readable rhythmic interface: rather than editing 16 booleans, a user can type a mnemonic sequence and immediately audition it in context.

Shruti Purity (Microtonal Blend) Microtonal behaviour is exposed as a continuous `shruti_purity` parameter in the generator configuration (`src/engine/generator.rs`).

- **0.0** — strict 12-TET tuning.
- **1.0** — apply the full raga-specific shruti offset table (when available for the active scale).

At render time, note frequencies are derived via a tuning function *after* degree selection: the melodic logic remains scale-degree based, while the final oscillator frequencies can slide microtonally. This separation keeps pattern generation deterministic and allows shruti to be treated as a timbral/intonational layer.

Raga Modulation (Scale Transition Over Bars) The engine supports raga modulation as a scheduled transition from a source raga to a target raga over B_{trans} bars beginning at B_{start} (`src/engine/raga_modulation.rs`). The modulation state evaluates a linear progress function t for the current bar b :

$$t(b) = \text{clamp}\left(\frac{b - B_{\text{start}}}{B_{\text{trans}}}, 0, 1\right) \quad (26)$$

In practice, modulation is implemented as scale blending: common tones are favoured early in the transition, while notes unique to the target scale are introduced as $t(b)$ increases.

This enables mid-track colour changes without abrupt key changes or DAW-side automation.

Time-of-Day (Samay) Mood Selection The samay mood preset (`src/theory/mood.rs`) selects a raga and an energy curve based on local time-of-day (hour buckets). This couples two orthogonal parameters:

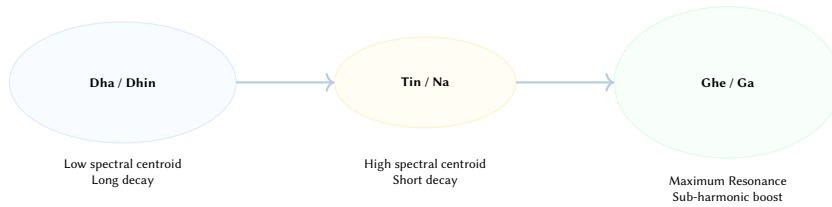


Figure 54. Mapping percussive syllables (bols) to spectral synthesis. The engine modifies the ADSR and filter bank of the percussive generator based on the syllable metadata attached to each event.



Figure 55. Time-domain envelopes for different Tabla strokes. The percussive engine switches between these envelope shapes based on the bol syllable, ensuring that "Open" strokes ring out while "Sharp" strokes remain percussive.

- **Scale choice** — biases toward ragas traditionally associated with certain times.
- **Energy architecture** — selects among curves such as `yoga_flow`, `long_journey`, and `ambient_meditation` to match the intended affect.

This feature demonstrates the intended design philosophy: music theory is encoded as deterministic selection logic over user-facing parameters, not as opaque learned behaviour.

Breath/Chakra/Arc Controls (Theory-Inspired Macro Behaviour) Several additional switches connect theory-inspired concepts to synthesis and arrangement:

- **Breath-synced LFO** — a slow modulation source that can shape brightness and wetness, particularly effective for low-energy outputs.
- **Chakra mode** — a global mode that maps sections/energy to chakra-derived colour and parameter bias.
- **Performance arc** — an Alap/Jor/Gat-inspired gating mode that controls feature activation over time.

These controls do not replace the energy model; rather, they provide interpretable, named presets that guide how energy maps onto timbre and pattern density.

User-Facing Controls in the TUI The eastern layer is directly manipulable in the terminal UI (`src/tui/app.rs` and `src/tui/ui.rs`). Notable bindings include:

- **Bol entry** — `:` enters bol input mode; on submit the bol string is applied to the next bar's tom lane.
- **Raga modulation** — a shifted key binding cycles through eastern ragas and schedules a transition over a fixed bar window.
- **Alankar** — a shifted key binding cycles the alankar type (and enables it); an alternate-modifier binding toggles alankar on/off.
- **Shruti purity** — incremental adjustments blend between 12-TET and shruti offsets.
- **Murchhana** — `Shift+1` through `Shift+7` selects a rotation degree; `Shift+0` disables. The status header shows the active degree.
- **Samay** — a dedicated binding applies the time-of-day recommendation (mood preset swap).

Because the generator treats the configuration as the single source of truth (section 4), each toggle results in a deterministic re-render that updates both the audio output and the visible state.

Feature-to-Implementation Map Table 13 summarises the primary entry points for each implemented feature: the configuration field that carries it, the module that implements it, and the principal render-time effect.

Configuration Surface (Eastern Parameters) The eastern layer is exposed as explicit fields on `GeneratorConfig` (`src/engine/generator.rs`). This makes the feature set accessible from the CLI, from preset serialization (`serde`), and from the TUI re-render loop.



Figure 56. The Breath LFO. This slow, 8-bar modulation cycle mimics the human breathing pattern (Puraka/Rechaka). It creates organic motion in the synthesised output, with rising brightness on inhale and receding density on exhale.

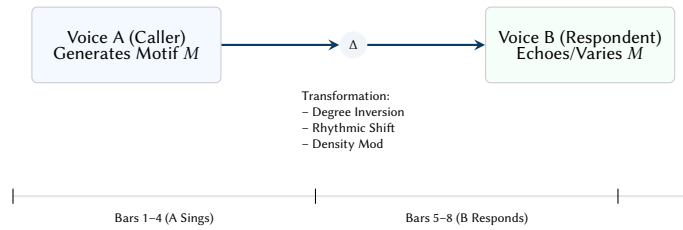


Figure 57. Jugalbandi pattern handover. The engine captures the melodic and rhythmic contour of the "Caller" voice and applies a stochastic transformation before assigning it to the "Respondent" voice. This mimics the live improvisational dialogue of Indian classical music.

Table 14. Eastern-layer configuration fields in `GeneratorConfig`.

Field	Type	Meaning / Notes
<code>mood_name</code>	String	Selects a mood preset (e.g., "eastern", "meditative", "devotional", "samay"); mood determines key/scale, energy curve name, and filter ranges.
<code>key_override</code>	<code>Option<(u8, String)></code>	Optional override of the mood's root MIDI note and scale name (e.g., (38, "bhairav")); applied when resolving the mood.
<code>energy_curve_override</code>	<code>Option<String></code>	Overrides the macro curve preset name (e.g., "yoga_flow", "long_journey", "ambient_meditation"); used by <code>MacroCurve::from_name</code> .
<code>drone_enabled</code>	bool	Enables tanpura-style drone synthesis layer; typically mixed inversely with macro energy to support sparse/meditative sections.
<code>breath_lfo_enabled</code>	bool	Enables breath-synced modulation (slow LFO) to shape brightness/wetness; useful for yoga/ambient curves.
<code>chakra_mode</code>	bool	Enables chakra-derived parameter bias and/or visual mapping in the TUI; can also be implied by yoga-style energy presets.
<code>shruti_purity</code>	f64	Microtonal blend in [0, 1]: 0.0 = 12-TET; 1.0 = full shruti offsets (when the active scale provides a tuning map).
<code>performance_arc_mode</code>	<code>Option<ArcMode></code>	Enables Alap/Jor/Gat-inspired gating of features over time; influences when melodic density and layers become available.

Continued on next page

Field	Type	Meaning / Notes
modulation	Option<RagaModulation>	Scheduled source→target raga transition: start_bar, transition_bars, and progress function <i>t</i> used at render time for scale blending.
alankar_enabled	bool	Enables alankar-derived melodic generation as a lead-mode enhancement (typically above an energy threshold).
alankar	AlankarGenerator	Alankar configuration (type, window size, direction, speed/laya, cursor state); serialized so repeated renders continue the pattern evolution.
murchhana_degree	Option<u8>	Murchhana rotation degree (0–6); when set, an EffectiveKey wraps the rotated interval set for bass quantisation, melody/alankar/pakad degree indexing, and drone retuning. TUI: Shift+1–7 to set, Shift+0 to disable.
tani_trigger_bar	Option<u32>	Schedules a percussion-solo style event (tani avartanam) beginning at a bar index; used as an arrangement accent.
jugalbandi_mode	JugalbandiMode	Selects call-and-response behaviour between voices; interacts with melody/pattern generation rather than tuning directly.
layakari_enabled	bool	Enables rhythmic multiplication/time-warp within bars (ekgun→dugun→tigun...); affects event timing density.
layakari	LayakariState	Carries the current/target laya and transition scheduling; interpreted per bar at render time.
nadai_enabled	bool	Enables subdivision-group accent warp (tisra/khanda/misra...); applied as a velocity emphasis pattern over 16 steps.
nadai	NadaiState	Holds the current nadai selection and related transition state (if any).

The remaining configuration fields (filter/DSP, sample placement, pattern presets, per-bar overrides) are shared across western and eastern modes; the eastern layer composes with these rather than replacing them.

10.27 Music Theory Primer for Parameterised Generation

The generator exposes musical concepts as user-facing parameters (key, scale, mood, energy curve) rather than as low-level note events. Consequently, a compact, implementation-oriented music theory vocabulary is useful to explain how scale choices, rhythmic emphasis, and harmonic density interact with the engine.

Pitch, Key, and Scales All pitched content is derived from a root pitch class (key) and a scale defined as semitone offsets within the octave. A scale thus becomes a constraint function: it filters candidate MIDI pitches (or oscillator frequencies) down to a musically coherent subset.

In Western terms, common scale families include major (Ionian), natural minor (Aeolian), and modal rotations (Dorian, Phrygian, Mixolydian). In eastern terms, the project also includes raga-coloured interval sets that emphasise characteristic seconds and sixths. Because the engine operates primarily in 12-TET, these are approximations; microtonal extensions (shruti offsets) are treated as future work (section 10).

Degrees, Stability, and Nyasa The system models pitch selection primarily in terms of scale degrees. This is compatible with both modal western usage and raga-based melodic grammar. A practical implementation benefit is that stability can be encoded as a simple weighting curve over degrees: at low energy the engine prefers stable tones (root, fifth) and nyasa-like landings; at higher energy it introduces more colour tones (second, fourth, sixth) and wider register.

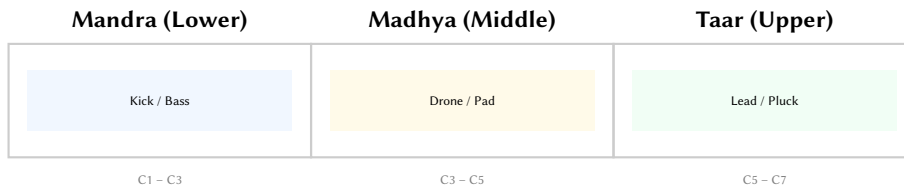


Figure 58. Register mapping across the Saptak hierarchy. By constraining elements to specific octaves, Overtone prevents spectral masking and ensures that the melodic lead (Taar) remains distinct from the foundational drone (Madhya) and rhythmic "engine room" (Mandra).

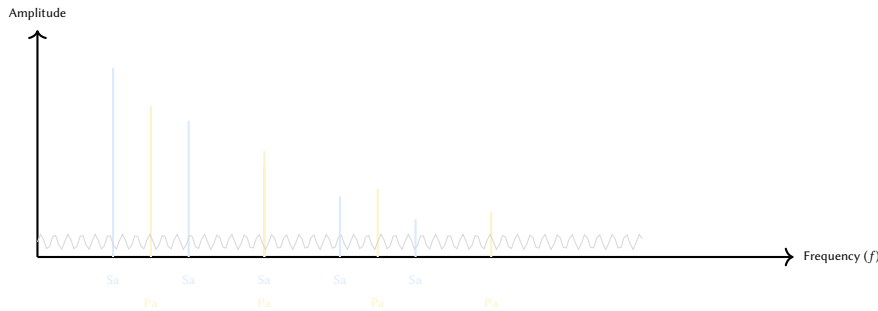


Figure 59. Harmonic spectrum of the Tanpura drone. The fundamental pitches (typically Sa and Pa) are accompanied by a dense series of upper partials that create a continuous, shimmering "bed" of sound. Overtone mimics this via multi-oscillator FM synthesis with slow phase modulations.

In the raga-oriented features, *nyasa* is treated as a cadence target instead of a strict rule system: the harmony layer can hold a *nyasa* tone for a bar (`src/engine/harmony.rs`), and melodic generators can bias phrase endings toward vadi/samvadi when they are annotated on the active scale.

Harmony and Implied Progression Psytrance often relies on implied harmony rather than functional chord progressions: bass + lead motion can suggest a tonal center even when no triads are voiced. Within the engine, harmony is therefore modelled as a lightweight layer:

- A scale constrains pitch selection.
- A degree-weighting profile biases landings toward stable tones (root, fifth) at low energy and toward colour tones (second, fourth, sixth) at higher energy.
- Energy can modulate harmonic density by enabling additional voices or widening pitch ranges.

This approach is compatible with both Western modes and raga-inspired sets, and avoids over-specifying chord symbols that are uncommon in the genre.

Rhythm, Meter, and Accent The system renders onto a fixed 4/4 transport grid with 16-step subdivision, but rhythm is perceived primarily through accent patterns. Classic EDM emphasis (beats 1 and 3) is augmented by syncopation styles and by tala-derived accent cycles (section 10). As a result, the engine can create the illusion of longer cycles (e.g., 7 or 10) while remaining compatible with DAW timelines and MIDI export.

Mode Rotation (Murchhana / Graha Bhedam) Beyond choosing a scale, the generator supports deriving *related* scales via mode rotation: selecting a new starting degree (graha) and re-normalising the resulting interval set to a zero-root representation. This is implemented in `src/theory/murchhana.rs` and is applied via an `EffectiveKey` abstraction so the rest of the engine can remain degree-based.

Musically, *murchhana* provides a controlled way to evolve harmonic colour over time while keeping the rhythmic surface stable. It can be applied as a section boundary device (e.g., at bar 17) or as a longer journey in combination with raga modulation.

Form and Energy Arrangement is expressed as an energy function over bars. Macro energy selects sections (intro, build, peak, breakdown), meso energy creates breathing, and micro energy controls per-hit density. Music theory concepts connect directly to this model:

- Lower energy favours fewer notes, narrower ranges, and stronger tonic anchoring.
- Higher energy supports faster note rates, wider ranges, and more dissonant colour tones.

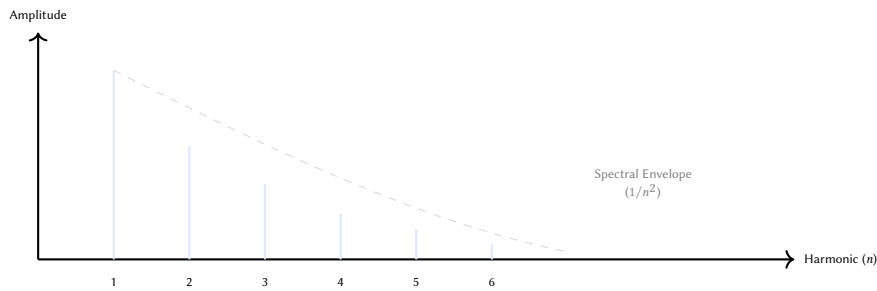


Figure 60. Additive synthesis model for the Shruti Box. The engine sums the first six harmonics of the tonic (Sa) and the fifth (Pa) with amplitudes decaying at a rate of $1/n^2$. A slow bellows-like amplitude LFO is applied to simulate the manual pumping of the instrument.

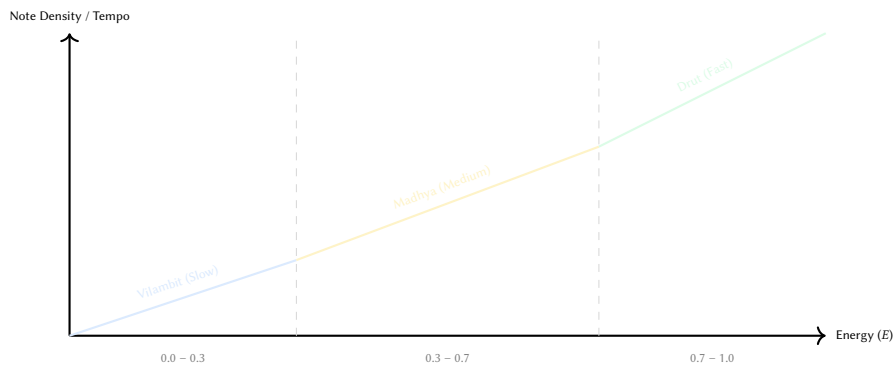


Figure 61. Laya-to-Energy mapping. The generator transitions between three speed regimes based on the macro energy state. As energy crosses the 0.3 and 0.7 thresholds, the rhythmic generators transition from sparse Vilambita phrases to dense Drut passages.

- Cadences (e.g., tihai-like resolutions) provide audible section boundaries even without explicit chord changes.

11 Ableton Integration

The generator integrates with Ableton Live through three complementary mechanisms: MIDI file export, real-time OSC clip pushing, and Ableton Link transport synchronisation.

11.1 MIDI Export

The `midi` module generates Standard MIDI Files (SMF Type 1, 960 PPQ) using the `midly` crate. Each non-muted element is written as a separate track. Drum elements use General MIDI standard note numbers (kick = 36/C1, closed hi-hat = 42/F#1, clap = 39/D#1). Bass notes are converted from frequency to MIDI pitch via $p = 69 + 12 \log_2(f/440)$.

11.2 MIDI Import Strategy: Generative Overriding

The `midi_import` module parses Standard MIDI Files and classifies tracks into generator lanes (Kick, Bass, Hihat, Clap, Other) using a two-stage mapping strategy:

1. **Track name matching** — case-insensitive keyword search for “kick”, “bass”, “hihat”/“hat”, “clap”/“snare” in the MIDI track name meta event.
2. **General MIDI drum note** — fallback to GM note numbers: 36 → Kick, 42/46 → Hihat, 38–40 → Clap.

Imported MIDI acts as an *override* layer. When the Generator or StreamingEngine encounters an element with an imported pattern in its `GeneratorConfig`, it bypasses the generative algorithms and uses the imported notes directly.

The user can select the classification mode: `TrackNameThenGm` (default, tries names first), `TrackNameOnly`, or `GmOnly`. The parser maintains a `HashMap<(channel, key), (start_tick, vel)>` of active notes, closing them on `NoteOff` or zero-velocity `NoteOn`. Imported notes are sorted per lane by tick and stored in an `ImportedMidiSnapshot` alongside the session for recall.

11.3 OSC Bridge and Non-Blocking Push

The `osc` module provides a bidirectional UDP bridge to Ableton Live via the `AbletonOSC` remote script [5], which exposes Live’s Python API over OSC on ports 11000 (send) and 11001 (receive).

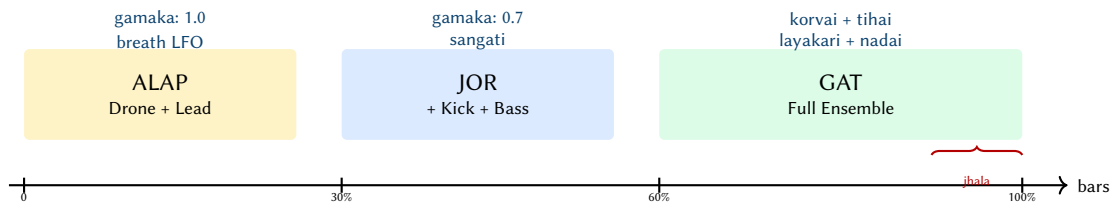


Figure 62. Performance arc: the classical Alap–Jor–Gat structure progressively activates synthesis elements and rhythmic devices. Gamaka intensity decreases as rhythmic complexity increases.




Figure 63. Raga modulation timeline. The transition begins at bar 2 and progresses linearly over 4 bars. During the transition, the engine blends the interval sets, gradually introducing notes unique to the target scale while phasing out source-unique tones.

11.3.1 Architecture

The OSC subsystem consists of three components:

- `OscClient` — a `UdpSocket` wrapper that encodes and sends OSC messages using the `rosc` crate.
- `start_listener` — a background thread that binds to port 11001 and decodes incoming OSC responses, forwarding them through an `mpsc` channel.
- `AbletonBridge` — a high-level command API for clip management (`create_clip`, `add_notes`, `fire_clip`), scene control (`create_scene`, `fire_scene`), and transport (`start_playing`, `stop_playing`).

11.3.2 Non-Blocking Clip Push Workflow

Because Ableton requires brief sleep pauses (e.g., 20 ms) after clip deletion to process commands sequentially, executing a clip push from the TUI thread would cause the UI to freeze for over 160 ms. To solve this, Overtone uses a background worker thread.

When the user triggers a clip push (or when a re-render occurs with an active OSC connection), the bridge executes the following sequence per element:

1. Delete existing clip in slot 0 of the target track.
2. Wait 20 ms (Ableton requires a brief pause after clip deletion).
3. Create a new clip of the appropriate length in beats.
4. Set the clip name to `Element - MoodName`.
5. Add all note events with pitch, start beat, duration, and velocity.

Track assignment is resolved by case-insensitive matching of Ableton track names against the element names (“kick”, “bass”, “hihat”, “clap”).

11.4 Ableton Link

The link module wraps the `rusty_link` crate [6]—a Rust FFI binding to Ableton’s C++ Link library—to provide tempo and phase synchronisation with any Link peer (Ableton Live, other Link-enabled applications, or hardware).

11.4.1 Tempo Synchronisation

The `LinkBridge` registers callbacks via `set_tempo_callback` and `set_num_peers_callback` that forward events through an `mpsc` channel, drained by the TUI event loop each frame. Tempo changes from any peer propagate within one beat. A feedback-loop guard ignores tempo deltas smaller than 0.001 BPM.

11.4.2 Phase-Locked Playback

When Link peers are present, the generator schedules playback start at the next bar boundary (quantum = 4 beats). The `cpal` audio callback maps Link beat positions to buffer frame indices using the `HostTimeFilter`:

$$\text{pos}_{\text{frames}} = \text{offset}_{\text{start}} + (b_{\text{link}} - b_{\text{origin}}) \cdot \frac{f_s \cdot 60}{\text{BPM}} \quad (27)$$

where b_{link} is the current Link beat position and b_{origin} is the beat at which playback was initiated.

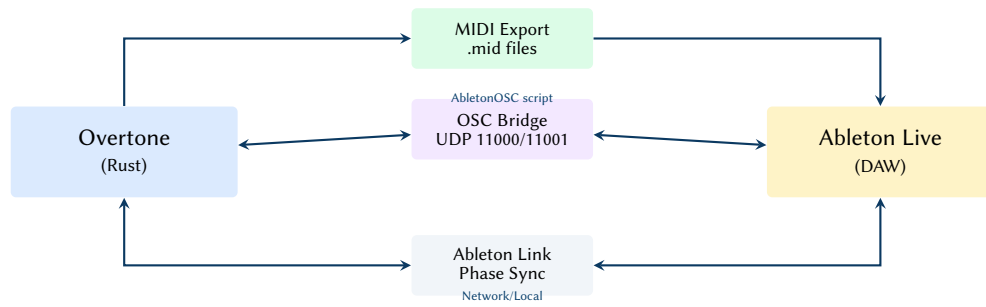


Figure 64. Ableton Live integration architecture. Overtone communicates via Standard MIDI Files for static export, bidirectional OSC for clip pushing and scene control, and Ableton Link for phase-locked transport synchronisation.

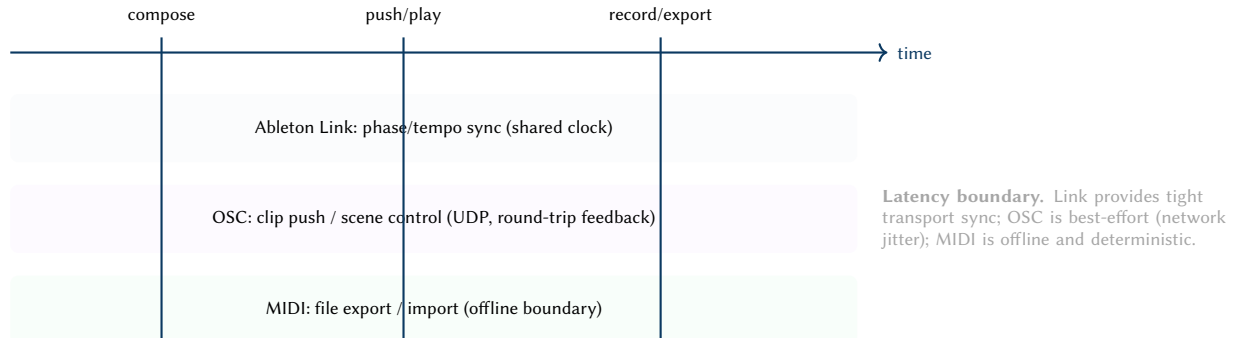


Figure 65. Timing and latency boundaries in Ableton integration. Link synchronises transport phase, OSC provides interactive control with network jitter, and MIDI provides an offline deterministic interchange format.

11.5 Scene Control

The energy model’s arrangement sections (Intro, Build, Peak, Breakdown) are mapped to Ableton scenes. When `follow_energy` mode is enabled, the generator fires the appropriate scene automatically as the bar cursor advances through section boundaries, driven by beat callbacks from the OSC listener.

12 Terminal User Interface

The TUI is implemented with `ratatui` [7] and `crossterm`, running at a 50 ms frame cadence. It provides a state machine with six screens: Launch, Playback, StepEdit, SessionList, PresetList, and EnergyEditor.

12.1 Screen State Machine

- **Launch** — parameter configuration: mood selection, BPM/bars adjustment, theme browsing, key/scale overrides, filter/LFO/arp settings, sample directory selection.
- **Playback** — live visualisation of pattern grids (4-bar view with per-step markers), energy curve sparkline, waveform display, element mute/solo/density controls, OSC/Link status indicators, and real-time parameter knobs.
- **StepEdit** — per-bar step editing with toggle-able 16th-note grid cells. Overridden patterns bypass the generative algorithm for the edited bar.
- **SessionList / PresetList** — browsable lists with timestamps and metadata, supporting load, save, and delete operations.
- **EnergyEditor** — direct manipulation of macro curve control points.

12.2 Re-Render Protocol

Parameter changes trigger a full re-render: the TUI stops playback (recording the current bar position), constructs a new Generator, calls `render()`, and resumes playback from the same bar offset. At 18 ms per render (section 15), this produces an imperceptible gap in audio output.

12.3 Theme System

Twelve theme presets are defined as a static array, each bundling a mood, BPM, key, scale, energy curve, and DSP parameters into a coherent sonic identity. Themes range from classic psytrance (Dark Phrygian, Acid Machine) through uplifting variants (Euphoric Rise, Solar Flare) to experimental settings (Alien Signal, Hitech Assault). Applying a theme overwrites all relevant fields in the `GeneratorConfig` via `apply_to()`.

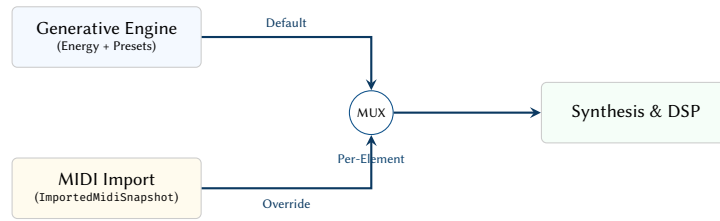


Figure 66. MIDI Import overriding architecture. Users can selectively replace the generative output of specific elements (e.g., locking in a custom bassline) while allowing the engine to continue generating the rest of the arrangement (drums, leads, drones).

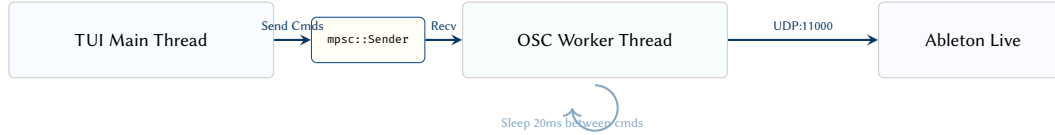


Figure 67. Non-blocking OSC Push architecture. The TUI sends sequences of commands (Delete → Create → Add Notes) via a channel. The background worker consumes this queue and handles the necessary network sleeps without stalling the rendering loop.

12.4 Tala Circle Visualisation

The `tala_circle` module renders a circular beat indicator in the TUI, displaying the current tala cycle as a ring of glyphs. Each beat position is mapped to polar coordinates ($\theta = 2\pi \cdot b/B - \pi/2$, starting from top-centre) and rendered with type-specific glyphs:

- **Sam** (downbeat) — red filled circle, yellow arrow when active.
- **Khali** (empty beat) — blue double circle.
- **Normal** — grey open circle.

The visualisation respects the tala’s vibhag structure (groupings of beats with assigned accent types), providing a musically meaningful display of rhythmic position within the cycle.

12.5 Energy Colour Mapping

The TUI uses a four-tier colour gradient to represent energy levels throughout the interface (pattern grid cells, energy sparkline, status indicators):

13 Streaming Engine

The batch pre-render pipeline described in section 4 produces a complete track in a single pass. The `streaming` module provides an alternative: a sample-accurate, event-driven engine that processes audio in blocks, enabling real-time playback with lower latency and incremental state updates.

13.1 Architecture

The `StreamingEngine` pre-sorts all note events by absolute sample position at construction time, then processes them via a linear cursor scan during block rendering. The engine maintains per-element synth instances (kick, bass, hi-hat, clap, lead, pad, tom, drone), an effects chain (sidechain compressor, ping-pong delay, Schroeder reverb, master HPF), and an optional breath LFO for ambient modulation.

13.2 Block Processing

For each sample frame in a block, the engine:

1. Computes the current bar index from the global sample clock and triggers bar-level sample placements (FX, risers, textures, vocals) at bar boundaries.
2. Dispatches all scheduled events at the current sample position, triggering the appropriate synth with energy-aware blend ratios ($r = \min(0.8 \cdot E_{\text{macro}}, 0.8)$).
3. Renders all active synth voices and sample playback instances, applying sidechain compression to the bass.
4. Optionally modulates volume ($\pm 15\%$), filter cutoff ($\pm 30\%$), and effects wet level ($\pm 20\%$) via the breath LFO.
5. Adds the drone and jhala layers (stereo).
6. Processes the stereo bus through the delay, reverb, and master HPF chain.
7. Outputs interleaved f32 stereo samples.


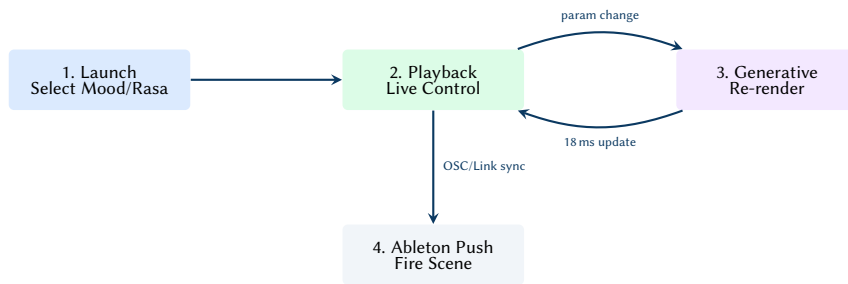


Figure 68. The user workflow journey. Selecting a mood configures the global state. Adjustments during playback trigger an instantaneous generative re-render, with structural updates pushed seamlessly to Ableton Live.

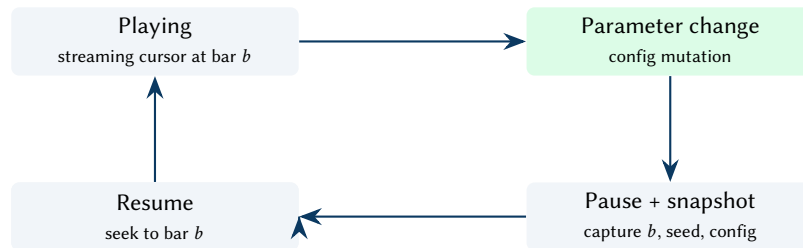

Conceptual point. The TUI loop is a deterministic state machine: config is the single source of truth, and every change triggers a replayable render step. The pause/snapshot boundary ensures the UI can restart playback at the same musical time coordinate (bar b) after regeneration.

Figure 69. Re-render-on-change as a state machine. The engine treats rendering as a pure function of config (and seed), enabling deterministic regeneration during live playback.

13.3 Synth/Sample Blending

Each element's blend ratio is computed from the macro energy at the current bar. The blending strategy varies by element:

- **Kick** — synth velocity scaled by $(1 - r_{\text{blend}})$; sample played at full velocity.
- **Bass** — at blend ≥ 0.8 , sample-only mode (synth bypassed entirely).
- **Hi-hat/Clap** — at blend ≥ 0.5 , sample preferred; synth used as fallback.
- **Lead** — pure synthesis (no sample blending).
- **Pad** — voiced as a minor chord (root, +3, +7, +10 semitones).

13.4 Sample Library

The `SampleLibrary` indexes loaded samples by (SampleCategory, EnergyZone) pairs, with round-robin counters per pair to prevent repetition. Samples are classified into nine categories (Kick, Snare, Hat, Clap, Bass, FX, Riser, Texture, Vocal) and three energy zones (Low, Mid, High). Zone assignment uses RMS level thresholds: Low below 0.08, Mid between 0.08 and 0.22, High above 0.22. For energy-aware selection during playback, zones are alternatively assigned from the macro energy curve: Low below 0.35, Mid between 0.35 and 0.70, High above 0.70.

When a category has samples in only one energy zone, the library automatically redistributes them into Low, Mid, and High zones by sorting on RMS level and dividing into equal thirds. Queries fall back through zones in priority order (requested $\rightarrow$ Mid $\rightarrow$ remaining) to maximise sample utilisation.

13.5 Playback and Live Parameters

The `PlaybackHandle` wraps a `cpal` audio stream with lock-free parameter control via `AtomicU64` (f64 bit patterns) and `AtomicUsize` for filter type. Four live parameters are exposed: cutoff frequency, resonance, gain, and filter type.

The audio callback checks for parameter changes each block using threshold guards ($|\Delta f_c| > 0.1 \text{ Hz}$ or $|\Delta Q| > 0.01$) and recomputes biquad coefficients only when needed. Two playback modes are supported:

- **Buffer playback** — pre-rendered samples are read sequentially with per-sample live filtering and gain.
- **Streaming playback** — the `StreamingEngine` is locked per block, live parameters are injected into its config, and `process_block()` renders directly into the output buffer.

When Ableton Link is active, the buffer playback mode uses per-sample beat position interpolation:

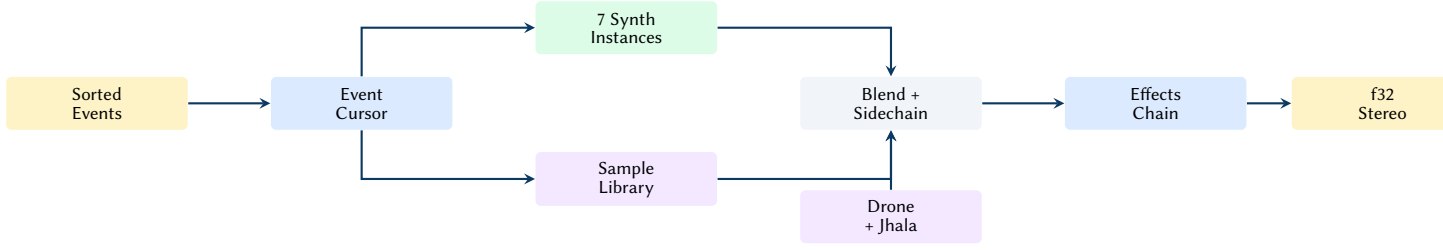


Figure 70. Streaming engine architecture: pre-sorted events are dispatched sample-accurately, blended with energy-aware sample playback, and processed through the effects chain.

$$p_{\text{frames}} = p_{\text{start}} + (b_{\text{link}} - b_{\text{origin}}) \cdot \frac{f_s \cdot 60}{\text{BPM}} \quad (28)$$

with linear sample interpolation between adjacent frames to avoid clicks at fractional positions.

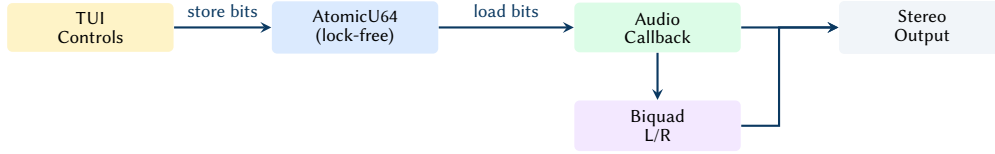


Figure 71. Lock-free live parameter path: the TUI stores f64 bit patterns into atomics; the audio callback loads them each block and updates the biquad filter only when thresholds are exceeded.

14 Session and Preset Management

14.1 Sessions

A Session captures the complete generator state (name, UTC timestamp, full `GeneratorConfig`, and an optional `ImportedMidiSnapshot`) as a JSON file. Sessions are named `{name}_{YYYYMMDD_HHMMSS}.json` and stored in a user-specified directory. The `list_sessions()` function scans the directory and returns all sessions sorted newest-first.

14.2 Presets

A Preset snapshots the audio-relevant subset of the generator configuration—mood, energy curve, filter settings, delay/reverb wet levels, pattern presets for all elements, sample blend overrides, and humanisation level—tagged with a name, timestamp, and search tags. Unlike sessions, presets omit runtime state (mute/solo, playback position) and focus on reproducible sound design.

The `from_config()` constructor extracts preset parameters from a live `GeneratorConfig`, and `apply_to()` writes them back, enabling rapid A/B comparison and preset morphing workflows.

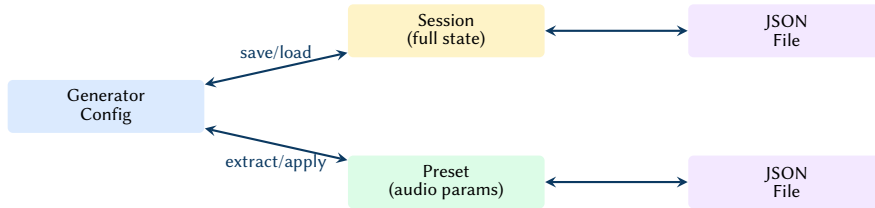


Figure 72. Session and preset persistence: sessions capture full state, presets capture audio parameters only. Both serialise to JSON.

15 Evaluation

We evaluate the generator on two axes: rendering throughput and output quality characteristics. All benchmarks were performed on a workstation with an Apple M2 processor and 16 GB of RAM, running Rust 1.82 on macOS 15.

15.1 Rendering Performance

Table 16 reports rendering times for tracks of increasing length. All renders use the *dark* mood preset at 142 BPM with default DSP parameters and no sample blending (pure synthesis).

The sub-linear scaling (real-time ratio *improves* with track length) reflects the fixed overhead of energy model initialisation and DSP state allocation, which is amortised over longer renders.

Sample Blending Overhead


When sample blending is active, render times increase by approximately 15–25% due to the additional PCM resampling and gain staging. A 64-bar track with full sample blending renders in approximately 22 ms—still well within the 50 ms TUI frame budget.

15.2 Memory Footprint

The system maintains a low memory profile. The core engine and DSP state allocate statically, requiring less than 50 MB. The `SampleLibrary` manages memory by eagerly extracting `rustfft` profiles during directory scans but caching them in sidecar JSON files (`*.sample.json`). During playback, only the necessary f32 audio buffers for scheduled samples are loaded into RAM, keeping the footprint tightly bounded even with extensive sample directories.

15.3 Concurrency Analysis

Real-time audio demands non-blocking, wait-free coordination between the TUI thread and the `cpal` audio callback. The engine achieves this via `AtomicU64` types that store f64 bit patterns (`f64::to_bits()`). When the user adjusts a live parameter (e.g., filter cutoff) in the TUI, it is written atomically. The audio block processor loads these values continuously without acquiring mutexes. This lock-free design ensures the audio thread is never preempted by UI updates, avoiding xruns (buffer underruns) and ensuring a glitch-free 50 ms re-render cadence.

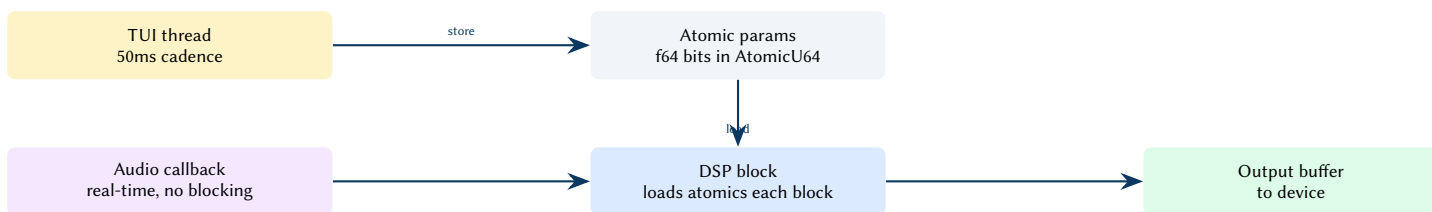

Conceptual point. Parameter transport is a one-way lock-free control plane. The audio callback loads without mutexes. This isolates real-time audio from UI swaps and live tweaks glitch-resistant.

Figure 73. Lock-free control plane between UI and audio threads. Atomics carry parameters across threads without blocking the audio callback.

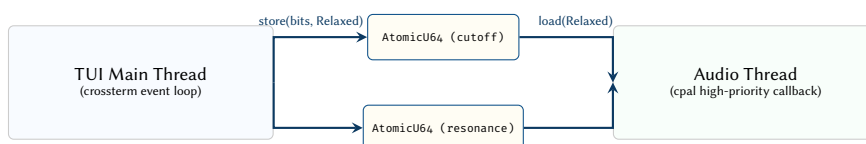


Figure 74. Lock-free concurrency model. The UI thread communicates with the real-time audio thread strictly through atomic variables, preventing priority inversion and guaranteeing that the audio callback never blocks waiting for a mutex.

15.4 Signal Characteristics

The generator produces output with the following signal properties at default settings:

- **Peak level:** -0.5 dBFS (after normalisation and limiting).
- **RMS level:** approximately -12 to -8 dBFS during peak energy sections, consistent with mastered electronic music.
- **Frequency range:** 30 Hz to 20 kHz, bounded by the master HPF and the Nyquist frequency.
- **Stereo field:** kick and bass centre-panned; hi-hat slightly right (pan 0.55); clap slightly left (pan 0.45).
- **Internal precision:** 64-bit floating-point throughout the signal path; 16-bit integer at WAV export.

16 Future Directions: Narrative Arc Builder

While Overtone’s current architecture excels at generating single-track arrangements based on static configurations, the ultimate goal is to evolve the engine into a macro-level *Set Experience Generator*. This involves abstracting the generative process from a single `GeneratorConfig` to a continuous `Timeline` populated by thematic `Chapters`.

16.1 The Deck and Tarot Metaphor

To make the construction of a 2-hour set intuitive, the proposed Web UI (Phase 21) abandons the traditional horizontal multi-track DAW layout in favor of a "DJ Deck crossed with a Tarot spread" metaphor.

Users will drag *Thematic Cards* onto a continuous horizontal ribbon. Each card represents a structural Chapter (e.g., "The Forest Awakening") containing its own tempo boundaries, macro energy curve, and stylistic identity (raga, density, synthesis constraints). By physically "stacking" cards, users can layer motifs (e.g., placing an "Acid Lead" card over a "Tribal Percussion" card).

16.2 Intelligent Recommendation and Transition Cost (C_T)

Overtone will act as a collaborative co-pilot, preventing jarring clashes while maintaining narrative flow. The *Recommendation Engine* evaluates potential transitions between adjacent chapters by calculating a *Transition Cost* (C_T):

$$C_T = w_1 C_{\text{bpm}} + w_2 C_{\text{raga}} + w_3 C_{\text{eng}} \quad (29)$$

- **Tempo Cost (C_{bpm}):** Transitions with $|\Delta\text{BPM}| \leq 2$ yield a low cost, whereas a jump from 140 to 170 BPM yields a high cost, demanding a structural breakdown.
- **Cultural Cost (C_{raga}):** Modulating between parallel modes is cheap. Transitioning from a meditative midnight raga (Malkauns) to an aggressive morning raga (Bhairav) is expensive ($C_{\text{raga}} \rightarrow 1.0$), prompting the engine to suggest a bridging *Tani Avartanam* (percussion solo) to cleanse the harmonic palette.
- **Energy Continuity (C_{eng}):** Dropping from a 0.9 peak directly into a 0.5 build is structurally awkward, raising the cost and triggering UI warnings.

16.3 Auto-Bridge and Multi-Genre Thematic Fading

When a user intentionally places two high-cost cards next to each other (e.g., a 150 BPM Forest Psy chapter followed by a 170 BPM Drum & Bass chapter), the engine provides an *Auto-Bridge* feature to mathematically "solve" the transition.

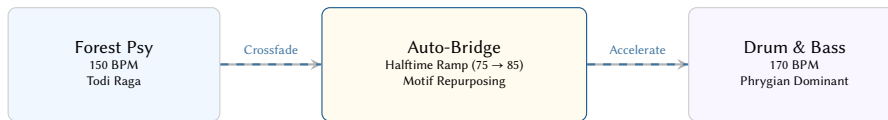


Figure 75. The Auto-Bridge mechanism. Instead of a hard cut, the engine dynamically inserts a transitional chapter that morphs the syncopation (dropping to halftime), interpolates synthesis parameters, and repurposes melodic motifs (e.g., turning a Psy lead into a DnB Reese bass) to glue disparate genres together.

The Auto-Bridge executes a *Multi-Genre Thematic Fade*:

1. **Rhythmic Morphing:** Dropping the beat into halftime, introducing broken-beat syncopations, and gradually accelerating.
2. **Motif Persistence:** Capturing a lead melody motif from the outgoing chapter and repurposing it as a bassline or atmospheric echo in the incoming chapter, ensuring thematic continuity.
3. **Timbral Crossfading:** Interpolating aggressive FM synthesis parameters into deep, sub-heavy textures.

16.4 Anchor Drop-Ins and Backward-Solving

Users are not forced to generate everything from scratch. They can place floating "Anchor Points" on the timeline—such as dropping a massive vocal sample or even importing an entire 6-minute pre-rendered track at exactly minute 45.

The Recommendation Engine treats this anchor as immutable and backward-solves the preceding chapters. If the Anchor track is 170 BPM in F-Minor, the engine calculates the transition costs backward to ensure the preceding chapter ramps seamlessly into 170 BPM. Furthermore, it will automatically *foreshadow* the anchor's motifs by playing heavily low-passed snippets of the imported audio or applying its rhythmic cadence to early hi-hat patterns.

16.5 Social Collaboration and The Generative Git-Tree

Because the underlying 2-hour set is simply a lightweight Timeline data structure, it can be version-controlled and shared instantly.

This architecture enables asynchronous "B2B" (Back-to-Back) sets. Producer A can build the first 30 minutes and push the state. Producer B imports it, and the Recommendation Engine immediately suggests paths that logically follow Producer A's closing chapter.

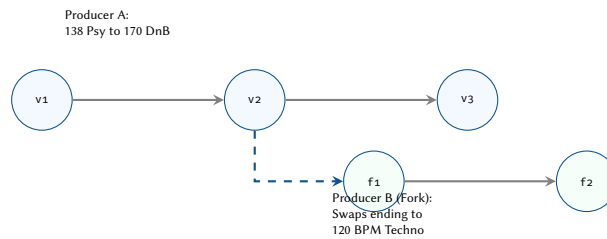


Figure 76. The Generative Git-Tree. Sets can be forked and collaboratively edited. When Producer B swaps the ending chapter, the engine automatically recalculates the transition bridges without requiring the transfer of massive audio stems.

16.6 Semantic Zoom (Macro-to-Micro UX)

Managing a continuous 2-hour timeline requires a UI that gracefully handles different levels of abstraction. The Web UI will implement *Semantic Zoom*, dynamically changing the represented data based on the current scale.

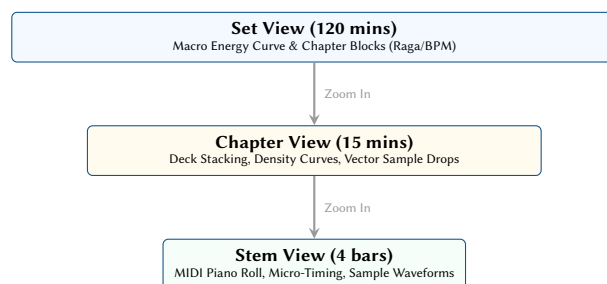


Figure 77. The Semantic Zoom interface. At the macro level, users arrange the global energetic flow. At the micro level, they edit precise MIDI syncopation. Edits made at the stem level automatically recalculate the structural tension displayed at the set level.

16.7 Natural Language Prompting (The Oracle)

Instead of manually dragging dozens of cards to initialize a set, users can start with an *Oracle Prompt*—a natural language interface. A prompt such as *"Build a 90-minute set that starts with deep ambient dub, transitions through heavy tribal percussion, and peaks at 150 BPM Goa trance at sunrise"* is algorithmically translated into a Timeline struct.

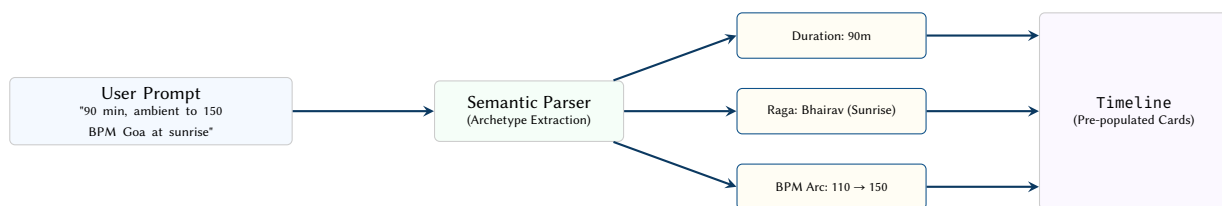


Figure 78. The Oracle Prompt workflow. Natural language is parsed into structural parameters (duration, raga mapping, tempo curves) to algorithmically pre-populate the timeline with thematic cards.

The engine automatically selects appropriate ragas (e.g., matching "sunrise" to Bhairav), calculates BPM ramps, and populates the timeline with thematic cards, providing a fully playable starting point for manual tweaking.

16.8 Semantic Sample Stitching (Vector Database)

In Phase 22, audio samples will evolve from static one-shots into elastic semantic objects. The engine will use `rustfft` to analyze Ableton sample packs (extracting pitch, transient markers, brightness, and semantic tags) and store them in a local Vector Database.

When the engine requires a "high-energy melodic vocal motif" during a 170 BPM D-Minor chapter, it queries the database. It might retrieve a 120 BPM vocal in G-Minor, pull it into memory, and use real-time phase vocoding (or granular synthesis) to warp the sample into the D-Minor 170 BPM pocket before seamlessly rendering it into the track.

16.8.1 Advanced Audio Manipulation

Beyond simple pitch-shifting, the engine treats these semantic objects as mutable musical primitives:

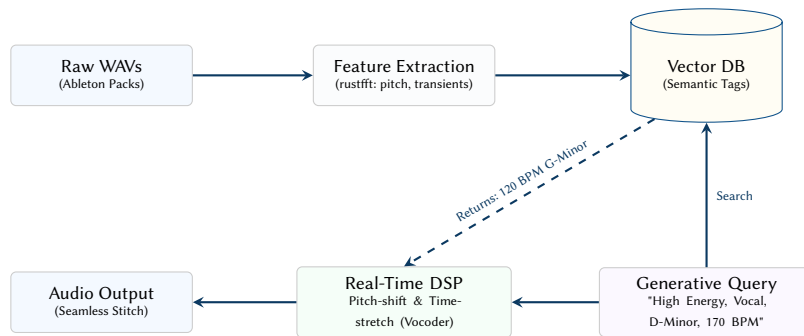


Figure 79. The Semantic Sample Stitching pipeline. During ingestion, samples are analyzed and stored in a vector database. During generation, the engine queries the DB based on the current thematic context, retrieves the best match, and dynamically time-stretches and pitch-shifts the audio to fit the active pocket.

- **Transient-Locked Swing:** Because the analyzer extracts exact millisecond markers for transients, the engine can "un-quantize" and "re-quantize" static audio loops natively. A rigidly straight 16th-note techno top-loop can be sliced at its transients and delayed to lock perfectly into a sluggish Dub swing chapter.
- **Algorithmic Breakbeat Chopping:** For Drum & Bass chapters, the analyzer identifies kicks and snares within a loop based on their spectral centroids. The generative engine can then "play" the sample out of order, triggering the kick slice on beat 1 and the snare slice on beat 2.5, synthesizing original breakbeats from static loops.
- **Latent Space Motif Interpolation:** The Vector DB allows the engine to mathematically bridge two disparate samples.

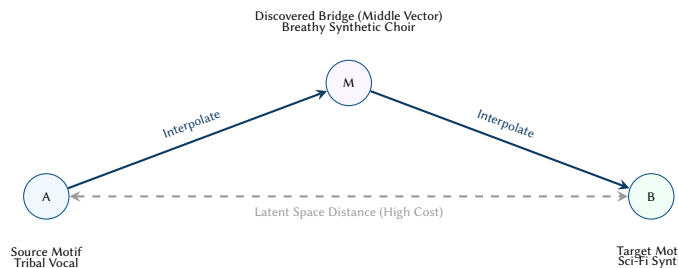


Figure 80. Latent space motif interpolation. When bridging two structurally distant chapters, the engine calculates the latent vector between their respective samples (A and B). It queries the database for a sample (M) that sits mathematically between them, creating a sonically logical bridge that a human might never have searched for.

16.9 Macro-Driven Micro-Timing (Deep Humanization)

The macro-narrative will directly dictate the lowest-level microscopic timing and dynamics of the DSP engine (Phase 20).

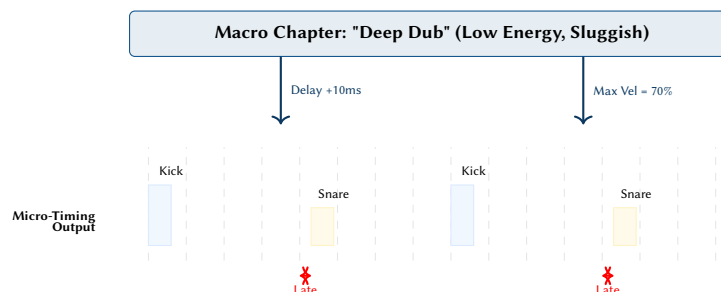


Figure 81. Macro-driven micro-timing. The global thematic state cascades down to the lowest level of the engine, algorithmically pushing notes off the rigid 16th-note grid and scaling absolute MIDI velocities to match the emotional intent of the chapter.

- **Thematic Swing:** A driving Goa chapter is locked strictly to a 0% swing 16th-note grid. As the set crossfades into a Deep Dub chapter, the engine automatically ramps up the swing and delays the snare hit by 5–10 ms, algorithmically creating a "sluggish" pocket.

- **Velocity Capping:** The engine scales the absolute MIDI strike force of the drums based on the macro-chapter. The kick drum might be hard-capped at 70% velocity during intro chapters, physically reserving the maximum 100% strike force for the exact moment the "Peak" chapter begins.

16.10 3D Audiovisual Representation

Because working strictly at the narrative level separates the user from the immediate "piano roll," the Web UI must provide high-fidelity sensory feedback.

Overtone will feature a real-time *Three.js/WebGL Particle Engine* directly patched into the DSP's output. When hovering over a polyrhythmic chapter (e.g., a 3-over-4 *Khanda* syncopation), the visualizer will render rotating geometric rings interlocking perfectly. When the Semantic Sample engine pitch-shifts a bright vocal, the 3D space will flash with high-frequency particle bursts synchronized precisely to the transient markers analyzed by *rustfft*. This ensures the user can "see" the groove without reading MIDI data.

16.11 Environmental and Gestural Generative Seeds

To push Overtone from a studio compositional tool into a truly live performance instrument, the generative model will react to the physical environment.

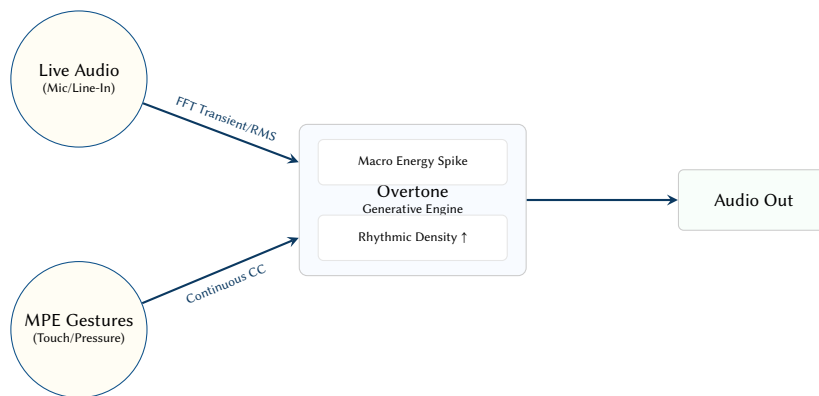


Figure 82. Environmental inputs acting as generative seeds. Instead of relying purely on pre-programmed automation curves, Overtone can analyze a live microphone feed (e.g., a crowd cheering or a live percussionist) or MPE gestural controllers to dynamically spike the internal energy model and force the algorithm into denser polyrhythms.

The Timeline will not be entirely fixed. The engine will support:

1. **Live Audio Analysis:** Listening to an external microphone or line-in (e.g., a live drummer playing a djembe). The engine calculates real-time energy and uses it to violently spike the MacroCurve or instantly increase the Humanization parameters.
2. **Gestural MIDI (MPE):** Polyphonic expression controllers (like a ROLI Seaboard) won't just map to filter cutoffs; they will map to macro-thematic variables. Pushing forcefully into a pad will dynamically force the algorithm to generate denser *tihai* polyrhythms in real-time, pulling the arrangement toward a climax solely through the performer's physical gesture.

17 Web UI and Visualization Architecture

To support the Narrative Arc Builder and Semantic Zoom workflows, Overtone's interface will evolve from a Ratatui-based terminal application into a decoupled client-server architecture (Phase 21).

17.1 Headless Backend and SPA Frontend

Overtone will implement a `-headless` CLI flag that bypasses the TUI initialization. Instead, it spins up the core audio/MIDI threads alongside an axum HTTP and WebSocket server. The frontend is a modern Single Page Application (SPA) built with React.

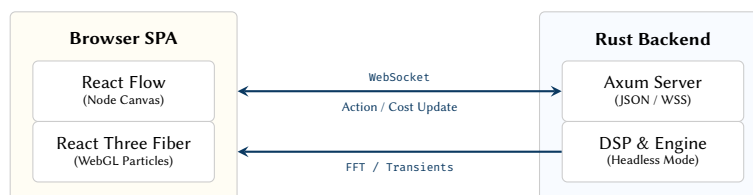


Figure 83. The Web UI Architecture. The Rust backend runs headless, exposing an Axum server. The React frontend syncs the Timeline state via WebSockets. The audio engine streams FFT and transient data directly to the Three.js particle system for zero-latency audio-reactive visuals.

- **React Flow:** Used to render the "Deck and Canvas" node-based timeline. It provides infinite panning/zooming for the Semantic Zoom mechanics.
- **React Three Fiber (R3F):** Drives the background WebGL particle engine. When the backend triggers a specific transient (e.g., a pitch-shifted vocal drop), the frontend intercepts the WebSocket event to generate synchronized, audio-reactive 3D bursts.

17.2 Live Remote Jamming (Multi-User Sync)

Because the engine state is entirely decoupled from the rendering UI, Overtone can support real-time remote collaboration. Using Conflict-free Replicated Data Types (CRDTs) like Automerge, two users in different locations can open the Web UI connected to a shared cloud relay. If User A drags a Goa Trance block to minute 30, User B sees it appear instantly and can draw an algorithmic spline connecting it to their 150 BPM Forest block. The backend resolves the timeline mathematically for both clients simultaneously.

18 Future Explorations: The Live Ecosystem

Looking beyond the v2 Pro milestone, Overtone aims to integrate directly with live performance ecosystems and hardware environments.

1. **The Stage Brain (VJ & DMX Integration):** The generative timeline will emit standardized OSC commands mapped to narrative phases. This allows VJ software (e.g., Resolume) and DMX lighting bridges to automatically generate light shows that strobe precisely during rhythm morphs and shift color palettes during raga modulations.
2. **Generative Spoken Word (AI Vocals):** Integration with local Text-to-Speech (TTS) models to procedurally generate philosophical or sci-fi monologues. Overtone will analyze, time-stretch, and granularize these vocals to sit seamlessly within ambient breakdown chapters.
3. **Hardware Ecosystem Export:**
 - **Modular Bridge:** A CV/Gate output module utilizing DC-coupled audio interfaces to sequence analog Eurorack synthesizers directly from the generative timeline.
 - **Rekordbox / CDJ Export:** Overtone will export the full 2-hour set chopped into 15-minute gapless stems, formatted and analyzed for Denon Engine or Pioneer Rekordbox. It will automatically embed hot-cues at algorithmically generated transition boundaries, allowing DJs to perform the generated set on standard club hardware.

19 Future Explorations: Global Ethnomusicology Expansion

While Overtone's initial architectural focus has been the fusion of Western electronic music with Indian classical theory (Hindustani and Carnatic), the platform's overarching goal is to act as a cross-cultural generative engine. Future phases will introduce deep theoretical and algorithmic models from other global traditions.

19.1 Arabic Maqam and 24-TET Microtonality

The Middle Eastern *Maqam* system relies on quarter-tones ("half-flats" and "half-sharps") that cannot be approximated in 12-TET.

- **Tuning Engine Upgrade:** The tuning layer will be expanded to natively support 24-TET and exact ratio-based *Just Intonation* specific to Arabic regions (e.g., *E♭* lowered by exactly 50 cents).
- **Maqamat Implementation:** Foundational scales such as *Bayati*, *Rast*, and *Hijaz* will be added. These are highly relevant to Psybient and "Desert Bass" subgenres.
- **Iqa'at Rhythms:** Middle Eastern rhythmic cycles (e.g., *Maqsum*, *Masmoudi*) will be added to the percussive generator, complete with *Dum* (low) and *Tak* (high) bol-to-synthesis mappings.

19.2 Indonesian Gamelan: Kotekan and Interlocking Rhythms

Gamelan music from Bali and Java offers a radically different approach to ensemble generation, relying heavily on *Kotekan*—rapid, interlocking parts played by multiple metallophones that combine to form a single continuous melodic line.

The *Pelog* (7-tone) and *Slendro* (5-tone) tuning systems will be implemented alongside a new physical modeling synthesis engine (FM-based bell and gong models). The Jugalbandi duet framework will be upgraded to support *Kotekan* generation, automatically splitting dense psytrance arpeggios across two hard-panned synth layers.

19.3 Japanese Aesthetics: Ma and Pentatonics

To support ultra-minimalist, ambient, and "Zen-forest" electronic tracks, the engine will integrate Japanese musical philosophy.

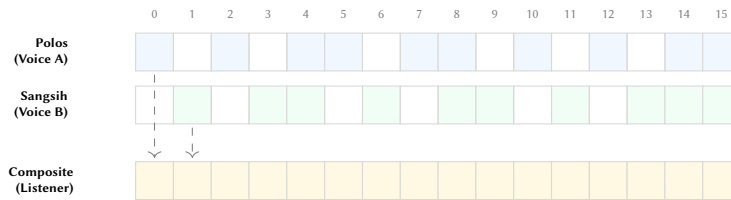


Figure 84. The Kotekan interlocking mechanism. The algorithm divides a high-speed 16th-note composite melody across two separate generative voices (*Polos* and *Sangsih*). Neither voice plays the full melody, but when panned left and right, the listener perceives a continuous, blazing-fast melodic line.

- **The Concept of Ma (Negative Space):** A new density heuristic that values silence as heavily as sound. In "Ma" mode, the engine intentionally leaves massive, unquantized gaps between notes, allowing long reverbs to breathe fully before the next strike.
- **Scales:** Implementation of the *In* (Sakura), *Yo*, and *Hirajoshi* pentatonic scales.
- **Synthesis Targets:** Granular processing tailored for Bamboo Flute (Shakuhachi) breath-noise textures, and a large-membrane physical model for Taiko drum impacts.

20 Conclusion

This report has presented Overtone, an energy-driven cross-cultural generative music engine that produces full arrangements from declarative parameter configurations. The key contribution is the four-level energy model (section 5) that replaces manual arrangement with a hierarchical abstraction: macro curves define the track arc, meso patterns add phrase-level breathing, micro grooves shape per-step accents, and sub-channel gating controls per-element entry and response characteristics.

The synthesis pipeline (section 6) implements nine dedicated engines—kick, bass, hi-hat, clap, FM lead, tanpura drone, ensemble pad, Karplus–Strong plucked strings (sitar, veena, sarod, santoor), shruti box, and tabla-articulated tom—all operating at 64-bit precision with per-sample filter modulation. The DSP layer (section 7) provides wavetable morphing with bilinear cross-cycle interpolation and PolyBLEP anti-aliased oscillators alongside the biquad filters, Schroeder reverb, and ping-pong delay.

The sample intelligence subsystem (section 8) extends the sonic palette by analysing, classifying, and blending audio samples with synthesised output based on the energy state. The sample library (section 13.4) indexes samples by category and energy zone with automatic redistribution and round-robin selection.

The eastern musical traditions layer (section 10) implements the 72-melakarta Carnatic classification, the 10 Hindustani thaats, the navarasa aesthetic framework, and murchhana modal rotation for scale discovery. Six classical rhythmic devices—tihai, korvai, layakari, nadai, tani avartanam, and sangati—compose within an Alap–Jor–Gat performance arc that progressively activates synthesis elements and ornamental techniques. Raga-aware melody generation respects aroh/avroh paths and assigns per-note gamaka ornaments (andolan, kampita, meend, kan-swar).

The Ableton integration (section 11) bridges the gap between generative composition and professional production, enabling MIDI export and import, real-time OSC clip pushing, Link transport synchronisation, and energy-driven scene control. Session and preset management (section 14) provides full-state persistence and reproducible sound design snapshots.

The streaming engine (section 13) provides sample-accurate, event-driven block processing as an alternative to the batch pre-render model, with energy-aware synth/sample blending and breath LFO modulation.

Rendering performance (section 15) exceeds 5,000× real time for typical track lengths, enabling the TUI's re-render-on-change workflow where any parameter adjustment produces an updated mix in under 20 ms.

Future development directions include moving toward a comprehensive spatial audio model, integrating granular and spectral-aware synthesis for Pad and Atmosphere generators, and expanding physical modelling to transcend the rigid Karplus–Strong string and hardcoded percussive envelopes. Furthermore, completing the DAW integration workflows with robust MIDI import overriding will close the loop between generative discovery and manual editing.

Critical Assessment

Despite these achievements, the current architecture harbours significant technical debt and rigid design biases. The reliance on 64-bit precision and per-sample coefficient updates wastes computational headroom that could be better spent on oversampling and anti-aliasing—crucial omissions that degrade the high-frequency fidelity of the FM lead and basic oscillators. Furthermore, the synthesiser implementations are heavily reliant on hardcoded parameters (e.g., fixed ADSR slopes, rigid clap multi-taps, exact 0.3s kick durations). This lack of

parameterization locks the engine into its primary psytrance use case, directly conflicting with its goal of broad cross-cultural and cross-genre flexibility. Addressing these limitations through modular parameterization and proper bandlimiting is essential before the engine can be considered a truly general-purpose generative tool.

References

- [1] K. Karplus and A. Strong, "Digital synthesis of plucked-string and drum timbres," *Computer Music Journal*, vol. 7, no. 2, pp. 43–55, 1983.
- [2] R. Bristow-Johnson, *Audio EQ cookbook*, 2021. [Online]. Available: <https://www.w3.org/2011/audio/audio-eq-cookbook.html>
- [3] M. R. Schroeder, "Natural sounding artificial reverberation," *Journal of the Audio Engineering Society*, vol. 10, no. 3, pp. 219–223, 1962.
- [4] rustfft contributors, *RustFFT: A mixed-radix FFT library*, 2024. [Online]. Available: <https://crates.io/crates/rustfft>
- [5] D. Jones, *AbletonOSC: OSC interface for Ableton Live*, 2024. [Online]. Available: <https://github.com/deoforms/AbletonOSC>
- [6] rusty_link contributors, *Rust bindings for Ableton Link*, 2024. [Online]. Available: https://crates.io/crates/rusty_link
- [7] Ratatui contributors, *Ratatui: A Rust library for terminal user interfaces*, 2024. [Online]. Available: <https://ratatui.rs/>

List of Figures

- 1 Energy as a multi-scale control signal. This is the organising abstraction that connects high-level intent to low-level synthesis and pattern decisions. 1
- 2 Comparison of foundational rhythmic patterns across psytrance sub-genres. *K* indicates a kick drum hit; *B* indicates a bass note. Full-On relies on a continuous 16th-note roll, Progressive creates space with offbeats, and Forest uses a syncopated gallop. 3
- 3 Phase-coherent sidechain alignment. To prevent frequency masking in the critical 40–100 Hz region, Overtone’s sidechain compressor attenuates the bass signal during the first 10–20 ms of each kick hit, creating the "pumping" sensation foundational to the genre. 3
- 4 The temporal hierarchy of a Tala. Individual beats (*matras*) are grouped into sections (*vibhags*), which together form the full cycle (*avartan*). Overtone uses this hierarchy to determine where to place accents and rhythmic flourishes. 3
- 5 Additive rhythm construction. While Western 4/4 meter is built by dividing a bar into four equal parts, Indian Talas like Rupak are built by adding unequal sections (3+2+2) together. Overtone uses this additive logic to generate asymmetric syncopations. 4
- 6 The Navarasa emotional mapping. Overtone maps these nine aesthetic states to BPM ranges, energy curve selection, and scale constraints. For example, *Veera* (Heroic) biases the engine toward Ahir Bhairav and rising energy, while *Shanta* (Peace) triggers meditative drones and low-density patterns. 4
- 7 Module dependency graph. Colours indicate functional layers: gold for music theory, blue for core engine and output, green for synthesis, purple for integration and samples, grey for DSP primitives. 6
- 8 The decoupled pipeline architecture. The Composition stage (I) is deterministic and produces a structured event set. This set can then be rendered to high-precision audio (IIa) or exported directly to external environments (IIb). 7
- 9 Data-boundary view of the two-stage pipeline. The immutable NoteEvent set is the stable interface between composition and multiple consumers (audio, MIDI, OSC), and is a natural caching boundary. 7
- 10 The four-level energy hierarchy. Macro and meso levels combine to drive the sub-channel gate, which is then modulated by the micro groove to produce the final step velocity. 7
- 11 Velocity composition in the engine. Macro/meso energy, micro groove, nadai masks, and per-layer gates combine multiplicatively into the final step velocity used by pattern emitters. 9
- 12 Kick drum synthesis model: parallel summation of main body, sub-harmonic, and click layers. 9
- 13 The bass synth signal flow. Dual sawtooth oscillators are summed and passed through a multi-mode biquad filter. Cutoff frequency is modulated by both an ADSR envelope and a free-running LFO. The signal is then saturated via a tanh function and shaped by the VCA envelope. 10
- 14 Filter response geometries. The "Acid" character is achieved by a sharp resonant peak at the cutoff frequency (f_c). When the cutoff is modulated by a fast envelope, this peak sweeps through the harmonics of the sawtooth oscillator, creating the characteristic "wow" and "squelch" textures. 10

15	Filter modulation as a control-sum graph. Multiple modulation sources sum into $f_c(n)$, which drives coefficient updates and then sample processing.	11
16	Percussion synthesis model. Hi-hats blend filtered noise with a metallic sine tone, while the clap relies entirely on a multi-tap noise envelope.	12
17	Two-operator FM Synthesis architecture. The modulator oscillator frequency (f_m) is a ratio (R) of the carrier pitch. The modulation depth (Index I) is dynamically scaled by the macro energy level, meaning higher energy sections produce much brighter, richer sideband harmonics. The FM envelope (E_{fm}) creates a "pluck" or "wow" transient.	12
18	Lead synthesiser signal flow using 2-operator FM.	13
19	Karplus-Strong physical modeling architecture. A short burst of noise (the "pluck") is fed into a delay line representing the string length. The output is fed back through a low-pass filter, causing higher frequencies to decay faster than fundamental frequencies, realistically simulating a plucked acoustic string.	14
20	Master effects signal flow. The kick triggers the sidechain compressor which ducks the bass. Hi-hat, clap, and lead pass through the ping-pong delay before joining the stereo bus.	15
21	Sidechain compression as a control graph. Dashed arrows carry control signals; solid arrows carry audio. This framing clarifies how the kick shapes bass dynamics without being mixed into the control path.	15
22	Sidechain compression signal flow. The absolute value of the kick signal drives an envelope follower with instantaneous attack and exponential release. This envelope calculates a dynamic gain reduction (g_{sc}) which is multiplied against the bass signal, ducking it to create rhythmic pumping.	16
23	Ping-Pong Delay topology. Left and right channel inputs (x_L, x_R) are fed into independent delay lines. The output of each delay line is low-pass filtered (for analog-style damping), multiplied by the feedback coefficient k , and routed into the input sum of the <i>opposite</i> channel's delay line, creating a stereo bouncing effect.	16
24	Schroeder Reverb topology (Left Channel). The input signal is fed in parallel to four comb filters with mutually prime delay lengths. Their outputs are summed and passed serially through two allpass filters to increase echo density without coloring the sound.	16
25	Bilinear cross-cycle interpolation in the Wavetable Oscillator. To prevent zipper noise when sweeping wavetables and aliasing when playing high pitches, the engine first interpolates horizontally between adjacent samples (i and $i + 1$) within two adjacent wave cycles (c_0 and c_1), and then interpolates vertically between the resulting values.	17
26	Wavetable oscillator data flow: WAV loading, cycle storage, and bilinear interpolation at playback.	17
27	PolyBLEP anti-aliasing: the correction term is subtracted from the naive waveform at phase discontinuities.	18
28	Oscillator correctness view: phase accumulation + bandlimiting. This unifies the time-domain source of aliasing (discontinuities) with the algorithmic fix (PolyBLEP).	18
29	The sample intelligence pipeline. Raw audio is processed via spectral analysis to extract acoustic features, classified into categories and energy zones, and stored as JSON profiles. The scheduler then uses macro energy state to place samples across the arrangement.	18
30	Sample intelligence as a decision DAG. Discrete classifications choose a blending policy which drives placement and mix decisions, making sample use energy-aware rather than purely random.	19
31	Synth/Sample energy blending. At low energy, the output is almost entirely driven by the internal algorithmic synthesis engines. As macro energy increases towards the peak, parsed audio samples are faded in, providing organic complexity and timbral density to the climax.	20
32	Raga melody generation: scale constraints and vadi/samvadi weighting feed pitch selection, energy controls density and ornamentation depth, and gamaka rules produce per-note ornaments.	22
33	Cyclic representations of Rupak and Jhaptal Talas. These cycles define the underlying "pulse" onto which Overtone superimposes its 16-step electronic patterns, creating complex cross-rhythms.	23
34	Tala-to-grid alignment. A 7-beat Rupak cycle (mapped here to 8th-note steps) drifts relative to the 16-step bar boundary. The <i>Sam</i> (beat 0) moves from step 0 in Bar 1 to step 14 in Bar 1, and step 12 in Bar 2, creating evolving syncopation.	23
35	Tihai as a generative constraint. The generator selects motif and spacing so the third repetition resolves on the cycle downbeat (<i>sam</i>).	23
36	Raga-aware pitch selection as a decision DAG. Constraints define what is legal, weights define what is likely, and ornaments carry expressive motion as metadata.	24

37	The 7-phase "Yoga Flow" macro energy curve. Unlike the multi-peak "Long Journey" EDM curve, this arc represents a continuous, single-peak meditation structure, moving smoothly from grounding (Muladhara) to high-energy effort (Manipura), resolving in peaceful dissolution (Sahasrara).	24
38	The Sub-Channel Preview mechanism. Instead of an abrupt binary switch when an element becomes active, the engine provides a "preview window." In this energy band, the element emits occasional low-velocity hits, telegraphing its arrival to the listener before full activation.	25
39	The performance arc implemented in Overtone. The engine maps the traditional Indian classical progression onto the EDM energy model, moving from non-metered melodic exploration to high-density rhythmic cycles.	26
40	The Hindustani Thaata classification. Each thaata represents a heptatonic interval set that serves as a parent scale for many ragas. Overtone's Thaata selector allows users to pivot between these North Indian modal centers instantly.	27
41	The combinatorial logic of the 72 Melakartas. Six purvanga variations are multiplied by two madhyama positions and six uttaranga variations ($6 \times 2 \times 6 = 72$). Each group of six purvanga/madhyama combinations forms a <i>Chakra</i>	27
42	Melakarta generation: three independent pitch choices yield 72 canonical ragas grouped into 12 chakras.	28
43	Murchhana integration: the original scale is rotated by degree, producing an EffectiveKey that is threaded through bass quantisation, melody generation, and drone retuning.	29
44	Chakra energy mapping: as macro energy rises, the active spectral focus ascends through the seven chakras.	30
45	Korvai as structured acceleration. The generator holds a motif constant while scheduling subdivision increases across bars, producing a build that still resolves on sam.	31
46	Korvai rhythmic acceleration. The density of note placement increases logarithmically over the 8-bar cycle, creating a "speeding up" sensation that resolves on the first beat of the next section. .	31
47	Layakari as a rescale + merge transform. The collision rule is what makes time-warp safe on a fixed 16-step grid.	32
48	Layakari time-stretching: the same rhythmic phrase at normal (1×), double (2×), and triple (3×) speed within a fixed 16-step bar.	33
49	Nadai as mask composition. The final per-step velocity is a product of groove accents, nadai grouping, and the energy gate for the element/layer.	33
50	Nadai subdivision masks. By applying these velocity multipliers, Overtone creates the sensation of different pulse groupings (3, 4, 5) while maintaining a strict 4/4 temporal grid. This is used to drive "Eastern Swing" and polyrhythmic lead variations.	34
51	The Prahar cycle. Overtone's samay mode queries the system clock to determine the current 3-hour period and selects a raga with the appropriate emotional "juice" (Rasa). For example, pre-dawn tracks default to Raga Bhairav, while late-night tracks favor Malkauns.	34
52	Visualisation of melodic micro-expressions. Meend provides a non-linear frequency transition between notes, while Andolan adds a characteristic slow oscillation to steady tones.	35
53	The mapping of Sargam notes to the 12-semitone grid. Lower-case letters (r, g, d, n) indicate <i>komal</i> (flat) variants, while upper-case (R, G, D, N) indicate <i>shuddha</i> (natural) or <i>tivra</i> (sharp) variants. Sa and Pa are fixed (<i>achala</i>).	35
54	Mapping percussive syllables (bols) to spectral synthesis. The engine modifies the ADSR and filter bank of the percussive generator based on the syllable metadata attached to each event.	36
55	Time-domain envelopes for different Tabla strokes. The percussive engine switches between these envelope shapes based on the bol syllable, ensuring that "Open" strokes ring out while "Sharp" strokes remain percussive.	36
56	The Breath LFO. This slow, 8-bar modulation cycle mimics the human breathing pattern (Puraka/Rechaka). It creates organic motion in the synthesised output, with rising brightness on inhale and receding density on exhale.	37
57	Jugalbandi pattern handover. The engine captures the melodic and rhythmic contour of the "Caller" voice and applies a stochastic transformation before assigning it to the "Respondent" voice. This mimics the live improvisational dialogue of Indian classical music.	37
58	Register mapping across the Saptak hierarchy. By constraining elements to specific octaves, Overtone prevents spectral masking and ensures that the melodic lead (Taara) remains distinct from the foundational drone (Madhya) and rhythmic "engine room" (Mandra).	39

59	Harmonic spectrum of the Tanpura drone. The fundamental pitches (typically Sa and Pa) are accompanied by a dense series of upper partials that create a continuous, shimmering "bed" of sound. Overtone mimics this via multi-oscillator FM synthesis with slow phase modulations.	39
60	Additive synthesis model for the Shruti Box. The engine sums the first six harmonics of the tonic (Sa) and the fifth (Pa) with amplitudes decaying at a rate of $1/n^2$. A slow bellows-like amplitude LFO is applied to simulate the manual pumping of the instrument.	40
61	Laya-to-Energy mapping. The generator transitions between three speed regimes based on the macro energy state. As energy crosses the 0.3 and 0.7 thresholds, the rhythmic generators transition from sparse Vilambit phrases to dense Drut passages.	40
62	Performance arc: the classical Alap–Jor–Gat structure progressively activates synthesis elements and rhythmic devices. Gamaka intensity decreases as rhythmic complexity increases.	41
63	Raga modulation timeline. The transition begins at bar 2 and progresses linearly over 4 bars. During the transition, the engine blends the interval sets, gradually introducing notes unique to the target scale while phasing out source-unique tones.	41
64	Ableton Live integration architecture. Overtone communicates via Standard MIDI Files for static export, bidirectional OSC for clip pushing and scene control, and Ableton Link for phase-locked transport synchronisation.	42
65	Timing and latency boundaries in Ableton integration. Link synchronises transport phase, OSC provides interactive control with network jitter, and MIDI provides an offline deterministic interchange format.	42
66	MIDI Import overriding architecture. Users can selectively replace the generative output of specific elements (e.g., locking in a custom bassline) while allowing the engine to continue generating the rest of the arrangement (drums, leads, drones).	43
67	Non-blocking OSC Push architecture. The TUI sends sequences of commands (Delete → Create → Add Notes) via a channel. The background worker consumes this queue and handles the necessary network sleeps without stalling the rendering loop.	43
68	The user workflow journey. Selecting a mood configures the global state. Adjustments during playback trigger an instantaneous generative re-render, with structural updates pushed seamlessly to Ableton Live.	44
69	Re-render-on-change as a state machine. The engine treats rendering as a pure function of config (and seed), enabling deterministic regeneration during live playback.	44
70	Streaming engine architecture: pre-sorted events are dispatched sample-accurately, blended with energy-aware sample playback, and processed through the effects chain.	45
71	Lock-free live parameter path: the TUI stores f64 bit patterns into atomics; the audio callback loads them each block and updates the biquad filter only when thresholds are exceeded.	45
72	Session and preset persistence: sessions capture full state, presets capture audio parameters only. Both serialise to JSON.	45
73	Lock-free control plane between UI and audio threads. Atomics carry parameters across threads without blocking the audio callback.	46
74	Lock-free concurrency model. The UI thread communicates with the real-time audio thread strictly through atomic variables, preventing priority inversion and guaranteeing that the audio callback never blocks waiting for a mutex.	46
75	The Auto-Bridge mechanism. Instead of a hard cut, the engine dynamically inserts a transitional chapter that morphs the syncopation (dropping to halftime), interpolates synthesis parameters, and repurposes melodic motifs (e.g., turning a Psy lead into a DnB Reese bass) to glue disparate genres together.	47
76	The Generative Git-Tree. Sets can be forked and collaboratively edited. When Producer B swaps the ending chapter, the engine automatically recalculates the transition bridges without requiring the transfer of massive audio stems.	48
77	The Semantic Zoom interface. At the macro level, users arrange the global energetic flow. At the micro level, they edit precise MIDI syncopation. Edits made at the stem level automatically recalculate the structural tension displayed at the set level.	48
78	The Oracle Prompt workflow. Natural language is parsed into structural parameters (duration, raga mapping, tempo curves) to algorithmically pre-populate the timeline with thematic cards.	48

79	The Semantic Sample Stitching pipeline. During ingestion, samples are analyzed and stored in a vector database. During generation, the engine queries the DB based on the current thematic context, retrieves the best match, and dynamically time-stretches and pitch-shifts the audio to fit the active pocket.	49
80	Latent space motif interpolation. When bridging two structurally distant chapters, the engine calculates the latent vector between their respective samples (A and B). It queries the database for a sample (M) that sits mathematically between them, creating a sonically logical bridge that a human might never have searched for.	49
81	Macro-driven micro-timing. The global thematic state cascades down to the lowest level of the engine, algorithmically pushing notes off the rigid 16th-note grid and scaling absolute MIDI velocities to match the emotional intent of the chapter.	49
82	Environmental inputs acting as generative seeds. Instead of relying purely on pre-programmed automation curves, Overtone can analyze a live microphone feed (e.g., a crowd cheering or a live percussionist) or MPE gestural controllers to dynamically spike the internal energy model and force the algorithm into denser polyrhythms.	50
83	The Web UI Architecture. The Rust backend runs headless, exposing an Axum server. The React frontend syncs the Timeline state via WebSockets. The audio engine streams FFT and transient data directly to the Three.js particle system for zero-latency audio-reactive visuals.	50
84	The Kotekan interlocking mechanism. The algorithm divides a high-speed 16th-note composite melody across two separate generative voices (<i>Polos</i> and <i>Sangsih</i>). Neither voice plays the full melody, but when panned left and right, the listener perceives a continuous, blazing-fast melodic line. . . .	52

List of Tables

1	Comparison of selected Shruti ratios vs. 12-TET cents.	6
2	Default sub-channel parameters. The response curve exponent controls how aggressively the element responds to energy changes: < 1 gives a gentle ramp, > 1 gives a sharp threshold effect.	8
3	Filter envelope presets. The <i>amount</i> parameter specifies the peak cutoff offset in Hz above the base frequency.	11
4	Plucked string preset parameters.	14
5	Extracted acoustic features per sample.	19
6	Kick pattern presets. Each preset defines placement rules that are further modulated by the energy level.	21
7	Arrangement section detection heuristics. Progress is measured as bar/total_bars.	22
8	The 10 Hindustani thaats with interval sets and time associations.	28
9	The nine rasas with representative synthesis parameters.	29
10	Chakra-to-energy mapping. Each chakra defines the active spectral region as energy rises through the track.	30
11	Korvai acceleration stages over 8 bars.	32
12	Performance arc mode boundaries as percentages of total bars.	33
14	Eastern-layer configuration fields in GeneratorConfig.	37
13	Implemented eastern layer features: config fields, implementation sites, and effects.	58
15	Energy-to-colour mapping in the TUI.	58
16	Rendering performance by track length (pure synthesis, 44.1 kHz stereo). The real-time ratio is computed as track duration / render time.	59

Table 13. Implemented eastern layer features: config fields, implementation sites, and effects.

Feature	Config / Entry Point	Implementation + Effect
Raga scales + pakad	Key.scale (mood / override)	src/theory/scales.rs: interval set + optional pakad phrases constrain pitch selection and provide phrase seeds.
Pakad melody	implicit via active scale pakad	src/engine/pakad.rs: phrase-bank bar generation with energy-scaled density/stride/variation.
Alankar runs	alankar_enabled, alankar	src/engine/alankar.rs: degree permutations emit fast raga-constrained runs; used as a high-energy lead mode.
Bol text input	TUI override workflow	src/engine/bol_parser.rs + src/tui/app.rs: parse bols to (step, vel, articulation) and write tom overrides for the next bar.
Shruti tuning	shruti_purity	src/engine/generator.rs + tuning functions: blend 12-TET to shruti offsets when available; applied at frequency computation.
Raga modulation	modulation	src/engine/raga_modulation.rs: schedule source→target transition; render-time scale blending introduces target-unique tones over bars.
Murchhana	murchhana_degree	src/theory/murchhana.rs + src/engine/effective_key.rs: live modal rotation; bass quantised, melody/alankar/pakad indexed, drone retuned to rotated degree. TUI: Shift+1–7/0.
Samay mood	mood_name="samay"	src/theory/mood.rs: time-of-day raga + energy curve selection; presets filter ranges accordingly.
Yoga/ambient curves	energy_curve_override / mood preset	src/engine/energy.rs: named macro curves shape arrangement density and timbral evolution.
Breath/chakra/arc	breath_lfo_enabled, chakra_mode, performance_arc_mode	src/dsp/lfo.rs + src/theory/chakra.rs + arc logic: interpretable macro modulation and feature gating layered atop energy.

Table 15. Energy-to-colour mapping in the TUI.

Energy Range	Colour	Meaning
< 0.33	Blue	Low energy (intro, breakdown)
0.33–0.66	Green	Moderate energy (build)
0.66–0.85	Yellow	High energy (drive)
≥ 0.85	Red	Peak energy (climax)

Table 16. Rendering performance by track length (pure synthesis, 44.1 kHz stereo). The real-time ratio is computed as track duration / render time.

Bars	Duration (s)	Render Time (ms)	Real-Time Ratio
8	13.5	3	4,500×
16	27.0	5	5,400×
32	54.1	10	5,410×
64	108.2	18	6,011×
128	216.3	35	6,180×
256	432.7	68	6,363×

List of Design Decisions & Rules

1	Nada Brahma in Overtone	4
2	The Shruti Math	5
3	Single Source of Truth	6
4	Decoupled Output Targets	7
5	Staggered Entry	8
6	Critical Evaluation: Hardcoded Envelopes and Inflexibility	9
7	Critical Evaluation: Per-Sample Coefficient Updates & Hardcoding	11
8	Critical Evaluation: Overly Simplistic Percussion Models	12
9	Critical Evaluation: Simplistic FM and Lack of Anti-Aliasing	12

Revision History

Version	Date	Changes
1.0.0	March 2026	Initial release: 12 phases complete