

Today's plan

1. A Brief Review of the Generalized Spectral Theory
2. Application to the Kuramoto Model (Synchronization)
3. Application to the neuronal dynamics (brain wave)

Generalized Spectral Theory and its Applications

Tohoku university, Japan

Hayato Chiba

2023, Oct. 13

A linear operator $A: X \rightarrow X$
defined on a Banach sp. X .

A spectral set $\sigma(A)$ plays
an important role in many areas.

• When $X = \mathbb{C}^n$ (i.e. A is a matrix)

$$\lambda \in \sigma(A)$$

$$\Leftrightarrow (\lambda - A)u = 0, \quad \exists u \neq 0$$

$$\Leftrightarrow \det(\lambda - A) = 0$$

$\Leftrightarrow$ The inverse

$$(z - A)^{-1} = \frac{(\text{adjugate matrix})}{\det(z - A)}$$

rational func. of z .

has a singularity at $z = \lambda$.

$$\sigma(A) = \{ \text{The set of singularities} \\ \text{of } (z - A)^{-1} \}$$

$(z - A)^{-1}$ is called the
resolvent of A .

X : Banach sp.

$A: X \rightarrow X$, linear op.

Def

The set of singularities of $(z - A)^{-1}$ on $\mathbb{C}$ is called the spectral set $\sigma(A)$.

that consists of ...

eigen values

continuous spectrum

residual spectrum

} difficult

Purpose

Generalize the concept of the spectral set to treat problems involving conti / res. spectra.

The Generalized Spectral

Theory

H. Chiba, Adv. in Math. (2015)

Ex. 1 (Kuramoto Model, 1975)

A model for synchronization.

$$\frac{d\theta_i}{dt} = \omega_i + \frac{K}{N} \sum_{j=1}^N \sin(\theta_j - \theta_i)$$

$(i = 1, \dots, N)$

$$\theta_i \in [0, 2\pi)$$

ω_i : natural frequencies drawn from a distribution $f(\omega)$.


Gaussian etc...

K : coupling strength
(bifurcation parameter)

The order parameter


$$r := \frac{1}{N} \sum_{j=1}^N e^{i\theta_j}$$

$\exists$ threshold $K_c > 0$ s.t.

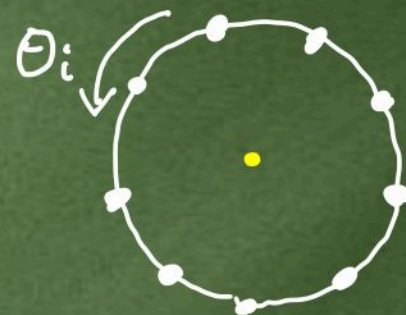

$0 < K < K_c$
de-synchro
 $r \sim 0$

↓ [phase transition]

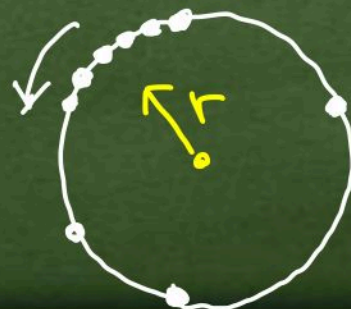


$K_c < K$
synchro
 $r > 0$

Kuramoto Conjecture

$$N \rightarrow \infty$$

(KM becomes a certain PDE) $\frac{\partial \rho}{\partial t} + \frac{\partial}{\partial \theta}(\rho \omega) = 0$

A bifurcation diagram of the order parameter is given as

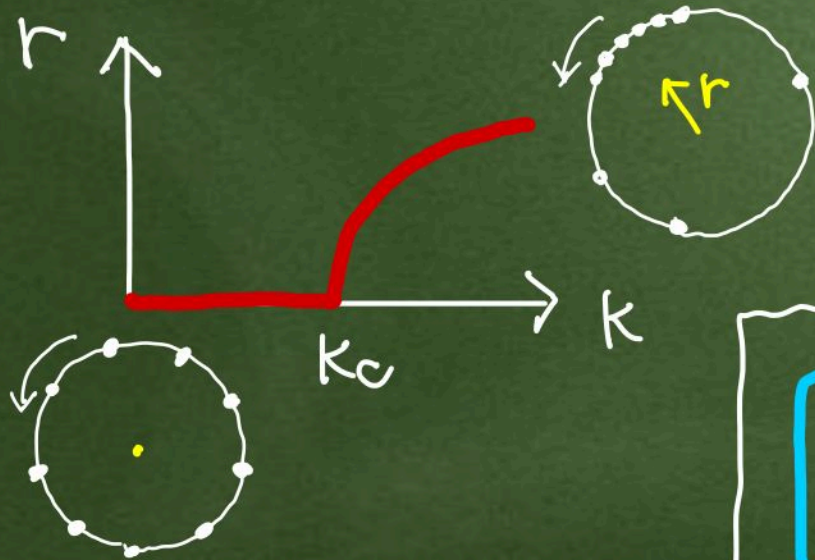


Linearization of the KM around the de-synchro state (uniform dist. on S^1)

Linearized op.

$$A : L^2(\mathbb{R}, g(\omega) d\omega) \rightarrow L^2(\mathbb{R}, g(\omega) d\omega)$$

The spectral set $\sigma(A)$ is $i\mathbb{R}$.

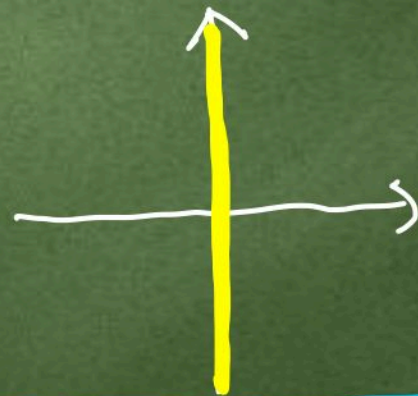


No information about stability / bifurcation,

The conjecture was solved with the aid of the generalized spectral theory (H.C. 2015)

Ex. 2 Laplace op. on $L^2(\mathbb{R}^m)$.

$$\sigma(-\Delta) = \mathbb{R}_{\geq 0}$$

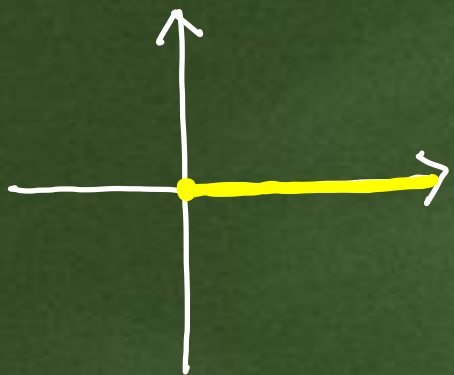

$$A = -\Delta + (\text{perturbation})$$

(e.g. Schrödinger eq.
reaction-diffusion eq.)

$\sigma(A)$ may have nontrivial
(usual) eigenvalues and
generalized eigenvalues.

Generalized e.v. describe ...

- tunnel effect for Schrödinger eq.
- zeros of the Evans function
for RD-eq.

(H.C. 2018)

Ex. 3 The extended theta model (by. K. Kotani)

A model for the onset of brain wave.

V_i : membrain potential of i -th neuron.

$$\frac{dV_i}{dt} = g_L \frac{(V_i - V_R)(V_i - V_T)}{V_T - V_R} + (\dots)$$


omitted

(...) includes interactions and a network structure of neurons.

μ : the number of synapse.

? μ : small $\rightarrow$ no brain wave.
 μ : large $\rightarrow$ stable brain wave.

Linearized op. A
 $\sigma(A)$ is given as

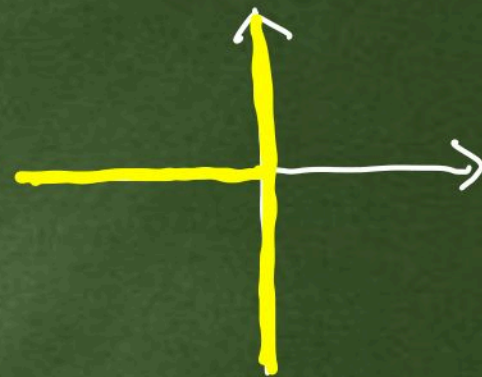

The dynamics is resolved by the generalized spectrum.

(H.C., K. Kotani, A. Akao, 2021)

Ex. 4 Koopman op. / Perron-Frobenius op. of symbolic dyn. systems.

- Full-shift of finite type

$$S: (\omega_1, \omega_2, \dots) \mapsto (\omega_2, \omega_3, \dots)$$


$$\omega_i \in \{0, 1, \dots, p\}, \quad \bar{I} \rightarrow \bar{I}$$

- Koopman op. $K_S: (K_S f)(\omega) := f(S\omega)$

$$L^2(\Sigma) \rightarrow L^2(\bar{I})$$

"chaos" $\Leftrightarrow$ continuous spectrum
on the unit circle.

$\sigma(K_S)$ is

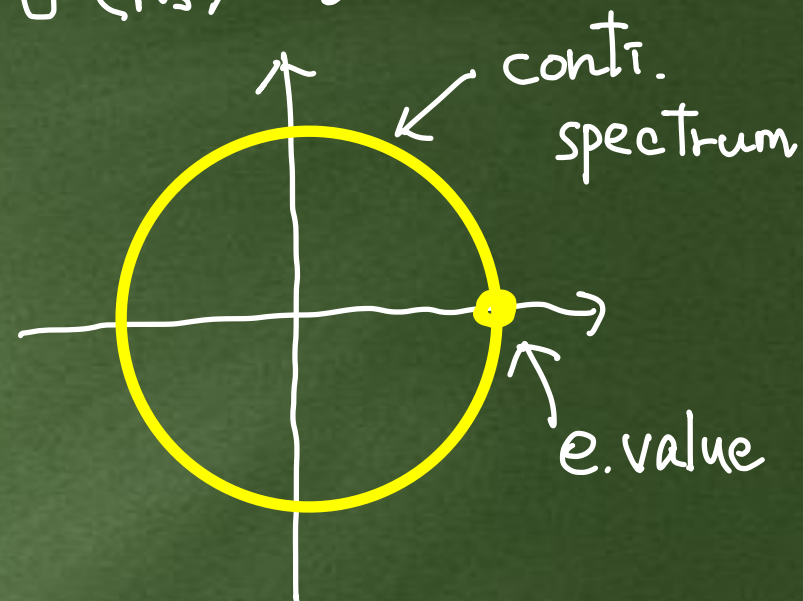

The rate of convergence to chaos is estimated by the generalized spectrum.

(H.C., I. Ishikawa, M. Ikeda)

Generalized Spectral Theory

(H.C. Adv. in. Math, 2015)

$\mathcal{H}$: Hilbert space.

A : Linear operator on $\mathcal{H}$.

$\sigma(A)$: Spectrum
(the set of sing. of $(z - A)^{-1}$)

-
- $X \subset \mathcal{H}$: dense subspace of $\mathcal{H}$
s.t. the topology of X is
stronger than that of $\mathcal{H}$.
 - X' : the dual space of X .

Gelfand triplet

$$X \subset \mathcal{H} \subset X'$$

e.g. $\mathcal{H} = L^2$ and

- $X = C_0^\infty \Rightarrow X' = (\text{Schwarz dist.})$
- $X = (\text{holomorphic functions})$ (Ex. 1.3)
 $\Rightarrow X' = (\text{analytic functionals})$
- $X = L^2(e^{a|x|} dx)$ (Ex. 2)
 $\Rightarrow X' = L^2(e^{-a|x|} dx)$
- $X = \{\text{the set of polynomials}\}$ (Ex. 4) (8)

Gelfand triplet $X \subset H \subset X'$

Thm.

Under "suitable" (technical) assumptions for op. A and X , the resolvent

$$(z - A)^{-1} : X \rightarrow X'$$

the domain and range are controlled

has an analytic continuation beyond the conti. spectrum.

Now the continuous spectrum becomes the branch cut of the (nontrivial) Riemann surface of $(z - A)^{-1} : X \rightarrow X'$

Def.


The set of the sing. of the analytic conti. of $(z - A)^{-1}$ on its Riemann surface is called the generalized spectrum.

Rem. The associated eigenvector (if it exists) is in the dual space X' .


Ex.1 Kuramoto Model (continued)

A : the linearized operator

We want to prove the diagram

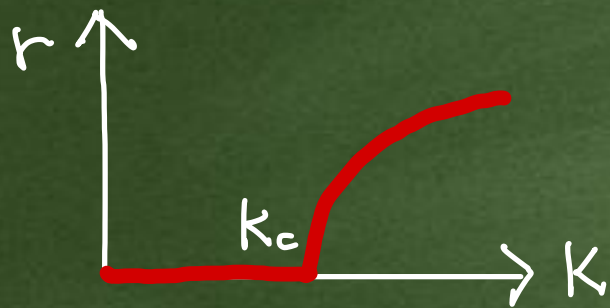

For $0 < K < K_c$, $\sigma(A)$ is $i\mathbb{R}$

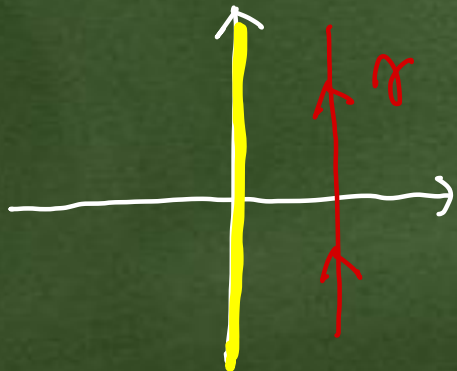

We want to estimate a solution (semi group) of the linearized eq.

$$d\alpha/dt = A\alpha, \quad \alpha \in L^2$$

given by the Laplace inversion formula

$$e^{At} = \frac{1}{2\pi i} \int_{\gamma} e^{-\lambda t} \underbrace{(\lambda - A)^{-1}}_{\text{resolvent}} d\lambda$$

It is difficult to calculate it because $i\mathbb{R}$ is the set of sing. of $(\lambda - A)^{-1}$.

→ We cannot deform γ toward the left half plane.

Gelfand triplet for A .

$$X \subset L^2 \subset X'$$


X : some class of holomorphic functions. $\nwarrow$ technical.

Prop.


$(\lambda - A)^{-1} : X \rightarrow X'$ has an analytic continuation from the right to the left half plane.

It has a sing. on the second Riemann sheet (gene. e.value).

(H.C. 2015)

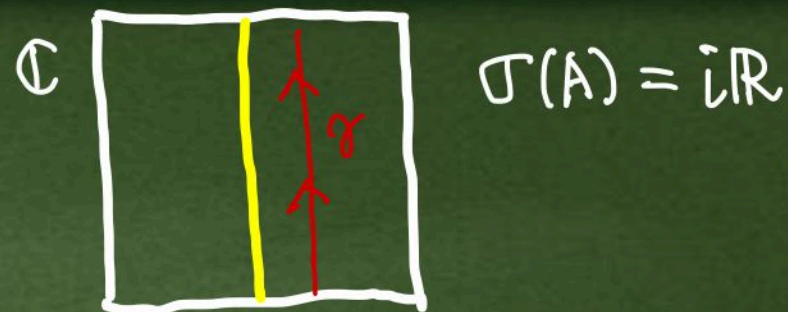



$\downarrow$ analy. conti.

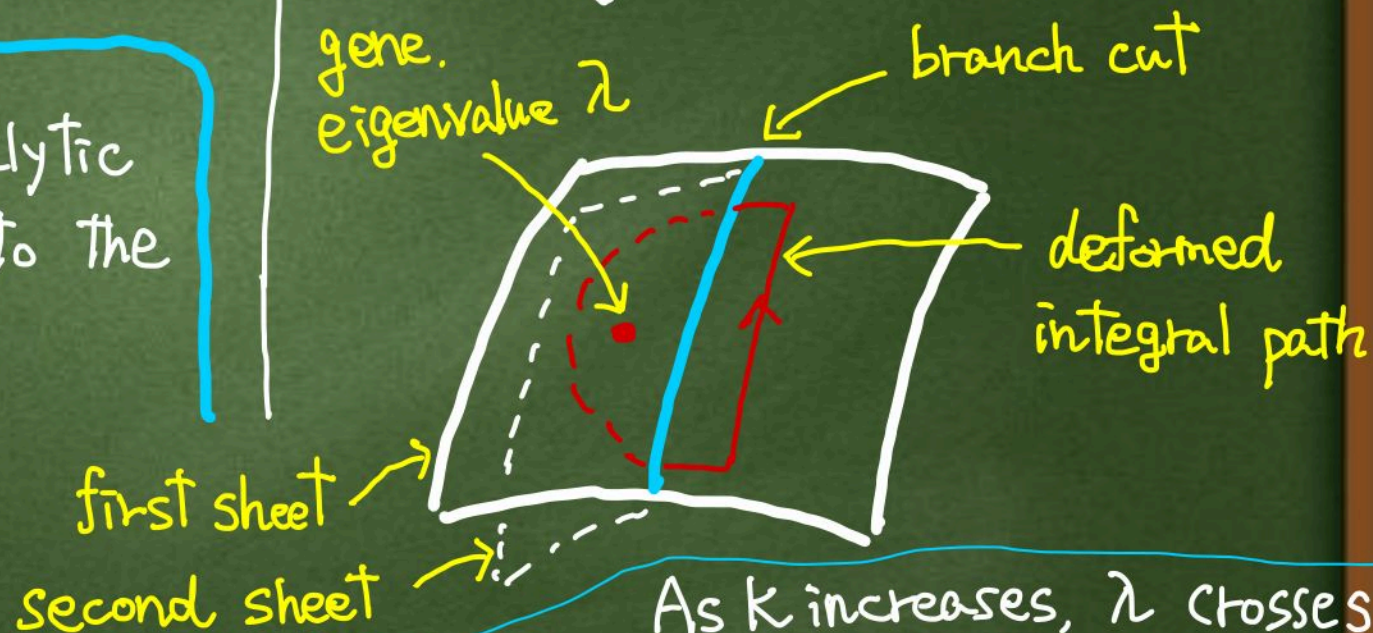


As k increases, λ crosses $i\mathbb{R}$ when $k = k_c$, at which a bifurcation occurs and the conjecture is proved.

Ex. 2 Schrödinger eq. (continued)

$$H\psi = -\frac{\hbar^2}{2m} \frac{\partial^2 \psi}{\partial x^2} + V(x), \text{ on } \mathbb{R}$$

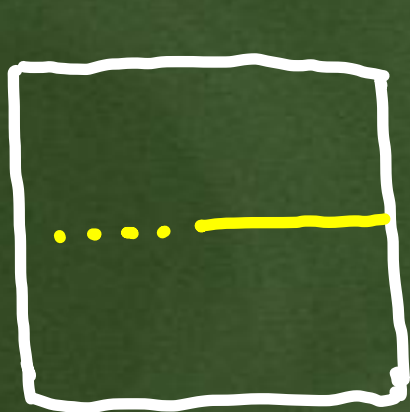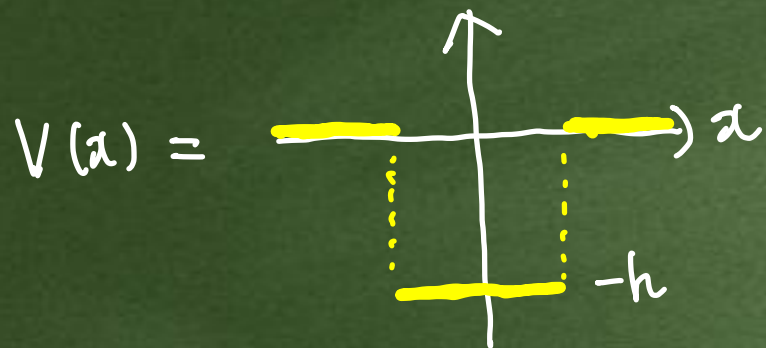


$\sigma(H)$

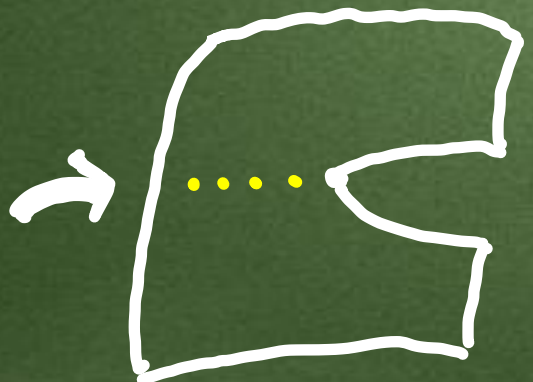

Cut along the
conti. spectrum

Two copies are glued along the cut
(The Riemann surface of $\sqrt{z}$)

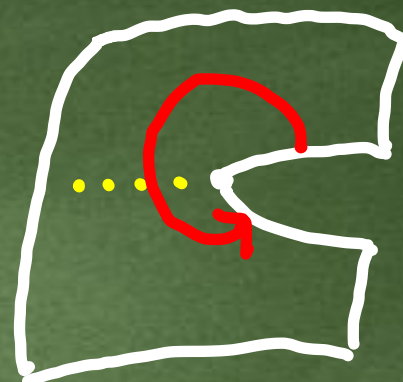

first sheet



second sheet

We find sing of $(\lambda - H)^{-1}$ on the
second sheet $\rightarrow$ generalized eigenvalue.


It is related to the time that a particle
remains in the well (tunnel effect).

(H.C. 2018)

Ex3. Brain wave (continued)

A : Linearized op.

μ : Bifurcation parameter
(the number of synapse)

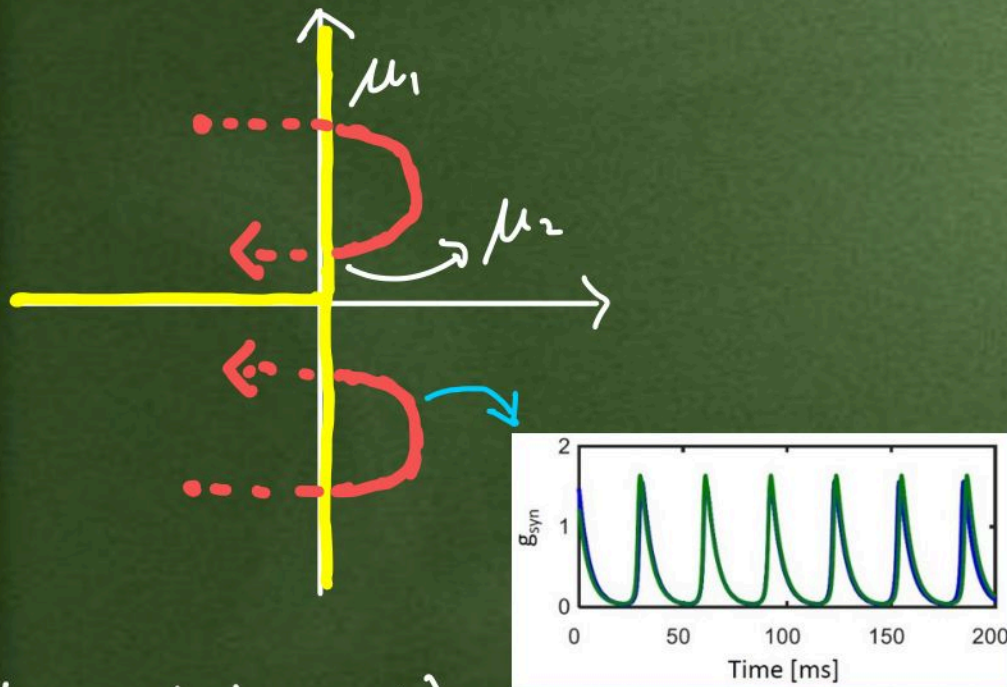

(H.C. et al, 2021)

Red: the motion of the gene. eigenvalues as μ increases.

Thm. $\exists 0 < \mu_1 < \mu_2$ s.t.

- (i) $0 < \mu < \mu_1$: no brain wave
- (ii) $\mu = \mu_1$: Hopf bifurcation
- (iii) $\mu_1 < \mu < \mu_2$: $\exists$ stable Gamma wave 30 ~ 80 Hz
- (iv) $\mu = \mu_2$: again Hopf
- (v) $\mu_2 < \mu$: no brain wave

The gamma wave exists only for intermediate values μ

→ Synaptic pruning in early childhood? (13)

Ex. 4 Symbolic dynamical systems (continued)

Shift op. $S: (\omega_1, \omega_2, \dots) \mapsto (\omega_2, \omega_3, \dots)$

Koopman op. $K_S: (K_S f)(\omega) = f(S\omega)$

$$X \subset L^2(\Sigma) \subset X',$$

X : the space of polynomials on Σ


$\exists$ Analytic conti. from the outside to the inside of the unit circle.
of $(\lambda - K_S)^{-1}$

Thm.

Gene. eigenvalues are given by $\lambda_n = 1/2^n$ ($n=0, 1, \dots$).
The spectral decomposition holds:

$$K_S \mu = \sum_{n=0}^{\infty} \lambda_n \langle \mu | \bar{\Phi}_n \rangle \bar{\Phi}_n', \quad \forall \mu \in X'$$

(H.c. et al. 2023)

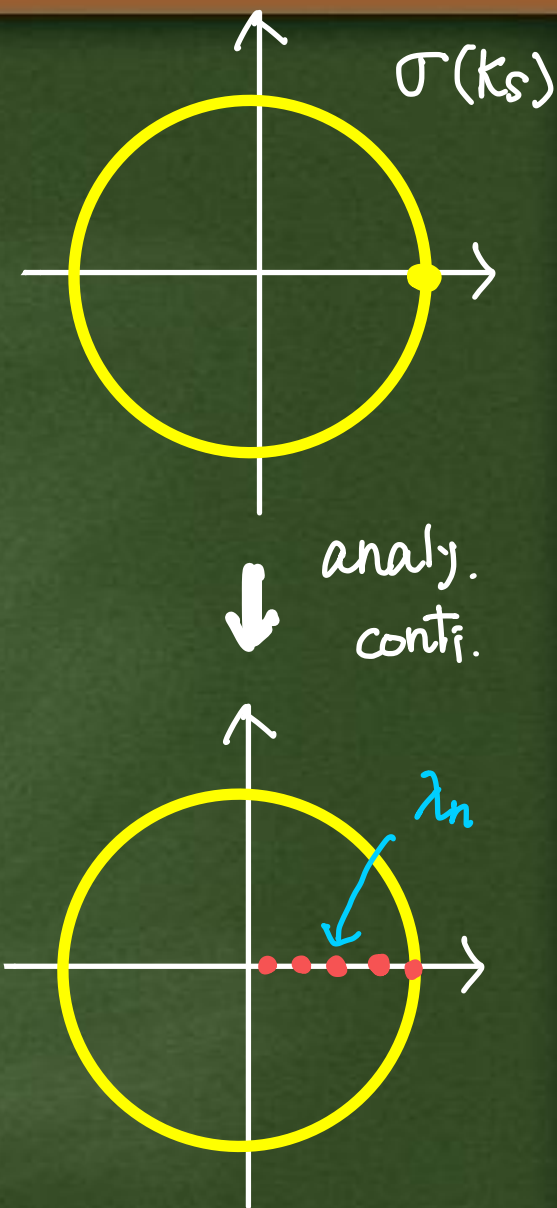

Thank you!!

