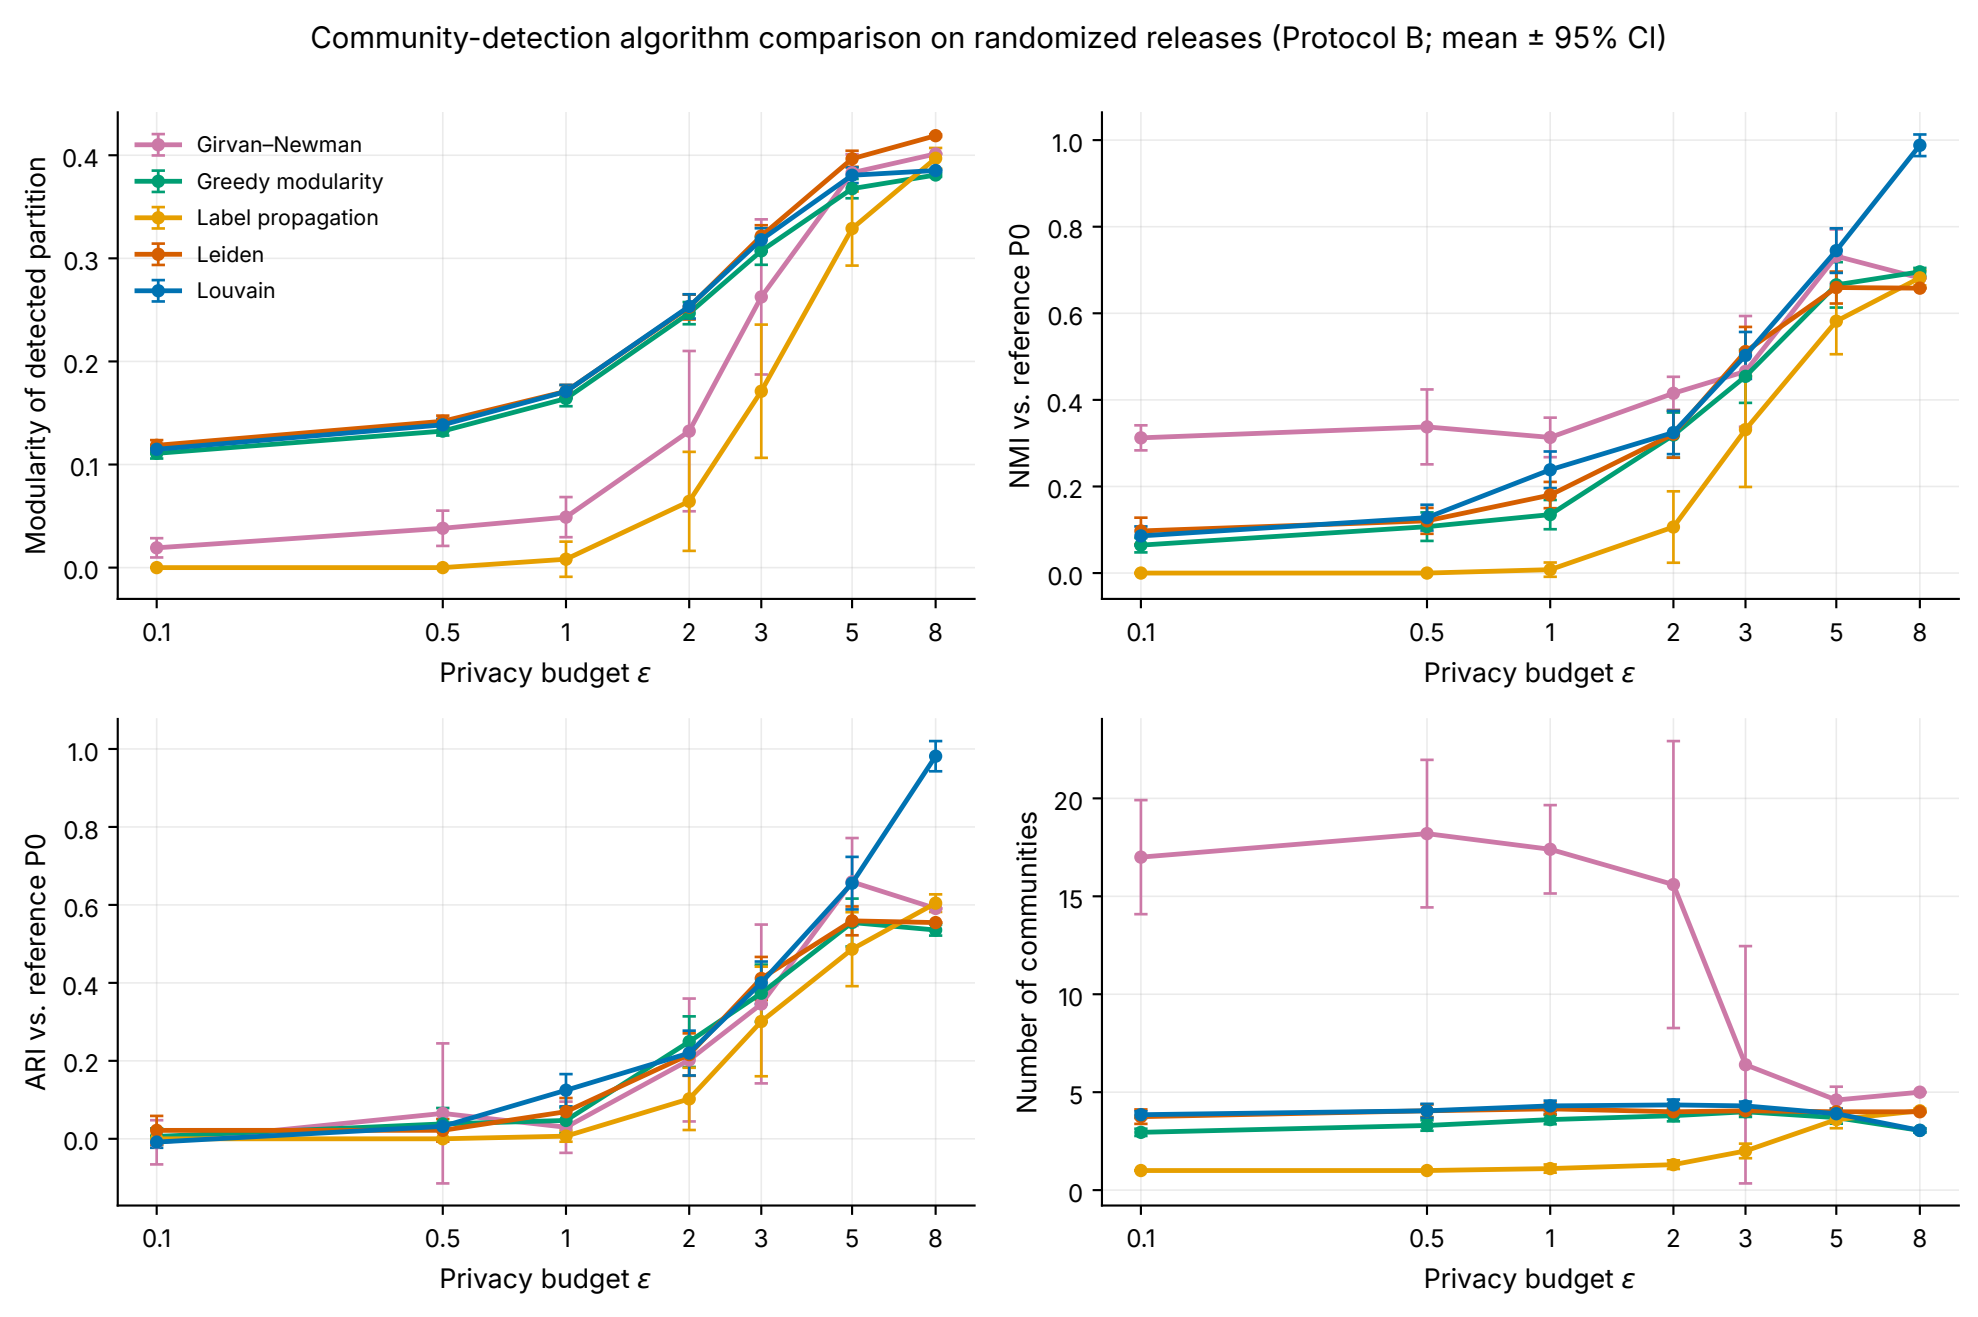
Community-detection algorithm comparison on randomized releases (Protocol B; mean ± 95% CI)
Girvan–Newman
Greedy modularity
Label propagation
Leiden
Louvain
Modularity of detected partition
NMI vs. reference P0
ARI vs. reference P0
Number of communities
Privacy budget ε
0.1
0.5
1
2
3
5
8