

Homework-1

Mallikarjuna Mannem

09/07/2023

R Markdown

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see <http://rmarkdown.rstudio.com>.


When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:

```
summary(cars)
```

```
##      speed      dist
##  Min.   : 4.0    Min.   : 2.00
##  1st Qu.:12.0    1st Qu.: 26.00
##  Median :15.0    Median : 36.00
##  Mean   :15.4    Mean   : 42.98
##  3rd Qu.:19.0    3rd Qu.: 56.00
##  Max.   :25.0    Max.   :120.00
```

Including Plots

You can also embed plots, for example:

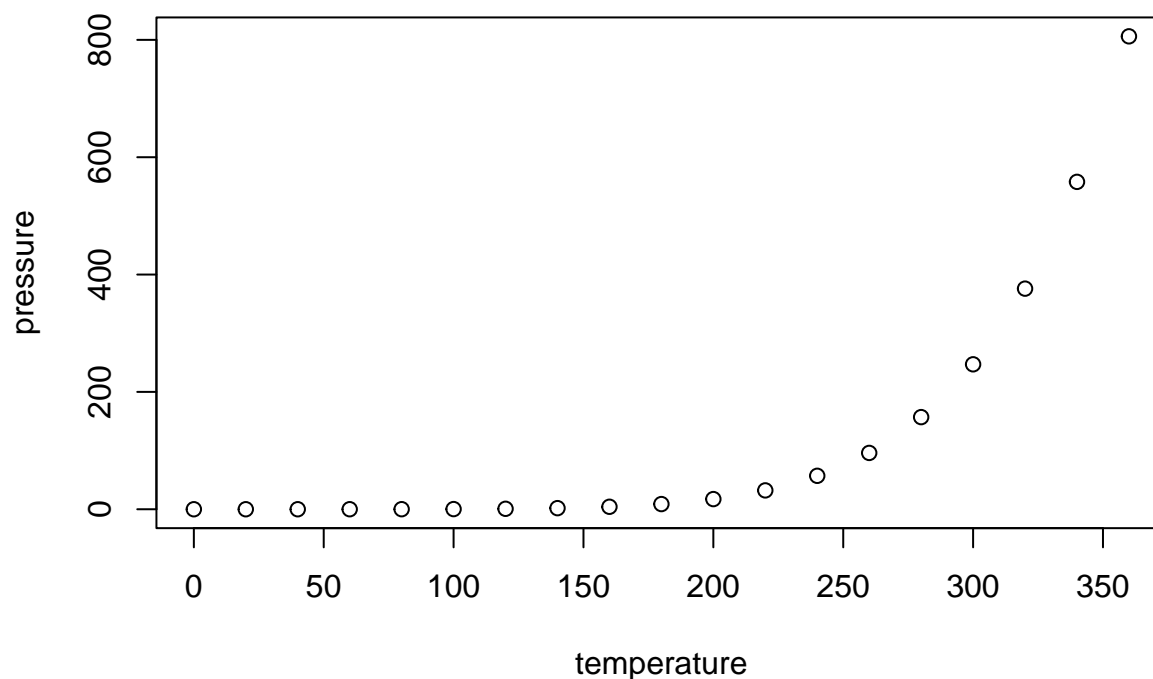

Note that the `echo = FALSE` parameter was added to the code chunk to prevent printing of the R code that generated the plot.

```
# Install the tidyverse package if needed
if(!("tidyverse" %in% installed.packages())) {
  install.packages("tidyverse")
}
```

```
# Load the tidyverse package
library(tidyverse)
```


```
## -- Attaching core tidyverse packages ----- tidyverse 2.0.0 --
## v dplyr      1.1.2      v readr      2.1.4
## v forcats    1.0.0      v stringr    1.5.0
## v ggplot2    3.4.3      v tibble     3.2.1
## v lubridate  1.9.2      v tidyr      1.3.0
## v purrr      1.0.2
```

```
## -- Conflicts ----- tidyverse_conflicts() --
## x dplyr::filter() masks stats::filter()
## x dplyr::lag()     masks stats::lag()
## i Use the conflicted package (<http://conflicted.r-lib.org/>) to force all conflicts to become errors
```

```
# Load the cars data set
data(cars)
```

```
# Scatterplot type 1
```

```
plot(cars$speed, cars$dist, main="Observation of Cars", xlab="Car Speed", ylab="Car Distance")
```

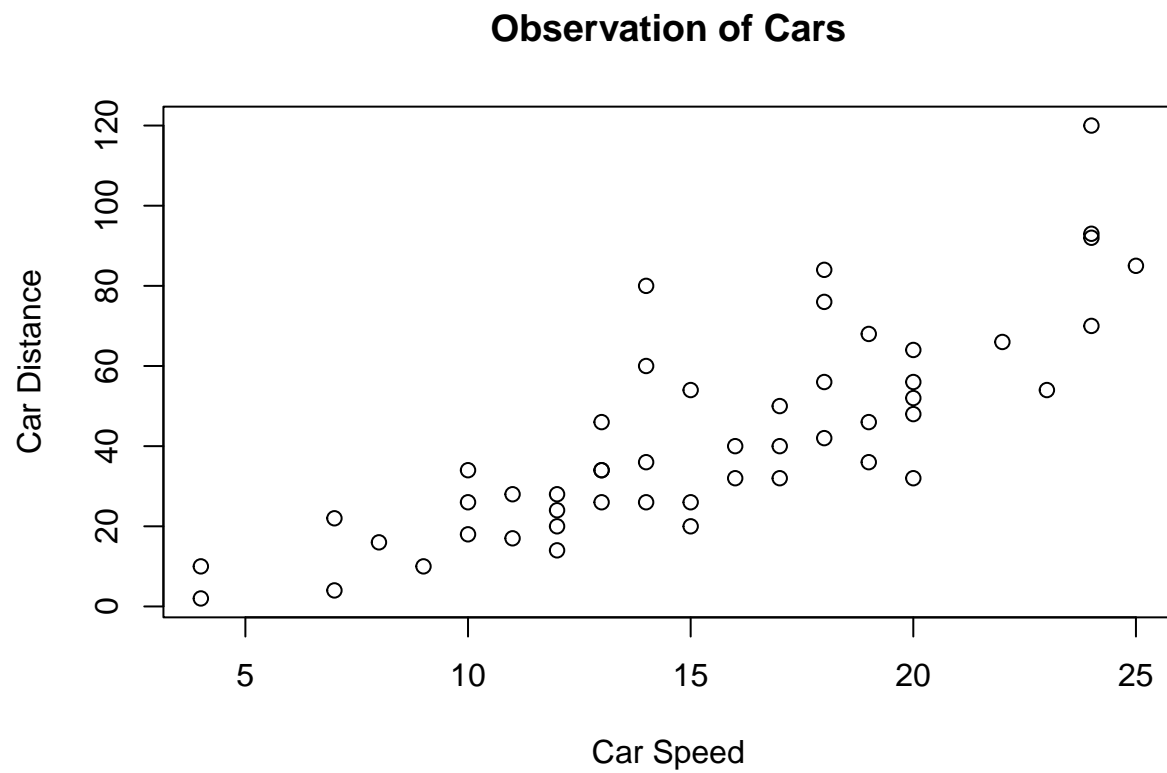

```
# Scatterplot type 2  
cars %>%  
ggplot(aes(x = speed, y = dist)) + geom_point()
```

